


1 NEW FIRE SPRINKLER RISER DETAIL NOT TO SCALE

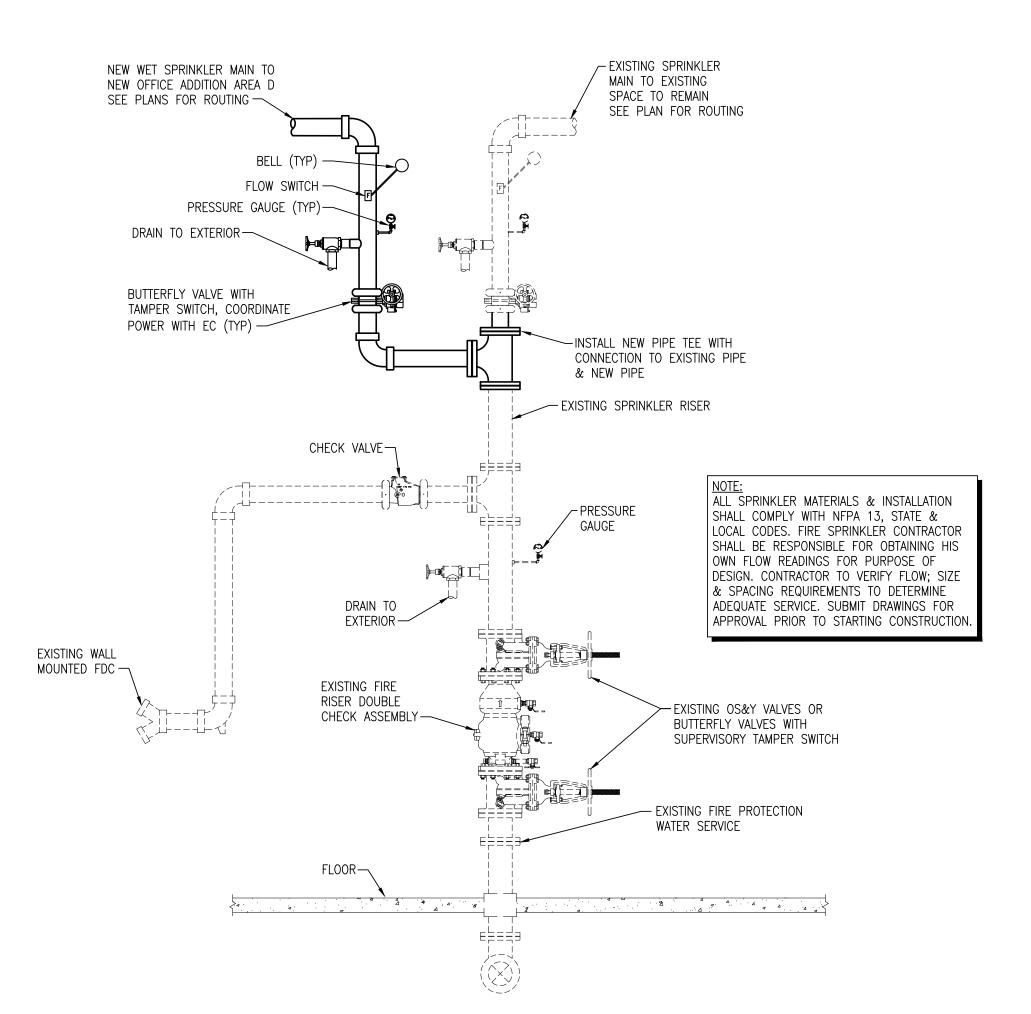

2 EXISTING FIRE SPRINKLER RISER DETAIL
NOT TO SCALE

FIRE PROTECTION ABBREVIATIONS ADD ADDENDUM GALLON ADDL GENERAL CONTRACTOR ADDITIONAL ADJ AFF GALLONS PER MINUTE **ADJUSTABLE** GPM ABOVE FINISH FLOOR MECHANICAL CONTRACTOR ABOVE FINISH GRADE MECH MECHANICAL ALTERNATE MINIMUM NTS NOT TO SCALE BELOW GRADE PLUMBING CONTRACTOR CAST IRON PLBG PLUMBING COL COLUMN CW COLD WATER QUANTITY QTY SCHEDULE DOWN ELECTRICAL CONTRACTOR SPEC SPECIFICATIONS STAINLESS STEEL FLOOR DRAIN FIRE DEPARTMENT CONNECTION FDC FLR TEMP TEMPERATURE **FLOOR** TYPICAL FIRE PROTECTION WITH

FIRE PROTECTION SYMBOL LEGEND		
	SHUTOFF VALVE	
	CHECK VALVE	
	DOUBLE CHECK VALVE	
E	END CAP	
\checkmark	FIRE DEPARTMENT CONNECTION(FDC)	
$\widehat{}$	BELL	

FIRE PROTECTION PIPING LINETYPES		
<u>LINETYPE</u>	<u>DESCRIPTION</u>	
	NEW - ABOVE GRADE	
	NEW — BELOW GRADE	

FIRE PROTECTION GENERAL NOTES

- 1. CONTRACTOR SHALL PROVIDE DESIGN FOR SPRINKLER SYSTEMS FOR NEW OFFICE ADDITION AND CLASSROOM ADDITION. OFFICE AREA TO BE SERVED BY EXISTING FIRE RISER IN MEDIA CENTER. CLASSROOM ADDITION TO BE SERVED BY NEW FIRE RISER.
- 2. COORDINATE INSTALLATION OF SPRINKLER PIPING AND ALL COMPONENTS WITH OTHER TRADES, OWNER, AND GENERAL CONTRACTOR.
- 3. FIRE PROTECTION SYSTEM TO COMPLY WITH NFPA 13, INSURANCE CARRIER AND ALL APPLICABLE STATE AND LOCAL CODES.
- 4. CUTTING OF STRUCTURAL AND/OR ARCHITECTURAL MEMBERS TO BE DONE ONLY WITH THE WRITTEN APPROVAL OF THE ARCHITECT AND STRUCTURAL ENGINEER
- 5. PROVIDE MINIMUM 10 PSI SAFETY FACTOR.
- 6. WORKING DRAWINGS INDICATING SPRINKLER HEAD LOCATIONS AND EXPOSED AND CONCEALED PIPING ROUTING SHALL BE PROVIDED TO THE ARCHITECT/ENGINEER PRIOR TO INSTALLATION FOR APPROVAL.
- 7. FIRE PROTECTION CONTRACTOR IS RESPONSIBLE FOR ORGANIZING A COORDINATION MEETING WITH OTHER TRADES AND OWNER PRIOR TO INSTALLATION.
- 8. SYSTEM PIPING LOCATION: WET SYSTEM PIPING SHALL BE INSTALLED AT HIGHEST ELEVATION POSSIBLE. PIPING SHALL BE INSTALLED ABOVE ALL MECHANICAL EQUIPMENT, DUCTWORK, AND ALL PLUMBING SYSTEM PIPING. PROVIDE ADEQUATE CLEARANCE TO MECHANICAL UNITS. FIRE PROTECTION CONTRACTOR SHALL COORDINATE FIRE PROTECTION PIPING PRIOR TO INSTALLATION.
- 9. PROPERLY TORQUE MECHANICAL TEES TO MANUFACTURER'S RECOMMENDATIONS.
- 10. FIRE PROTECTION PLANS ARE FOR REFERENCE ONLY. OCCUPANCIES AND AREAS OF PROTECTION NOTED ON THE PLANS SHALL BE CONFIRMED WITH NFPA 13 AND AUTHORITIES HAVING JURISDICTION. THIS CONTRACTOR SHALL COMPLY WITH ANY CODE REQUIREMENTS AS REQUIRED.
- 1. REFER TO ARCHITECTURAL FIRE CODE PLAN FOR ADDITIONAL INFORMATION.
- FIRESEAL ALL PENETRATIONS THRU RATED STRUCTURES TO MAINTAIN FIRE
- 13. SEMI-RECESSED PENDANT SPRINKLER HEADS SHALL HAVE WHITE FINISH.
- 14. UPRIGHT SPRINKLER HEADS SHALL BE BRASS. PROVIDE PROTECTIVE GUARD FOR HEAD.

FIRE PROTECTION SHEET INDEX		
F000	FIRE PROTECTION NOTES & SYMBOLS	
F001	FIRE PROTECTION PLAN — OVERALL	
F101	FIRE PROTECTION PLAN — AREA A	
F102	FIRE PROTECTION PLAN — AREA B	
F103	FIRE PROTECTION PLAN — AREA C	
F104	FIRE PROTECTION PLAN — AREA D	



201 N. BROADWAY SUITE 210 MOORE, OK. 73160 405.735.3477 AGP@theAGP.net www.theAGP.net

CEDAR CREEK

KEC ENCINEE

KFC ENGINEERING

STRUCTURAL

CIVIL

SALAS O'BRIEN

MECHANICAL / ELECTRICAL



KC
drawn by

KP
checked by

JULY 2023
date

MOORE PUBLIC SCHOOLS
BOARD OF EDUCATION
MOORE, OKLAHOMA



CLASSROOM ADDITION HIGHLAND WEST JUNIOR HIGH SCHOOL

sheet no:

F000



Salas O'Brien Project Number: 2023-02792-00

Salas O'Brien Registration: CA# 7058

Expiration Date : 6/30/2025

OWNERSHIP USE OF DOCUMENTS:

AGP EXPRESSLY RESERVES ITS
COPYRIGHT AND OTHER PROPERTY
RIGHTS OF ALL PLANS AND DRAWINGS
DESIGNED AND/OR PRODUCED. PLANS
AND DRAWINGS ARE NOT TO BE
REPRODUCED IN ANY FORM OR MANNER
WITHOUT THE EXPRESSED WRITTEN
CONSENT OF AGP.