


**ROOF PLAN**  
1/16" = 1'-0"  
NORTH

- NOTES:**
1. RE: MECH & ELEC. FOR ADDITIONAL ROOF MOUNTED ITEMS. CONTRACTOR TO COORDINATE ALL ROOF MOUNTED ITEMS & PENETRATIONS W/ APPLICABLE TRADES
  2. CONTRACTOR TO COORDINATE ROOF VENT PENETRATIONS W/ ARCHITECT.
  3. INDICATES NEW WALKWAY PAD LOCATIONS - CUT PADS INTO 5'-0" MAX LENGTHS & PLACE 2' APART TO COVER AREAS INDICATED.
  4. PROVIDE @ ALL ROOF PENETRATIONS - PENETRATION DAM / SEALER POCKETS AS PER 6A115
  5. PROVIDE NEW "CRICKETS" AT EXISTING ROOF SYSTEM TO PROVIDE POSITIVE DRAINAGE TO ROOF EDGE / NEW SCUPPER. MAINTAIN A MIN. OF 1/8" PER FOOT SLOPE. PROVIDE NEW WOOD BLOCKING, EDGE METAL, ETC. FOR A COMPLETE INSTALLATION. MODIFY EXISTING ROOF SYSTEM AS REQUIRED TO INSTALL NEW OVERLAY AND TAPERED INSULATION TO PROVIDE POSITIVE DRAINAGE TO NEW SCUPPER COORDINATE W/ ARCHITECT
  6. DO NOT SCALE DRAWINGS TO OBTAIN MATERIAL QUANTITIES. USE DRAWINGS WHICH ARE DIMENSIONED OR COORDINATE W/ EXISTING CONDITIONS & COR ARCHITECT & ENGINEERS.

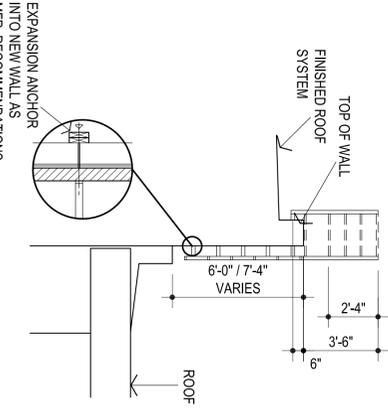

**2** ALUMINUM LADDER  
1/4" = 1'-0"