ABBREVIATIONS

@	AT
ABV	ABOVE
ACOUST.	ACOUSTICAL
ADJ.	ADJUSTABLE
ANCH.	ANCHOR
APPROX.	APPROXIMATE
BD.	BOARD
BLK'G.	BLOCKING
BM.	BEAM
BOT.	BOTTOM
℄	CENTERLINE
CL'G.	CEILING
CONC.	CONCRETE
CMU	CONCRETE MASONARY UNIT
COL.	COLUMN
CONT.	CONTINUOUS
D.F.	DRINKING FOUNTAIN
DIM.	DIMENSION
DR.	DOOR
DWG.	DRAWING
DWL.	DOWEL
EA.	EACH
ELECT.	ELECTRICAL
ELEV.	ELEVATION
EQ.	EQUAL
E.J.	EXPANSION JOINT
E.W.	EACH WAY
EXIST.	EXISTING
EXP.	EXPANSION
EXT.	EXTERIOR
FD.	FLOOR DRAIN
FE.	FIRE EXTINGUISHER
FEC.	FIRE EXTINGUISHER CABINET
FFL.	FINISH FLOOR LINE
FIN.	FINISH
FRM'G.	FRAMING
GA.	GAUGE
G.B.	GRAB BAR
GALV.	GALVANIZED
GYP. BD.	GYPSUM BOARD
H.C.	HANDICAP
HDWD.	HARDWOOD
HDWR.	HARDWARE
HORIZ.	HORIZONTAL
HT.	HEIGHT
INSUL.	INSULATION
JST.	JOIST
JT.	JOINT
LAV.	LAVATORY
MAT'L	MATERIAL
MAX.	MAXIMUM
MECH.	MECHANICAL
MFG.	MANUFACTURING
MFR.	MANUFACTURER
MIN.	MINIMUM
MISC.	MISCELLANEOUS
MTL.	METAL
N.I.C.	NOT IN CONTRACT
NO. / #	NUMBER
N.T.S.	NOT TO SCALE
O.C.	ON CENTER
OPN'G.	OPENING
OPP.	OPPOSITE
PP.	POWER POLE
PREFIN.	PREFINISHED
P.T.	PAPER TOWEL
PW / PLY. WD.	PLYWOOD
RE:	REFER
REQ'D.	REQUIRED
RM.	ROOM
S.B.	SPLASH BLOCK
SCHED.	SCHEDULE
STD.	STANDARD
STL.	STEEL
S.J.	SAWJOINT
T.C.	TOP OF CURB
T.P.H.	TOILET PAPER HOLDER
TYP.	TYPICAL
U.N.O.	UNLESS NOTED OTHERWISE
VTR.	VENT THROUGH ROOF
W/	WITH
W.C.	WATERCLOSET
WD.	WOOD
WWF.	WELDED WIRE FABRIC

MATERIALS LEGEND

FOR PLANS AND DETAILS

- MASONRY VENEER
- C.M.U.
- CONCRETE
- FRAME PARTITION, METAL STUDS

FOR DETAILS

- GYPSUM BOARD
- PARTICLE BOARD
- RIGID INSULATION
- WOOD BLOCKING / FRAMING, CONTINUOUS
- WOOD BLOCKING, DISCONTINUOUS
- FINISH WOOD
- SMALL SCALE STRUCTURAL STEEL / MISCELLANEOUS METAL
- LARGE SCALE STRUCTURAL STEEL
- BATT INSULATION
- ACOUSTICAL CEILING TILE
- EARTH FILL

SYMBOLS LEGEND

1152	EXISTING SPOT ELEVATION
1152	FINISH SPOT ELEVATION
1152	EXISTING GRADE CONTOUR
1152	FINISH GRADE CONTOUR
18" ELM	EXISTING TREE TO BE PROTECTED
15" OAK	EXISTING TREE TO BE REMOVED
	PROJECT LIMITS
	CHAINLINK FENCE
	BARBED WIRE FENCE
	CONCRETE PAVING
	ASPHALT PAVING
	CONCRETE SIDEWALK
	EXISTING PAVING/SIDEWALK TO REMAIN
	EXISTING PAVING TO BE REMOVED
	NEW BUILDING
	EXISTING BUILDING - NO WORK
3	ROOM NUMBER
3 RE: 4A7	ROOM NUMBER/ LARGE SCALE PLAN REFERENCE
3 2A6	ROOM NUMBER/INTERIOR ELEVATION REFERENCE
2A7	WALL SECTION/DETAIL CUT MARK
5A7	LARGE SCALE DETAIL MARK
A 1	STRUCTURAL GRID COORDINATES
1A4	BUILDING SECTION CUT MARK
6	DOOR NUMBER
C	WINDOW MARK
B	FRAME MARK
G2	GLAZING MATERIAL MARK
4	EQUIPMENT MARK
*A18	EXTERIOR ELEVATION MARK
#4	TEST HOLE
ELEV. 1152	BENCH MARK/BUILDING ELEVATION (SECTION)

GENERAL NOTES:

1. ALL REQUIRED HANDICAP ACCESSIBLE ITEMS TO COMPLY WITH AMERICANS WITH DISABILITIES ACT AND ARCHITECTURAL BARRIERS ACT ACCESSIBILITY GUIDELINES.
2. THE CONTRACTOR SHALL NOT USE ANY LEAD-BASED PAINT OR ASBESTOS CONTAINING MATERIAL ON THIS PROJECT
3. THESE CONTRACT DOCUMENTS INCLUDING BUT NOT LIMITED TO THE DRAWINGS, PROJECT MANUAL AND ANY SUBSEQUENT ADDENDA ARE ISSUED AS A "WHOLE" AND SHALL BE BID AS SUCH. EACH DISCIPLINE / SUBCONTRACTOR SHALL REVIEW THE ENTIRE SET OF CONTRACT DOCUMENTS AND INCLUDE APPLICABLE WORK IN THEIR BID REGARDLESS OF LOCATION WITHIN THE CONTRACT DOCUMENTS. REVIEWING ONLY PORTION OF THE CONTRACT DOCUMENTS SHALL NOT ABSOLVE THE CONTRACTOR OR SUBCONTRACTOR OF THE REQUIREMENT TO PERFORM THE WORK OF THEIR RESPECTIVE DISCIPLINES.
4. LOCATIONS OF EXISTING BUILDINGS, SITE FEATURES, & UNDERGROUND UTILTIES HAVE BEEN OBTAINED FROM EXISTING AVAILABLE SOURCES. THE CONTRACTOR IS TO FIELD VERIFY EXISTING LOCATIONS PRIOR TO STARTING CONSTRUCTION AND NOTIFY THE ARCHITECT IMMEDIATELY IF ANY EXISTING BUILDING &/OR SITE FEATURE CONFLICTS W/ THE NEW CONSTRUCTION.
5. THE CONTRACTOR SHALL VERIFY ALL EXISTING SITE UTILITIES AND PROTECT DURING CONSTRUCTION. COORDINATE NEW UTILITY REQUIREMENTS WITH APPLICABLE UTILITY COMPANIES (WATER, GAS ELECTRICITY, SANITARY SEWER, TELEPHONE, CABLE, SITE DRAINAGE AND OTHERS AS REQUIRED). COMPLY WITH ALL APPLICABLE REGULATIONS. INCLUDE ALL CONNECTION FEES AND OTHER CHARGES IN BID.
6. REFER TO CIVIL, MECHANICAL AND ELECTRICAL DRAWINGS FOR UTILITY INFORMATION.
7. REFER TO CIVIL, MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL REQUIREMENTS AND CONCRETE TO BE PROVIDED BY CONTRACTOR.
8. GENERAL CONTRACTOR TO VERITY LOCATIONS OF EASEMENTS, ENCUMBRANCES AND SET BACKS PRIOR TO STARTING CONSTRUCTION
9. CONFLICTS BETWEEN DRAWINGS AND SPECIFICATIONS SHALL BE BROUGHT TO ARCHITECT'S ATTENTION. FAILURE TO BID ITEM(S) NOTED ON DRAWINGS AND OMITTED FROM SPECIFICATIONS DOES NOT REMOVE RESPONSIBILITY TO PROVIDE AND INSTALL SUCH.

AGP
the Abla Griffin Partnership L.L.C.

313 S. E. 5th Street
MOORE, OK. 73160
405.735.3477
AGP@theAGP.net
www.theAGP.net

CEDAR CREEK
CIVIL

KFC ENGINEERING
STRUCTURAL

SALAS O'BRIEN
MECHANICAL / ELECTRICAL

STATE OF OKLAHOMA
MICHAEL L. ABLA
2639
OKLAHOMA CITY, OKLAHOMA
LICENSED ARCHITECT

4/25/25

PROJECT LOCATION

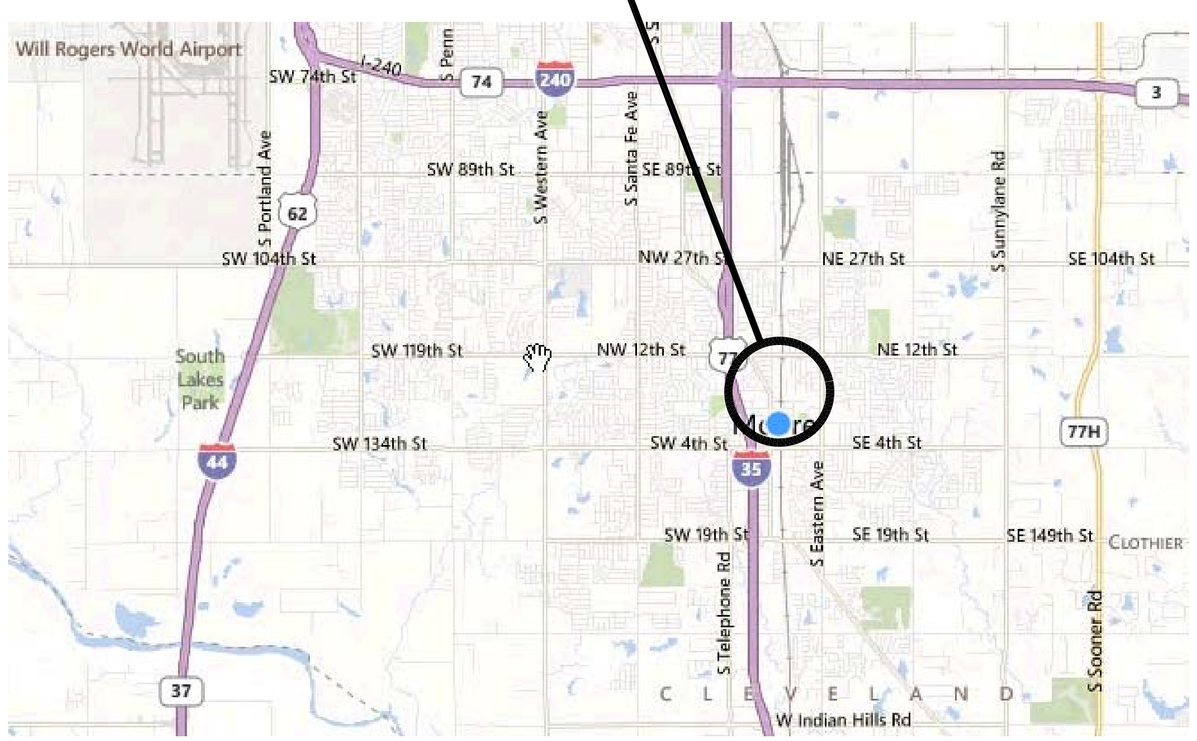

CENTRAL JUNIOR HIGH SCHOOL
400 NORTH BROADWAY
MOORE, OKLAHOMA 73160

NORTH

VICINITY MAP

GENERAL NOTES (CON'T):

10. CONSTRUCTION STAGING AREA & VEHICLE ACCESS SHALL BE CONFIRMED WITH OWNER, AND CONSTRUCTION MANAGER IF APPLICABLE, PRIOR TO CONSTRUCTION.
11. FINISH GRADE AT BUILDING PERIMETERS SHALL BE 6" BELOW FINISH FLOOR UNLESS SPECIFICALLY NOTED OTHERWISE ON CIVIL DRAWINGS. DEVELOP POSITIVE DRAINAGE AWAY FROM NEW AND/OR EXISTING BUILDING(S).
12. ALL GRID LINES IDENTIFIED BY A LETTER OR NUMBER ARE PARALLEL UNLESS OTHERWISE NOTED.
13. SIZES OF HOUSEKEEPING PADS AND BASES FOR MECHANICAL EQUIPMENT ARE APPROXIMATE. CONTRACTOR SHALL VERIFY EXACT LOCATION AND REQUIRED SIZE OF ALL CONCRETE PADS AND BASES WITH EQUIPMENT MANUFACTURERS BEFORE POURING. ALL PADS (& ASSOCIATED BOLLARDS @ EXTERIOR LOCATIONS) TO BE PROVIDED BY THE CONTRACTOR.
14. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF THE VARIOUS TRADE ITEMS WITHIN THE SPACE ABOVE THE CEILINGS (INCLUDING, BUT NOT LIMITED TO STRUCTURAL MEMBERS AND SPRAY-ON INSULATION OR FIREPROOFING, MECHANICAL DUCTS AND BATT INSULATION, CONDUITS, RACEWAY, SPRINKLER SYSTEMS, LIGHT FIXTURES, CEILING SYSTEMS, AND ANY SPECIAL STRUCTURAL SUPPORTS REQUIRED) AND SHALL BE RESPONSIBLE FOR MAINTAINING THE FINISH CEILING HEIGHT ABOVE THE FINISH FLOOR INDICATED IN THE DRAWINGS AND FINISH SCHEDULE.
15. ALL METAL STUDS WALLS WHERE PLUMBING OCCURS OR STRUCTURAL COLUMNS ARE LOCATED SHALL BE MINIMUM 6" METAL STUDS. NOTIFY ARCHITECT OF ANY DISCREPANCIES OR CONFLICTS.
16. PROVIDE AND INSTALL ACCESS PANELS, WHERE REQUIRED BY BUILDING CODE OR FOR THE PROPER OPERATION OF MECHANICAL OR ELECTRICAL EQUIPMENT, AND AS SHOWN ON THE DRAWINGS. CONTRACTOR SHALL COORDINATE SIZE, LOCATION, AND TYPE OF ACCESS PANEL WITH OTHER CONTRACTORS' WORK AND RECEIVE APPROVAL OF THE ARCHITECT. ACCESS PANEL SHALL BE AS SPECIFIED.
17. 3/4" FIRE-RETARDANT TREATED PLYWOOD BACKING 8'-0" HIGH SHALL BE PROVIDED AND INSTALLED ON ALL WALLS OF TELEPHONE AND ELECTRICAL ROOMS UNLESS SPECIFICALLY SHOWN OTHERWISE ON ELECTRICAL DRAWINGS.
18. ALL WOOD WITHIN THIS PROJECT (I.E. PLYWOOD, BLOCKING, ETC.) SHALL BE FIRE-RETARDANT TREATED.
19. FOR ILLUSTRATION AND DEFINITION OF TYPICAL SYMBOLS USED ON THE ARCHITECTURAL DRAWINGS, SEE "SYMBOLS AND ABBREVIATIONS" SHEET. ADDITIONAL SYMBOLS NOT SHOWN OR DEFINED THERE MAY OCCUR AND ARE DEFINED ON OTHER DRAWINGS.
20. REFER TO SPECIFICATIONS FOR ADDITIONAL PAINT ITEMS NOT SHOWN ON ROOM FINISH SCHEDULE.
21. THE SPECIFICATIONS AND ALL CONSULTANT DRAWINGS ARE SUPPLEMENTAL TO THE ARCHITECTURAL DRAWINGS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH THE ARCHITECTURAL DRAWINGS BEFORE THE INSTALLATION OF ANY OF THE CONSULTANTS' WORK AND TO BRING ANY DISCREPANCIES OR CONFLICTS TO THE ARCHITECT'S ATTENTION FOR CLARIFICATION. IMPROPERLY INSTALLED WORK SHALL BE CORRECTED BY THE CONTRACTOR AT NO EXPENSE TO THE ARCHITECT, HIS CONSULTANTS, OR THE OWNER.
22. THE ARCHITECTURAL DRAWINGS ARE A PART OF A LARGER SET OF DRAWINGS WHICH, WHEN COMPLETE, CONSISTS OF ALL DRAWINGS LISTED BY THE INDEX OF DRAWINGS. THE WORK DESCRIBED BY THE DRAWINGS OF ANY ONE DISCIPLINE MAY BE AFFECTED BY THE WORK DESCRIBED ON DRAWINGS OF ANOTHER DISCIPLINE AND MAY REQUIRE REFERENCE TO DRAWINGS OF ANOTHER DISCIPLINE. PARTIAL SETS OF DRAWINGS SHALL NOT BE DISTRIBUTED AND UTILIZED BY THE CONTRACTOR. IT IS THE CONTRACTOR'S RESPONSIBILITY TO REVIEW AND COORDINATE THE WORK OF ALL SUBCONTRACTORS, TRADES, AND SUPPLIERS WITH THE REQUIREMENTS OF THE CONTRACT BEFORE COMMENCING CONSTRUCTION AND TO ASSURE THAT ALL PARTIES ARE AWARE OF ALL REQUIREMENTS, REGARDLESS OF WHERE THE REQUIREMENTS OCCUR IN THE CONTRACT DOCUMENTS.
23. THE ARCHITECTURAL DRAWINGS ESTABLISH AND COORDINATE THE FINISHED APPEARANCE AND EXACT LOCATIONS OF ALL EXPOSED ELEMENTS OF THE WORK, INCLUDING THAT WORK WHICH IS ILLUSTRATED PRIMARILY ON DRAWINGS OF OTHER DISCIPLINES. LOCATIONS SHOWN ON OTHER DRAWINGS ARE SCHEMATIC, UNLESS OTHERWISE NOTED ON THE ARCHITECTURAL DRAWINGS. THE ARCHITECTURAL DRAWINGS TAKE PRECEDENCE FOR THE FINISHED APPEARANCE AND EXACT LOCATION OF ALL PARTS OF THE WORK. [EXCEPTIONS: DIMENSIONED LOCATIONS SHOWN ON DRAWINGS OF OTHER DISCIPLINES SHALL GOVERN ONLY WHERE: (A) SPECIFICALLY AND INDIVIDUALLY INDICATED BY SYMBOL, KEYED NOTE, OR NOTATION ON THE ARCHITECTURAL DRAWINGS. (B) OCCURRING WITHIN A ROOM OR OTHER IDENTIFIED SPACE FOR WHICH ARCHITECTURAL SHEET OR SCHEDULE NOTES INDICATE THAT DIMENSIONS PROVIDED ELSEWHERE SHALL GOVERN.]
24. WORK NOT SPECIFICALLY INDICATED ON A PART OF THE DRAWINGS BUT REASONABLY IMPLIED TO BE SIMILAR TO WORK SHOWN ON THE DRAWINGS IN CORRESPONDING AND OTHER PLACES SHALL BE CONSTRUCTED SIMILARLY.
25. PROVIDE FIRE EXTINGUISHERS WITH A RATING OF NOT LESS THAN 2A WITHIN 75 FOOT TRAVEL DISTANCE TO ALL PORTIONS OF THE BUILDING. PROVIDE PORTABLE FIRE EXTINGUISHERS AS THE BUILDING IS CONSTRUCTED.
26. FOR THIS PROJECT, THE TERM "CONTRACTOR" SHALL BE UNDERSTOOD TO REFER TO THE "CONSTRUCTION MANAGER / MANAGEMENT COMPANY"
27. CONTRACTOR SHALL COORDINATE / SCHEDULE ALL CONSTRUCTION WITH THE OWNERS REQUIREMENTS FOR ALL ACADEMICS TO REMAIN ACTIVE DURING CONSTRUCTION.

CG
drawn by

MA
checked by

APRIL 2025
date

revisions

MOORE PUBLIC SCHOOLS

MOORE PUBLIC SCHOOLS
BOARD OF EDUCATION
MOORE, OKLAHOMA

CLASSROOM ADDITION
CENTRAL JUNIOR
HIGH SCHOOL

sheet no:

G100

OWNERSHIP USE OF DOCUMENTS:

AGP EXPRESSLY RESERVES ITS COPYRIGHT AND OTHER PROPERTY RIGHTS OF ALL PLANS AND DRAWINGS DESIGNED AND/OR PRODUCED. PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM OR MANNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF AGP.