


PUG

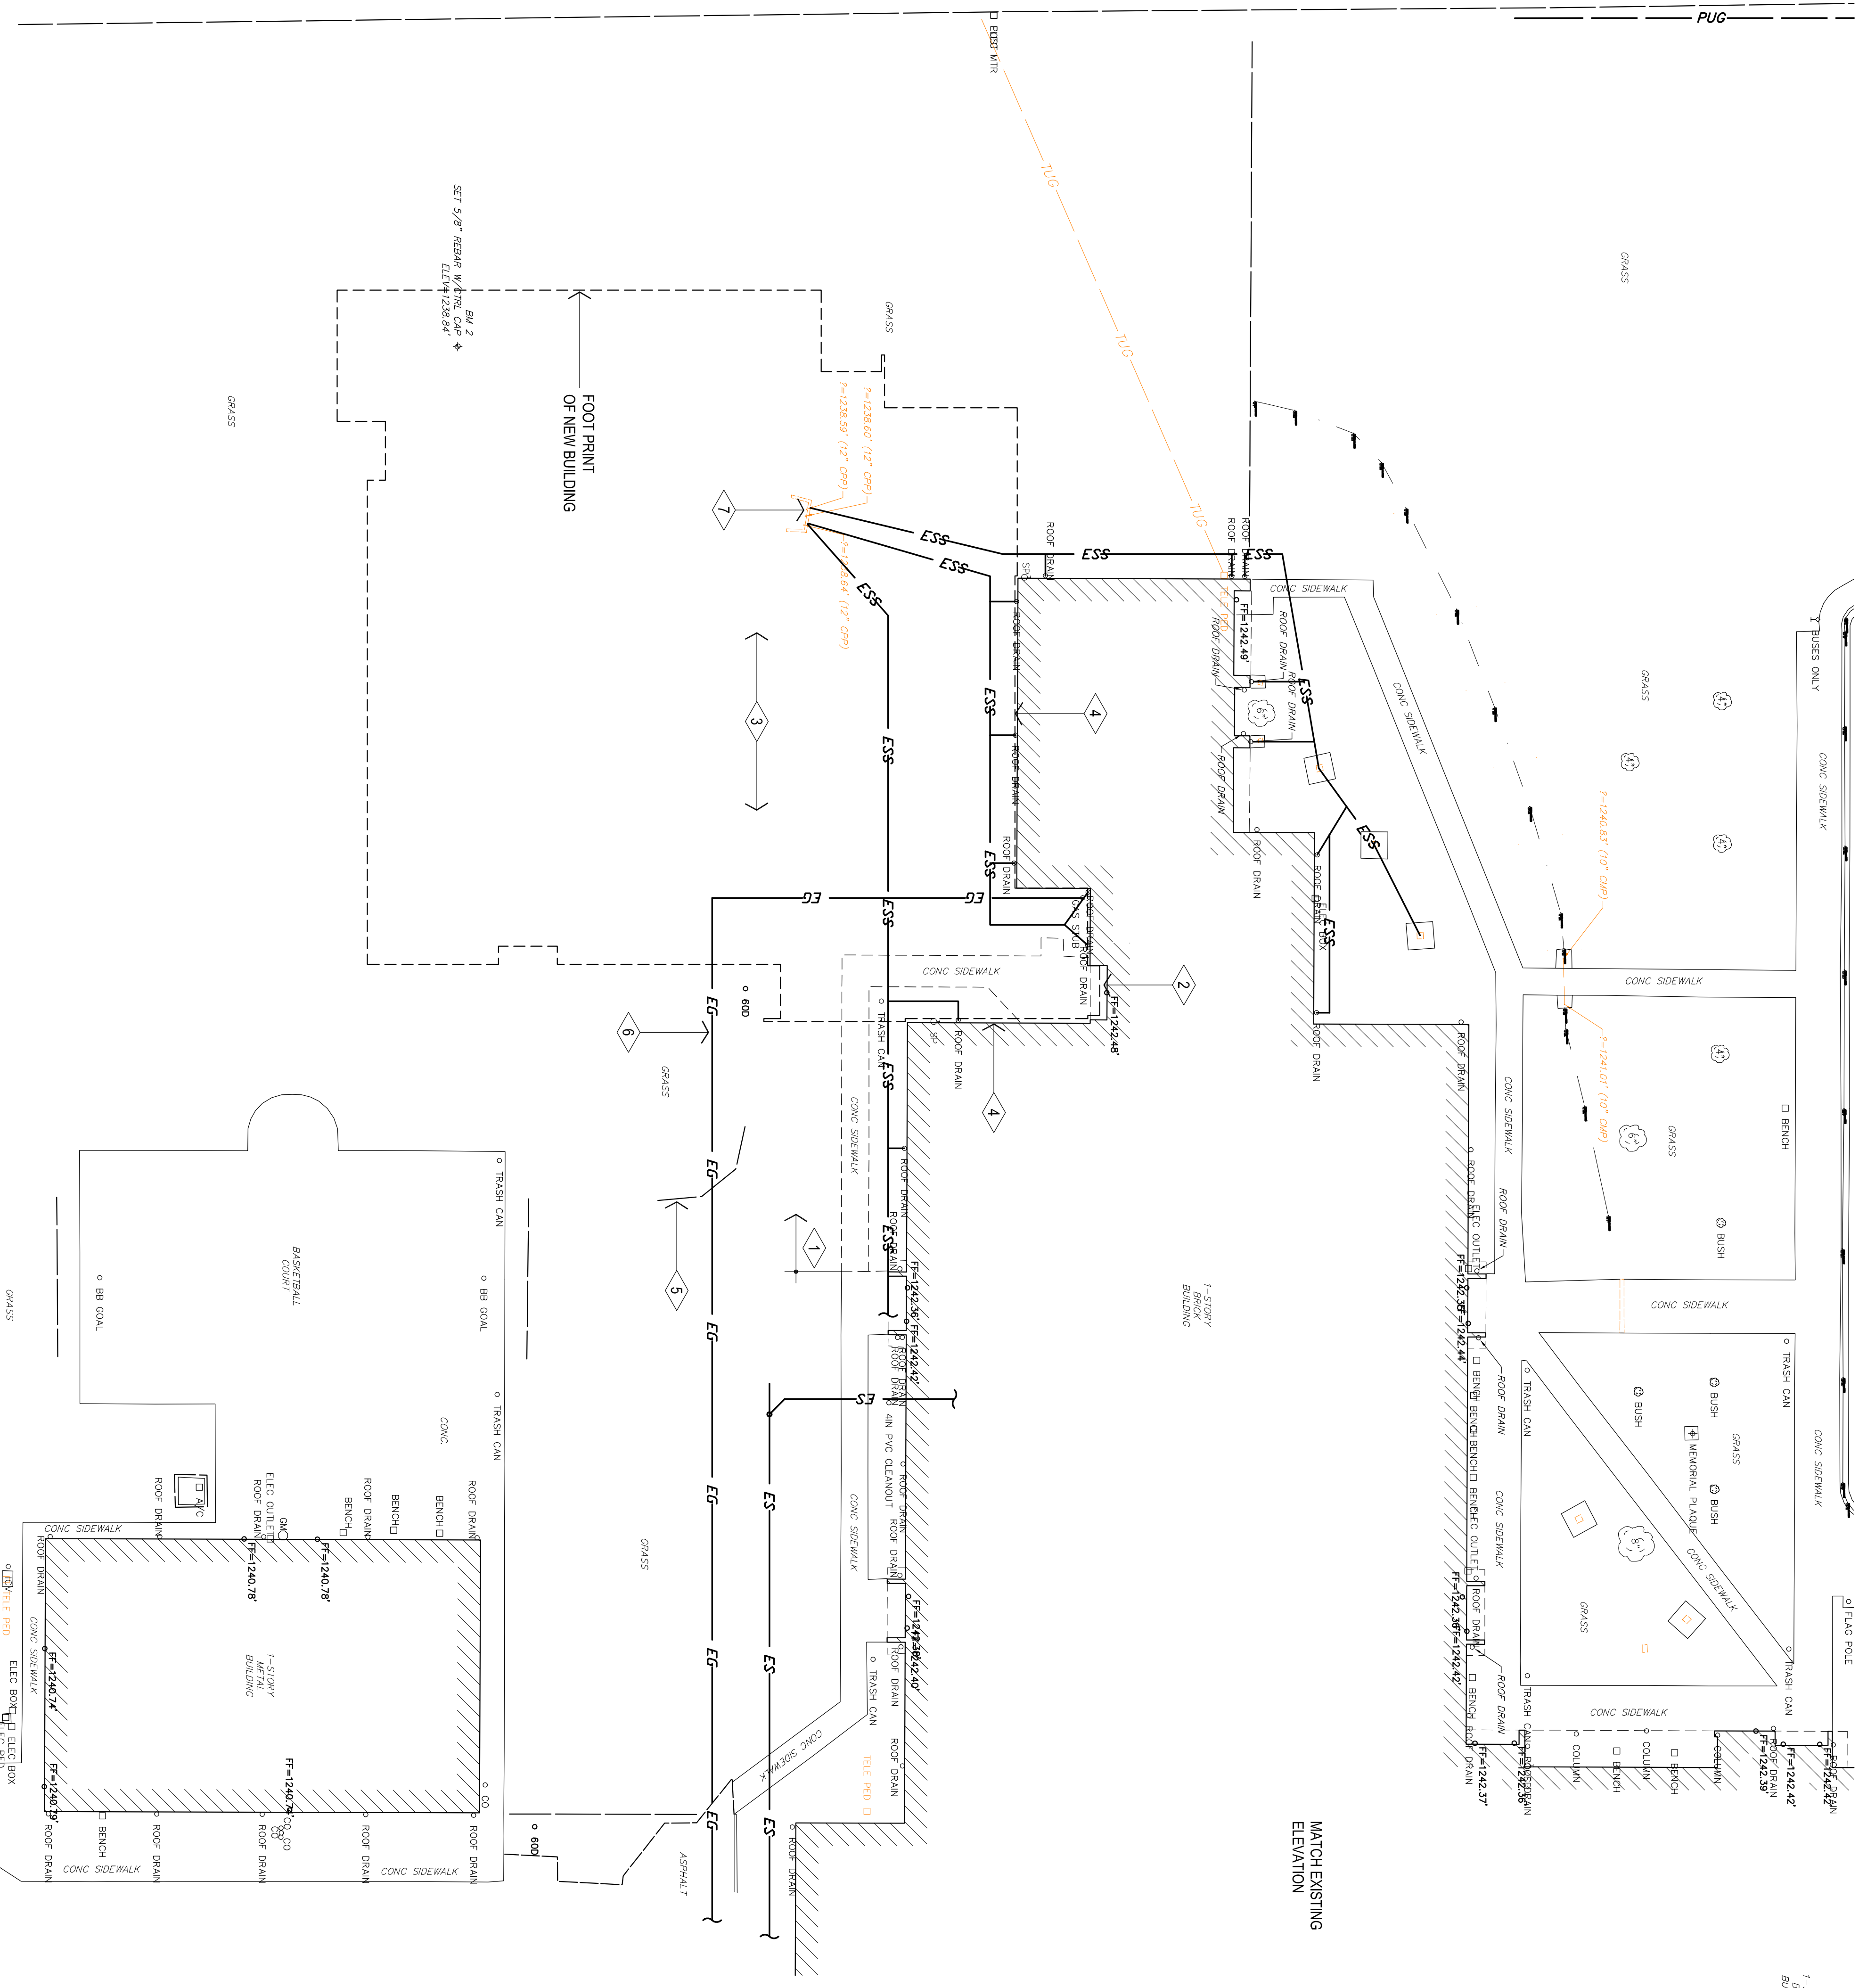

MATCH EXISTING ELEVATION

- GENERAL NOTES:**
1. FILL GRADE & PREPARE ALL EXCAVATED AREAS TO RECEIVE NEW SITE FEATURES.
 2. CONTRACTOR TO VISIT SITE PRIOR TO PREPARING BID, & VERIFY ALL ITEMS TO BE DEMOLISHED. ANY ADDITIONAL ITEMS REQUIRING DEMOLITION THAT ARE NOT INCLUDED IN THESE DOCUMENTS SHOULD BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT AND INCLUDED IN THE BASE BID.
 3. EXISTING UNDERGROUND UTILITY LOCATIONS & CONTOUR INFORMATION HAVE BEEN OBTAINED FROM THE BEST AVAILABLE SOURCES. THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO COMMENCING WORK & COORDINATE W/ ARCHITECT.
 4. CONTRACTOR IS TO FIELD VERIFY ALL EXISTING ELEVATIONS PRIOR TO STARTING EARTHWORK - AND ADJUST ACCORDINGLY AS DIRECTED BY THE ARCHITECT.
 5. DURING ALL EXISTING UTILITY REVISIONS - TEMPORARY SERVICE IS TO BE PROVIDED @ ALL EFFECTED BUILDINGS.
 6. ALL SALVAGEABLE ITEMS TO REMAIN OWNERS PROPERTY & SHALL BE STORED OR DISPOSED OF AS PER OWNERS INSTRUCTIONS.
 7. ORDINANCES, REGULATIONS & STANDARDS REQUIRED BY THE CITY OF MOORE, OKLAHOMA.
 8. CONSTRUCTION SHALL MEET ALL APPLICABLE REQUIREMENTS OF THE AMERICANS W/ DISABILITIES ACT INCLUDING ANY SUPPLEMENTAL REQUIREMENTS BY THE CITY OF MOORE, OKLAHOMA.
 9. CONTRACTOR SHALL COORDINATE ACCESS TO SITE W/ OWNER PRIOR TO STARTING WORK. OBTAIN APPROVAL FROM OWNER FOR ON-SITE MATERIAL STORAGE, ETC. CONTRACTOR SHALL PROVIDE PROPER SEPARATION BTWN. WORK & STUDENTS.
 10. COORDINATE LOCATION OF CONSTRUCTION FENCE W/ ARCHITECT & OWNER PRIOR TO STARTING WORK. RE: 10800 FOR EROSION CONTROL PLAN.

DEMOLITION NOTES:

1. DEMOLISH EXISTING CONCRETE SIDEWALKS TO LIMITS INDICATED. FILL & COMPACT VOIDS & PREPARE FOR CLASSROOM ADDITION. WHERE APPLICABLE, PROTECT EXISTING CONCRETE CURB TO REMAIN. REPAIR/ REPLACE ANY CURB DAMAGED DURING CONSTRUCTION W/ NEW TO MATCH EXISTING.
2. REMOVE EXISTING SOFFIT AND FRAMING. PREPARE AREA TO RECEIVE NEW GYP. BD. CEILING. RE: A103
3. THE CONTRACTOR SHALL FIELD VERIFY, INVENTORY & REMOVE ANY SPRINKLER SYSTEM HEADS, PIPING & ASSOCIATED ITEMS WHICH INTERFERE W/ THE NEW BUILDING ADDITION. THE CONTRACTOR SHALL MODIFY REMAINING SYSTEM AS NECESSARY AFTER CONSTRUCTION OF NEW ADDITION TO PROPER WORKING ORDER COORDINATE W/ ARCHITECT.
4. REMOVE ALL EXISTING WALL MOUNTED ITEMS TO BE SALVAGED. RE: ELECTRICAL & COORDINATE W/ ARCHITECT & OWNER.
5. REMOVE EXISTING BACK STOP FENCE AND ASSOCIATED FOUNDATION COMPLETELY - FILL AND COMPACT VOIDS. RE: CIVIL
6. REMOVE EXISTING GAS LINE TO BEST DETERMINED "CAP" LOCATION PROVIDE ALL MATERIALS AS REQUIRED TO MEET CODE. COORDINATE WITH ARCHITECT. RE: CIVIL
7. EXISTING CONCRETE STRUCTURE TO BE REMOVED. FILL & COMPACT VOIDS & PREPARE FOR CLASSROOM ADDITION.
8. REMOVE EXISTING PIPING SYSTEM TO LIMITS INDICATED. RE: CIVIL FOR NEW DRAINAGE INFORMATION

LEGEND :

ESS ——— EXISTING STORM SEWER

EG ——— EXISTING WATERLINE

C200

CLASSROOM ADDITION
HIGHLAND EAST
JUNIOR HIGH SCHOOL

MOORE PUBLIC SCHOOLS
BOARD OF EDUCATION
MOORE, OKLAHOMA


LEARNING FOR LIFE

MOORE Public Schools

STATE OF OKLAHOMA
MICHAEL L. ABILA
2839
9/30/21

WDB ENGINEERING PLLC
CIVIL
KFC ENGINEERING
STRUCTURAL
SALAS OBRIEN
MECHANICAL/ELECTRICAL

the Abila Griffin
Partnership L.L.C.
201 N. BROADWAY
SUITE 210
MOORE, OK. 73160
405.735.3477
ACGP@theAGP.net
www.theAGP.net



1

SITE DEMOLITION PLAN
1" = 20'-0"

OWNERSHIP USE OF DOCUMENTS:
AGP EXPRESSLY RESERVES ITS
COPYRIGHT AND OTHER PROPERTY
RIGHTS OF ALL PLANS AND DRAWINGS
DESIGNED AND/OR PRODUCED HEREIN.
REPRODUCTION IN ANY FORM OR MANNER
WITHOUT THE EXPRESSED WRITTEN
CONSENT OF AGP.