


1 SITE PLAN
1" = 10'-0"

NEW ADDITION
MATCH EXISTING FIN. F.L.R.

- GENERAL NOTES:**
- LOCATIONS OF EXISTING BUILDINGS, SITE FEATURES, & UNDERGROUND UTILITIES HAVE BEEN OBTAINED FROM EXISTING AVAILABLE SOURCES. THE CONTRACTOR IS TO FIELD VERIFY EXISTING LOCATIONS PRIOR TO STARTING CONSTRUCTION AND NOTIFY THE ARCHITECT IMMEDIATELY IF ANY EXISTING BUILDING OR SITE FEATURE CONFLICTS WITH THE NEW CONSTRUCTION.
 - ALL SOIL DISTURBED DURING CONSTRUCTION SHALL BE GRADED BY CONTRACTOR FOR INSTALLATION OF NEW SOD. COORDINATE W/ ARCHITECT.
 - NO SURVEY OR EXISTING GRADING INFORMATION IS AVAILABLE. WATER FLOW - SET FINAL GRADING ELEVATIONS AS REQUIRED TO INSURE POSITIVE SLOPE & DRAINAGE AWAY FROM BUILDING COORDINATE W/ ARCHITECT.
 - CONSTRUCTION SHALL MEET ALL APPLICABLE CODES, ORDINANCES, REGULATIONS & STANDARDS REQUIRED BY THE CITY OF MOORE, OKLAHOMA.
 - CONSTRUCTION SHALL MEET ALL APPLICABLE REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT INCLUDING ANY SUPPLEMENTAL REQUIREMENTS BY THE CITY OF MOORE, OKLAHOMA.
 - CONTRACTOR IS RESPONSIBLE FOR REPAIR OF ANY DAMAGE DONE TO EXISTING PAVING / ASPHALT TO REMAIN

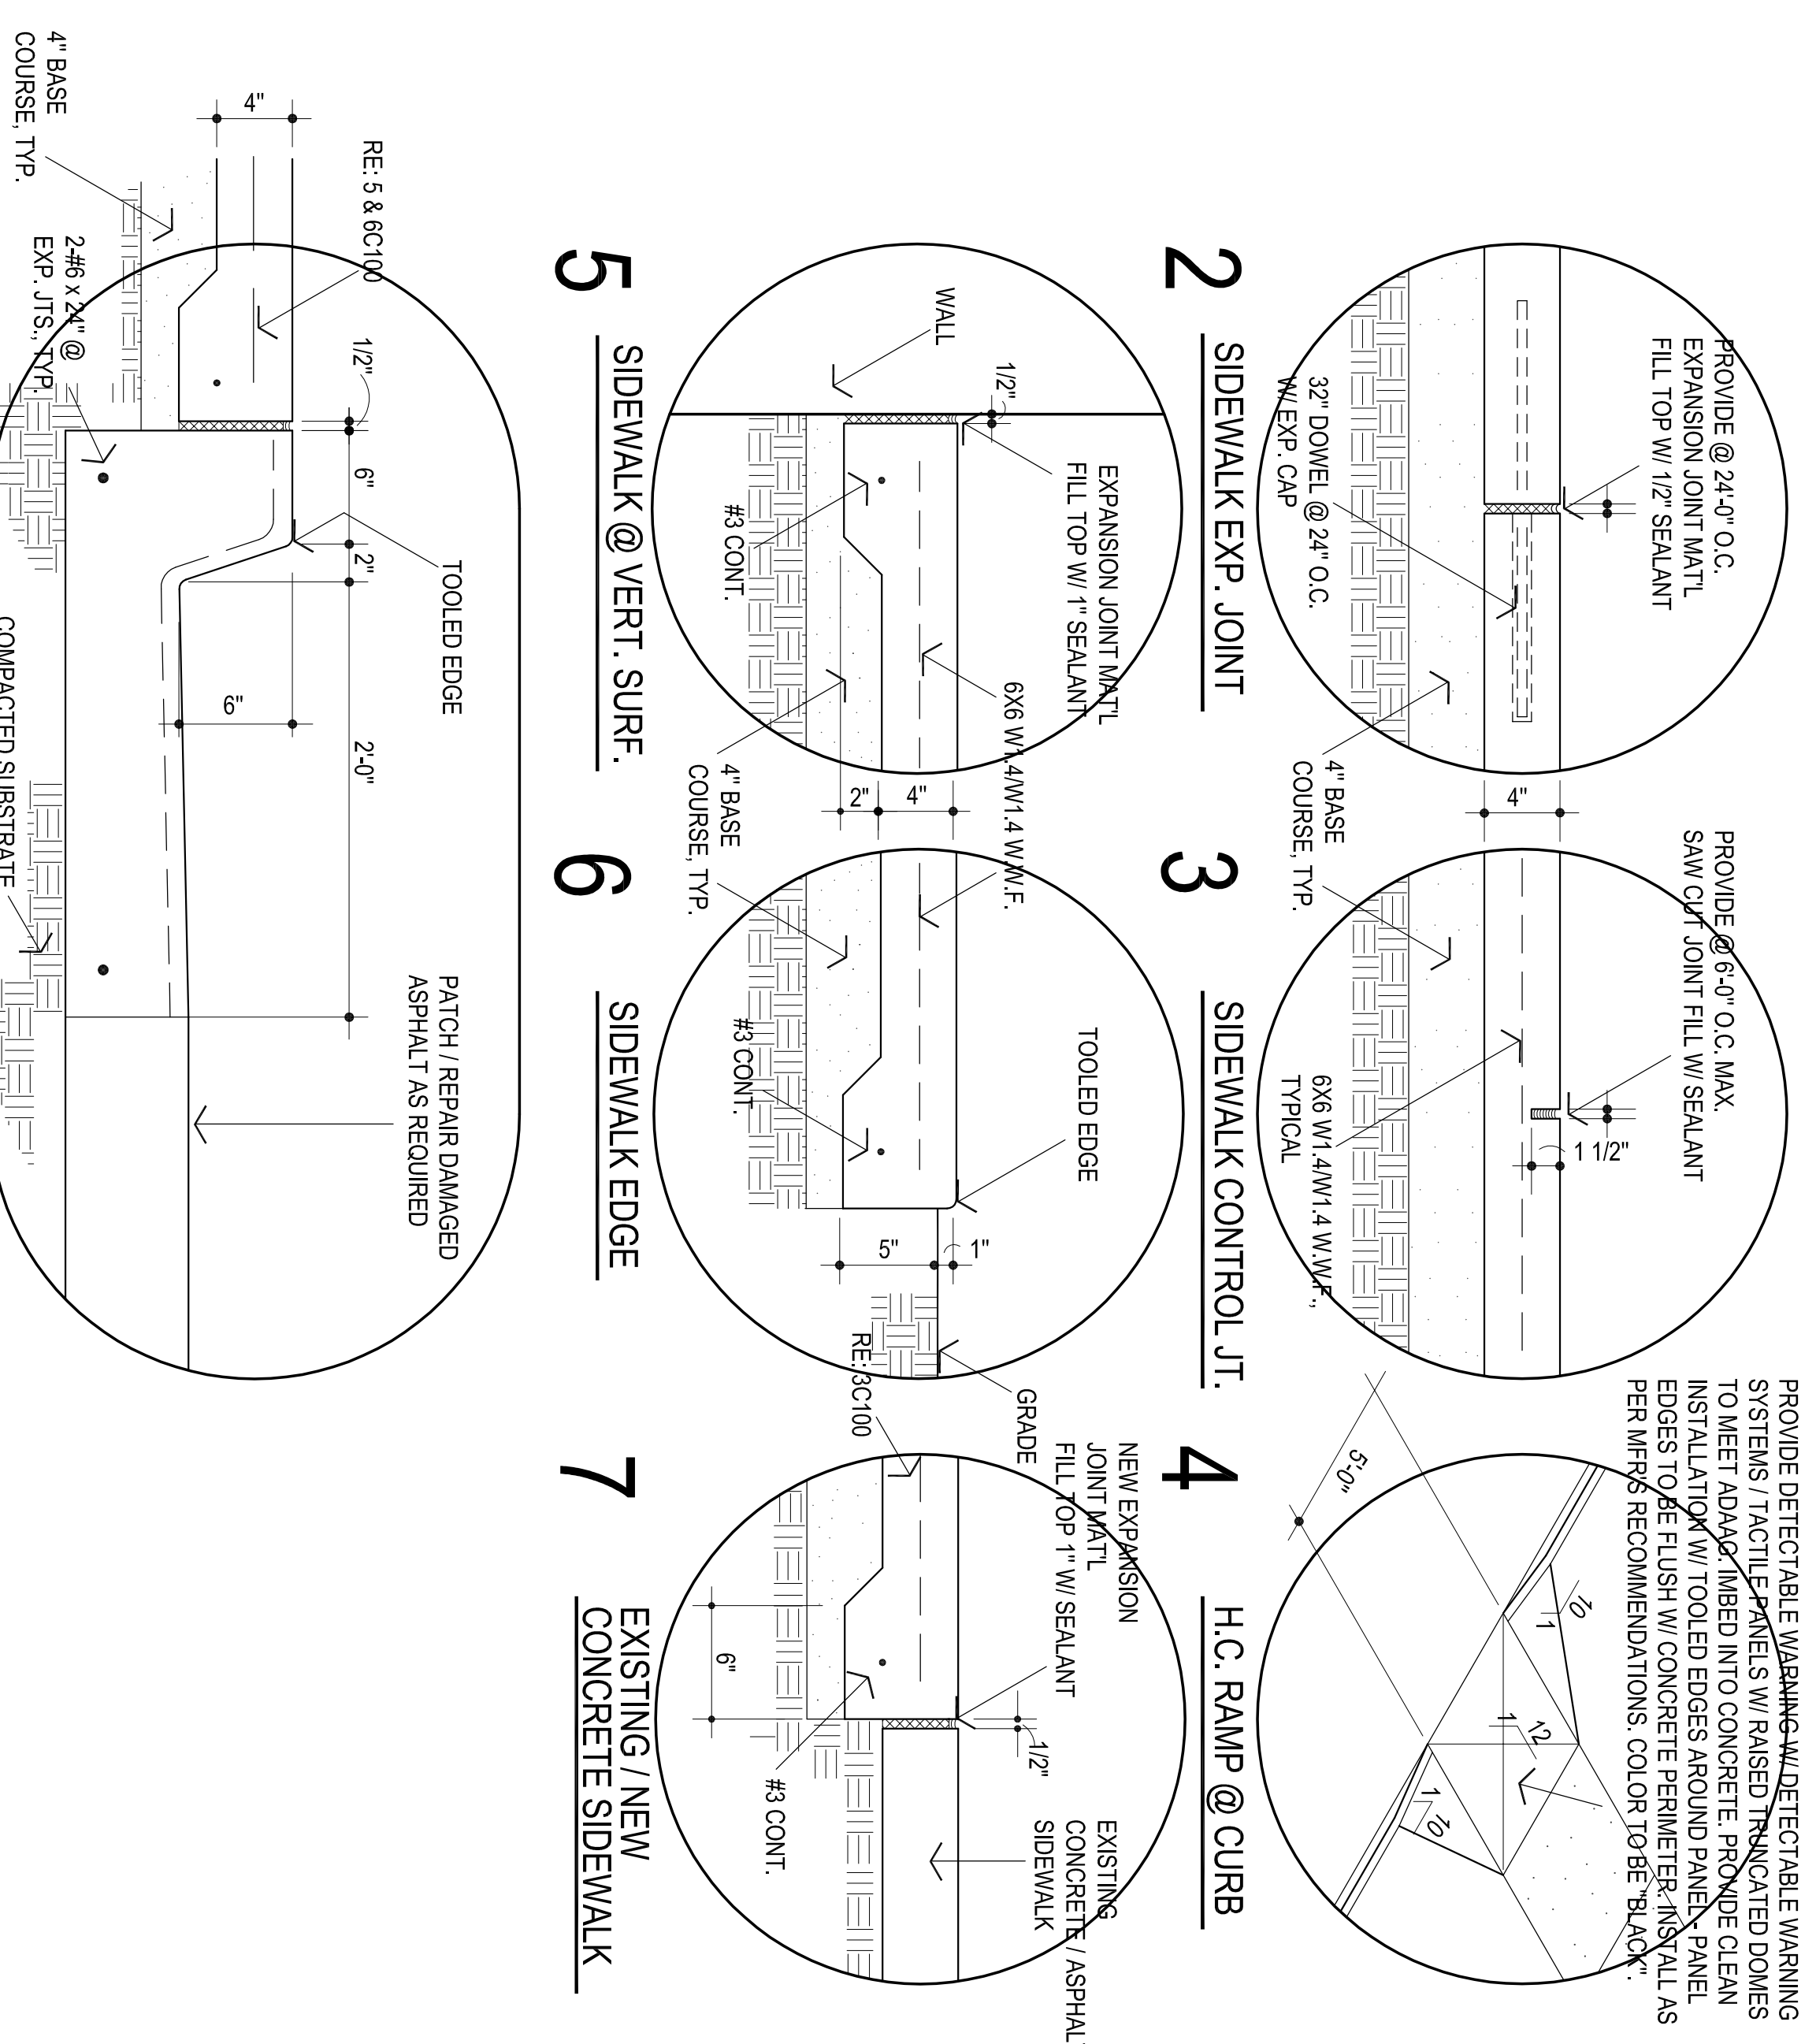

8 SIDEWALK / CONC. CURB

5 SIDEWALK @ VERT. SURF.

6 SIDEWALK EDGE

7 EXISTING / NEW CONCRETE SIDEWALK

2 SIDEWALK EXP. JOINT

3 SIDEWALK CONTROL JT.

4 H.C. RAMP @ CURB

PROVIDE DETECTABLE WARNING W/ DETECTABLE WARNING SYSTEMS / TACTILE PANELS W/ RAISED INDICATED DOMES TO MEET ADA. TAMPED INTO CONCRETE. PROVIDE CLEAN INSTALLATION W/ TOOLED EDGES AROUND PANEL. PANEL EDGES TO BE FLUSH W/ CONCRETE PERIMETER. INSTALL AS PER MFR'S RECOMMENDATIONS. COLOR TO BE BLACK.