

# MOORE PUBLIC SCHOOLS 2025 OLD SCHOOL REPLACEMENT

INDEPENDENT DISTRICT NO. 2  
CLEVELAND COUNTY, MOORE, OKLAHOMA

201 NORTH BROADWAY  
MOORE, OKLAHOMA 73160

PROJECT MANUAL  
NOVEMBER 2025



PROJECT MANUAL  
NOVEMBER 2025

MOORE PUBLIC SCHOOLS  
2025 OLD SCHOOL  
REPLACEMENT


INDEPENDENT DISTRICT NO. 2  
CLEVELAND COUNTY, MOORE, OKLAHOMA

201 NORTH BROADWAY  
MOORE, OKLAHOMA 73160

ARCHITECT:



the Abla Griffin Partnership LLC  
313 Southeast 5<sup>th</sup> Street  
Moore, Oklahoma 73160  
t: 405.735.3477  
AGP@theAGP.net

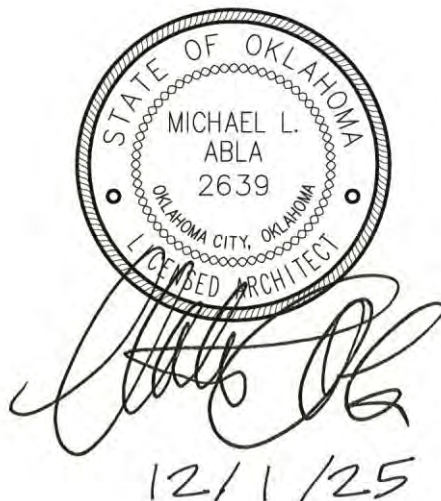

## TABLE OF CONTENT

|                                                                                          |              |
|------------------------------------------------------------------------------------------|--------------|
| Title Page                                                                               | 1 page       |
| Table of Contents                                                                        | 3 pages      |
| Mechanical, Electrical, Plumbing, & Technology                                           |              |
| Table of Contents                                                                        | 3 pages      |
| Civil Specification Table of Contents                                                    | 1 page       |
| <b>BIDDING REQUIREMENTS</b>                                                              |              |
| Special Conditions                                                                       | 7 pages      |
| Geotechnical Engineering Report prepared by<br>Standard Engineering + Field Services LLC | 50 pages     |
| <b>DIVISION 1 - GENERAL REQUIREMENTS</b>                                                 |              |
| 01010 Summary of the Work                                                                | 01010-1 - 4  |
| Job Sign Drawing                                                                         | 1 page       |
| <b>DIVISION 2 - SITE WORK</b>                                                            |              |
| 02110 Temporary Construction Fencing                                                     | 02110-1 - 2  |
| <b>DIVISION 3 - CONCRETE</b>                                                             |              |
| 03300 Cast-In-Place Concrete                                                             | 03300-1 - 14 |
| 03354 Polished Concrete Finishing                                                        | 03354-1 - 10 |
| <b>DIVISION 4 - MASONRY</b>                                                              |              |
| 04720 Architectural Cast Stone                                                           | 04720-1 - 3  |
| 04810 Unit Masonry Assemblies                                                            | 04810-1 - 11 |
| <b>DIVISION 5 - METALS</b>                                                               |              |
| 05120 Structural Steel                                                                   | 05120-1 - 6  |
| 05210 Steel Joists                                                                       | 05210-1 - 4  |
| 05310 Metal Deck                                                                         | 05310-1 - 3  |
| 05400 Cold Formed Metal Framing                                                          | 05400-1 - 10 |
| 05500 Metal Fabrications                                                                 | 05500-1 - 4  |
| 05510 Metal Stairs                                                                       | 05510-1 - 8  |
| 05515 Aluminum Ladders                                                                   | 05515-1 - 3  |
| 05521 Pipe and Tube Railings                                                             | 05521-1 - 9  |
| <b>DIVISION 6 - WOOD &amp; PLASTIC</b>                                                   |              |
| 06100 Rough Carpentry                                                                    | 06100-1 - 4  |
| 06200 Finish Carpentry                                                                   | 06200-1 - 2  |
| 06300 Wood Treatment                                                                     | 06300-1      |
| 06410 Custom Casework                                                                    | 06410-1 - 7  |
| 06420 Custom Laminate Casework (Contractor Option)                                       | 06420-1 - 11 |

## TABLE OF CONTENT

### DIVISION 7 - THERMAL & MOISTURE PROTECTION

|       |                                          |         |      |
|-------|------------------------------------------|---------|------|
| 07100 | Waterproofing                            | 07100-1 | - 2  |
| 07150 | Dampproofing                             | 07150-1 | - 2  |
| 07200 | Insulation                               | 07200-1 | - 2  |
| 07219 | Foamed-In-Place Insulation               | 07219-1 | - 7  |
| 07260 | Vapor Barrier                            | 07260-1 | - 3  |
| 07415 | Prefinished Metal Soffit Panels          | 07415-1 | - 2  |
| 07550 | Modified Bitumen Membrane Roofing System | 07550-1 | - 14 |
| 07600 | Flashing and Sheet Metal                 | 07600-1 | - 3  |
| 07700 | Roof Accessories                         | 07700-1 | - 2  |
| 07840 | Firestopping                             | 07840-1 | - 9  |
| 07900 | Sealants                                 | 07900-1 | - 6  |

### DIVISION 8 - DOORS & WINDOWS

|       |                                 |         |     |
|-------|---------------------------------|---------|-----|
| 08100 | Metal Doors and Frames          | 08100-1 | - 9 |
| 08200 | Wood Doors                      | 08200-1 | - 5 |
| 08300 | Special Doors                   | 08300-1 | - 3 |
| 08310 | Tornado Doors                   | 08310-1 | - 3 |
| 08330 | Tornado Resistant Coiling Doors | 08330-1 | - 6 |
| 08331 | Coiling Grilles                 | 08331-1 | - 4 |
| 08500 | Metal Windows                   | 08500-1 | - 6 |
| 08700 | Finish Hardware                 | 08700-1 | - 6 |
| 08800 | Glazing                         | 08800-1 | - 3 |

### DIVISION 9 - FINISHES

|        |                                        |          |      |
|--------|----------------------------------------|----------|------|
| 09120  | Ceiling Suspension Systems             | 09120-1  | - 3  |
| 09250  | Gypsum Wallboard                       | 09250-1  | - 2  |
| 09260  | Architectural Plaster System           | 09260-1  | - 4  |
| 09300  | Tile                                   | 09300-1  | - 11 |
| 09500  | Acoustical Treatment                   | 09500-1  | - 2  |
| 095113 | Acoustical Panel Ceilings Kitchen Zone | 095113-1 | - 8  |
| 09650  | Resilient Flooring                     | 09650-1  | - 3  |
| 09670  | Resinous Flooring                      | 09670-1  | - 6  |
| 09681  | Carpet Tile                            | 09681-1  | - 7  |
| 09780  | Stainless Steel Wall Panels and Trim   | 09780-1  | - 5  |
| 09900  | Painting                               | 09900-1  | - 4  |

### DIVISION 10 - SPECIALTIES

|       |                             |         |     |
|-------|-----------------------------|---------|-----|
| 10100 | Markerboards and Tackboards | 10100-1 | - 2 |
| 10400 | Interior Signage            | 10400-1 | - 4 |
| 10420 | Letters and Plaques         | 10420-1 | - 3 |
| 10520 | Fire Protection Specialties | 10520-1 | - 2 |
| 10750 | Flagpoles                   | 10750-1 | - 3 |
| 10800 | Toilet and Bath Accessories | 10800-1 | - 2 |

### DIVISION 11 - EQUIPMENT

|        |                   |          |      |
|--------|-------------------|----------|------|
| 114000 | Kitchen Equipment | 114000-1 | - 19 |
|--------|-------------------|----------|------|

## TABLE OF CONTENT

### **DIVISION 12 - FURNISHINGS**

Not Used

### **DIVISION 13 - SPECIAL CONSTRUCTION**

Not Used

### **DIVISION 14 - CONVEYING SYSTEMS**

14240 Hydraulic Elevators

14240-1 - 9

### **DIVISION 21 THRU 26 - MECHANICAL, PLUMBING, ELECTRICAL & TECHNOLOGY**

REFER TO MECHANICAL, PLUMBING, ELECTRICAL AND TECHNOLOGY  
TABLE OF CONTENTS


### **DIVISIONS 01, 02, & 31 THRU 33 - CIVIL**

REFER TO CIVIL TABLE OF CONTENTS

SECTION 00 01 10

TABLE OF CONTENTS

Engineer of Record  
Divisions 21, 22, 23  
Dwayne McDonald Gordon  
Mechanical Engineer  
Salas O'Brien, LLC  
OK 30822 / EXP 02.28.2026  
CA 7058/ EXP 06.30.2027



DIVISION 21 - FIRE SUPPRESSION

- 21 01 00 Fire Protection Operating and Maintenance Manuals
- 21 05 00 Fire Protection General Provisions
- 21 05 10 Fire Protection Contract Quality Control
- 21 05 12 Fire Protection Shop Drawings, Coordination Drawings and Product Data
- 21 10 00 Fire Sprinkler Systems

DIVISION 22 - PLUMBING

- 22 01 00 Plumbing Operating and Maintenance Manuals
- 22 05 00 Plumbing General Provisions
- 22 05 10 Plumbing Contract Quality Control
- 22 05 12 Plumbing Shop Drawings, Coordination Drawings and Product Data
- 22 05 15 Plumbing Earthwork
- 22 05 17 Plumbing Access Doors
- 22 05 19 Pressure and Temperature Instruments
- 22 05 23 Valves, Strainers and Vents
- 22 07 19 Plumbing Piping Insulation
- 22 08 00 Plumbing Commissioning Coordination
- 22 11 16 Domestic Water Piping and Appurtenances
- 22 11 21 PEX Pipe and Fittings
- 22 11 23 Domestic Water Pumps
- 22 13 16 Soil, Waste and Sanitary Drain Piping, Vent Piping and Appurtenances
- 22 20 00 Plumbing Pipe and Pipe Fittings – General
- 22 33 34 Electric Water Heater (Commercial - Non-ASME)
- 22 35 16 Instantaneous Gas Fired Tankless Water Heaters
- 22 40 00 Plumbing Fixtures and Fixture Carriers
- 22 63 11 Gas Piping and Appurtenances

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

- 23 05 00 Mechanical General Provisions
- 23 05 12 HVAC Shop Drawings, Coordination Drawings & Product Data
- 23 05 13 Electrical Provisions of HVAC Work

|          |                                                            |
|----------|------------------------------------------------------------|
| 23 05 14 | HVAC Condensate Drain Piping                               |
| 23 05 93 | Testing, Adjusting, and Balancing of Environmental Systems |
| 23 07 13 | External Duct Insulation                                   |
| 23 07 19 | HVAC Piping Insulation                                     |
| 23 20 00 | HVAC Pipe and Pipe Fittings - General                      |
| 23 23 00 | Refrigerant Piping and Appurtenances                       |
| 23 31 13 | Ductwork                                                   |
| 23 34 16 | Fans                                                       |
| 23 37 13 | Air Devices                                                |
| 23 63 00 | Air Cooled Condensing Unit                                 |
| 23 81 18 | Single Package Rooftop Air Conditioners (100% Outside Air) |
| 23 82 17 | Ducted Mini Splits DX Units                                |
| 23 82 23 | Gas Fired Furnace with DX Evaporator                       |
| 23 82 39 | Electric Unit Heaters                                      |

Engineer of Record  
Division 26  
Timothy Van Ostran  
Electrical Engineer  
Salas O'Brien, LLC  
OK 32650 / EXP 03.31.2027  
CA 7058 / EXP 06.30.2027



#### DIVISION 26 - ELECTRICAL

|          |                                                                  |
|----------|------------------------------------------------------------------|
| 26 05 00 | Electrical General Provisions                                    |
| 26 05 09 | Electric Utility Coordination and Service Entrance               |
| 26 05 12 | Electrical Shop Drawings, Coordination Drawings and Product Data |
| 26 05 16 | Excavating, Backfilling and Compacting for Electrical            |
| 26 05 19 | Conductors and Connectors - 600 Volt                             |
| 26 05 26 | Electrical Grounding                                             |
| 26 05 33 | Conduit Systems                                                  |
| 26 05 35 | Electrical Connections for Equipment                             |
| 26 05 37 | Electrical Boxes and Fittings                                    |
| 26 05 38 | Electrical Floor Boxes and Fittings                              |
| 26 05 40 | Electrical Gutters and Wireways                                  |
| 26 05 50 | Firestops                                                        |
| 26 09 44 | Lighting Controls                                                |
| 26 12 15 | Dry-Type Transformers                                            |
| 26 24 13 | Switchboards                                                     |
| 26 24 16 | Panelboards and Enclosures                                       |
| 26 27 73 | Line Voltage Wiring Devices                                      |
| 26 43 00 | Surge Protection Devices                                         |
| 26 51 13 | Lighting Fixtures                                                |

END OF SECTION



## TABLE OF CONTENTS

### CIVIL

#### Civil Construction Specifications

|           |                                                     |
|-----------|-----------------------------------------------------|
| 015713    | Erosion and Sedimentation Control (Including SWPPP) |
| 017123    | Field Engineering                                   |
| 024116    | Demolition                                          |
| 311000    | Site Clearing                                       |
| 312000    | Earth Moving                                        |
| 313116    | Termite Control                                     |
| 321216    | Asphalt Paving                                      |
| 321236.13 | Asphalt Seal and Fog Coat                           |
| 321313    | Concrete Paving Curb and Sidewalk                   |
| 321373    | Concrete Paving Joint Sealants                      |
| 329200    | Turf and Grasses                                    |
| 331000    | Water Utilities                                     |
| 333000    | Sanitary Sewage Utilities                           |
| 334100    | Storm Utility Drainage Piping                       |

#### ATTACHMENTS

Construction Drawings – 201 N. Broadway, Moore OK  
CCC Project No. 25144, dated November 18, 2025

**Local and/or State jurisdictional requirements and specifications shall govern if requirements are stricter and different than as stated in these specifications.**

**PROJECT: 25144- 201 N. Broadway Moore, OK**

PROJECT ENGINEER: Derek Harris, P.E.



---

(Engineer's Seal & Signature)

## **SPECIAL CONDITIONS**

### **TIME FOR COMPLETION AND LIQUIDATED DAMAGES:**

- A. Upon execution of the contract agreement between the Owner and the Contractor, it shall become an obligation of the contractor to complete all work to be performed under this agreement for the Construction of the 2025 Old School Replacement to be located at 201 North Broadway, Moore, OK - **within 480 Calendar Days.**
- B. Penalty for noncompliance by the above date shall be cessation of all further periodical payments until the work is completed and can be fully used for the purpose intended.

### **PAYMENTS:**

- A. The Owner's payment schedule indicating the payment dates established by Moore Public Schools shall be provided to the contractor to establish a monthly payment schedule.
- B. **Certificates of payment shall be submitted to the Architect on or before 7 days prior to Owner's cut-off date.**
- C. Until the Work is 50 percent complete, the Owner will pay 95 percent of the amount due the Contractor on account of progress payments. At the time the Work is 50 percent complete, any **remaining** partial payments shall be paid at 97.5 percent of amount due. The retainage shall be retained until the project is completed.

### **INSURANCE AND BONDS:**

- A. Insurance provided shall be with a company or companies licensed to do business in the state of Oklahoma.
- B. Policies shall be provided in the following types and amounts:
  - 1.
    - a. Workmen's Compensation-Statutory
    - b. Employer's Liability-\$500,000 each accident.
  - 2. Comprehensive General Liability:
    - a. Bodily Injury - \$1,000,000 each occurrence.
    - b. Personal Injury - \$1,000,000
    - c. Property Damage - \$1,000,000 each occurrence
  - 3. Automobile Liability:
    - a. Bodily Injury - \$500,000 each person/\$1,000.000 each occurrence

- b. Such Comprehensive Automobile Liability Insurance shall include all owned and non-owned hired motor vehicles.
- 4. Owner's Protective Liability - Same limits as above.
- 5. Products and Completed Operations - Same limits as above.
- 6. Contractual Liability - Same limits as above.
- C. Furnish one copy of Certificates herein required for each copy of the Agreement; specifically set forth evidence of all coverage required by Subparagraphs 11.1 and 11.2. Furnish to the Owner copies of any endorsements that are subsequently issued amending coverage or limits.
- D. **The Contractor shall provide property insurance in the amount of the initial contract sum as well as subsequent modifications thereto for the entire Work at the site on a replacement cost basis without voluntary deductibles. This insurance coverage shall be the "all-risk" form for completed value.**

#### **TEMPORARY SERVICES:**

- A. Sanitary Facilities: The Contractor shall provide and maintain necessary sanitary conveniences for the use of those employed on/or about the work. The sanitary facilities shall be properly secluded from public observation and shall be such locations as shall be approved by the Owner, and their use shall be strictly enforced.

#### **SHOP DRAWINGS and SUBMITTALS:**

- A. Unless otherwise specified, the shop drawings and product data shall be submitted **electronically**. Physical samples of materials shall be submitted to the Architect as required.
- B. Construction Manager is responsible for obtaining and distributing required prints of shop drawings to his subcontractors and material suppliers after as well as before final approval.
- C. Shop drawings and samples shall be dated and marked to show the names of the Project, Architect, CM, originating Sub-Contractor, manufacturer or supplier, and separate detailer if pertinent.

Shop drawings shall completely identify Specifications section and locations at which materials or equipment are to be installed. Reproduction of Contract Drawings are acceptable as Shop Drawings only when specifically authorized in writing by the Architect &/or applicable Engineer/Consultant.

- D. If materials or specified items other than those specified in these Contract Documents are supplied - and approved by the Architect - it shall be the Construction Manager's responsibility to provide **ALL** additional materials, accessories, substrates, utility connections, etc. for a complete and operational installation at **NO** additional cost to the Owner.

#### **CHANGES IN THE WORK:**

- A. Cost shall be limited to the following: cost of materials, including sales tax and cost of delivery; cost of labor, including social security, old age and unemployment insurance, and fringe benefits under collective bargaining agreements; workmen's compensation insurance; bond premiums; and rental value of power tools and equipment. Overhead shall include the following; supervision, superintendence, wages of timekeepers, watchmen and clerks, hand tools, incidentals, general office expense, and all other expenses not included in "cost".
- B. Subcontractor Change Order markups shall be limited to 10% overhead and 10% profit.

Constructor Manager markups shall be limited to 7% profit UNLESS a time extension has been approved by the Owner and the Architect allowing for an increase of G.C.s as per original base agreement times the number of approved additional days. No other markups shall be allowed.

#### **AS BUILT DRAWINGS:**

- A. Provide and maintain in proper order and in good, clean condition in the field office at the project site, one complete full-size set of all working drawings. On this set of drawing prints, in red ink, neatly and accurately inscribe any and all changes in the work.
- B. Upon completion of work, the Contractor shall furnish one set of "as built" drawings. These drawings shall be contract drawings corrected in **red ink** to show any differences between contract

drawings and actual construction. All changes made during construction shall be noted. Each drawing showing changes in dimensions, details, or containing supplemental information shall be plainly marked "**As Built**" and shall contain the signature of both the Architect and the Contractor.

#### **CLOSEOUT SUBMITTALS:**

Prepare project data in the form of an instructional manual supplied electronically on media as requested by Owner (CD or flash drive). The following information shall be included and arranged under a Table of Contents:

1. Directory listing names, addresses, and telephone numbers of the Architect/Engineer(s), General Contractor, Subcontractors, and major material/equipment suppliers.
2. Operation and Maintenance Instructions arranged by system and subdivided by specification section. For each category, identify names, addresses, and telephone numbers of Subcontractors and Suppliers. Include equipment, parts list for each, operating instructions, maintenance instructions for equipment, special finishes, etc.
3. Project documents and certificates, including shop drawings and product data, air and water balance reports, photocopies of warranties.
4. Record As-Built Drawings as described above.
5. Completed Non-Asbestos Affidavit.

#### **DEBRIS DISPOSAL:**

Waste disposal shall be the responsibility of the Contractor. The Contractor shall make arrangements with the local authorities having jurisdiction for accommodation of all waste disposal. If local facilities are not available, the contractor shall be responsible for all other arrangements for waste disposal.

#### **SUPPLEMENTARY CONDITIONS AND SPECIAL CONDITIONS:**

In the following sections where the term "General Conditions" is used, it shall include the "Supplementary Conditions" and/or "Special Conditions" bound in this project manual.

#### **MISCELLANEOUS PROVISIONS:**

##### **A. TESTS AND INSPECTIONS**

Add the following clarification: **Regardless of how it is**

**described elsewhere in the drawings and specifications, the CM shall engage all testing laboratories / subcontractors as approved by the Architect; and, pay for ALL testing as required by the drawings and specifications.** The CM shall pay for any additional testing due to defective work. The Owner shall pay for any additional testing requested and found to be non-defective.

**B. EQUAL OPPORTUNITY**

The Contractor shall maintain policies of employment as follows:

The Construction Manager and all Subcontractors shall not discriminate against any employee or applicant for employment because of race, religion, color, sex, or national origin. The Contractor shall take affirmative action to ensure that applicants are employed, and that employees are treated fairly during employment without regard to their race, religion, color, sex, or national origin. Such action shall include, but not be limited to the following: employment, upgrading, demotion, or transfer; recruitment advertising; layoff or termination; rates of pay or any other forms of compensation; and selection for training, including apprenticeship. The CM agrees to post in conspicuous places, available to employees and applicants for employment, notices setting forth the policies of non-discrimination.

**C. COOPERATION WITH BUILDING OFFICIALS**

Cooperate with applicable Federal, State, City or other governmental officials and inspectors at all times. If such officials or inspectors deem special inspections are necessary, provide assistance and facilities that will expedite their inspection.

**Construction Manager shall be responsible for obtaining and paying for ALL building permits required for this project. This cost shall be included in the Construction Manager's General Conditions.**

**D. MEASUREMENTS**

Before doing any work or ordering any materials, the Contractor shall verify all measurements of existing and new work and shall be responsible for their correctness.

Quantities obtained during bidding &/or construction shall

not be from the scaling of the drawings. Only dimensions obtained from dimensioned documents &/or existing on-site conditions shall be utilized for quantities determination, pricing, and ordering. Any scaling of the Construction Documents will be at the bidder's risk and any discrepancies shall be corrected by and paid for by the bidder.

If differences are found, they shall be submitted to the Architect for consideration and verification before proceeding with the work.

E. MANUFACTURER'S SPECIFICATIONS AND INSTRUCTIONS

Install all manufactured items of materials or equipment in strict accordance with manufacturer's recommended specifications, except that the specifications herein, where more stringent, shall be complied with.

At the completion of the project and prior to final acceptance by the Owner, provide the Owner with three complete sets of operating and maintenance instructions, and demonstrate to him the procedures for proper operation and maintenance of all equipment.

F. CONFLICTS BETWEEN DRAWINGS AND SPECIFICATIONS:

Conflicts between the drawings and specifications shall be brought to the immediate attention of the Architect. Failure to bid items(s) noted on the drawings and omitted from the specifications **does not** remove responsibility from the Construction Manager and applicable Subcontractor(s) to provide and install such with no additional cost to the Owner.

These Contract Documents - including but not limited to the Drawings, Project Manual, and any subsequent Addenda - are issued as a "whole" and shall be bid as such. Each discipline / subcontractor shall review the **entire set** of Contract Documents and include applicable work in their bid **regardless of location within the Contract Documents**.

Reviewing only a portion of the Contract Documents shall not absolve the construction manager or subcontractor of the requirements to perform all the work required of their respective disciplines and/or trade to provide a complete and properly functioning product, system, device, material, etc.

G. JOB MAINTENANCE

During the course of their work, all crafts and trades shall protect all work which preceded theirs from damage, and they shall make repairs or replacements to any damage caused either directly or indirectly by them.

H. COMPLIANCE WITH STATE AND FEDERAL LAWS

Construction Manager assumes full responsibility for the payment of all contributions and payroll taxes (state and federal) as to all subcontractors and employees engaged in the performance of work pursuant hereto and further agrees to check and meet all requirements that might be specified under regulations of the administrative officials or board charged with the enforcement of any state or federal act on the subject referred. CM agrees to furnish Owner, upon request, a certificate or other evidence of compliance therewith.

I. OCCUPATIONAL SAFETY AND HEALTH ACT OF 1970 (OSHA)

The Construction Manager shall comply with the latest edition and revision of The Federal Occupational Safety and Health Act of 1970 for construction.

J. GUARANTY BONDS

1. Prior to the Owner signing the contract agreement, they will require the Construction Manager to furnish performance and payment bonds covering the faithful performance of the entire construction contract agreement. The performance bond and the payment bond shall each be made out in one hundred percent (100%) of the contract sum and shall be in a company or companies against which the Owner has no reasonable objection.
2. Bonds shall be signed by an official of the bonding company and shall be accompanied by the bonding agent's written power-of-attorney in order that one copy may be attached to each copy of the contract agreement.
3. The Construction Manager shall include in his proposal amount the total premiums for all required bonds.



4. The Contractor does hereby warrant and/or guarantee against defects in all workmanship and materials performed or furnished by him directly or by his subcontractors for a period of one (1) year from the date of completion, as evidenced by the date of the Final Certificate or final acceptance of the project. Said warranty and/or guarantee shall be in the form of a good and sufficient bond in a sum equal to one hundred percent (100%) of the contract price.

**End of Special Conditions**

## SUBSURFACE EXPLORATION

Old School Elementary School Kitchen Addition  
Moore, Oklahoma

PROJECT NO. 2530-0265

May 14, 2025

The Abla Griffin Partnership, LLC  
313 SE 5<sup>th</sup> Street  
Moore, OK 73160

Attn: Mr. Michael Abla  
Principal

Re: Subsurface Exploration  
Old School Elementary School Kitchen Addition  
201 North Broadway Avenue  
Moore, Oklahoma

Dear Mr. Abla:

Standard Engineering & Field Services, LLC (Standard) is pleased to present the report covering the subsurface exploration for the subject project. This study was authorized by receipt of the signed "Agreement for Services" contract, dated April 2<sup>nd</sup>, 2025.

Standard conducted a geotechnical investigation at the site of the new Old School Elementary School Kitchen Addition project in Moore, Oklahoma. This report contains the detailed results of the geotechnical investigation, including foundation recommendations, pavement recommendations, and construction considerations.


The subsurface soils consist of approximately 10 to 15 feet of fat clay with various amounts of sand overlying very weathered shale and shale rock. These soils exhibit high plasticity characteristics. The estimated potential vertical rise of the soil is 2.4 inches.

Foundation recommendations include: (1) Shallow Footings, (2) Ribbed Mat Foundation, or (3) Drilled Pier Foundation.


We trust that the results and recommendations contained herein will permit adequate economical design and construction of the proposed structure. Unless you specify otherwise, we will keep samples obtained from these borings in our Oklahoma City laboratory for the next thirty (30) days.

We appreciate the opportunity to assist on this project. Please call on us if we can be of further service.

Respectfully submitted,  
STANDARD ENGINEERING & FIELD SERVICES, LLC



Donovan Bradshaw, E.I.  
Staff Geotechnical Engineer



Roy Khalife, P.E.  
Geotechnical Engineer

Project No. 2530-0265  
Account No. 0230AGP25



## SUBSURFACE EXPLORATION

Old School Elementary School Kitchen Addition  
201 North Broadway Avenue  
Moore, Oklahoma

PROJECT NO. 2530-0265

PREPARED FOR

**The Abla Griffin Partnership, LLC**  
313 SE 5<sup>th</sup> Street  
Moore, OK 73160


PREPARED BY

**STANDARD ENGINEERING & FIELD SERVICES, LLC**  
3400 N. Lincoln Blvd.  
Oklahoma City, OK 73105  
Certificate of Authorization No. 7933, Expiration 6/30/2025  
(405) 528-0541

Prepared By:

Reviewed By:

Reviewed By:



Donovan Bradshaw, E.I.

Staff Geotechnical Engineer



Alan Soltani, P.E.

Principal Engineer



Roy Khalife, P.E.

Geotechnical Engineer

I certify my e-signature for the study entitled "Subsurface Exploration."

Dated 5/14/2025

May 14, 2025

## TABLE OF CONTENTS

### Page

|                                                            |    |
|------------------------------------------------------------|----|
| 1. INTRODUCTION.....                                       | 1  |
| 1.1 Authorization .....                                    | 1  |
| 1.2 Purpose and Scope .....                                | 1  |
| 1.3 Project Location and Description .....                 | 1  |
| 2. FIELD EXPLORATION .....                                 | 2  |
| 2.1 Drilling Information.....                              | 2  |
| 2.2 Equipment Used .....                                   | 2  |
| 2.3 Testing and Sampling Performed .....                   | 2  |
| 2.4 Subsurface Conditions .....                            | 3  |
| 2.5 Groundwater.....                                       | 3  |
| 3. LABORATORY TESTING .....                                | 5  |
| 3.1 Tests Performed .....                                  | 5  |
| 3.2 Laboratory Summary .....                               | 5  |
| 4. ENGINEERING EVALUATION AND RECOMMENDATIONS.....         | 6  |
| 4.1 Soil Conditions.....                                   | 6  |
| 4.2 Existing Site Conditions.....                          | 7  |
| 4.3 Seismic Site Class.....                                | 7  |
| 4.4 Laboratory Testing Results.....                        | 8  |
| Swell or Collapse Test.....                                | 8  |
| Unconfined Compressive Strength of Soil Test Results ..... | 8  |
| 4.5 Earthwork Recommendations .....                        | 8  |
| Building Pad Construction .....                            | 8  |
| Inert Fill Requirements .....                              | 10 |
| Subgrade Preparation .....                                 | 10 |
| Compaction Requirements .....                              | 10 |
| Deep Fill Sections .....                                   | 11 |
| Drainage.....                                              | 12 |
| 4.6 Foundation Recommendations.....                        | 13 |
| Footing Foundation System.....                             | 13 |
| Ribbed Mat Foundation System .....                         | 14 |
| Pier Foundation System .....                               | 15 |
| 4.7 Concrete Slabs.....                                    | 16 |
| Elevated Structural Floor Slabs .....                      | 17 |
| 4.8 Grade Beams .....                                      | 18 |
| 4.9 Pavement Recommendations .....                         | 18 |
| Subgrade Preparation .....                                 | 18 |
| Pavement Sections .....                                    | 19 |
| Materials and Construction.....                            | 20 |
| 4.10 Soil Stabilization Recommendations .....              | 20 |
| Application of Chemical Stabilizer and Initial Mixing..... | 20 |
| Water Application and Moist Mixing .....                   | 21 |
| 4.11 Lateral Earth Pressure Parameters .....               | 21 |
| 4.12 Excavation Requirements (OSHA Requirements).....      | 24 |

|                                                       |    |
|-------------------------------------------------------|----|
| 4.13 Construction Procedures and Considerations ..... | 26 |
| 5. BASIS FOR RECOMMENDATIONS .....                    | 27 |
| 5.1 General Comments .....                            | 27 |
| 5.2 Limitations .....                                 | 27 |

## APPENDICES

|                   |                                                                         |
|-------------------|-------------------------------------------------------------------------|
| <b>Appendix A</b> | Vicinity Map<br>Site and Boring Location Plan                           |
| <b>Appendix B</b> | Boring Logs<br>Soil Profile<br>Definition of Descriptive Terms          |
| <b>Appendix C</b> | AASHTO Soil Classification System<br>Unified Soil Classification System |
| <b>Appendix D</b> | Summary of Test Results                                                 |

## LIST OF TABLES

|                                                        | <u>Page</u> |
|--------------------------------------------------------|-------------|
| Relative Elevation of Rock Material .....              | 3           |
| Swell or Collapse Test Results .....                   | 8           |
| Unconfined Compressive Strength Test Results .....     | 8           |
| Cut and Fill Building Pad Requirements .....           | 9           |
| Over Ground Inert Fill Building Pad Requirements ..... | 9           |
| Ribbed Mat Design Parameters .....                     | 15          |
| Pavement Sections .....                                | 19          |
| Recommended Transverse Joint Spacings .....            | 20          |
| Equivalent Fluid Pressure .....                        | 24          |
| OSHA Soil Classification .....                         | 25          |
| Maximum Allowable Slopes .....                         | 25          |

## LIST OF FIGURES

|                                               | <u>Page</u> |
|-----------------------------------------------|-------------|
| Google Earth Aerial View, February 2025 ..... | 7           |

## Section 1

### INTRODUCTION

#### 1.1 Authorization

This report presents the results of a subsurface exploration performed by Standard Engineering & Field Services, LLC (Standard) in accordance with the proposal (P-2025-085) prepared for Mr. Michael Ablá, dated March 28<sup>th</sup>, 2025, and identified as Standard's project number 2530-0265. This geotechnical study was authorized by receipt of the signed "Agreement for Services" contract, dated April 2<sup>nd</sup>, 2025.

#### 1.2 Purpose and Scope

A geotechnical investigation was performed for the purpose of (1) determining the subsurface conditions, (2) evaluating the bearing capacity and plasticity characteristics of the soils, and (3) making recommendations concerning the earthwork, pavement and foundation systems for the building addition.

Two (2) exploratory borings (borings DB-1 and DB-2) were drilled to a depth of 25 feet. The boring depths and types of testing were performed according to the scope of work proposed by Standard and accepted by Mr. Ablá of the AGP. Narrative descriptions of our findings and recommendations are contained in the body of this report. A site and boring location plan, the boring logs, the soil profile, and a summary sheet of laboratory test results are included in the Appendices of this report.

#### 1.3 Project Location and Description

The Old School Elementary School Kitchen Addition project is proposed to be constructed at 201 North Broadway Avenue in Moore, Oklahoma. The project will consist of a new shelter addition to the existing structure. The loads on continuous footings and grade beams are estimated to be 9 KLF, and the column loads are estimated to be 10 K to 200 K.

If the project is not as described or has changed, Standard must be notified in order to reevaluate the recommendations for the project.



## Section 2

### FIELD EXPLORATION

#### 2.1 Drilling Information

The field exploration work was performed on April 11<sup>th</sup>, 2025. Conditions at the site were investigated with two (2) borings at the locations indicated on the site and boring location plan, included in Appendix "A." The boring surface elevations were measured with respect to a Temporary Benchmark (TBM) established at the top nut of an existing fire hydrant. The Temporary Benchmark (TBM) location is also shown in the site and boring location plan in Appendix "A." Boring surface elevations, rounded to the nearest foot, are reported on the individual boring logs, included in Appendix "A."

The benchmark has an assigned relative elevation of 100 feet. Boring depths were 25 feet within the building addition's footprint. For accurate sampling, cuttings were observed continuously during drilling with specific samples being taken at distinct lithologic changes. The equipment used, field tests performed, and soil samples taken are discussed below.

#### 2.2 Equipment Used

Two (2) borings were drilled with a truck-mounted CME-75 rotary drilling unit equipped with 4" solid flight augers (SFA). Standard penetration tests (SPT) used a 1.375" ID split spoon sampler driven by an automatic hammer utilizing a 140 lb. weight falling 30 inches.

#### 2.3 Testing and Sampling Performed

Standard penetration tests were performed in order to estimate the shear strengths of the soils in their natural state. The test was conducted as specified by ASTM D1586, "Penetration Test and Split-Barrel Sampling of Soils." The in-situ bearing strength is related to the N-value from this test. "N" is the number of blows required to drive a split-spoon sampler twelve inches, after a 6-inch seating, into undisturbed soil. The soil samples recovered in the split-spoon barrel were removed from the sample tool in the field, visually classified, and labeled according to boring number and depth. Results of the standard penetration tests are denoted at their respective depths on the boring logs.

According to Skempton, A.W. (Geotechnique, Vol. 36, No.3, pp 425-447, 1986), and hammer efficiency the corrected N value can be determined as follows:

$$N_{60} = C_b C_r \left( \frac{E_m}{60} \right) N$$

Where:

$N_{60}$  = Standard Penetration Test N Value Corrected for Field Testing Procedures

$C_b$  = Borehole Diameter Correction ( $C_b = 1.0$  for Boreholes of 3.25" in Diameter)

$C_r$  = Rod Length Correction ( $C_r = 0.75$  for up to 13 feet of drilling rods, 0.85 for 13 to 20 feet of drilling rods, 0.95 for 20 to 33 of drilling rods, and 1.00 for drilling rods in excess of 33 feet)

N = Measured Standard Penetration Test N Value

$E_m$  = Hammer Efficiency in Percent ( $E_m = 81.3\%$  for CME-75)

Thin-walled tube samples were collected as specified by ASTM D1587, "Standard Practice for Thin-Walled Tube Sampling of Soils for Geotechnical Purposes."

Depths of individual split spoon (standard penetration tests), thin-walled tube, and grab samples are indicated on the boring logs included in Appendix "B." All samples were labeled and sealed in water tight, protective containers and returned to the laboratory for further evaluation and testing.

## 2.4 Subsurface Conditions

The soils encountered consist of fat clay with various amounts of sand overlying very weathered shale and shale rock. The cohesive soils were found to be firm to very stiff in consistency. Rock materials (i.e., defined by standard penetration test refusal) were encountered in the indicated borings at the relative elevation shown in the following table:

**Table 1: Relative Elevation of Rock Material**

| Boring No. | Surface Elevation (feet) | Rock Depth (feet) | Rock Elevation (feet) | Rock Material |
|------------|--------------------------|-------------------|-----------------------|---------------|
| DB-1       | 98.0                     | 15.0              | 83.0                  | Shale         |
| DB-2       | 97.0                     | 15.0              | 82.0                  | Shale         |

## 2.5 Groundwater

During drilling and at completion of drilling operations, groundwater was NOT encountered in the borings. However, due to the significant presence of high plasticity "fat" clays across the site and the high moisture content present, it can be expected that if any excavation is left open for more than 24 hours, it will likely experience water seepage and infiltration into the excavation. Because of this, the presence of water should be anticipated in any excavation. Water travelling through soil (subsurface water) is often unpredictable and may be present at shallow depths. Due to the seasonal changes in groundwater and the unpredictable nature of groundwater paths, groundwater levels will fluctuate. Therefore, it is necessary during construction to be observant for groundwater seepage in excavations in order to assess the

situation and make necessary changes. We cannot assume responsibility for difficulties experienced during construction or for future operational problems due to elevation or volume of water encountered.

### Section 3

## LABORATORY TESTING

Laboratory testing was performed in order to determine the plasticity characteristics of the subsurface materials as well as confirm the soil classifications.

### 3.1 Tests Performed

- Moisture content tests were performed on split spoon, thin-walled tube, and bag samples, in accordance with ASTM D2216, to determine the in-situ moisture conditions.
- Density tests were performed on intact split spoon, and thin-walled tube samples in accordance with ASTM D7263 Method A.
- Atterberg limits tests were performed on split spoon, thin-walled tube, and bag samples to determine the plasticity characteristics and swell potential of the soil. The tests were performed in accordance with ASTM D4318.
- Sieve analyses were performed on split spoon, thin-walled tube, and bag samples, in accordance with ASTM D2487, for aid in soil classification. These soils were classified according to the Unified Soil Classification System (USCS) and the American Association of State Highway and Transportation Officials (AASHTO) soil classification system.
- Swell or collapse test was performed on a select undisturbed thin-walled tube sample in accordance with ASTM D4546 Method B testing procedures. The test result is summarized in the Laboratory Testing Results Section of this report.
- Unconfined compressive strength tests were conducted on thin-walled tube soil samples in accordance with ASTM D2166. The unconfined compressive strength as determined by this test, along with the results of the standard penetration test, is used to estimate the in-situ shear strength of the various soils encountered. The graphs in Appendix "D" depict the behavior of the tested soil under compression without confinement. The unconfined compressive strengths of the soils samples are presented on the boring logs and in the "Summary of Laboratory Test Results" table in Appendix "D."

### 3.2 Laboratory Summary

General descriptions of the encountered soils together with visual and laboratory classifications and numerical values of the test results are on the boring logs and soil profile included in Appendix "B." A "Summary of Test Results" is included in Appendix "D."

## Section 4

# ENGINEERING EVALUATION AND RECOMMENDATIONS

## 4.1 Soil Conditions

A geotechnical concern at this site is the presence of expansive soils. The soils encountered in this investigation consist of fat clay with various amounts of sand overlying very weathered shale and shale rock. The cohesive soils were found to be firm to very stiff in consistency. These near surface soils exhibit high plasticity characteristics. Rock materials (i.e., defined by standard penetration test refusal) were encountered in both borings. The plasticity characteristics of the soils encountered indicate that these soils are active for consideration of soil expansion on foundation design. The plasticity index (PI) of a soil indicates a soil's potential to shrink or swell with changes in its moisture content. The near-surface soils at this site generally display high plasticity characteristics and were found in a moist to very moist condition. Atterberg limits test results indicate that on-site plastic soils have PI's up to 33. These soils should be considered active and should be expected to undergo significant volume change upon moisture variation.

These soils are expected to undergo expansion upon moisture increase and, conversely, contraction upon moisture decrease. Oklahoma is well known for its heaving clays and the foundation problems associated with soil expansion and uplift pressures. These soil characteristics accompanied with the seasonal variability in soil moisture content caused by the regional climatic conditions often result in foundation and structural damage. Accordingly, the swelling characteristic of the soil is a primary concern and the Potential Vertical Rise (PVR) becomes an important factor in the foundation design of the proposed facility.

The maximum PVR value computed for this site is 2.4 inches. The procedure used to predict the PVR was developed by Standard based on AASHTO test method T258 and modified to incorporate our experience with actual Oklahoma soils. The displacement associated with the PVR is a relatively long-term effect, associated with significant moisture changes in the soil, and applies to free surface conditions. A maximum PVR of 0.75 inch or less is generally considered tolerable for most structures. These soils should be removed from underneath the slabs and replaced with inert fill as specified in the Earthwork Recommendations Section of this report.



## 4.2 Existing Site Conditions



**Figure 1: Google Earth Aerial View, February 2025**

Based on aerial imagery available from Google Earth®, and firsthand experience from our drilling crew, the project site consists of an existing lot of land adjacent to the nearby Old School Elementary School Business Center. Areas of the site include sidewalks and underground utilities, and as such, fill may be encountered in construction at this location. The character of the site has remained largely the same for the last 20 years.

If fill or debris are encountered during construction, fill materials and any debris should be removed and replaced with inert fill as described in the Earthwork Recommendations section of this revised report. A representative of Standard should observe the exposed grade in these areas following over-excavation and prior to placement of new fill when applicable.

## 4.3 Seismic Site Class

Based on the results of our investigation, this site is classified as Seismic Site Class CD. This recommendation is based on the criteria given in Table 20.3-1 of the ASCE/SEI 7-22 entitled "Site Class Definitions." The conditions are assumed based on the depth of rock encountered and the assumption that it continues to a depth of 100 ft. Following are the approximate mapped and design spectral acceleration parameters.

- The Approximate Mapped Spectral Acceleration for Short Periods,  $S_s=0.37$

- The Approximate Mapped Spectral Acceleration for a 1-Second Period,  $S_1=0.084$
- The Approximate Design Spectral Response Acceleration at Short Period,  $S_{ds}=0.26$
- The Approximate Design Spectral Response Acceleration at 1-Second, Period,  $S_{d1}=0.099$

## 4.4 Laboratory Testing Results

### Swell or Collapse Test

A Swell/Collapse test was performed on selected thin-walled tube sample in accordance with ASTM D4546 Method B. This test is used for determining the magnitude of swell or collapse of relatively undisturbed cohesive soils. Graphs of these results are presented in Appendix "D." Summary of test results are below:

**Table 2: Swell or Collapse Test Results**

| Boring No. | Depth (feet) | Void Ratio ( $E_o$ ) | % Swell (+)<br>% Collapse (-) |
|------------|--------------|----------------------|-------------------------------|
| DB-1       | 3.0-5.0      | 0.669                | +1.2                          |

### Unconfined Compressive Strength of Soil Test Results

Unconfined compressive strength tests were conducted on thin-walled tube soil samples in accordance with ASTM D2166 testing method. The results are presented in the following table and are also presented in Appendix "D."

**Table 3: Unconfined Compressive Strength Test Results**

| Boring No. | Depth (feet) | Moisture Content (%) | Dry Density (pcf) | Max. Shear Strength, $c_u$ (psf) | Strain at Max. Stress (%) |
|------------|--------------|----------------------|-------------------|----------------------------------|---------------------------|
| DB-1       | 3.0-5.0      | 10.3                 | 113.3             | 1753                             | 13.1                      |
| DB-2       | 3.0-5.0      | 22.0                 | 106.7             | 1802                             | 14.9                      |

## 4.5 Earthwork Recommendations

### Building Pad Construction

A critical geotechnical consideration at this site is the swelling soils. If slab-on-grade construction is to be used for the building floor at this site, construction of an inert fill building pad is advisable. The amount of ground surface movement that can be tolerated by the structure should be evaluated by the designer (a value of 0.75 inch or less may be used for

most structures) and the corresponding amount of removal and replacement or over ground fill should be performed as indicated in the following options:

**Option 1: Cut and Fill**

- Remove the required amount of existing soil (see following table) and replace that soil with inert fill, meeting all requirements given herein,

**Table 4: Cut and Fill Building Pad Requirements**

| Depth of Removal and Replacement Soil<br>(feet)* | Estimated Potential Vertical Rise (PVR)<br>(inches) |
|--------------------------------------------------|-----------------------------------------------------|
| 0.0                                              | 2.4                                                 |
| 2.0                                              | 1.5                                                 |
| 3.0                                              | 1.2                                                 |
| 4.0                                              | 1.0                                                 |
| 5.0                                              | 0.7                                                 |

\*Below existing site grade

or

**Option 2: Fill Only**

- Place the required amount or more of inert fill (see following table), meeting all requirements given herein, over the native soils.

**Table 5: Over Ground Inert Fill Building Pad Requirements**

| Depth of Over Ground Inert Fill Building Pad<br>(feet)** | Estimated Potential Vertical Rise (PVR)<br>(inches) |
|----------------------------------------------------------|-----------------------------------------------------|
| 0.0                                                      | 2.4                                                 |
| 2.0                                                      | 1.5                                                 |
| 3.0                                                      | 1.2                                                 |
| 4.0                                                      | 1.0                                                 |
| 5.0                                                      | 0.7                                                 |

\*\*Above existing site grade

Only low plasticity on-site soils or imported inert fill should be used for fill under structure. Inert fill should meet the following requirements:



### Inert Fill Requirements

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Amount finer than 2-inch sieve  | 100%                                          |
| Amount finer than No. 200 Sieve | 12% minimum and, if $PI \leq 7$ , 60% maximum |
| Liquid Limit                    | 35 maximum                                    |
| Plasticity Index (PI)           | 5 to 15                                       |

### Subgrade Preparation

The existing subgrade should be:

- Stripped of topsoil, vegetation, pavement, fills and any other deleterious materials,
- Over-excavated to the required depth to reduce PVR to a level appropriate for the structural system to be used referring to the cut and fill building pad requirements and overground inert fill building pad requirements tables and extended to at least five (5) feet beyond building footprint,
- Proofrolled, including removing and replacing any soft material which exhibits permanent subgrade deformation exceeding 0.5 inch when traversed by a loaded truck with a rear axle load of approximately 16,000 lbs./axle, and
- Tested for moisture and density and, if deficient, scarified to a depth of 8 inches, moisture conditioned and compacted to 95 percent or more of standard Proctor maximum dry density (ASTM D698).

When required during construction, removal of soft subgrade should not exceed a 3-foot depth below final top of subgrade elevation, nor extend below the static groundwater elevation. If such a depth is reached without encountering stable subgrade conditions, 3-inch diameter surge rock may be driven into the soft subgrade to provide a stable platform for construction equipment and then a minimum of 12 inches of ODOT Type A aggregate base should be placed in the bottom of the over-excavated area then suitable fill material placed and compacted to bring the subgrade to design elevation. In specific situations, geogrid may need to be placed on top of the subgrade, underneath the aggregate base material.

### Compaction Requirements

All fill in the structural areas should be:

- Compacted to at least 95 percent of standard Proctor maximum dry density (ASTM D698) at a moisture content within -2% to +2% of the optimum.
- Compacted to at least 95 percent of modified Proctor maximum dry density (ASTM D1557) at a moisture content near optimum for ODOT Type A aggregate base.
- Placed in lifts not to exceed eight (8) inches in compacted thickness.

- Tested for field density for each lift of fill at frequencies of every 1,500 sq. ft. in areas under structure and 2,500 sq. ft. in areas under pavement but no less than 3 tests per lift. For utility trenches, test field density at frequencies of 100 linear foot of trench and at frequencies of 50 linear foot of any utility underneath pavement or other structure.
- Fill compacted with hand-operated equipment, i.e. small walk behind rollers, plate compactors etc. around and near pipelines, manholes etc. should be placed in lifts not to exceed four (4) inches in loose lift.

Moisture should be maintained up until the placement of concrete in structural areas to prevent shrinkage (and subsequent post-construction swell) of the soil.

### Deep Fill Sections

It is recommended that any fill section under buildings or behind retaining walls above 5 feet in thickness be composed of no more than 5 feet of inert fill and the remaining section to be compacted ODOT Type A aggregate base in order to limit the consolidation settlement to approximately 1 inch. We recommend that the aggregate base be placed at the bottom of the fill section to provide improved structural capacity. The fill should be compacted to at least 95% of the Maximum Dry Density as determined using the Modified Proctor effort (ASTM D1557). If deep fill sections are to be composed of compressible materials such as cohesive inert fill, one of the following recommendations should be followed:

- Prior to placement of the fill section at its deepest section, settlement monitoring plates should be installed at several locations on top of subgrade and also settlement monuments should be installed on top of the fill section. Subgrade settlement and the self-consolidation of the fill section should be monitored using survey equipment at regular intervals (typically 30-days under the supervision of the Geotechnical Engineer of Record). Once the full consolidation settlement of the fill section is complete, structure such as foundations and slabs-on-grade may be placed on top.
- Alternatively, and if the schedule does not allow for settlement monitoring, the full deep fill section may be composed of compacted ODOT Type A aggregate base compacted to 95% of the Modified Proctor effort (ASTM D1557).
- A Structural or elevated slab may also be and is recommended to be designed and constructed to span over any deep fill section that may potentially settle and therefore results in a gap underneath the slab.
- Plumbing and mechanical piping should be designed in such a way that they will not be

affected by any movement of the deep fills or slabs above to prevent any damage to non-flexible piping.

### Drainage

The ground immediately adjacent to the foundation shall be sloped away from the building at a slope of not less than six (6) inches vertical fall in the first ten (10) feet measured perpendicular to the face of each wall. Trees and large bushes for landscaping should not be permitted within this 10-foot zone adjacent to the building. General site slopes, drainage swales, or storm drains shall be constructed to provide 1.0 percent slope, or more, along drainage paths which serve to discharge storm water from the site. If surface soil should be left exposed (e.g., flower beds) near the structure foundation, then it is suggested that efforts be taken to maintain such areas at a constant moisture in order to avoid swell/shrinkage of the soil that will affect the foundation system.

If a non-expansive (inert fill) building pad is constructed such that it extends below the adjacent higher plasticity soils, the bottom of such excavation shall be cut at a slope of not less than 1.0 percent to provide a subsurface sump. Drainage shall be provided from this sump in the base of the non-expansive building pad by an underdrain with a slope of at least 1.0 percent discharging either to daylight or to a permanent, automated sump pump system. The underdrain at the sump shall extend below the excavation and shall consist of a perforated nonmetallic underdrain conduit (ODOT 726.02(b)6), 4.0 inches diameter or larger, wrapped in drainage geotextile (ODOT 712.03) and surrounded by at least 6 inches of coarse cover aggregate (ODOT 703.04) on all sides.

The underdrain system mentioned in the above paragraph can be waived if a clay cap is placed surrounding the building footprint and all utility line trenches sealed with a clay plug at the building perimeter.

Clay cap should be:

- Over-excavated at least one foot deep below final grade and be extended horizontally to at least five (5) feet beyond edge of the exterior wall;
- Placed with geofabric over the excavated subgrade soils;
- Backfilled with compacted CLAYS of Pls greater than twenty-five (25); and
- Sloped away from the building at a slope of not less than six (6) inches vertical fall in the first ten (10) feet.
- On-site CLAYS with Pls greater than twenty-five may be used for the clay cap

## 4.6 Foundation Recommendations

Considering the soils encountered and based on the test results of this exploration, the following foundation design parameters are recommended for the indicated foundation systems:

### Footings Foundation System

Shallow foundations (e.g. spot or continuous cast-in-place concrete footings) may be used to support the new structures at this site. Footings must be placed a minimum of 2.0 feet below finished grade to provide adequate protection from frost action. Footings may be used with allowable net bearing capacity of 2,500 psf on native soils, 2,000 psf on compacted inert fills as described in the Earthwork Recommendations Section of this report or 3,000 psf on 2.0 feet of properly compacted ODOT Type A Aggregate Base. Footings should have a width of at least 16 inches.

Continuous footings and spot footings are expected to undergo no more than 1.0 inch settlement when designed for the recommended bearing pressure when constructed on existing soil or no more than 5 feet of properly compacted inert fill. Standard shall be provided with final grading plans and structural loads in order to re-evaluate our recommendations if deemed necessary.

If this addition is to tie into an existing structure which is supported on shallow footings, we recommend that the proposed addition also be supported with shallow footings. Care should be exercised during the construction of foundations adjacent to the existing building to avoid negatively influencing the existing structure. It is recommended that, where possible, excavations below existing footings not extend below an imaginary plane extending out and down from the outside edge of the existing footings at a slope approximately 2H: 1V. Even with these criteria, excavations that extend below the level of existing foundations should be backfilled the same day they are excavated. Where this is impractical, shoring or underpinning of existing foundation may be required.

Some overlap in stress distribution from new and existing footings may occur, which may cause minor movement of the existing footings and supported structures. Maintaining a clear distance at least equal to the width of the new column spread footings between the edges of new and existing footings could significantly reduce the risk. If connections between the new and existing structures are required, such connections should be designed to allow for the anticipated differential movement.

### Ribbed Mat Foundation System

Considering the swelling soils encountered, the test results of this exploration and our understanding of the project, a post-tensioned ribbed mat would provide an appropriate foundation for this structure.

Reinforced or post-tensioned ribbed mats provide a foundation system composite with the floor. The inherent rigidity of the ribbed mat allows it to span across differential movements of the subgrade. A reinforced or post-tensioned ribbed mat may be used over a uniformly prepared subgrade consisting of natural soils or fill as long as the appropriate differential movements of the subgrade are considered in the design of the mat for moment, shear, and differential deflection. The design methodology that we recommend is the procedure detailed in "Design of Post-Tensioned Slabs-on-Ground," PTI DC10.1-08 third edition with 2008 supplement, by the Post-Tensioning Institute (PTI).

If a uniform thickness, post-tensioned slab is desired in lieu of the ribbed mat, the 2008 edition of the "Design of Post-Tensioned Slabs-on-Ground" published by PTI includes design and construction provisions for such foundation system. The PTI document requires that the foundation first be designed as a ribbed mat to satisfy moment, shear, stiffness, and differential deflection requirements given in the design procedure and then converted to an equivalent uniform thickness foundation using a conversion equation. The ribbed mat design must also satisfy the limitations on beam spacing, depth, and width listed in section 4.5.2 of the PTI document. The ribbed mat design may then be converted to an equivalent uniform thickness foundation by using a slab thickness which provides gross section stiffness equivalent to that of the ribbed mat design. This is accomplished by setting the gross moment of inertia of the uniform thickness slab about its centroid (i.e., one-twelfth the slab width times the cube of the slab thickness) equal to the gross moment of inertia of the ribbed mat about its centroid and solving for the slab thickness. Additionally, uniform thickness foundations should be limited in thickness to not less than 7.5 inches unless a continuous rib conforming to the requirements in section 4.5.2.2 and 4.5.2.3 of the PTI document is provided at the entire perimeter of the foundation.

A conventionally reinforced or post-tensioned ribbed mat may be used over a uniformly prepared subgrade. For this foundation alternative, the proofrolling and subgrade preparation recommendations given in the Earthwork Recommendations Section of this report must be followed to provide a uniform subgrade, but the removal and replacement of the subgrade soils currently on the site to reduce heave potential is not necessary. The inherent rigidity of the ribbed mat gives it the ability to distribute loads over a much wider area and mitigates the

potential for excessive heave and/or settlement of the foundation. A ribbed mat may be designed using the following parameters:

**Table 6: Ribbed Mat Design Parameters**

| Parameter                                 | Estimated Value                                                     |
|-------------------------------------------|---------------------------------------------------------------------|
| Bearing Capacity (on ribs only)           | 2,500 psf (other material)<br>2,000 psf (compacted inert fill)*     |
| Modulus of Elasticity of Subgrade, $E_s$  | 200,000 psf (other material)<br>300,000 psf (compacted inert fill)* |
| Slab Subgrade Friction Coefficient, $F_f$ | 0.75 (other material)<br>1.0 (compacted inert fill)*                |
| Modulus of Subgrade Reaction, $k_s$       | 75 pci (other material)<br>140 pci (compacted inert fill)*          |
| Moisture Variation Distance, $e_{in}$     | 7.9 ft. (center lift)<br>4.0 ft. (edge lift)                        |
| Differential Soil Movement, $Y_m$         | 1.17 in (center lift)<br>1.76 in (edge lift)                        |

\*Compacted inert fill extending at least 2 feet below bearing elevation

### Pier Foundation System

Structures may be designed to be supported by drilled cast-in-place concrete piers founded 3.0 feet or more below the depths indicated in the "Relative Elevation of Rock Material" table provided in Section 2.4 of this report. Using this type of foundation, each column is supported on a single drilled pier and the building walls are placed on grade beams supported by a series of piers. Loads applied to the piers are transmitted to the rock partially through skin friction along the sides of the pier and partially through end bearing pressure.

All drilled piers should:

- Extend at least 3.0 feet or at least one (1) pier diameter, whichever is deeper, beyond the elevation indicated in the "Relative Elevation of Rock Material" table provided in Section 2.4 of this report,
- Have an aspect ratio (length/diameter) between three (3) and thirty (30),
- Have a spacing between individual piers of three diameters or more (clear spacing),
- Be adequately reinforced with the reinforcement extending into the grade beams and/or pier caps, and
- Have a diameter of at least 18 inches.



Piers may be proportioned using an allowable net end bearing capacity of 22,000 psf and an allowable skin friction capacity of 1,330 psf for that portion of the pier in direct contact with the shale rock. The allowable net bearing capacity and allowable skin friction capacity both include a factor of safety of 3.0. Uplift of the piers can be resisted by using the same skin friction values plus for the pier weight (i.e. 150 pcf x Pier Area x length of Pier). Maximum service load vertical displacement of piers designed in this manner is expected to be on the order of 0.8% of the pier base diameter.

Drilled shafts may require casing or slurry-drilling methods due to the potential for groundwater in the borings. Concrete should be placed in pier holes as soon as practicable after completion of drilling to prevent weathering of the bearing stratum and relaxation of horizontal ground stresses.

If groundwater is encountered during pier excavation and cannot be dewatered, concrete may be placed by tremie-pipe method so as to assure no contamination of the fresh concrete by groundwater or drilling fluids. A sufficient head of plastic concrete should be maintained within the casing at all times during its extraction in order to overcome the hydrostatic groundwater pressure outside the casing.

#### **4.7 Concrete Slabs**

Concrete slabs-on-grade for floors should be constructed as follows:

- The subgrade, inert fill, and/or soil building pad should be prepared as described in the Earthwork Recommendations section of this report.
- Four (4) inches or more of granular base, meeting the following requirements, should be placed over the subgrade:

|                                   |              |
|-----------------------------------|--------------|
| passing the 1.5 inches sieve..... | 100 %        |
| passing the #200 sieve.....       | 15 % or less |
| plasticity index.....             | 6 or less    |
- At the time of concrete placement, the granular base should be moist, but free of any standing water.
- The concrete slab should be placed a minimum of four (4) inches thick in lightly loaded areas and up to six (6) inches thick in heavily loaded areas and should not be tied into the footings, stemwalls, or structural frame. If it is necessary to tie the concrete slab into the foundation walls, exterior walls, and/or pitwalls, the slab should be jointed no more than 10 to 15 feet from the point of the restraint (ACI 360R-10, Section 14.7). Other control joints should be provided, each way, at a spacing of 24 to 36 times the slab thickness but no more than 18 feet. Refer to ACI 360R-10, Section 6.1.3 and Figure 6.6 for additional guidance on joint spacing.

If floor coverings susceptible to moisture damage by moist floor conditions (capillary moisture) are to be used, a vapor retarder consisting of one or more polyethylene or polypropylene fabric reinforcement layers with one or more bonded polyethylene film layers, at least 10 mils in total thickness, should be placed below the slab. The vapor retarder should be lapped 6 inches and taped at joints and fitted around all service openings. Section 5.2.3.2 of ACI 302.1R-15 provides the most current industry recommendations for use and placement of vapor retarders. Figure 5.2.3.2, in ACI 302.1R-15, provides guidance for determining whether to place the vapor retarder above or below the "granular material" below the slab.

Concrete slabs can be designed using a modulus of subgrade reaction,  $k_s$ , of 140 pci for compacted inert fill described in the Earthwork Recommendations Section of this report or 75 pci for native soil.

### Elevated Structural Floor Slabs

Floor slabs may be constructed so as to be elevated at least four (4) inches from the natural ground surface to avoid contact with the swelling soils or non-engineered fills. This may best be accomplished by casting the concrete over cardboard carton forms or "void" boxes. Such floor slabs must be designed to span between supporting structural elements without the aid of soil support. These slabs are necessary when slabs at ground level should remain independent of soil movement. Slabs-on-carton forms are most commonly used when soils at the building site are expansive clays subject to significant movement as a result of moisture variation. They provide a more economical construction solution than conventional framing systems, which require a crawl space to remove forms. The cardboard carton forms deteriorate in the months following construction, eventually leaving the desired void space below the slab and forcing the slab to span between supporting foundation elements.

If floor slabs are designed and constructed to be elevated in this manner and the foundation elements are designed to counteract the soil swelling pressures, then the inert fill subgrade provisions in the Earthwork Recommendations Section of this report may be waived. We recommend that the elevated floor slab be structurally connected to the foundation elements and grade beams. Construction of such slabs should follow ACI 318-19 Chapter 8 for two-way slabs especially when the slab is supporting or attached to partitions or other construction likely to be damaged by large deflections.

The minimum thickness of the slab should be determined in accordance with ACI 318-19 Table 8.3.1.1 (8.3.1.2 for 2-way slabs with beams spanning between supports on all sides). The



minimum area of flexural reinforcement for the slab should be determined in accordance with ACI 318-19 section 8.6.1.2

Experience has shown that certain types of wet cardboard carton forms can fail locally under the weight of concrete and construction activities, resulting in a loss of part or all of the desired void space in the vicinity of the form failure. This failure can occur immediately or up to 30 or 45 minutes after strike-off. The latter type of failure, in addition to reducing desired void space, can result in a loss of local slab levelness. Forms that have been damaged by rain should be replaced or allowed to dry thoroughly, with their capacity verified, before concrete placement.

#### **4.8 Grade Beams**

Grade beams, supported by shallow footing systems, may be constructed so as to be elevated at least four (4) inches from the ground to avoid contact with the swelling soils. This may be best accomplished by casting the concrete over cardboard carton forms or “void” boxes.

#### **4.9 Pavement Recommendations**

##### Subgrade Preparation

Prior to the placement of fill or preparation of pavement subbase:

- The natural subgrade should be stripped of all topsoil, vegetation, pavement, fills and any other deleterious materials.
- The parking and drive areas should then be graded and shaped to facilitate drainage, with a minimum slope of 1/8 inch per foot.
- Next, the subgrade should be proofrolled, including removing and replacing any soft material which exhibits permanent subgrade deformation exceeding 0.5 inch when traversed by a loaded truck with a rear axle load of approximately 16,000 lbs./axle. Removal of soft subgrade should not exceed a 3-foot depth below final top of subgrade elevation, nor extend below the static groundwater elevation. If such a depth is reached without encountering stable subgrade conditions, 12 inches of ODOT Type A aggregate base should be placed in the bottom of the overexcavated area and suitable fill material placed and compacted to bring the subgrade to design elevation.
- Once the subgrade has been satisfactorily proofrolled, the surface layer of the subgrade shall be scarified to a depth of 6 inches.
- It is recommended that the prepared subgrade and subbase extend a minimum of 2 feet outside the pavement edges.

## Pavement Sections

We estimate the CBR value of the near surface soils as 3.0 based on the borings. This would correspond to a modulus of subgrade reaction,  $k_s$ , of 75 pci, and a resilient modulus,  $M_r$ , of 3,000 psi.

Pavement sections were evaluated based on the AASHTO 1993 guidelines with the following assumptions. If traffic loads are greater than used in the analysis, Standard must be notified in order to reevaluate the recommendations.

- Design Period = 20 years
- Reliability Level = 85% (flexible and rigid)
- Initial Serviceability Index = 4.5 (flexible and rigid)
- Terminal Serviceability Index = 2.0 (flexible and rigid)
- Combined Standard Error ( $S_0$ ) = 0.5 (flexible) and 0.4 (rigid)
- Light duty (car parking) total design ESALs ( $W_{18}$ ) = 99,000 (flexible) and 150,000 (rigid)
- Heavy duty (truck parking) total design ESALs ( $W_{18}$ ) = 348,000 (flexible) and 500,000 (rigid)

We recommend that the following pavement sections be used:

**Table 7: Pavement Sections**

| Pavement Type                               | Light Duty<br>(inches) | Heavy Duty<br>(inches) |
|---------------------------------------------|------------------------|------------------------|
| <u>Flexible Pavement</u>                    |                        |                        |
| Surface Course (S4)                         | 2.0                    | 2.0                    |
| Intermediate Course (S3)                    | -                      | 2.5                    |
| Base Course (S3)                            | 3.0                    | 2.5                    |
| Stabilized Subgrade (Portland Cement, Lime) | 8.0                    | 8.0                    |
| <u>Rigid Pavement</u>                       |                        |                        |
| Portland Cement Concrete                    | 5.0                    | 7.0                    |
| Stabilized Subgrade (Portland Cement, Lime) | 8.0                    | 8.0                    |

\* Based on the presence of A-7-6 and A-6 near-surface soils across the site, ODOT OHD L-50 recommends Lime, or Portland Cement stabilization, and a full mix design will be required for the treated subgrade mixture.

\*In order to utilize Portland Cement, a mix design must be performed to ensure that the cement stabilizer sufficiently reduces the soil plasticity

## Materials and Construction

All materials and construction for base should be in accordance with the Oklahoma Department of Transportation (ODOT), "2019 Standard Specifications for Highway Construction," and the latest Special Provisions adopted by ODOT to supplement the Standard Specifications. ODOT Type "A" aggregate base should be compacted to not less than 95 percent modified Proctor maximum dry density (ASTM D1557). Compacted/treated subgrade should be compacted to not less than 95% of the standard Proctor maximum dry density (ASTM D698) within -1 to +3 percentage points of the corresponding optimum moisture content. Compacted/treated subgrade should extend the full width of the pavement section (i.e., including curb and gutter).

Concrete for paving should have a modulus of rupture,  $M_r$ , of at least 550 psi (compressive strength of approximately 3,500 psi or more), should be air entrained with 4 to 7 percent air, should have a cementitious materials content of at least 564 pcy, and should have a maximum water to cementitious materials ratio of 0.45. The concrete mix design submittal should adequately address the criteria of ACI 301, section 4, including documentation of strength test results. Control joints should be saw cut at least one-eighth (0.125) inch wide and one-quarter of pavement thickness deep as soon as possible after concrete reaches final set (i.e., approximately 8 to 12 hours after placing the concrete), cleaned by high pressure air jet, and sealed with a suitable pavement joint sealing material to prevent intrusion of surface water into the pavement base. Control joints should be spaced as indicated in the following table:

**Table 8: Recommended Transverse Joint Spacings**

| Concrete Thickness (inches) | Maximum Joint Spacing (feet) |
|-----------------------------|------------------------------|
| 5.0                         | 12.5                         |
| 7.0                         | 15.0                         |

## **4.10 Soil Stabilization Recommendations**

### Application of Chemical Stabilizer and Initial Mixing

Assuming a 5% Lime or 4% Portland Cement (PC) by dry weight of soil, the application rate of the stabilizer is estimated to be 33 lbs/square yard, or 26 lbs/square yard respectively. Stabilizer must:

- Be applied so that it is uniformly mixed with the soil, the specified stabilizer content is obtained, and a sufficient quantity of Lime or Portland Cement treated soil is produced to construct the compacted Lime or Portland Cement treated course conforming to the lines, grades, and cross section.

- Be spread only on areas where mixing operations can be completed during the same work shift or work day.
- Be applied as a slurry, and distributors are utilized in application of the slurry.
- Be applied by hand only if distributors are not able to access the area of application.
- Have no equipment pass over applied areas, except that used in spreading and mixing.
- Have adequate initial mixture to alleviate any dusting or wetting that may occur as a result of wind or inclement weather.

#### Water Application and Moist Mixing

Moisture content of the mixture must be determined prior to final mixing. Moisture in the mixture following final mixing shall not be less than the optimum moisture content (OMC), nor exceed the OMC by more than +2% of the optimum. Water must be added in increments as large as available equipment will permit; however, such increments of water shall be partially incorporated in the mix to avoid concentration of water near the surface of the mixture.

After the last increment of water has been added, continue mixing until water is uniformly distributed throughout the full depth of the mixture, including satisfactory moisture distribution along the edges of the cross section.

For lime stabilized soil, the soil shall be mixed in two stages, allowing for an intervening 24-to-48-hour mellowing period. The modified mixture should mellow sufficiently to allow the chemical reaction to break down the material. After mellowing, the soil should be remixed prior to compaction.

For cement stabilized soil, the mellowing requirement may be waived per the Geotechnical Engineer's permission.

#### **4.11 Lateral Earth Pressure Parameters**

Lateral earth pressure can be assumed to increase linearly with depth and may be represented as an equivalent fluid column equal to the effective unit weight of the soil times the appropriate coefficient of lateral earth pressure times the thickness of overlying soil at the depth in question. For consideration of lateral earth pressure, the effective unit weight of the soil is the weighted average, down to the depth in question, of the moist unit weight of the soil above the groundwater and the submerged unit weight of the soil below the groundwater. The following estimated parameters may be used for determining approximate lateral earth pressures for the retaining walls at this site:

High Plasticity Clay

|            |           |                                            |
|------------|-----------|--------------------------------------------|
| $\gamma =$ | 125 pcf   | moist unit weight                          |
| $\phi =$   | 8°        | angle of internal friction                 |
| $c =$      | 1,800 psf | apparent cohesion                          |
| $k_a =$    | 0.76      | coefficient of active lateral pressure     |
| $k_p =$    | 1.32      | coefficient of passive lateral pressure    |
| $k_0 =$    | 0.86      | coefficient lateral earth pressure at rest |

Inert Fill

|            |         |                                               |
|------------|---------|-----------------------------------------------|
| $\gamma =$ | 110 pcf | moist unit weight                             |
| $\phi =$   | 25°     | angle of internal friction                    |
| $c =$      | 500 psf | apparent cohesion                             |
| $k_a =$    | 0.41    | coefficient of active lateral pressure        |
| $k_p =$    | 2.46    | coefficient of passive lateral pressure       |
| $k_0 =$    | 0.58    | coefficient of lateral earth pressure at rest |

The parameters for inert fill should be used only if the inert fill meets all requirements given in the Earthwork Recommendations Section of this report, testing has confirmed that the inert fill has an angle of internal friction of 25° or more, the slope of the native soil from the toe of the earth-retaining structure is no steeper than 1:1, and only inert fill is used in the backfill between the earth-retaining structure and the native soil slope. If these criteria are not met, then the appropriate parameters for the native soil should be used.

Note:  $P_{\text{water}}$  (Hydrostatic Pressure; psf) = 62.4 (pcf) x h (ft); h=depth below water level

Soil retaining structures (i.e., retaining walls or basement walls) will be subjected to horizontal loading due to lateral earth pressure. The magnitude of this lateral earth pressure depends on the natural and backfill soils, extent of the original excavation, and wall deflections (i.e., stiffness). The appropriate coefficient of lateral earth pressure will vary, based on these considerations, between the coefficient of active lateral earth pressure and the coefficient of lateral earth pressure at rest. Greater wall deflections result in the development of greater internal shear strength in the retained soil, thereby lowering the lateral pressure on the wall. Granular backfill and clay backfill require horizontal deflections of the top of the wall on the order of 0.2 percent and 2 percent, respectively, of the wall height to mobilize the full internal shear strength of the soil. Thus, at reasonably small wall deflections, a greater portion of the internal strength of granular backfill is mobilized reducing the lateral earth pressure on the wall for this type of material.

Retaining walls or basement walls which are laterally supported and can be expected to undergo only a slight amount of deflection (i.e., less than 0.1 percent of wall height for granular

soils or less than 1.0 percent of wall height for clay soils) should be designed for lateral loadings based on lateral earth pressure computed using the coefficient of lateral pressure at rest.

Retaining structures which can deflect sufficiently to mobilize the full active earth pressure condition should be designed for a smaller active lateral earth pressure computed using the coefficient of active lateral earth pressure. Walls designed for such loading must be detailed and specified such that (1) hydrostatic pressure cannot develop and (2) compaction effort used on backfill is limited to that required to achieve 95 percent of modified Proctor density.

If the slope of the undisturbed soil beyond the backfill behind retaining walls is steeper than the equivalent of a 1:1 slope measured from the base of the wall, then the active earth pressure should be based on the greater of the earth pressure value described above for backfill or the earth pressure computed based on the coefficient of lateral earth pressure at rest for the undisturbed soil.

A continuous back drain system should be installed at the heel of all walls to prevent water pressure build-up behind the walls. It is recommended that a free-draining, cohesionless material such as crushed stone having a gradation corresponding to ASTM C33, size 6, 7, or 67 be used to form a drainage blanket against the backside of the walls. The drainage blanket should have a minimum horizontal thickness of 12 inches and should extend from the bottom of the buried walls to within 18 inches of the finish ground surface. The crushed stone should be separated from soil surfaces by use of a fabric meeting the requirements of AASHTO M288 for a Class 2 subsurface drainage geotextile rated for soils with less than 50 percent passing the 0.075 mm sieve. A minimum 4 inch diameter, slotted or perforated, corrugated polyethylene pipe should be placed in the bottom of the drainage blanket to collect and transport groundwater to an appropriate point for disposal. Manufactured wall drain systems may be considered in lieu of the described gravel drainage blanket. With a drainage system in place, it is recommended that the buried walls be designed to resist lateral pressures equivalent to those produced by a fluid having a unit weight calculated from the parameters at the beginning of this section plus a uniform pressure equal to 40 percent of any anticipated surcharges adjacent to the walls.

Ultimate resistance to lateral sliding at the bottoms of footings may be calculated based on a coefficient of friction of 0.35. Sliding resistance may also include ultimate passive pressure against the front of the footings which can be calculated using an equivalent fluid unit weight in the table below. The designer may use the passive pressure in this zone only if there is a certainty of no loss of toe soil. If necessary, additional sliding stability may be derived from the use of a key embedded into soil beneath the base and utilizing equivalent fluid unit weight for



passive lateral earth pressure seen in the table below. A factor of safety of at least 1.5 should be used with stability calculations involving lateral earth pressures. The safety factor should be computed as the sum of resisting forces or moments divided by the sum of driving forces or moments.

**Table 9: Equivalent Fluid Pressure**

| Soil Type/ State                 | At Rest psf | Active psf | Passive psf |
|----------------------------------|-------------|------------|-------------|
| High Plasticity Clay / Drained   | 108         | 94         | 165         |
| Inert Fill / Drained             | 64          | 45         | 271         |
| High Plasticity Clay / Undrained | 116         | 110        | 145         |
| Inert Fill / Undrained           | 90          | 82         | 180         |

#### 4.12 Excavation Requirements (OSHA Requirements)

Excavations adjacent to structures or public ways or to which personnel will enter which are more than 5 feet deep must be either supported (e.g., shoring or trench box) or laid back to a stable slope. If excavations less than 5 feet in depth appear to be unstable, they must also be shored or sloped sufficiently to protect the employees working within them. The recommended slopes provided herein on the Occupational Safety and Health Administration (OSHA) requirements and are intended for construction operations. Permanent slopes should not be constructed utilizing the slope angles described herein.

Trees, boulders, and other surface encumbrances, located so as to create a hazard to employees involved in excavation work or in the vicinity thereof at any time during operations, shall be removed or made safe before excavation begins. Existing underground utility lines shall also be protected during excavation. The excavation slopes specified herein have been determined to hold back the earth banks and not more than 2 feet of stockpiled soil within a distance of 5 feet from the edge of the excavation. Any excavated soil at the edge of the excavation must be stockpiled at a slope of 1.5 or more horizontal to 1.0 vertical. Additionally, no equipment should be allowed within 5 feet of the trench edge.

Someone capable of identifying existing and predictable hazards and who has the authorization to take prompt corrective measures (i.e., a "competent person") must inspect the excavations daily for any condition which may adversely affect the reliability and safety of the excavation. The excavations must also be inspected after each rainstorm or when any change in condition occurs that can increase the possibility of a cave-in or slide. If evidence of possible cave-ins or slides is apparent, all work in the excavation shall cease until the necessary



precautions for sloping or bracing have been taken to safeguard the employees and the excavation. Any loose soil shall be scaled from the slope and removed from the excavation to protect workers against falling soil.

An adequate means of egress must be provided within 25 feet of lateral travel to any worker in all trench excavations 4 feet or more in depth. The means of egress may be a ladder or a ramp of stable soil having a slope which can be quickly traversed by personnel exiting the excavation under emergency conditions.

During excavation, the material encountered must be evaluated with respect to the soils encountered during the subsurface investigation as described on the boring logs. If material with different properties (e.g., fill soil, loose sand, etc.) is encountered, the recommendations given in this report may not be adequate to assure safe excavations.

Unless otherwise indicated all sloping requirements are given as a ratio of horizontal distance to vertical distance (i.e., H:V). OSHA soil classifications for the various soil and groundwater conditions encountered in the borings are indicated in the OSHA Soil Classification table:

**Table 10: OSHA Soil Classification**

| Boring No.  | Depth Range (feet)             | Soil Description       | OSHA Soil Type |
|-------------|--------------------------------|------------------------|----------------|
| All Borings | Surface to Groundwater         | All Soils              | Type B         |
|             | Below Groundwater              | All Soils              | Type C         |
|             | Top of Rock/<br>Weathered Rock | Weathered<br>Rock/Rock | Type A         |

Sloping requirements for excavation up to 20 feet in depth for the soils encountered are tabulated as follows:

**Table 11: Maximum Allowable Slopes**

| OSHA Soil Type | Maximum Allowable Slopes (H:V)* for<br>Excavations Less Than 20 Feet Deep** |
|----------------|-----------------------------------------------------------------------------|
| A              | ¾:1 (53°)                                                                   |
| B              | 1:1 (45°)                                                                   |
| C              | 1.5:1 (34°)                                                                 |

\* Numbers shown in parentheses next to maximum allowable slopes are angles expressed in degrees from horizontal. Angles are given to the nearest degree.

\*\* Sloping or benching for excavations greater than 20 feet deep shall be designed by a registered professional engineer using the conditions unique to the specific excavation.

OSHA requires that all excavation slopes for any soil type overlying an exposed Type C soil follow Type C recommendations and for all Type A soils overlying an exposed Type B soil to follow Type B recommendations. All soils which are submerged are to be considered Type C.

All water should be continuously removed from the excavations to prevent softening and weakening of the excavation face. All excavations should be protected from rain and groundwater by surface diversion ditches or dikes and appropriate de-watering systems. Water shall be continuously removed to keep the water level below excavation depth. The groundwater levels shown on the boring logs represent its location on the day indicated. Groundwater levels will fluctuate with the seasons and may be encountered during construction at a level other than that shown on the boring logs. Workers should be prohibited from working in excavations where water has accumulated or is accumulating.

#### **4.13 Construction Procedures and Considerations**

If ground water is encountered during excavation of the footings and trenches, water should be removed from the excavation area and Standard should be contacted to verify to inspection the bearing soils and verify the recommended bearing capacity before the construction of the foundations is resumed.

Unless otherwise indicated all sloping requirements are given in horizontal: vertical. The OSHA Soil Classification for the soil and groundwater conditions encountered in the borings is a type B.

We recommend a slope no steeper than 1.5:1 for the subsurface conditions encountered. Sloping or benching for excavations greater than 20 feet deep shall be explicitly designed by a registered professional engineer.

The soils encountered are susceptible to rapid erosion from rainfall. Excavation slopes should be protected from erosion by some type of impermeable covering, such as plastic sheeting.

If space limitations prevent a 1.5:1 excavation side slope, use of shoring or sheet piles will be necessary.

## Section 5

### BASIS FOR RECOMMENDATIONS

#### 5.1 General Comments

The recommendations and conclusions contained in this report are based on the borings drilled and tests performed. We would point out that there may be variations in material properties over the site and would caution that there may be unknown conditions in existence which differ seriously from those encountered by the test borings. Such conditions, if indeed they exist at all, cannot be, and have not been, accounted for in this report. Therefore, the descriptions, recommendations, and conclusions contained herein should be considered as generalized, applying only to the immediate vicinity of the borings.

#### 5.2 Limitations

Since this report is being prepared in advance of much of the detailed design, the finalized soil and structure parameters (i.e., floor elevation, structural system and loading, vertical movement tolerance, etc.) may differ from the ones considered during the preparation of this report. If such a design variance is substantial, Standard would request the opportunity to review the plans and specifications of the proposed facility for applicability to the soil conditions in this report, and assurance of consistency with its intent.

It is recommended that Standard be retained for testing and observation during earthwork and foundation construction phases, to help determine that the design requirements are fulfilled. It is also recommended that Standard's pier inspector be present during the pier drilling operations to verify the hardness of the support soil stratum and the proper depth of embedment.

This report has been prepared for the exclusive use of our client for specific application to the project discussed and has been prepared in accordance with generally accepted geotechnical practice.

## **APPENDIX A**

### **Vicinity Map Site and Boring Location Plan**






Vicinity Map

Project Name: Old School Kitchen Addition  
 Project Location: 201 North Broadway Avenue, Moore, Oklahoma  
 Project No.: 2530-0265





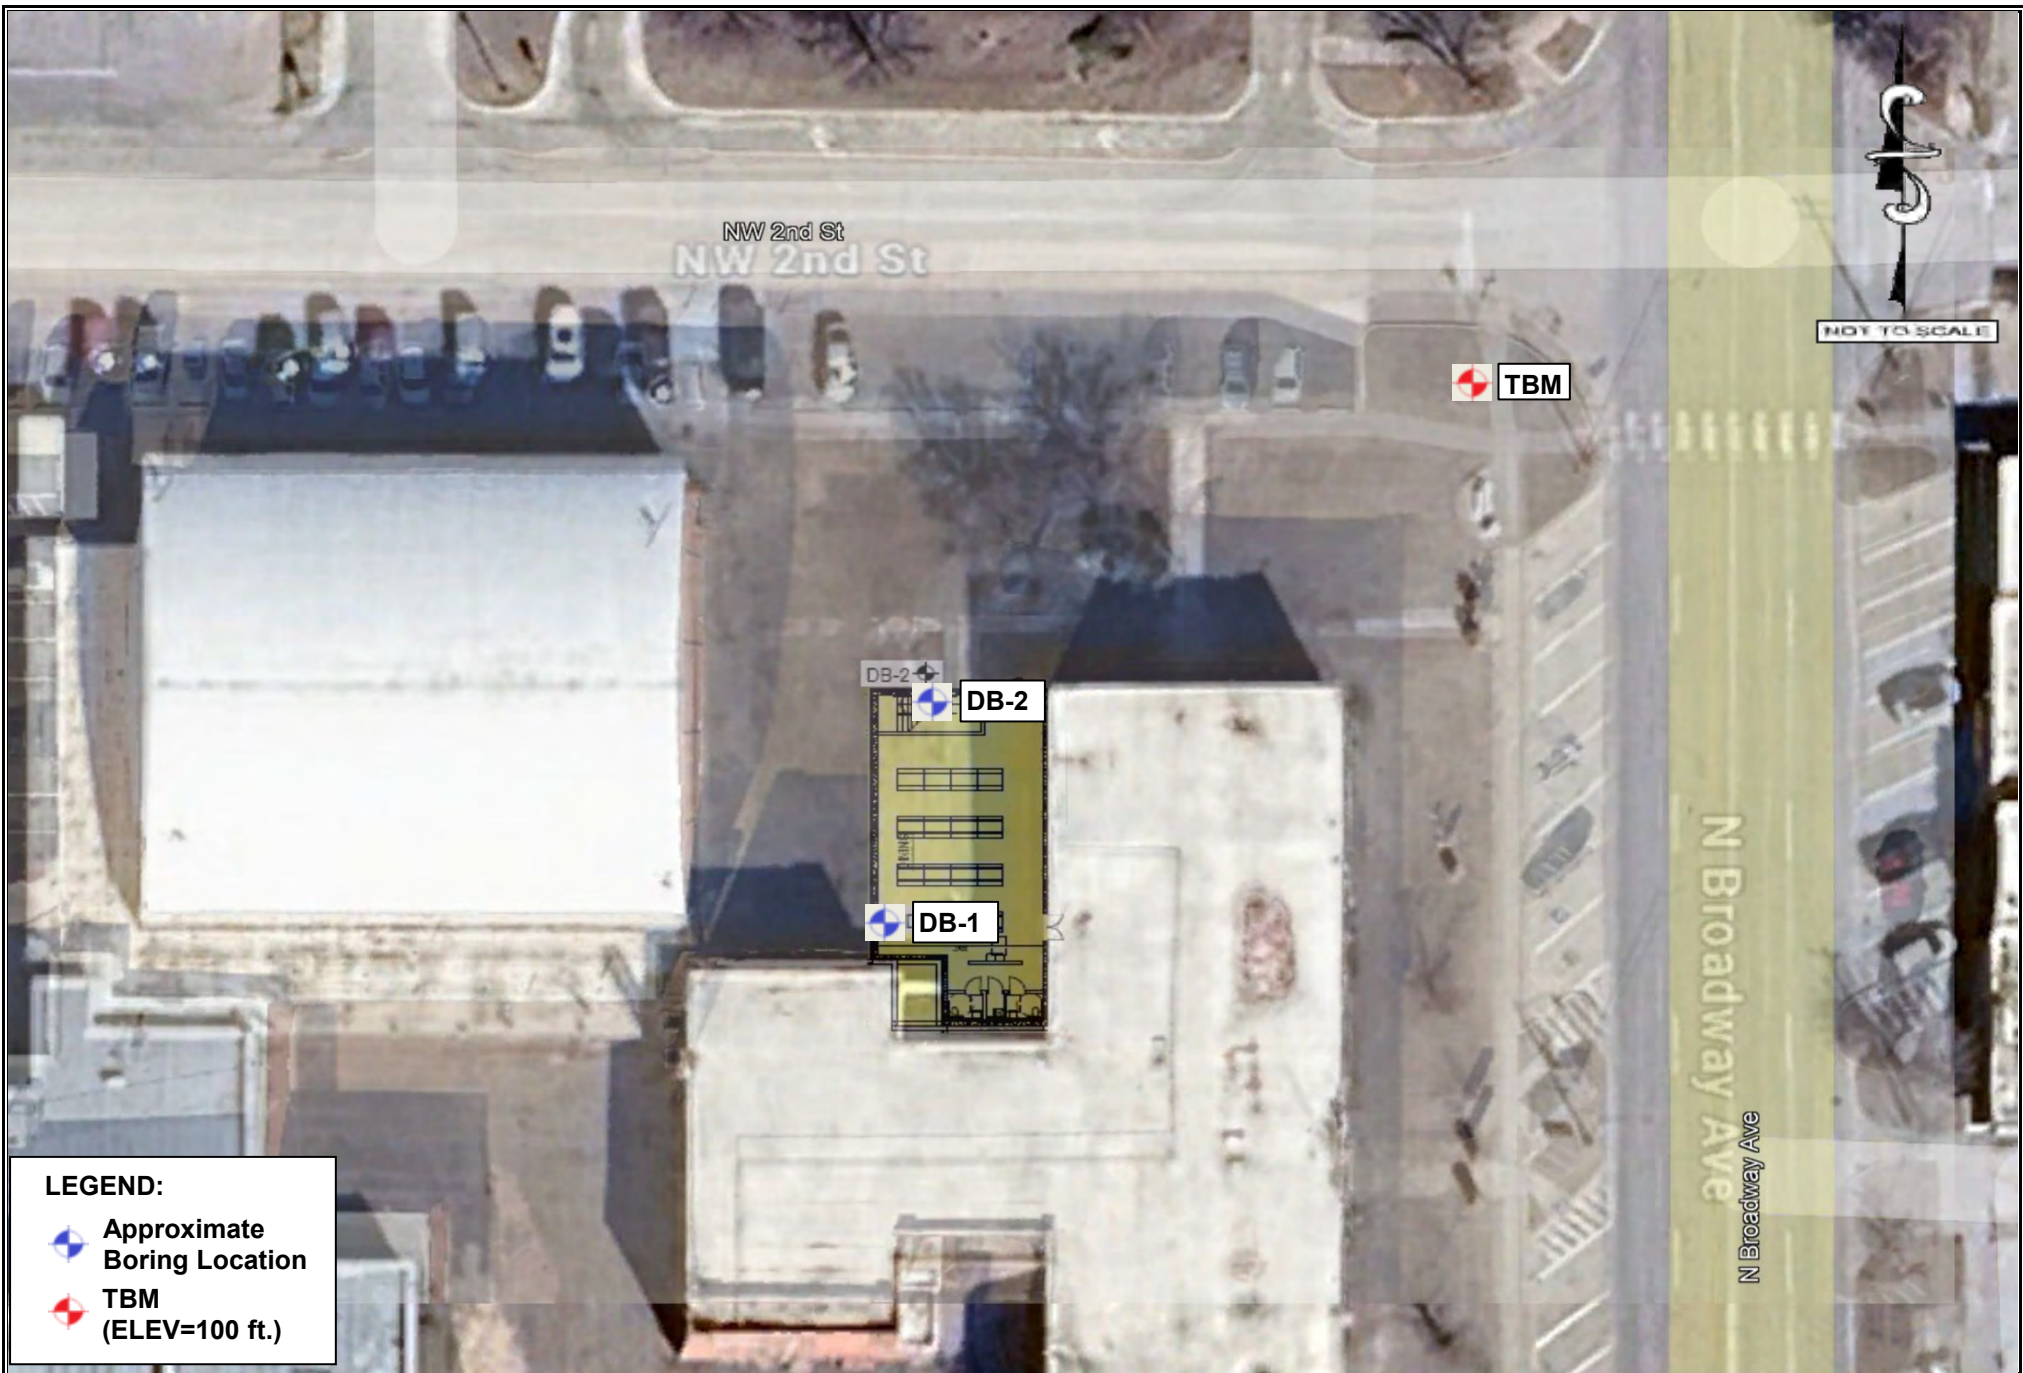

Site and Boring Location Plan

Project Name: Old School Kitchen Addition  
Project Location: 201 North Broadway Avenue, Moore, Oklahoma  
Project No.: 2530-0265

## **APPENDIX B**

**Boring Logs**

**Soil Profile**

**Definition of Descriptive Terms**



# BORING LOG DB-1

(1 of 1)

PROJECT NAME: Old School Kitchen Additions  
 PROJECT NUMBER: 2530-0265  
 PROJECT LOCATION: 201 N Broadway Ave, Moore Oklahoma  
 CLIENT: The Abila Griffin Partnership

| DEPTH (FT)<br>ELEVATION (FT) |  | GRAPHIC LOG                                                                         | USCS | SAMPLER SYMBOLS                                    |    |    | SAMPLE TYPE                                                                         | SAMPLE NUMBER | BLOW COUNTS (N) | POCKET PENETROMETER (tsf) | RECOVERY % / RQD | WATER CONTENT (%) | DRY UNIT WEIGHT (pcf) | UCS (psf) | -#200 SIEVE (%) | ATTENBERG LIMITS |    |    |          |
|------------------------------|--|-------------------------------------------------------------------------------------|------|----------------------------------------------------|----|----|-------------------------------------------------------------------------------------|---------------|-----------------|---------------------------|------------------|-------------------|-----------------------|-----------|-----------------|------------------|----|----|----------|
|                              |  |                                                                                     |      | Grab                                               | SS | ST |                                                                                     |               |                 |                           |                  |                   |                       |           |                 | TC               | RC | HA | LL-PL-PI |
|                              |  |                                                                                     |      | MATERIAL DESCRIPTION                               |    |    |                                                                                     |               |                 |                           |                  |                   |                       |           |                 |                  |    |    |          |
| 0                            |  |    |      | (Short Grass & 8" Topsoil)                         |    |    |    | A             |                 |                           |                  | 19.4              |                       |           |                 |                  |    |    |          |
| 95                           |  |    | CH   | Dk. Brn. FAT CLAY W/ SAND Firm                     |    |    |    | B             | 1-2-3 (5)       |                           | 67               | 25.2              |                       |           |                 |                  |    |    |          |
| 5                            |  |    |      | Dk. Brn. W/O SAND V. Moist, High Plasticity, Stiff |    |    |    | C             |                 |                           | 52               | 22.8              | 113                   | 3506      |                 |                  |    |    |          |
| 90                           |  |    |      | Dk. Brn. W/O SAND V. Moist, High Plasticity, Stiff |    |    |    | D             | 3-4-6 (10)      |                           | 100              | 23.9              | 102                   |           | 95.5            | 51-18-33         |    |    |          |
| 10                           |  |    |      | V. Stiff                                           |    |    |    | E             |                 |                           |                  |                   | 20.9                  |           |                 |                  |    |    |          |
| 85                           |  |    |      | V. Stiff                                           |    |    |    | F             | 5-7-9 (16)      |                           | 78               | 18.4              |                       |           |                 |                  |    |    |          |
| 15                           |  |    |      | V. Stiff                                           |    |    |    |               |                 |                           |                  |                   |                       |           |                 |                  |    |    |          |
| 80                           |  |   | CL   | (ROCK) Reddish Brn. SHALE W/ SAND Soft Rock        |    |    |  | G             | 50/5.00"        |                           | 100              | 11.8              |                       |           |                 |                  |    |    |          |
| 20                           |  |  |      | W/O SAND Sl. Moist, Moderate Plasticity            |    |    |  | H             | 22-50/4.00"     |                           | 100              | 10.7              |                       |           | 92.6            | 36-16-20         |    |    |          |
| 75                           |  |  |      | W/O SAND Sl. Moist, Moderate Plasticity            |    |    |  |               |                 |                           |                  |                   |                       |           |                 |                  |    |    |          |
| 25                           |  |  |      | Med. Hard Rock                                     |    |    |  | I             | 29-50/3.00"     |                           | 100              | 14.6              |                       |           |                 |                  |    |    |          |
| 70                           |  |                                                                                     |      | Bottom of borehole at 25.8 feet                    |    |    |                                                                                     |               |                 |                           |                  |                   |                       |           |                 |                  |    |    |          |
| 30                           |  |                                                                                     |      |                                                    |    |    |                                                                                     |               |                 |                           |                  |                   |                       |           |                 |                  |    |    |          |

| WATER LEVELS |                                                                                     |     | ELEVATIONS / LOCATIONS                      |  | DRILLING      |           |               |
|--------------|-------------------------------------------------------------------------------------|-----|---------------------------------------------|--|---------------|-----------|---------------|
| WD           |  | Dry | GROUND ELEVATION: 98                        |  | DRILL START:  | 4/11/2025 | LOGGER: CS    |
| AD           |  | Dry | TBM: Top Nut of Fire Hydrant (ELEV= 100 ft) |  | DRILLED END:  | 4/11/2025 | DRILLER: RJ   |
| 24 Hrs       |  |     | GPS: 35.340051, -97.48725                   |  | DRILL RIG:    | CME-75    | HOLE SIZE: 4" |
| > 24 Hrs     |  |     | STA: OFFSET:                                |  | DRILL METHOD: | S.F.A.    |               |


# BORING LOG DB-2

(1 of 1)

PROJECT NAME: Old School Kitchen Additions  
 PROJECT NUMBER: 2530-0265  
 PROJECT LOCATION: 201 N Broadway Ave, Moore Oklahoma  
 CLIENT: The Abila Griffin Partnership

| DEPTH (FT)<br>ELEVATION (FT) | GRAPHIC LOG | USCS | SAMPLER SYMBOLS                          |    |    | SAMPLE TYPE | SAMPLE NUMBER | BLOW COUNTS (N)  | POCKET PENETROMETER (tsf) | RECOVERY % / RQD | WATER CONTENT (%) | DRY UNIT WEIGHT (pcf) | UCS (psf) | #200 SIEVE (%) | ATTERBERG LIMITS |  |
|------------------------------|-------------|------|------------------------------------------|----|----|-------------|---------------|------------------|---------------------------|------------------|-------------------|-----------------------|-----------|----------------|------------------|--|
|                              |             |      | Grab                                     | ST | RC |             |               |                  |                           |                  |                   |                       |           |                | LL-PL-PI         |  |
|                              |             |      | SS                                       | TC | HA |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
|                              |             |      | MATERIAL DESCRIPTION                     |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
| 0                            |             |      | (Short Grass & 8" Topsoil)               |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
| 95                           |             | CH   | Dk. Brn. FAT CLAY                        |    |    |             | A             |                  |                           |                  | 20.9              |                       |           |                |                  |  |
|                              |             |      | Moist, High Plasticity, Firm             |    |    |             | B             | 2-3-4<br>(7)     |                           | 100              | 23.6              |                       |           | 93.3           | 51-19-32         |  |
| 5                            |             |      | Stiff                                    |    |    |             | C             |                  |                           | 54               | 22.9              | 107                   | 3603      |                |                  |  |
| 90                           |             |      | Reddish Brn.                             |    |    |             | D             | 4-5-8<br>(13)    |                           | 100              | 20.3              | 108                   |           |                |                  |  |
| 10                           |             | CL   | Reddish Brn. VERY WEATHERED SHALE        |    |    |             | E             |                  |                           |                  | 19.8              |                       |           |                |                  |  |
|                              |             |      | Moist, Moderate Plasticity, V. Soft Rock |    |    |             | F             | 16-27-43<br>(70) |                           | 100              | 12.5              |                       |           | 98.9           | 39-14-25         |  |
| 15                           |             |      | (ROCK) Reddish Brn. SHALE                |    |    |             | G             | 50/4.50"         |                           | 100              | 10.4              |                       |           |                |                  |  |
| 80                           |             |      | Soft Rock                                |    |    |             | H             | 50/4.50"         |                           | 100              | 11.2              |                       |           |                |                  |  |
| 20                           |             |      |                                          |    |    |             | I             | 50/3.25"         |                           | 100              | 15.8              |                       |           |                |                  |  |
| 75                           |             |      |                                          |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
| 25                           |             |      | Bottom of borehole at 25.3 feet          |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
| 70                           |             |      |                                          |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |
| 30                           |             |      |                                          |    |    |             |               |                  |                           |                  |                   |                       |           |                |                  |  |

| WATER LEVELS |                                                                                     |     | ELEVATIONS / LOCATIONS                      |  | DRILLING      |           |               |
|--------------|-------------------------------------------------------------------------------------|-----|---------------------------------------------|--|---------------|-----------|---------------|
| WD           |  | Dry | GROUND ELEVATION: 97                        |  | DRILL START:  | 4/11/2025 | LOGGER: CS    |
| AD           |  | Dry | TBM: Top Nut of Fire Hydrant (ELEV= 100 ft) |  | DRILLED END:  | 4/11/2025 | DRILLER: RJ   |
| 24 Hrs       |  |     | GPS: 35.340168, -97.48723                   |  | DRILL RIG:    | CME-75    | HOLE SIZE: 4" |
| > 24 Hrs     |  |     | STA:                      OFFSET:           |  | DRILL METHOD: | S.F.A.    |               |

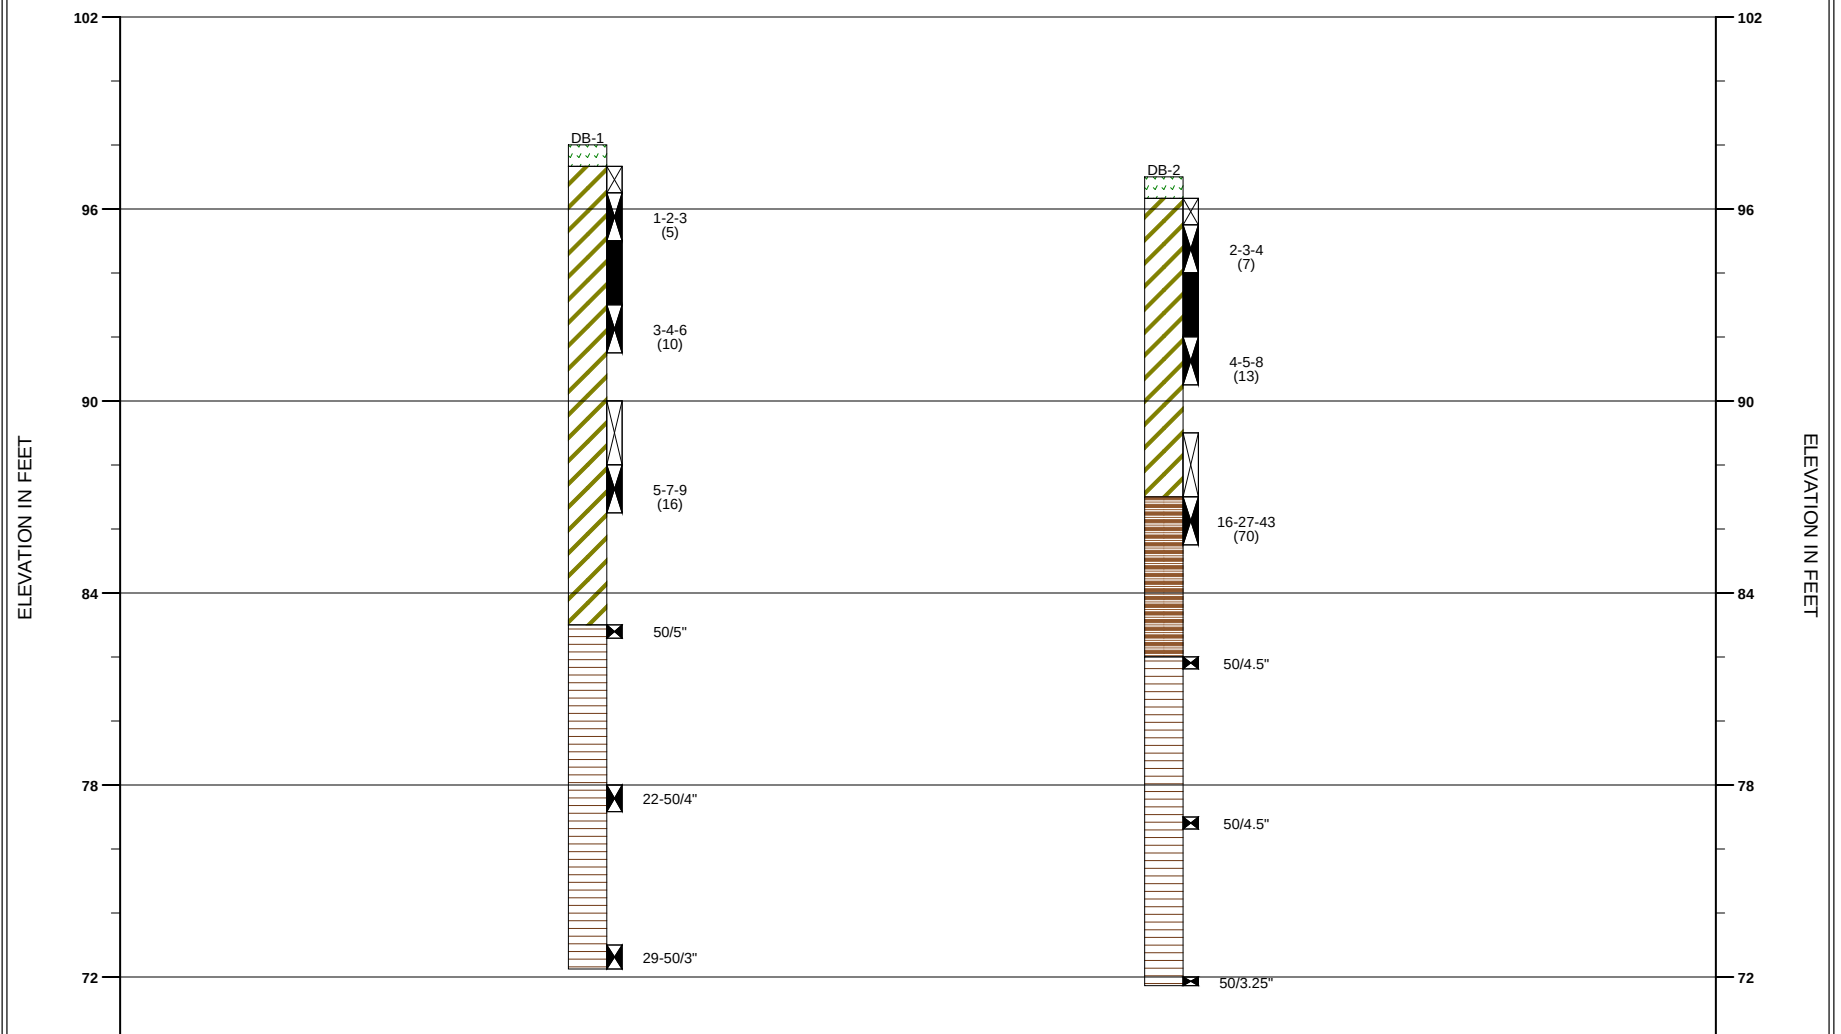

-  Topsoil
-  Fat Clay
-  Shale
-  Weathered Shale



## SOIL PROFILE

Old School Kitchen Additions

PROJECT NO. 2530-0265

HORIZONTAL

VERTICAL

SCALE:

SCALE: 1"=6'

## DEFINITION OF DESCRIPTIVE TERMS

### Consistency of Cohesive Soils (at moisture content near plastic limit):

- Very Soft - Easily penetrated 4" to 6" by fist; tall core will sag under its own weight.
- Soft - Easily molded by fingers.
- Firm - Can be penetrated 2" to 3" by thumb with moderate effort, imprinted with fingers.
- Stiff - Readily indented by thumb but penetrated only with great effort.
- Very Stiff - Readily indented by thumbnail, imprinted very slightly with pressure from fingers.
- Hard - Indented with difficulty by thumbnail, cannot be imprinted with fingers.

### Density of Cohesionless Soils:

- Very Loose - less than 4 SPT "N" value corrected for overburden.
- Loose - 5 to 10 SPT "N" value corrected for overburden.
- Medium Dense - 11 to 30 SPT "N" value corrected for overburden.
- Dense - 31 to 50 SPT "N" value corrected for overburden.
- Very Dense - 51 to 50/6" SPT "N" value corrected for overburden.
- Hard - less than 6" penetration in 50 SPT "N" blows corrected for overburden (cemented).

### Hardness of Rock:

- Very Soft - can be scratched readily by fingernail
- Soft - can be grooved readily by knife or pick
- Medium - can be grooved 0.05" deep by firm pressure of knife
- Moderately Hard - can be scratched by knife
- Hard - can be scratched by knife or pick only with difficulty
- Very Hard - cannot be scratched by knife or sharp pick

### Other Terms Descriptive of Consistency:

- Brittle - Ruptures with little deformation
- Friable - Crumbles or pulverizes easily.
- Elastic - Returns to original length after small deformation.
- Spongy - Is very porous, loose and elastic.
- Sticky - Adheres or sticks to tools or hands.

### In-Situ Moisture Descriptions:

- Dry - powdery
- Slightly Moist - water not readily absorbed by paper
- Moist - water readily absorbed by paper
- Very Moist - water condenses on sample tray
- Wet - water drips from sample

### Degree of Plasticity When Moist to Very Moist:

- Nonplastic - cannot be rolled into a ball
- Trace of Plasticity - can be rolled into a ball but not into a 1/8" thread
- Low Plasticity - barely holds its shape when rolled into a 1/8" thread
- Fairly Low Plasticity - 1/8" thread quickly ruptures when bent
- Medium Plasticity - 1/8" thread withstands considerable deformation without rupture.
- Fairly High Plasticity - difficult to rupture a 1/8" thread by bending.
- High Plasticity - can be kneaded without rupture; greasy texture.

### Abbreviations:


- |                |               |              |
|----------------|---------------|--------------|
| V. - Very      | Dk. - Dark    | Blk. - Black |
| Tr. - Trace    | Lt. - Light   | Brn. - Brown |
| Fl. - Fairly   | Med. - Medium |              |
| Sl. - Slightly |               |              |

## **APPENDIX C**


**AASHTO Soil Classification System**  
**Unified Soil Classification System**

# Soil Classification System — American Association of State Highway and Transportation Officials

The tables and charts given below are from AASHTO Designation: M 145-83, The Classification of Soils and Soil-Aggregate Mixtures for Highway Construction Purposes. More detailed information as to the background and application of the system may be obtained from the report.

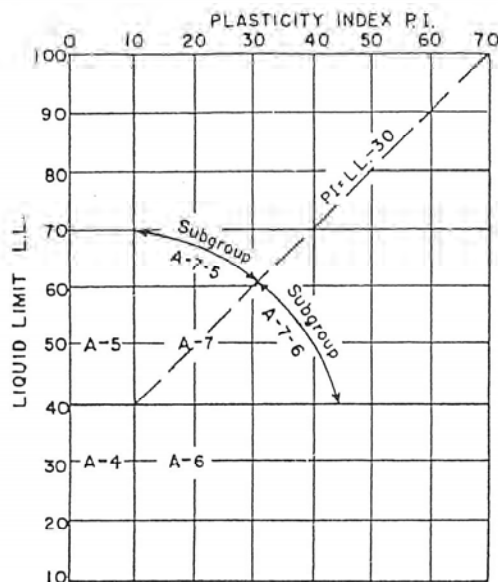

Liquid-limit and plasticity-index ranges for the A-4, A-5, A-6 and A-7 subgrade groups.

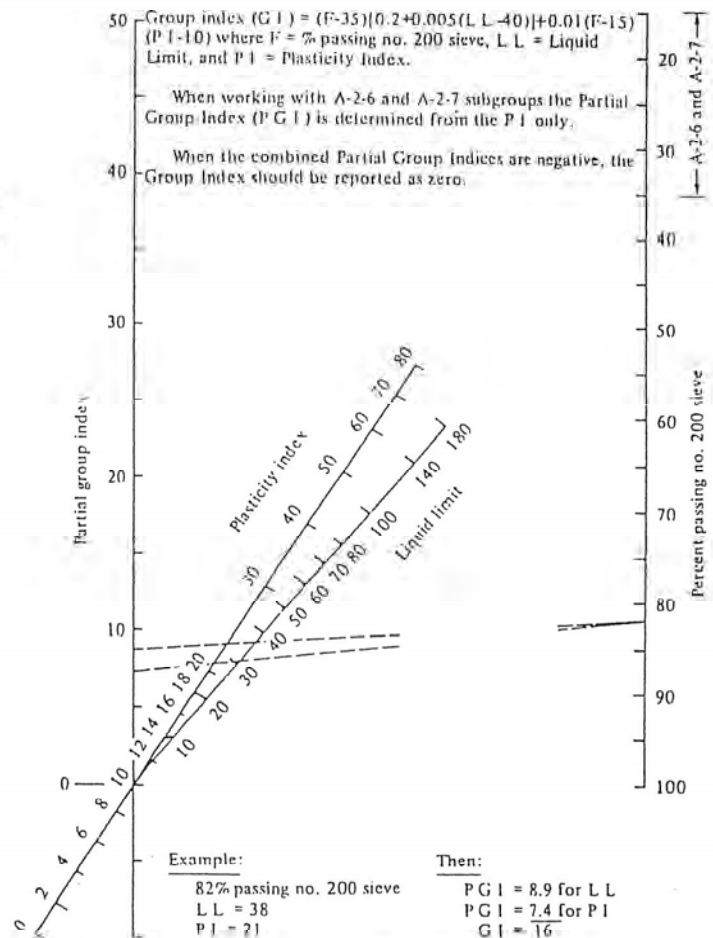

Group index chart

## Classification of Soils and Soil-Aggregate Mixtures (with Suggested Subgroups)

| General classification                                                             | Granular materials<br>(35 per cent or less passing No. 200) |                         |                         |                                    |                    |                    |                    | Silt-clay materials<br>(More than 35 per cent passing No. 200) |                    |                    |                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------|-------------------------|------------------------------------|--------------------|--------------------|--------------------|----------------------------------------------------------------|--------------------|--------------------|---------------------|
| Group classification                                                               | A-1                                                         |                         | A-3                     | A-2                                |                    |                    |                    | A-4                                                            | A-5                | A-6                | A-7                 |
|                                                                                    | A-1-a                                                       | A-1-b                   |                         | A-2-4                              | A-2-5              | A-2-6              | A-2-7              |                                                                |                    |                    | A-7-5; A-7-6        |
| Sieve analysis;<br>Per cent passing:<br>No. 10<br>No. 40<br>No. 200                | 50 max.<br>30 max.<br>15 max.                               | —<br>50 max.<br>25 max. | —<br>51 min.<br>10 max. | —<br>—<br>35 max.                  | —<br>—<br>35 max.  | —<br>—<br>35 max.  | —<br>—<br>35 max.  | —<br>—<br>36 min.                                              | —<br>—<br>36 min.  | —<br>—<br>36 min.  | —<br>—<br>36 min.   |
| Characteristics of fraction<br>passing No. 40;<br>Liquid limit<br>Plasticity index |                                                             | —<br>6 max.             | —<br>NP                 | 40 max.<br>10 max.                 | 41 min.<br>10 max. | 40 max.<br>11 min. | 41 min.<br>11 min. | 40 max.<br>10 max.                                             | 41 min.<br>10 max. | 40 max.<br>11 min. | 41 min.<br>11 min.* |
| Usual types of significant<br>constituent materials                                | Stone fragments,<br>gravel and sand                         |                         | Fine<br>sand            | Silty or clayey<br>gravel and sand |                    |                    |                    | Silty<br>soils                                                 |                    | Clayey<br>soils    |                     |
| General rating as subgrade                                                         | Excellent to good                                           |                         |                         |                                    |                    | Fair to poor       |                    |                                                                |                    |                    |                     |

\*P.I. of A-7-5 subgroup is equal to or less than L.L. minus 30. P.I. of A-7-6 subgroup is greater than L.L. minus 30



| UNIFIED SOIL CLASSIFICATION<br>(Including Identification and Description)                                                                                                    |                                                                               |                                                                                                                                                                                    |                                                                                      |                                                                                                                      |                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------|
| Major Divisions                                                                                                                                                              |                                                                               | Group Symbols                                                                                                                                                                      | Typical Names                                                                        | Field Identification Procedures (Excluding particles larger than 3 inches and basing fractions on estimated weights) |                                                                                             | Information Required for Describing Soils                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Laboratory Classification Criteria                                                                                                                                                                                                                                                         |                                                                                |                                                                                                           |                                                                                          |                                              |
| 1                                                                                                                                                                            | 2                                                                             | 3                                                                                                                                                                                  | 4                                                                                    | 5                                                                                                                    |                                                                                             | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 7                                                                                                                                                                                                                                                                                          |                                                                                |                                                                                                           |                                                                                          |                                              |
| Coarse-grained Soils<br>More than half of material is larger than No. 200 sieve size.<br><br>The No. 200 sieve size is about the smallest particle visible to the naked eye. | Gravels<br>More than half of coarse fraction is larger than No. 4 sieve size. | Clean Gravels<br>(Little or no fines)                                                                                                                                              | GW                                                                                   | Well-graded gravels, gravel-sand mixtures, little or no fines.                                                       | Wide range in grain sizes and substantial amounts of all intermediate particle sizes.       | For undisturbed soils add information on stratification, degree of compactness, cementation, moisture conditions and drainage characteristics.<br><br>Give typical name; indicate approximate percentages of sand and gravel, maximum size, angularity, surface condition, and hardness of the coarse grains; local or geologic name and other pertinent descriptive information; and symbol in parentheses.<br><br>Example:<br>Silty sand, gravelly; about 20% hard, angular gravel particles 1/4-in. maximum size; rounded and subangular sand grains coarse to fine, about 15% nonplastic fines with low dry strength; well compacted and moist in place, alluvial sand; (SM). | Determine percentages of gravel and sand from grain size curve. Depending on percentages of fines (fraction smaller than No. 200 sieve size) coarse-grained soils are classified as follows:<br><br>Use grain-size curve in identifying the fractions as given under field identification. | GW, GP, SW, SP, GM, GC, SM, SC<br>Borderline cases require use of dual symbols | $C_u = \frac{D_{60}}{D_{10}}$ Greater than 4                                                              |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | GP                                                                                   | Poorly-graded gravels, gravel-sand mixtures, little or no fines.                                                     | Predominantly one size or a range of sizes with some intermediate sizes missing.            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                | $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | Not meeting all gradation requirements for GW                                                                                                                                      |                                                                                      |                                                                                                                      |                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | Gravels with Fines<br>(Appreciable amount of fines)                                                                                                                                | GM                                                                                   | Silty gravels, gravel-sand-silt mixtures.                                                                            | Nonplastic fines or fines with low plasticity (for identification procedures see ML below). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                | Atterberg limits below "A" line or PI less than 4                                                         | Above "A" Line with PI between 4 and 7 and bordering cases requiring use of dual symbols |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | GC                                                                                   | Clayey gravels, gravel-sand-clay mixtures.                                                                           | Plastic fines (for identification procedures see CL below).                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                | Atterberg limits above "A" line or PI greater than 7                                                      |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | Sands<br>More than half of coarse fraction is smaller than No. 4 sieve size.<br><br>(For visual classification, the 1/4-in size may be used as equivalent to the No. 4 sieve size) | Clean Sands<br>(Little or no fines)                                                  | SW                                                                                                                   | Well-graded sands, gravelly sands, little or no fines.                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                | Wide range in grain size and substantial amounts of all intermediate particle sizes.                      |                                                                                          | $C_u = \frac{D_{60}}{D_{10}}$ Greater than 6 |
|                                                                                                                                                                              | SP                                                                            |                                                                                                                                                                                    |                                                                                      | Poorly-graded sands, gravelly sands, little or no fines.                                                             | Predominantly one size or a range of sizes with some intermediate sizes missing.            | $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              | Not meeting all gradation requirements for SW                                 |                                                                                                                                                                                    |                                                                                      |                                                                                                                      |                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              | Sands with Fines<br>(Appreciable amount of fines)                             |                                                                                                                                                                                    | SM                                                                                   | Silty sands, sand-silt mixtures.                                                                                     | Nonplastic fines or fines with low plasticity (for identification procedures see ML below). | Atterberg limits below "A" line or PI less than 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                            |                                                                                | Limits plotting in hatched zone with PI between 4 and 7 and bordering cases requiring use of dual symbols |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | SC                                                                                   | Clayey sands, sand-clay mixtures.                                                                                    | Plastic fines (for identification procedures see CL below).                                 | Atterberg limits above "A" line or PI greater than 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | Highly Organic Soils                                                                 |                                                                                                                      | PI                                                                                          | Peat and other high organic soils.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                            |                                                                                | Readily identified by color, odor, spongy feel and frequently by fibrous texture.                         |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    |                                                                                      | Identification Procedures<br>On Fractions Smaller than No. 40 Sieve Sizes                                            |                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    |                                                                                      | Dry Strength<br>(Crushing<br>characteristics)                                                                        | Dilatancy<br>(Reaction<br>to shaking)                                                       | Toughness<br>(Consistency<br>near PL)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | ML                                                                                   | Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.  | None to slight                                                                              | Quick to slow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | None                                                                                                                                                                                                                                                                                       |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    | CL                                                                                   | Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays.                   | Medium to high                                                                              | None to very slow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Medium                                                                                                                                                                                                                                                                                     |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | OL                                                                                                                                                                                 | Organic silts and organic silty clays of low plasticity.                             | Slight to medium                                                                                                     | Slow                                                                                        | Slight                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | MH                                                                                                                                                                                 | Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts. | Slight to medium                                                                                                     | Slow to none                                                                                | Slight to Medium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | CH                                                                                                                                                                                 | Inorganic clays of high plasticity, fat clays.                                       | High to very high                                                                                                    | None                                                                                        | High                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               | OH                                                                                                                                                                                 | Organic clays of medium to high plasticity, organic silts.                           | Medium to high                                                                                                       | None to very slow                                                                           | Slight to medium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |
|                                                                                                                                                                              |                                                                               |                                                                                                                                                                                    |                                                                                      |                                                                                                                      |                                                                                             | Example:<br>Clayey silt, brown, slightly plastic, small percentage of fine sand, numerous vertical root holes, firm and dry in place, loess, (ML).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                            |                                                                                |                                                                                                           |                                                                                          |                                              |

Less than 5%  
More than 12%  
5% to 12%

PLASTICITY INDEX

LIQUID LIMIT  
PLASTICITY CHART  
For laboratory classification of fine-grained soils.

(1) **Boundary Classifications.** Soils possessing characteristics of two groups are designated by combinations of group symbols. For example GW-GC, well-graded gravel-sand mixture with clay binder. (2) All sieve sizes on this chart are U.S. Standard.

**FIELD IDENTIFICATION PROCEDURES FOR FINE-GRAINED SOILS OR FRACTIONS**

These procedures are to be performed on the minus No. 40 sieve size particles, approximately 1/64 in. For field classification purposes, screening is not intended, simply remove by hand the coarse particles that interfere with the tests.

**Dilatancy (Reaction to shaking)**

After removing particles larger than No. 40 sieve size, prepare a pat of moist soil with a volume of about one-half cubic inch. Add enough water if necessary to make the soil soft but not sticky. Place the pat in the open palm of one hand and shake horizontally, striking vigorously against the other hand several times. A positive reaction consists of the appearance of water on the surface of the pat, which changes to a levery consistency and becomes glossy. When the sample is squeezed between the fingers, the water and gloss disappear from the surface, the pat stiffens, and finally it cracks or crumbles. The rapidity of appearance of water during shaking and of its disappearance during squeezing assist in identifying the character of the fines in a soil.

Very fine clean sands give the quickest and most distinct reactions whereas a plastic clay has no reaction. Inorganic silts, such as a typical rock flour show a moderately quick reaction.

**Dry Strength (Crushing Characteristics)**

After removing particles larger than No. 40 sieve size, mold a pat of soil to the consistency of putty, adding water if necessary. Allow the pat to dry completely by oven, sun, or air drying, and then test its strength by breaking and crumpling between the fingers. This strength is a measure of the character and quantity of the colloidal fraction contained in the soil. The dry strength increases with increasing plasticity.

High dry strength is characteristic for clays of the CH group. A typical inorganic silt possesses only very slight dry strength. Silty fine sands and silts have about the same slight dry strength, but can be distinguished by the feel when powdering the dried specimen. Fine sand feels gritty, whereas a typical silt has the smooth feel of flour.

**Toughness (Consistency near plastic limit)**

After removing particles larger than the No. 40 sieve size, a specimen of soil about one-half inch cube in size is molded to the consistency of putty. If too dry, water must be added and if sticky, specimen should be spread out in a thin layer and allowed to lose some moisture by evaporation. Then the specimen is rolled out by hand on a smooth surface or between the palms into a thread about one-eighth inch in diameter. The thread is then folded and rerolled repeatedly. During this manipulation the moisture content is gradually reduced and the specimen stiffens, finally loses its plasticity, and crumbles when the plastic limit is reached.

After the thread crumbles, the pieces should be lumped together and slight kneading action continued until lump crumbles.

The tougher the thread near the plastic limit and the stiffer the lump when it finally crumbles, the more potent is the colloidal clay fraction in the soil. Weakness of the thread at plastic limit and quick loss of coherence of the lump below the plastic limit indicate either inorganic clay of low plasticity, or materials such as kaolin-type clays and organic clays which occur below the A-line.

Highly organic clays have a very weak and spongy feel at the plastic limit.


Adopted by Corps of Engineers and Bureau of Reclamation January 1952

## **APPENDIX D**

### **Summary of Laboratory Test Results**

## SUMMARY OF LABORATORY TEST RESULTS

# UNCONFINED COMPRESSION TEST

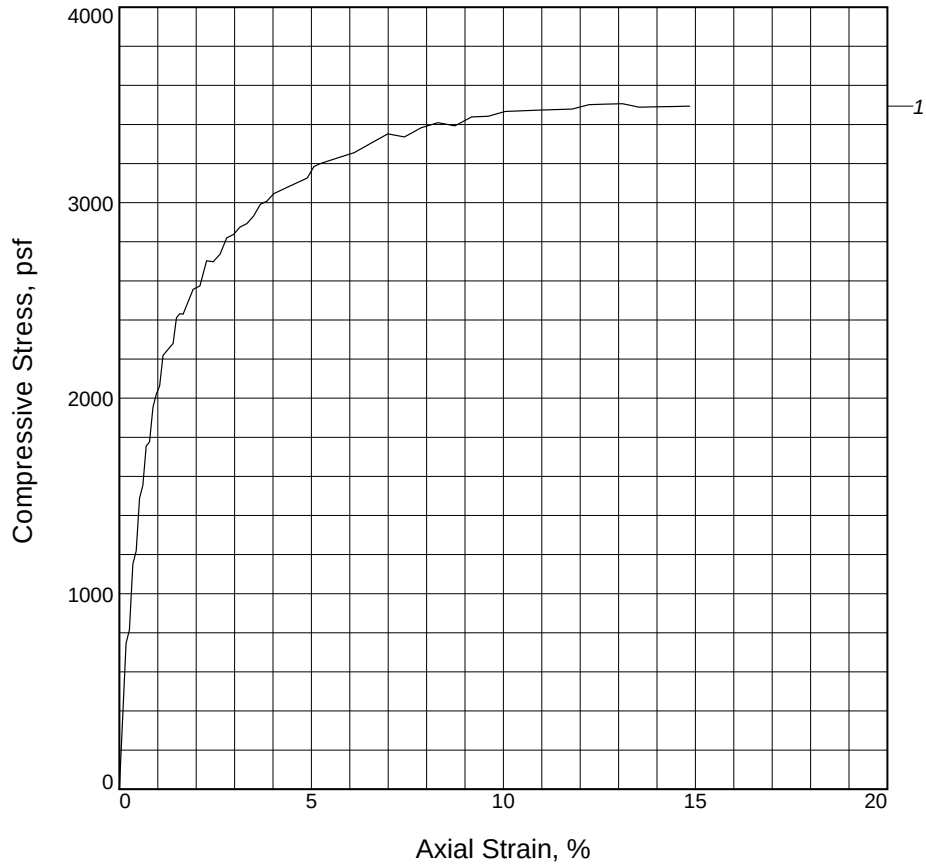

|                               |        |  |  |  |
|-------------------------------|--------|--|--|--|
| Stage                         | 1      |  |  |  |
| Unconfined strength, psf      | 3506   |  |  |  |
| Undrained shear strength, psf | 1753   |  |  |  |
| Failure strain, %             | 13.1   |  |  |  |
| Strain rate, in./min.         | 0.052  |  |  |  |
| Water content, %              | 10.3   |  |  |  |
| Wet density, pcf              | 124.9  |  |  |  |
| Dry density, pcf              | 113.3  |  |  |  |
| Saturation, %                 | 59.1   |  |  |  |
| Void ratio                    | 0.4599 |  |  |  |
| Specimen diameter, in.        | 2.84   |  |  |  |
| Specimen height, in.          | 5.72   |  |  |  |
| Height/diameter ratio         | 2.01   |  |  |  |

## Description:

LL =      PL =      PI =      Assumed GS= 2.65      Type:

**Project No.:** 2530-0265

**Date Sampled:**

**Remarks:**

**Client:** The Abila Griffin Partnership

**Project:** Old School Kitchen Additions


**Source of Sample:** DB-1      **Depth:** 3.0

**Sample Number:** C

**Figure** \_\_\_\_\_



# UNCONFINED COMPRESSION TEST

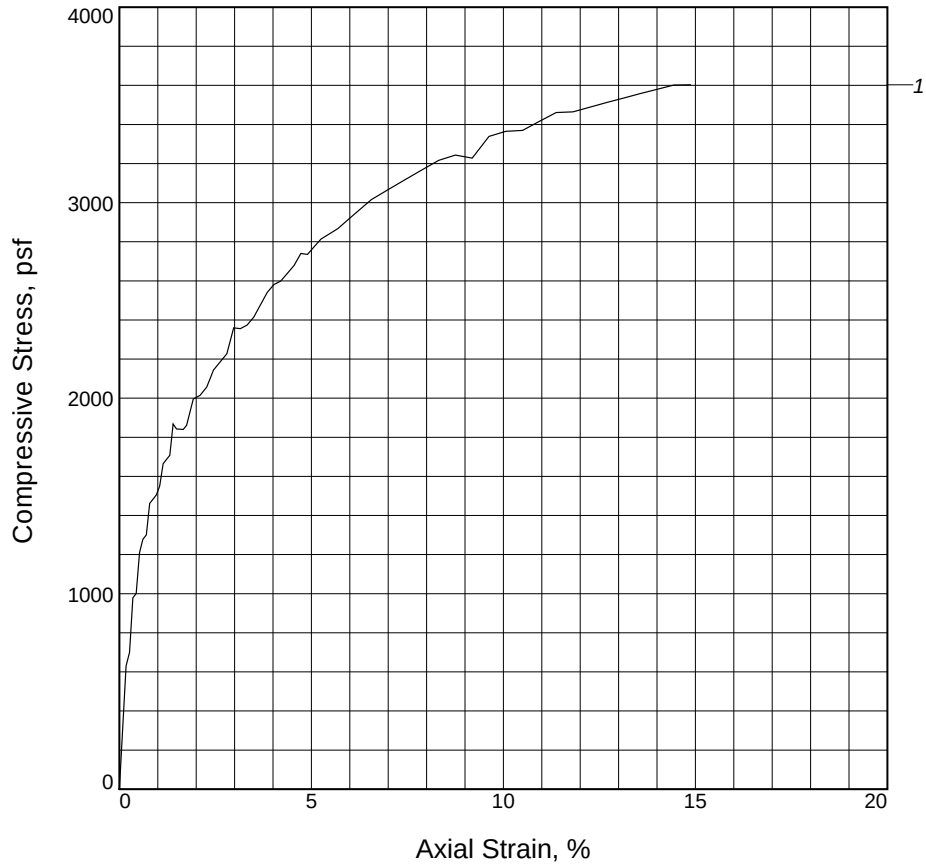

|                               |        |  |  |  |
|-------------------------------|--------|--|--|--|
| Stage                         | 1      |  |  |  |
| Unconfined strength, psf      | 3603   |  |  |  |
| Undrained shear strength, psf | 1802   |  |  |  |
| Failure strain, %             | 14.9   |  |  |  |
| Strain rate, in./min.         | 0.052  |  |  |  |
| Water content, %              | 22.0   |  |  |  |
| Wet density, pcf              | 130.3  |  |  |  |
| Dry density, pcf              | 106.7  |  |  |  |
| Saturation, %                 | 99.6   |  |  |  |
| Void ratio                    | 0.6083 |  |  |  |
| Specimen diameter, in.        | 2.80   |  |  |  |
| Specimen height, in.          | 5.71   |  |  |  |
| Height/diameter ratio         | 2.04   |  |  |  |

## Description:

LL =      PL =      PI =      Assumed GS= 2.75      Type:

**Project No.:** 2530-0265

**Date Sampled:**

**Remarks:**

**Client:** The Abila Griffin Partnership

**Project:** Old School Kitchen Additions

**Source of Sample:** DB-2      **Depth:** 3.0

**Sample Number:** C

**Figure** \_\_\_\_\_



The graph plots 'Change In Height - in.' on the y-axis against 'Applied Pressure - tsf' on the x-axis. The y-axis ranges from -0.0030 to 0.0120 with major grid lines every 0.0015. The x-axis is logarithmic, ranging from 0.01 to 1.0 with major grid lines at 0.01, 0.1, and 1.0. The data points are connected by a solid black line. The curve starts at approximately (0.05, 0.001), passes through (0.1, 0.000), and reaches a minimum at (0.2, -0.001). From this point, the curve rises sharply to (0.2, 0.011). A label 'Water Added' with a pointer indicates the region where the height change increases rapidly as pressure increases beyond 0.1 tsf.

| Applied Pressure - tsf | Change In Height - in. |
|------------------------|------------------------|
| 0.05                   | 0.001                  |
| 0.1                    | 0.000                  |
| 0.2                    | -0.001                 |
| 0.2                    | 0.011                  |

| Natural |        | Dry Dens.<br>(pcf) | LL | PI | Sp.<br>Gr. | Overburden<br>(tsf) | e <sub>0</sub> | Swell Press.<br>(tsf) | Heave<br>% | C <sub>r</sub> |
|---------|--------|--------------------|----|----|------------|---------------------|----------------|-----------------------|------------|----------------|
| Sat.    | Moist. |                    |    |    |            |                     |                |                       |            |                |
| 92.0 %  | 23.2 % | 99.6               |    |    | 2.65       | 0.18                | 0.669          |                       | 1.2        |                |

| MATERIAL DESCRIPTION | USCS | AASHTO |
|----------------------|------|--------|
|                      |      |        |



**STANDARD**  
ENGINEERING  
+ FIELD SERVICES


### Figure



## Dial Reading vs. Time

Project No.: 2530-0265  
Project: Old School Kitchen Additions

Source of Sample: DB-1      Depth: 3.0      Sample Number: C

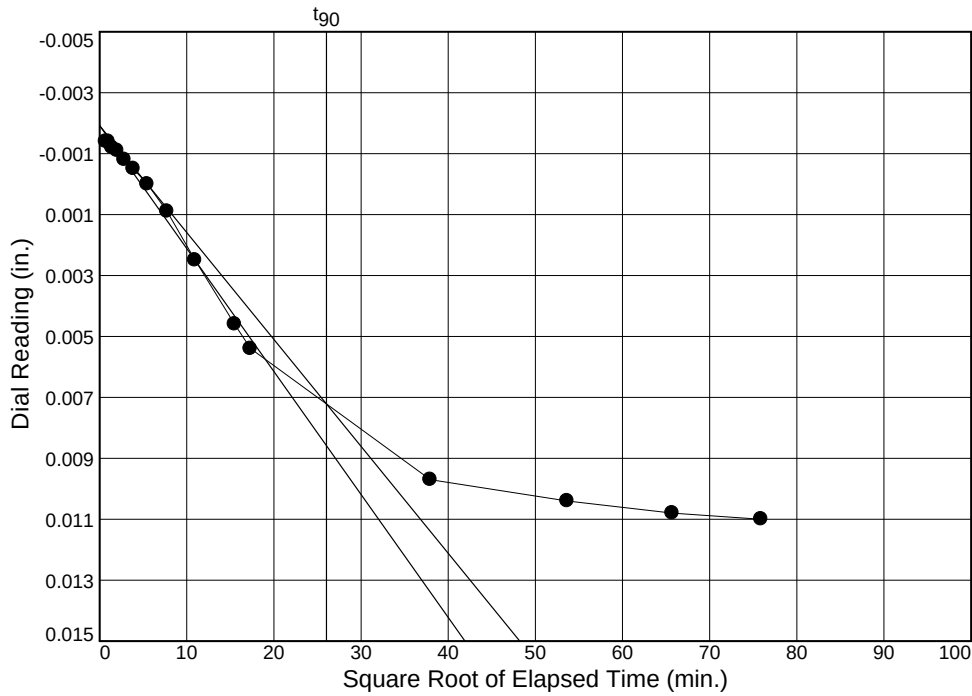

Load No.= 4

Load= 0.18 tsf

$D_0 = -0.0019$

$D_{90} = 0.0072$

$D_{100} = 0.0082$

$T_{90} = 677.54 \text{ min.}$

$C_v @ T_{90}$

0.003 ft.<sup>2</sup>/day

## DIVISION 1 - GENERAL REQUIREMENTS

### SECTION 01010-SUMMARY OF THE WORK

#### Part 1 - General

##### 1.01 Work Included:

- A. The General Conditions, Bidding Requirements, and Division I are hereby made a part of each of the technical sections that follow, and shall be understood to apply and shall apply in full to all individuals or corporations who contract or subcontract to perform any part or all of the project work.
- B. Indications on the working drawings or in any section of the specifications of an article or material, operation, or method, requires that the Contractor shall provide each item or service or quality or is subject to qualifications noted; and, the Contractor shall perform each operation prescribed according to the conditions stated providing, therefore, all necessary labor, equipment and incidentals to complete the project work.
- C. The project:
  - 1. Name: 2025 Old School Replacement - Moore Public Schools.
  - 2. Location: 201 North Broadway - Moore, Oklahoma.

##### 1.02 Summary of Work:

- A. **Base Bid:** Provide and pay for all materials, labor, services, equipment, licenses, taxes, permits, and other items necessary for the demolition and reconstruction of an (approximately) 30,402 total s.f. new building including classrooms, offices, kitchen, support areas, and dining area which is also a storm shelter structure plus new sidewalks, and site utilities. Contractor shall maintain all barriers, guards and other environmental items required at the site during construction.
- B. Owner: Moore Public Schools
  - 1. Owner's Representative:  
Jeff Horn, Bond Issue Consultant  
Moore Public Schools  
1500 SE 4<sup>th</sup> Street  
Moore, OK 73160  
405-735-4221
- C. Design Team:
  - 1. Architect:  
Mike Abila, Principal Architect  
AGP  
313 SE 5<sup>th</sup> Street  
Moore, OK 73160  
405-735-3477
  - 2. Structural Engineer:  
Brandon Birch, Structural Engineer  
KFC Engineering, Inc.  
1300 N. Walker, Suite 200  
Oklahoma City, OK 73103

## **DIVISION 1 - GENERAL REQUIREMENTS**

### **SECTION 01010-SUMMARY OF THE WORK**

3. Mechanical, Electrical and Plumbing Engineers:  
Dwayne Gordon, Mechanical Engineer  
Salas O'Brien LLC  
2900 S. Telephone Rd., Suite 120  
Moore, OK 73160  
405-364-9926
4. Civil Engineer:  
Derek Harris, Civil Engineer  
Cedar Creek  
P.O. Box 14534  
Oklahoma City, OK 73113  
405-863-8984
4. Construction Manager:  
Joe Sherga, Project Manager  
Omni Construction LLC  
1909 S. Eastern Ave.  
Moore, OK 73160  
405-735-3992
- 1.04 Work to be Provided and Installed By Others:  
Not applicable.
- 1.05 Use of the Site:
  - A. Confine operations at the site to the areas permitted under the contract. Portions of the site beyond areas on which work is indicated are not to be disturbed.
  - B. Keep facility free from accumulation of waste material, rubbish or construction debris.
- 1.06 Safety of Persons and property:
  - A. Contractor shall at all times protect the building from damage from rainwater.
  - B. Contractor shall provide barricades and clearly mark work zone areas.
  - C. Refer to Special Conditions "Temporary Services" for additional information.
  - D. During the period of construction, the OSHA Standards shall be followed as applicable by law.
  - E. The Contractor shall post emergency telephone numbers.
- 1.07 Preconstruction Conference:
  - A. A preconstruction meeting will be held at a time and place designated by the Architect or Owner's Representative, for the purpose of identifying responsibilities of the Owner's and the Architect's personnel and explanation of administrative procedures.
  - B. The Contractor shall use this meeting for the following minimum agenda:
    1. Construction Schedule/Project Phasing.
    2. Use of areas of the site.
    3. Delivery and storage.
    4. Safety.
    5. Security.
    6. Cleaning up.
    7. Subcontractor procedures relating to:
      - a. Submittals.

## **DIVISION 1 - GENERAL REQUIREMENTS**

### **SECTION 01010-SUMMARY OF THE WORK**

- b. Change orders.
    - c. Applications for payment.
    - d. Record documents.
  - C. The attendees shall include:
    - 1. The Owner's Representatives.
    - 2. The Architect.
    - 3. The Contractor and its superintendent.
- 1.08 Project Scheduling:
  - A. The Contractor is responsible for the scheduling of construction and must prepare a schedule and charting system described below. This schedule is to ensure adequate planning and execution of the work by the contractor and to assist the Architect in appraising the schedule and evaluating the progress of the work.
  - B. The project schedule shall be presented within ten (10) days after receipt of the Notice to Proceed. Electronic copies of the schedule shall be submitted to the Architect for review and approval.
  - C. The schedule logic must be in the form of a "fenced" bar chart or Critical Path Method network indicating the planned start and completion dates of the activity, logical constraints between activities, and total float of each activity.
  - D. An updated project schedule shall be provided when requested by the Architect.
- 1.09 Environmental Controls:
  - A. Water Resources:
    - 1. Oily substances: prevent oily or other hazardous substances from entering the ground, drainage areas, or local bodies of water.
    - 2. Mosquito abatement: prevent ponding of stagnant water conducive to mosquito breeding habitat.
  - B. Land Resources:
    - 1. Erodible soils: plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use the areas developed. Immediately protect side slopes and back slopes upon completion of rough grading.
  - C. Air resources:
    - 1. Prevent creation of dust, air pollution, and odors.
    - 2. Use water sprinkling, temporary enclosures, and other appropriate methods to limit dust and dirt rising and scattering in air to locate practical level.
    - 3. Store volatile liquids, including fuels and solvents, in closed containers.
    - 4. Properly maintain equipment to reduce gaseous pollutant emissions.
  - D. Comply with all applicable environmental control guidelines as required by the City of Moore.
- 1.10 Temporary Utilities:
  - A. The Contractor shall provide and pay for all temporary utilities required for the complete construction of the project including, but not limited to, electricity, lighting, heating,

## **DIVISION 1 - GENERAL REQUIREMENTS**

### **SECTION 01010-SUMMARY OF THE WORK**

cooling, ventilating, telephone, water, sanitary facilities, exterior and interior enclosures, access roads and parking areas, cleaning and waste removal, project identification and signs, etc.

#### **1.11 Cleaning:**

- A. Use cleaning materials and agents recommended by manufacturer or fabricator of surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property, or that might damage finished surfaces.
- B. Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit of work to condition expected from a commercial building cleaning and maintenance program. Comply with manufacturer's published instructions.
- C. Complete cleaning operations prior to requesting a Final / Substantial Completion Inspection.

#### **1.12 Project Sign:**

- A. Provide and install painted plywood project sign on wooden posts securely erected at the project site in a location approved by the Owner.
- B. No other project signs or advertisement shall be allowed at the project site unless approved by the Owner.
- C. Graphics and form of letter of the project sign shall be as indicated in the attached detail.

#### **1.13 Additional Requirements:**

- A. The Construction Manager and all is to take all precautions necessary and required by code to protect the existing masonry walls, etc. to remain including structural support, care in performing work to prevent the possibility of damaging, collapsing, etc. of said walls.

**End of Section**

8'-0"



## 2025 OLD SCHOOL REPLACEMENT

ARCHITECT:

AGP - ABLA GRIFFIN PARTNERSHIP L.L.C.  
MOORE, OKLAHOMA

CONTRACTOR:

OMNI CONSTRUCTION, L.L.C.  
MOORE, OKLAHOMA

4'-0"

NOTES:

1. WHITE LETTERS ON DARK BLUE BACKGROUND
2. 3/4" EXTERIOR PLYWOOD - PAINTED ALL SIDES
3. MOUNT ON 4" X 4" WOOD POST
4. CONTRACTOR TO HAVE LAYOUT APPROVED PRIOR TO INSTALLATION



## **DIVISION 2 - SITE WORK**

### **SECTION 02110 - TEMPORARY CONSTRUCTION FENCING**

#### **Part 1 - General**

##### **1.01 Summary**

- A. Section includes: Erection, maintenance and dismantling of temporary fencing around construction site and materials storage areas. This section does not apply where security fencing is required.
- B. Refer to Drawings for temporary fencing layout and location of gates.

##### **1.02 Submittals**

- A. Submit the following:
  - 1. Shop drawing indicating layout of temporary fencing, location and size of gates, existing pavement and roads, access to fire hydrants and hose connections, and other site specific conditions. Prepare drawing after site observation and verification of existing conditions.

#### **Part 2 - Products**

##### **2.01 Temporary Chain Link fencing:**

- A. Unless otherwise indicated, type of temporary chain link fencing shall be Contractor's option. Following types are acceptable:
  - 1. New materials or previously used salvaged chain link fencing in good condition.
  - 2. Posts: Galvanized steel pipe of diameter to provide rigidity. Post shall be suitable for setting in concrete footings, driving into ground, anchoring with base plates, or inserting in precast concrete blocks.
  - 3. Fabric: Woven galvanized steel wire mesh. Provide in continuous lengths to be wire tied to fence posts or prefabricated into modular pipe-framed fence panels.
  - 4. Height: Minimum Height shall be 8'-0".
- B. Gates: Provide personnel and vehicle gates of the quantity and size indicated on the Drawings or required for functional access to site.
  - 1. Fabricate of same material as used for fencing.
  - 2. Vehicle gates:
    - a. Minimum width: 20 feet to allow access for emergency vehicles.
    - b. Capable of manual operation by one person.

#### **Part 3 - Execution:**

##### **3.01 Layout:**

- A. Installation of temporary fencing shall not deter or hinder

## **DIVISION 2 - SITE WORK**

### **SECTION 02110 - TEMPORARY CONSTRUCTION FENCING**

access to existing and new hose connections and fire hydrants.

1. Maintain 3 feet diameter clear space around fire hydrants.

2. Where fire hydrant or hose connection is blocked by fencing, provide access gate.

B. Access: Provide gates for personnel, delivery of materials, and access by emergency vehicles.

#### **3.02 Installation:**

A. Chain link posts:

1. Space at 10'-0" maximum.

2. Drive posts, set in holes and backfill, or anchor in precast concrete blocks.

3. For soft and unstable ground conditions, cast concrete plug around post.

4. Posts over pavement: Use steel post plates or precast concrete blocks.

5. Gate posts: Use bracing or concrete footings to provide rigidity for accommodating size of gate.

B. Fabric: Securely attach to posts.

C. Gates: Install with required hardware.

D. Plastic mesh fencing: Space steel support posts to ensure mesh remains vertical and at proper height. Securely tie mesh to posts.

#### **3.03 Maintenance and Removal:**

A. Maintain fencing in good condition. If damaged, immediately repair.

B. Remove temporary fencing upon completion of Work or when no longer required for security or control. Backfill holes and compact. Holes in pavement shall be surfaced to match existing paving. Repair damage caused by installation of temporary fencing.

**End of Section**

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

#### **PART 1 - GENERAL**

##### **1.01 Section Includes**

- A. Concrete formwork.
- B. Slabs on grade.
- C. Concrete foundation walls and retaining walls.
- D. Concrete reinforcement.
- E. Joint devices associated with concrete work.
- F. Miscellaneous concrete elements, including equipment pads and equipment pits.
- G. Concrete curing.

##### **1.02 Related Requirements**

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Section 07 9200 - Joint Sealants: Products and installation for sealants and joint fillers for saw cut joints, construction joints and isolation joints in slabs.

##### **1.03 Reference Standards**

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. ACI 117 - Specifications for Tolerances for Concrete Construction and Materials.
- C. ACI 211.1 - Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete.
- D. ACI 301 - Specifications for Structural Concrete.
- E. ACI 302.1R - Guide to Concrete Floor and Slab Construction.
- F. ACI 302.2R - Guide for Concrete Slabs that Receive Moisture-Sensitive Flooring Materials.
- G. ACI 304R - Guide for Measuring, Mixing, Transporting, and Placing Concrete.
- H. ACI 305R - Guide to Hot Weather Concreting.
- I. ACI 305.1 - Specification for Hot Weather Concreting.
- J. ACI 306R - Guide to Cold Weather Concreting.
- K. ACI 308R - Guide to External Curing of Concrete.
- L. ACI 318 - Building Code Requirements for Structural Concrete and Commentary.
- M. ACI 347R - Guide to Formwork for Concrete.
- N. ACI SP-66 - ACI Detailing Manual.
- O. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
- P. ASTM A706/A706M - Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- Q. ASTM A1064/A1064M - Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
- R. ASTM C33/C33M - Standard Specification for Concrete Aggregates.
- S. ASTM C39/C39M - Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens.
- T. ASTM C94/C94M - Standard Specification for Ready-Mixed Concrete.
- U. ASTM C143/C143M - Standard Test Method for Slump of Hydraulic-Cement Concrete.
- V. ASTM C150/C150M - Standard Specification for Portland Cement.
- W. ASTM C171 - Standard Specification for Sheet Materials for Curing Concrete.
- X. ASTM C173/C173M - Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method.
- Y. ASTM C260/C260M - Standard Specification for Air-Entraining Admixtures for Concrete.
- Z. ASTM C494/C494M - Standard Specification for Chemical Admixtures for Concrete.
- AA. ASTM C618 - Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
- AB. ASTM C1064/C1064M - Standard Test Method for Temperature of Freshly Mixed Hydraulic-Cement Concrete.
- AC. ASTM C1107/C1107M - Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink).
- AD. ASTM C1602/C1602M - Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete.
- AE. ASTM D1751 - Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
- AF. ASTM D2103 - Standard Specification for Polyethylene Film and Sheeting.
- AG. ASTM E1745 - Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.
- AH. CRSI (DA4) - Manual of Standard Practice.
- AI. ICC (IBC)-2015 - International Building Code.

#### **1.04 Definitions**

- A. Cold Weather: A period when for more than three successive days the average daily outdoor temperature drops below 40 F. The average daily temperature is the average of the highest and lowest temperature during the period from midnight to midnight. When temperatures above 50 F occur during more than half of any 24 hr duration, the period shall no longer be regarded as cold weather.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- B. Hot Weather: Hot weather is any combination of the following conditions that tends to impair the quality of freshly mixed or hardened concrete by accelerating the rate of moisture loss and rate of cement hydration, or otherwise causing detrimental results:
  - 1. High ambient temperature
  - 2. High concrete temperature
  - 3. Low relative humidity
  - 4. Wind speed
  - 5. Solar radiation

#### **1.05 Submittals**

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Submit manufacturers' data on manufactured products showing compliance with specified requirements and installation instructions.
- C. Mix Design: Submit proposed concrete mix design.
  - 1. Indicate proposed mix design complies with requirements of ACI 301, Section 4 - Concrete Mixtures.
  - 2. Indicate proposed mix design complies with requirements of ACI 318, Chapter 26 - Concrete Documents and Inspection.
- D. Shop Drawings: Comply with requirements of ACI SP-66. Include bar schedules, shapes of bent bars, spacing of bars, and location of splices.
- E. Test Reports: Submit report for each test or series of tests specified.
- F. Manufacturer's Installation Instructions: For concrete accessories, indicate installation procedures and interface required with adjacent construction.
- G. Formwork Design Submittal: As required by authorities having jurisdiction.
- H. Project Record Documents: Accurately record actual locations of embedded utilities and components that will be concealed from view upon completion of concrete work.
- I. Warranty: Submit manufacturer warranty and ensure forms have been completed in Owner's name and registered with manufacturer.

#### **1.06 Quality Assurance**

- A. Perform work of this section in accordance with ACI 301 and ACI 318.
- B. Follow recommendations of ACI 305R when concreting during hot weather.
- C. Follow recommendations of ACI 306R when concreting during cold weather.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- D. For slabs required to include moisture vapor reducing admixture (MVRA), do not proceed with placement unless manufacturer's representative is present for placement as required by the manufacturer's warranty.

#### **1.07 Warranty**

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. See Section 01 7800 - Closeout Submittals, for additional warranty requirements.
- C. Slabs with Moisture Vapor Reducing Admixture (MVRA): Provide warranty to cover cost of flooring failures due to moisture migration from slabs for life of the concrete.
  - 1. Include cost of repair or removal of failed flooring, placement of topical moisture remediation system, and replacement of flooring with comparable flooring system.
  - 2. Provide warranty by manufacturer of MVRA matching terms of flooring adhesive or primer manufacturer's material defect warranty.

## **PART 2 PRODUCTS**

#### **2.01 Formwork**

- A. Formwork Design and Construction: Comply with guidelines of ACI 347R to provide formwork that will produce concrete complying with tolerances of ACI 117.
- B. Form Materials: Contractor's choice of standard products with sufficient strength to withstand hydrostatic head without distortion in excess of permitted tolerances.
  - 1. Form Facing for Exposed Finish Concrete: Contractor's choice of materials that will provide smooth, stain-free final appearance.
  - 2. Earth Cuts: Do not use earth cuts as forms for vertical surfaces of trenched footings unless expressly allowed in the General Notes in the structural drawings. Natural rock formations that maintain a stable vertical edge may be used as side forms for below-grade concrete.
  - 3. Form Coating: Release agent that will not adversely affect concrete or interfere with application of coatings.
  - 4. Form Ties: Cone snap type that will leave no metal within the clear cover zone of the concrete surface as specified in the Minimum Concrete Cover for Cast-in-Place Non-Prestressed Members table included in the General Notes of the structural drawings.



## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

#### **2.02 Reinforcement Materials**

- A. Reinforcing Steel: ASTM A615/A615M, Grade 60 (60,000 psi).
  - 1. Type: Deformed billet-steel bars.
  - 2. Finish: Unfinished, unless otherwise indicated.
- B. Reinforcing Steel: ASTM A706/A706M, deformed low-alloy steel bars, weldable.
  - 1. Unfinished.
- C. Reinforcement Accessories:
  - 1. Joint Dowel Bars: ASTM A615/A615M, Grade 60 (60,000 psi) plain-steel bars, cut true to length with ends square and free of burrs.
  - 2. Tie Wire: Annealed, minimum 16 gauge, 0.0508 inch.
  - 3. Chairs, Bolsters, Bar Supports, Spacers: Sized and shaped for adequate support of reinforcement during concrete placement.
    - a. Continuous slab bolsters shall be used to support the bottom reinforcing bars of all reinforced slabs-on-grade.
  - 4. Provide stainless steel, galvanized, plastic, or plastic coated steel components for placement of reinforcing steel within 1-1/2 inches of weathering surfaces and for concrete surfaces that will be exposed to view.
- D. Fabrication of Reinforcing:
  - 1. Fabricate concrete reinforcing in accordance with CRSI (DA4) - Manual of Standard Practice.
  - 2. Welding of reinforcement is permitted only with the specific approval of Architect/Engineer. Perform welding in accordance with AWS D1.4/D1.4M.
  - 3. Locate reinforcing splices not indicated on drawings at point of minimum stress.

#### **2.03 Concrete Materials**

- A. Cement: ASTM C150/C150M, Type I - Normal Portland type.
  - 1. Acquire cement for entire project from same source.
- B. Fine and Coarse Aggregates: ASTM C33/C33M.
  - 1. Acquire aggregates for entire project from same source.
- C. Fly Ash: ASTM C618, Class C or F.
- D. Water: ASTM C1602/C1602M; clean, potable, and not detrimental to concrete.

#### **2.04 Admixtures**

- A. Do not use chemicals that will result in soluble chloride ions in excess of 0.1 percent by weight of cement.
- B. Air Entrainment Admixture: ASTM C260/C260M.
- C. Water Reducing and Retarding Admixture: ASTM C494/C494M Type D.
- D. Water Reducing Admixture: ASTM C494/C494M Type A.

## DIVISION 3 - CONCRETE

### SECTION 03300 - CAST-IN-PLACE CONCRETE

- E. Moisture Vapor Reducing Admixture (MVRA): Liquid, inorganic admixture free of volatile organic compounds (VOCs) and formulated to close capillary systems formed during curing to reduce moisture vapor emission and transmission with no adverse effect on concrete properties or finish flooring.
  - 1. Provide admixture in slabs to receive adhesively applied flooring.
  - 2. Manufacturers:
    - a. Barrier One, Inc; Barrier One Moisture Vapor Reduction Admixture: [www.barrierone.com/#sle](http://www.barrierone.com/#sle).
    - b. Substitutions: Substitutions shall comply with the use of concrete staining/dye products. See Section 01 6000 - Product Requirements.
- 2.05 Accessory Materials
  - A. Non-Shrink Cementitious Grout: Premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents.
    - 1. Grout: Comply with ASTM C1107/C1107M.
- 2.06 Bonding And Jointing Products
  - A. Latex Bonding Agent: Non-redispersable acrylic latex, complying with ASTM C1059/C1059M, Type II.
  - B. Epoxy Bonding System:
    - 1. Complying with ASTM C881/C881M and of Type required for specific application.
  - C. Waterstops: Bentonite and butyl rubber, complying with NSF 61 and NSF 372.
  - D. Slab Isolation Joint Filler: 1/2 inch (13 mm) thick, height equal to slab thickness.
    - 1. Material: ASTM D1751, cellulose fiber.
- 2.07 Evaporation Retarders
  - A. Evaporation Retarder: Liquid thin film-forming compound that reduces rapid moisture loss caused by high temperature, low humidity, and high winds; intended for application immediately after concrete placement. These products provide a protective film shield over plastic concrete, dissipate as soon as the concrete is no longer plastic, and are not curing products.
    - 1. Manufacturers:
      - a. Euclid Chemical Company ; EUCOBAR: [www.euclidchemical.com/#sle](http://www.euclidchemical.com/#sle).
      - b. SpecChem, LLC; SpecFilm Concentrate or SpecFilm: [www.specchemllc.com/#sle](http://www.specchemllc.com/#sle).
      - c. W. R. Meadows, Inc ; Evapre or Evapre-RTU: [www.wrmeadows.com/#sle](http://www.wrmeadows.com/#sle).
      - d. Substitutions: See Section 01 6000 - Product Requirements.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

#### **2.08 Liquid Floor Treatments**

- A. Penetrating Liquid Floor Treatment: Clear, chemically reactive, waterborne solution of inorganic silicate or siliconate materials and proprietary components; odorless; that penetrates, hardens, and densifies concrete surfaces.
  - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
    - a. ChemMasters; Chemisil Plus.
    - b. ChemTec Int'l; ChemTec One.
    - c. Conspec by Dayton Superior; Intraseal.
    - d. Curecrete Distribution Inc.; Ashford Formula.
    - e. Dayton Superior Corporation; Day-Chem Sure Hard (J-17).
    - f. Edoco by Dayton Superior; Titan Hard.
    - g. Euclid Chemical Company (The), an RPM company; Euco Diamond Hard.
    - h. Kaufman Products, Inc.; SureHard.
    - i. L&M Construction Chemicals, Inc.; Seal Hard.
    - j. Meadows, W. R., Inc.; LIQUI-HARD.
    - k. Metalcrete Industries; Floorsaver.
    - l. Nox-Crete Products Group; Duro-Nox.
    - m. Symons by Dayton Superior; Buff Hard.
    - n. US SPEC, Division of US Mix Products Company; US SPEC Industraseal.
    - o. Vexcon Chemicals, Inc.; Vexcon StarSeal PS Clear.

#### **2.09 Curing Materials**

- A. Moisture-Retaining Sheet: ASTM C171.
  - 1. Polyethylene film, white opaque, minimum nominal thickness of 4 mil, 0.004 inch.
  - 2. White-burlap-polyethylene sheet, weighing not less than 3.8 ounces per square yard.
- B. Polyethylene Film: ASTM D2103, 4 mil, 0.004 inch thick, clear.
- C. Water: Potable, not detrimental to concrete.

#### **2.10 Concrete Mix Design**

- A. Proportioning Normal Weight Concrete: Comply with ACI 211.1 recommendations.
- B. Concrete Strength: Establish required average strength for each type of concrete on the basis of field experience or trial mixtures, as specified in ACI 301.
  - 1. For trial mixtures method, employ independent testing agency acceptable to Architect for preparing and reporting proposed mix designs.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- C. Admixtures: Add acceptable admixtures as recommended in ACI 211.1 and at rates recommended or required by manufacturer.
- D. Normal Weight Concrete: Refer Structural General Notes for mix requirements for various classes of concrete.

#### **2.11 Mixing**

- A. Transit Mixers: Comply with ASTM C94/C94M.
- B. Adding Water: If concrete arrives on-site with slump less than suitable for placement, do not add water that exceeds the maximum water-cement ratio or exceeds the maximum permissible slump.

### **PART 3 EXECUTION**

#### **3.01 Examination**

- A. Verify lines, levels, and dimensions before proceeding with work of this section.

#### **3.02 Preparation**

- A. Formwork: Comply with requirements of ACI 301. Design and fabricate forms to support all applied loads until concrete is cured, and for easy removal without damage to concrete.
- B. Verify that forms are clean and free of rust before applying release agent.
- C. Coordinate placement of embedded items with erection of concrete formwork and placement of form accessories.
- D. Where new concrete is to be bonded to previously placed concrete, prepare existing surface by cleaning and applying bonding agent according to bonding agent manufacturer's instructions.
  - 1. Use epoxy bonding system for bonding to damp surfaces, for structural load-bearing applications, and where curing under humid conditions is required.
  - 2. Use latex bonding agent only for non-load-bearing applications.
- E. Where new concrete with integral waterproofing is to be bonded to previously placed concrete, prepare surfaces to be treated in accordance with waterproofing manufacturer's instructions. Saturate cold joint surface with clean water, and remove excess water before application of coat of waterproofing admixture slurry. Apply slurry coat uniformly with semi-stiff bristle brush at rate recommended by waterproofing manufacturer.
- F. In locations where new concrete is doweled to existing work, drill holes in existing concrete, clean out drilled holes, inject the adhesive indicated on drawings and/or General Notes, and insert steel dowels, all in accordance with adhesive manufacturer's installation instructions.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- G. Interior Slabs on Grade: Install vapor retarder under interior slabs on grade in accordance with manufacturer's instructions, ASTM E1643, ASTM F710 and ACI 302.2R.
  - 1. Install compactible granular fill before placing vapor retarder as indicated on drawings. Do not use sand.
  - 2. Lap vapor retarder sheet over footings and seal to previously placed concrete foundations.
  - 3. Lap joints minimum 6 inches (150 mm).
  - 4. Seal joints, seams and penetrations watertight with manufacturer's recommended products and follow manufacturer's written instructions.
  - 5. No penetration of vapor retarder is allowed except for reinforcing steel and permanent utilities.
  - 6. Repair damaged vapor retarder before covering with other materials.
  - 7. Vapor Retarder Over Granular Fill: Install compactible granular fill before placing vapor retarder as indicated on drawings. Do not use sand.
- 3.03 Installing Reinforcement And Other Embedded Items
  - A. Comply with requirements of ACI 301. Clean reinforcement of loose rust and mill scale, and accurately position, support, and secure in place to achieve not less than minimum concrete coverage required for protection.
  - B. Install welded wire reinforcement in maximum possible lengths, and offset end laps in both directions. Splice laps with tie wire.
  - C. Verify that anchors, seats, plates, reinforcement, waterstops and other items to be cast into concrete are accurately placed, positioned securely, and will not interfere with concrete placement.
- 3.04 Placing Concrete
  - A. Place concrete in accordance with ACI 304R.
  - B. Place concrete for floor slabs in accordance with ACI 302.1R.
  - C. Notify Architect not less than 48 hours prior to commencement of placement operations.
  - D. Maintain records of concrete placement. Record date, location, quantity, air temperature, and test samples taken.
  - E. Ensure reinforcement, inserts, waterstops, embedded parts, and formed construction joint devices will not be disturbed during concrete placement.
  - F. Place concrete continuously without construction (cold) joints wherever possible; where construction joints are necessary, before next placement prepare joint surface by removing laitance and exposing the sand and sound surface mortar, by sandblasting or high-pressure water jetting.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- G. Finish slab-on-grade and shored elevated floors level and flat, unless otherwise indicated, within the tolerances specified below.
- 3.05 Slab Jointing
- A. Locate and install joints as indicated on drawings and Slab-On-Grade Schedule or as submitted by Contractor and approved by structural engineer.
  - B. Anchor joint fillers and devices to prevent movement during concrete placement.
  - C. Isolation Joints: Use preformed joint filler, total height equal to thickness of slab, set flush with top of slab.
    - 1. Install wherever necessary to separate slab from other building members, including columns, walls, equipment foundations, footings, stairs, manholes, sumps, and drains.
  - D. Load Transfer Construction and Contraction Joints: Install load transfer devices as indicated; saw cut joint at surface as indicated for contraction joints.
  - E. Saw Cut Contraction Joints: Saw cut joints shall be installed with early-entry dry-cut saw before concrete begins to cool, within 1 to 4 hours after completing the slab finishing operations; commence in approximately 1 hours in hot weather or approximately 4 hours in cold weather. Use 3/16 inch thick blade and cut at least 1 inch deep but not less than one quarter (1/4) the depth of the slab. Refer to Slab-On-Grade Schedule in drawings for additional requirements.
- 3.06 Floor Flatness And Levelness Tolerances
- A. An independent testing agency, as specified in Section 01 4000, will inspect finished slabs for compliance with specified tolerances.
  - B. Maximum Variation of Surface Flatness:
    - 1. Exposed Concrete Floors: 1/4 inch in 10 feet.
    - 2. Under Seamless Resilient Flooring: 1/4 inch in 10 feet.
    - 3. Under Carpeting: 1/4 inch in 10 feet.
  - C. Correct the slab surface if surface variations exceed specified tolerances.
  - D. Correct defects by grinding or by removal and replacement of the defective work. Areas requiring corrective work will be identified. Re-measure corrected areas by the same process.
- 3.07 Concrete Finishing
- A. Repair surface defects, including tie holes, immediately after removing formwork.
  - B. Unexposed Form Finish: Rub down or chip off fins or other raised areas 1/4 inch or more in height.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- C. Exposed Form Finish: Rub down or chip off and smooth fins or other raised areas 1/4 inch or more in height. Provide finish as follows:
    - 1. Smooth Rubbed Finish: Wet concrete and rub with carborundum brick or other abrasive, not more than 24 hours after form removal.
  - D. Concrete Slabs: Finish to requirements of ACI 302.1R, and as follows:
    - 1. Surfaces to Receive Thick Floor Coverings: "Wood float" as described in ACI 302.1R; thick floor coverings include quarry tile, ceramic tile, and Portland cement terrazzo with full bed setting system.
    - 2. Surfaces to Receive Thin Floor Coverings: "Steel trowel" as described in ACI 302.1R; thin floor coverings include carpeting, resilient flooring, seamless flooring, resinous matrix terrazzo, thin set quarry tile, and thin set ceramic tile.
    - 3. Decorative Exposed Surfaces: Trowel as described in ACI 302.1R; take measures necessary to avoid black-burnish marks; decorative exposed surfaces include surfaces to be stained or dyed, pigmented concrete, surfaces to receive liquid hardeners, surfaces to receive dry-shake hardeners, surfaces to be polished, and all other exposed slab surfaces.
    - 4. Other Surfaces to Be Left Exposed: Trowel as described in ACI 302.1R, minimizing burnish marks and other appearance defects.
  - E. In areas with floor drains, maintain floor elevation at walls; pitch surfaces uniformly to drains at 1:100 nominal (approximately 1/8 inch per foot).
- 3.08 Curing And Protection
- A. Comply with requirements of ACI 308R. Immediately after placement, protect concrete from premature drying, excessively hot or cold temperatures, and mechanical injury.
  - B. Uniformly apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss due to evaporation approaching 0.2 lb/sq.ft./h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing. A methodology for calculating the moisture loss due to evaporation is provided in ACI 305.1.
  - C. Maintain concrete with minimal moisture loss at relatively constant temperature for period necessary for hydration of cement and hardening of concrete.
    - 1. Normal concrete: Not less than seven (7) days.



## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- D. Formed Surfaces: Cure by moist curing with forms in place for full curing period.
- E. Surfaces Not in Contact with Forms:
  - 1. Initial Curing: Start as soon as free water has disappeared and before surface is dry. Keep continuously moist for not less than seven (7) days by water ponding, water-saturated sand, water-fog spray, or saturated burlap.
    - a. Ponding: Maintain 100 percent coverage of water over floor slab areas, continuously for seven (7) days.
    - b. Spraying: Spray water over floor slab areas and maintain wet.
    - c. Saturated Burlap: Saturate burlap-polyethylene and place burlap-side down over floor slab areas, lapping ends and sides; maintain in place.
  - 2. Final Curing: The surface shall be protected against rapid moisture loss upon the termination of initial curing by replacing wet burlap or similar coverings with plastic sheets until the surface has dried under the sheets.
    - a. Moisture-Retaining Sheet: Lap strips not less than 3 inches and seal with waterproof tape or adhesive; secure at edges.

#### **3.09 Liquid Floor Treatments**

- A. Penetrating Liquid Floor Treatment: Prepare, apply, and finish penetrating liquid floor treatment according to manufacturer's written instructions.
  - 1. Remove sealers, oil, dirt, laitance, and other contaminants and complete surface repairs.
  - 2. Do not apply to concrete that is less than 28 days old.
    - a. Apply liquid until surface is saturated, scrubbing into surface until a gel forms; rewet; and repeat brooming or scrubbing. Rinse with water; remove excess material until surface is dry. Apply a second coat in a similar manner if surface is rough or porous.
- B. Sealing Coat: Uniformly apply a continuous sealing coat of curing and sealing compound to hardened concrete by power spray or roller according to manufacturer's written instructions.

#### **3.10 Field Quality Control**

- A. An independent testing agency will perform Special Inspections and field quality control tests as required by

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

Chapter 17 of ICC (IBC)-2015. The testing outlined below includes some, but not all, of the testing and observations required to meet the Special Inspection provisions of the building code. Refer to the following parts of the structural drawings for additional Special Inspection requirements:

1. Statement of Special Inspection Notes
  2. Table 1705.3 titled "Required Special Inspections and Tests of Concrete Construction"
- B. Provide free access to concrete operations at project site and cooperate with appointed firm.
  - C. Submit approved mix design of each class of concrete to inspection and testing firm for review prior to commencement of concrete operations.
  - D. Tests of concrete and concrete materials may be performed at any time to ensure compliance with specified requirements.
  - E. Compressive Strength Tests: ASTM C39/C39M, for each test, mold and cure four concrete test cylinders. Obtain test samples for every 100 cubic yards or less of each class of concrete placed each day.
  - F. Take one additional test cylinder during cold weather concreting, cured on job site under same conditions as concrete it represents.
  - G. Perform one slump test for each set of test cylinders taken, following procedures of ASTM C143/C143M.
  - H. Air Content: ASTM C173/C173M, one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
  - I. Concrete Temperature: ASTM C1064/C1064M, one test hourly when air temperature is 40 deg F and below or 80 deg F and above, and one test for each composite sample.
  - J. Slab Testing: Cooperate with manufacturer of specified moisture vapor reducing admixture (MVRA) to allow access for sampling and testing concrete for compliance with warranty requirements.
- 3.11 Defective Concrete
- A. Test Results: The testing agency shall report test results in writing to Architect and Contractor within 24 hours of test.
  - B. Defective Concrete: Concrete not complying with required lines, details, dimensions, tolerances or specified requirements.
  - C. Repair or replacement of defective concrete will be determined by the Architect. The cost of additional testing shall be borne by Contractor when defective concrete is identified.

## **DIVISION 3 - CONCRETE**

### **SECTION 03300 - CAST-IN-PLACE CONCRETE**

- D. Do not patch, fill, touch-up, repair, or replace exposed concrete except upon express direction of Architect for each individual area.

#### **3.12 Protection**

- A. Do not permit traffic over unprotected concrete floor surface until fully cured.

**END OF SECTION**

## **DIVISION 9 - FINISHES**

### **SECTION 03354 – POLISHED CONCRETE FINISHING**

#### **PART 1 - GENERAL**

##### **1.1 SUMMARY**

###### **A. Section Includes:**

1. Polished concrete finishing including staining and scoring.
2. Concrete for polished concrete, including concrete materials, mixture design, placement procedures, initial finishing, and curing is specified in Section 03300 "Cast-in-Place Concrete". At the areas to receive the "polished concrete finish", the following requirements shall be incorporated into the Cast-in-Place Concrete specification to meet the requirements of this specification:
  - a. Maximum fly ash content – less than 5%.
  - b. Admixtures shall not be calcium chloride based.
  - c. Maximum slump shall be 5 inches, plus or minus 0.5".
  - d. Finish concrete as required to achieve a Floor Flatness of 50 Overall Value (35 Minimum Local Value) and Floor Levelness of 30 (20) as per CPAA. Testing shall be conducted within 8 hours after completion of the final troweling operation. Testing shall be conducted by an independent testing agency as approved by Architect.
  - e. Contraction joints shall be provided as per CPAA recommendations using a saw-cutting process. Refer to the Drawings for floor color layout for additional required joints.
  - f. Concrete slab shall be protected from damage during building construction for time required.

###### **B. Related Requirements:**

1. Section 033000 "Cast-in-Place Concrete" for concrete not designated as polished concrete.

##### **1.2 DEFINITIONS**

- ###### **A. Design Reference Sample:** Sample designated by Architect in the Contract Documents that reflects acceptable surface quality and appearance of polished concrete.

## **DIVISION 9 - FINISHES**

### **SECTION 03354 – POLISHED CONCRETE FINISHING**

#### **1.3 PREINSTALLATION MEETINGS**

- A. Preinstallation Conference: Conduct conference at Project site.
  - 1. Before submitting design mixtures, review concrete design mixture and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with polished concrete to attend, including the following:
    - a. Contractor's superintendent.
    - b. Independent testing agency responsible for concrete design mixtures.
    - c. Ready-mix concrete manufacturer.
    - d. Cast-in-place concrete subcontractor.
    - e. Polished concrete finishing Subcontractor.
  - 2. Review cold- and hot-weather concreting procedures, curing procedures, construction joints, concrete repair procedures, concrete finishing, and protection of polished concrete.

#### **1.4 ACTION SUBMITTALS**

- A. Product Data: For each type of product.
- B. Sustainable Design Submittals:
  - 1. Laboratory Test Reports: For stains and liquid floor treatments, indicating compliance with requirements for low-emitting materials.
- C. Polishing Schedule: Submit plan showing polished concrete surfaces and schedule of polishing operations for each area of polished concrete before start of polishing operations. Include locations of all joints, including construction joints.
- D. Samples for Initial Selection: For each type of product requiring color selection.
- E. Samples for Verification: For each type of exposed color.

## **DIVISION 9 - FINISHES**

### **SECTION 03354 – POLISHED CONCRETE FINISHING**

#### **1.5 INFORMATIONAL SUBMITTALS**

- A. Qualification Data: For Installer.
- B. Material Certificates: For each of the following, signed by manufacturers:
  - 1. Repair materials.
  - 2. Stain materials.
  - 3. Liquid floor treatments.

#### **1.6 QUALITY ASSURANCE**

- A. Field Sample Panels: After approval of verification sample and before casting concrete, produce field sample panels to demonstrate the approved range of selections made under Sample submittals. Produce a minimum of three sets of full-scale panels, approximately 48 by 48 inches minimum, to demonstrate the expected range of finish, color, and appearance variations.
  - 1. Locate panels as indicated or, if not indicated, as directed by Architect.
  - 2. Maintain field sample panels during construction in an undisturbed condition as a standard for judging the completed Work.
  - 3. Demolish and remove field sample panels when directed.
- B. Mockups: Before casting concrete, build mockups to verify selections made under Sample submittals and to demonstrate typical joints, surface finish, tolerances, and standard of workmanship. Build mockups to comply with the following requirements, using materials indicated for the completed Work:
  - 1. Build mockups in the location and of the size indicated or, if not indicated, as directed by Architect.
  - 2. Demonstrate curing, finishing, and protecting of polished concrete.
  - 3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

## **DIVISION 9 - FINISHES**

### **SECTION 03354 - POLISHED CONCRETE FINISHING**

#### **1.7 FIELD CONDITIONS**

- A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities.

### **PART 2 - PRODUCTS**

#### **2.1 STAIN MATERIALS**

- A. Reactive Stain: Acidic-based stain with wetting agents and high-grade, UV-stable metallic salts that react with calcium hydroxide in cured concrete to produce permanent, variegated, or translucent color effects.

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
  - a. Americrete, Inc.
  - b. Artcrete, Inc.
  - c. Bomanite Co.
  - d. Bon Tool Co.
  - e. Brickform; a division of Solomon Colors.
  - f. Butterfield Color, Inc.
  - g. Decosup Inc.
  - h. Epmar Corporation; Quaker Chemical Corporation.
  - i. H&C® Decorative Concrete Products; a brand of Sherwin-Williams Co.
  - j. QC Construction Products.
  - k. Scofield, a Business Unit of Sika Corporation.
  - l. Specialty Concrete Products, Inc.
  - m. Stampcrete International, Ltd.
  - n. SuperStone, Inc.
  - o. SureCrete Design Products.
- 2. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
- 3. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."



## DIVISION 9 - FINISHES

### SECTION 03354 - POLISHED CONCRETE FINISHING

4. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers." Formaldehyde emissions shall not exceed 16.5 mcg/cu. m or 13.5 ppb, whichever is less.
  5. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
  6. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
- B. Penetrating Stain: Water-based, acrylic latex, penetrating stain with colorfast pigments.
1. Basis-of-Design Product: Subject to compliance with requirements, provide **AmeriPolish, Inc.; Classic Dye** or comparable product by one of the following:
    - a. Americrete, Inc.
    - b. Bomanite Co.
    - c. Bon Tool Co.
    - d. Brickform; a division of Solomon Colors.
    - e. Butterfield Color, Inc.
    - f. Duckback Products.
    - g. H&C® Decorative Concrete Products; a brand of Sherwin-Williams Co.
    - h. Scofield, a Business Unit of Sika Corporation.
    - i. SuperStone, Inc.
  2. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
  3. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

## DIVISION 9 - FINISHES

### SECTION 03354 – POLISHED CONCRETE FINISHING

4. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers." Formaldehyde emissions shall not exceed 16.5 mcg/cu. m or 13.5 ppb, whichever is less.
5. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
6. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

#### 2.2 LIQUID FLOOR TREATMENTS

- A. Penetrating Liquid Floor Treatments for Polished Concrete Finish: Clear, waterborne solution of inorganic silicate or siliconate materials and proprietary components; odorless; that penetrates, hardens, and is suitable for polished concrete surfaces.

•

1. Basis-of-Design Product: Subject to compliance with requirements, provide **AmeriPolish, Inc.; 3D HS densifier; 3D SP E and Ameripolish SR<sup>2</sup> sealer** or comparable product by one of the following:
  - a. Advanced Floor Products.
  - b. ARDEX Americas.
  - c. AWRC Corporation.
  - d. Euclid Chemical Company (The); an RPM company.
  - e. H&C® Decorative Concrete Products; a brand of Sherwin-Williams Co.
  - f. Laticrete International, Inc.
  - g. MAPEI Corporation.
  - h. Moxie International.
  - i. NewLook International, Inc.
  - j. Nox-Crete Products Group.
  - k. PROSOCO, Inc.
  - l. QuestMark.
  - m. Vexcon Chemicals Inc.

## DIVISION 9 - FINISHES

### SECTION 03354 - POLISHED CONCRETE FINISHING

2. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
3. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
4. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers." Formaldehyde emissions shall not exceed 16.5 mcg/cu. m or 13.5 ppb, whichever is less.
5. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
6. Products shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers".

### PART 3 - EXECUTION

#### 3.1 POLISHING

- A. Polish: Match design reference noted below.
- B. Apply polished concrete finish system to cured and prepared slabs to match accepted mockup.
  1. Machine grind floor surfaces to receive polished finishes level and smooth **to depth required to achieve "Class B - Fine Aggregate" as classified by the Concrete Polishing Council's Polished Concrete Aggregate Exposure Chart and to match approved mockup.**
  2. Apply reactive stain for polished concrete in polishing sequence and in accordance with manufacturer's written instructions.

## **DIVISION 9 - FINISHES**

### **SECTION 03354 - POLISHED CONCRETE FINISHING**

3. Apply penetrating liquid floor treatment for polished concrete in polishing sequence and in accordance with manufacturer's written instructions, allowing recommended drying time between successive coats.
4. Apply penetrating stain for polished concrete in polishing sequence and in accordance with manufacturer's written instructions.
5. Continue polishing with progressively finer-grit diamond polishing pads to gloss level, to match approved mockup.
6. Control and dispose of waste products produced by grinding and polishing operations.
7. Neutralize and clean polished floor surfaces.

#### **3.2 STAINING**

- A. Newly placed concrete shall be at least 30 days old before staining.
- B. Prepare surfaces in accordance with manufacturer's written instructions and as follows:
  1. Clean concrete thoroughly by scraping, applying solvents or stripping agents, sweeping and pressure washing, or scrubbing with a rotary floor machine and detergents recommended by stain manufacturer. Rinse until water is clear and allow surface to dry.
    - a. Do not use acidic solutions to clean surfaces.
  2. Test surfaces with droplets of water. If water beads and does not penetrate surface, or penetrates only in some areas, profile surfaces by grinding, sanding, or abrasive blasting. Retest and continue profiling surface until water droplets immediately darken and uniformly penetrate concrete surfaces.
  3. Apply acidic solution to dampened concrete surfaces, scrubbing with uncolored, acid-resistant nylon-bristle brushes until bubbling stops and concrete surface has texture of 120-grit sandpaper. Do not allow solution to dry on concrete surfaces. Rinse until water is clear. Control, collect, and legally dispose of runoff.
  4. Neutralize concrete surfaces and rinse until water is clear. Test surface for residue with clean white

## **DIVISION 9 - FINISHES**

### **SECTION 03354 - POLISHED CONCRETE FINISHING**

cloth. Test surface in accordance with ASTM F710 to ensure pH is between 7 and 8.

- C. Scoring: Score decorative jointing in concrete surfaces 1/2 inch deep with diamond blades to match pattern indicated. Rinse until water is clear. Score before staining.
  - 1. Joint Width: 3/8 inch.
- D. Allow concrete surface to dry before applying stain. Verify readiness of concrete to receive stain in accordance with ASTM D4263 by tightly taping 18-by-18-inch, 4-mil- thick polyethylene sheet to a representative area of concrete surface. Apply stain only if no evidence of moisture has accumulated under sheet after 16 hours.
- E. Reactive Stain: Apply reactive stain to concrete surfaces in accordance with manufacturer's written instructions and as follows:
  - 1. Apply stain by uncolored bristle brush, roller, or high-volume, low-pressure sprayer and immediately scrub into concrete surface with uncolored, acid-resistant nylon-bristle brushes in continuous, circular motion. Do not spread stain after fizzing stops. Allow to dry four hours and repeat application of stain in sufficient quantity to obtain color consistent with approved mockup.
  - 2. Remove stain residue after four hours by wet scrubbing with commercial-grade detergent recommended by stain manufacturer. Rinse until water is clear. Control, collect, and legally dispose of runoff.
- F. Penetrating Stain: Apply penetrating stain to concrete surfaces in accordance with manufacturer's written instructions and as follows:
  - 1. Apply first coat of stain to dry, clean surfaces by airless sprayer or by high-volume, low-pressure sprayer.
  - 2. Allow to dry four hours and repeat application of stain in sufficient quantity to obtain color consistent with approved mockup.

## **DIVISION 9 - FINISHES**

### **SECTION 03354 - POLISHED CONCRETE FINISHING**

3. Rinse until water is clear. Control, collect, and legally dispose of runoff.

**End of Section**

## **DIVISION 4 - MASONRY**

### **SECTION 04720 - Architectural Cast Stone**

#### **Part 1 - General**

##### **1.01 Scope:**

- A. All labor, materials, and equipment to provide the Cast Stone shown on architectural drawings and as described in this specification.
- B. Manufacturer shall furnish and deliver Cast Stone covered by this specification.
- C. Setting contractor shall unload, store, furnish all anchors and set Cast Stone.

##### **1.02 Quality Assurance:**

- A. Shall be producer member of the Architectural Precast Association.
- B. Reference Standards: Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.
  - 1. ASTM C150 - Specification for Portland Cement
  - 2. ASTM C33 - Specification for Concrete Aggregates
  - 3. ASTM C979 - Specification for Coloring Pigments for Integrally Pigmented Concrete
  - 4. ASTM C494 - Specification for Concrete Admixtures
  - 5. ASTM A615 - Specification for Deformed and Plain Billet Steel Bars for Concrete Reinforcement.
  - 6. ASTM C1194 - Tested Method for Compressive Strength of Architectural Cast Stone.
  - 7. ASTM C1195 - Test Method for Absorption of Architectural Cast Stone.
  - 8. ASTM C642 - Test Method for Specific Gravity, Absorption, and Voids in Hardened Concrete.
  - 9. ASTM C39 - Test Method for Compressive Strength of Concrete Cylinders.
  - 10. ASTM D2244 - Test Method for Calculation of Color Differences From Instrumentally Measured Color Coordinates.
  - 11. ASTM C1364-97 - Standard specification for Architectural Cast Stone.
- C. Testing: Test three specimens per 500 cubic feet at random from plant production in accordance with referenced standards.

##### **1.03 Submittals:**

- A. Submit for approval the following:
  - 1. Samples of the Cast Stone specified which will be representative of the general range of color and finish to be furnished.
  - 2. Test results of Cast Stone previously made by the manufacturer.
- B. Shop Drawings: Submit for approval the following:
  - 1. Copies of shop drawings showing details of the stone to be provided including profiles, cross-sections, reinforcement, exposed faces, arrangement of joints, anchoring methods, anchors, annotation of stone types and their location.

## **DIVISION 4 - MASONRY**

### **SECTION 04720 - Architectural Cast Stone**

2. Unless otherwise shown on contract drawings:
  - a. Provide suitable wash on all exterior sills, coping, projecting courses and pieces with exposed top surfaces.
  - b. Provide drips as needed.

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Architectural Cast Stone:
  1. Physical properties: Provide the following:
    - a. Compressive Strength, ASTM C1194: 6500 psi min. for products at 28 days.
    - b. Absorption, ASTM C1195: less than 6% max. for products at 28 days.
  2. Raw Materials:
    - a. Portland cement - Type I or III, white and/or gray, ASTM C150
    - b. Coarse aggregates - Granite, quartz, or limestone, ASTM C33
    - c. Fine aggregates - Manufactured or natural sands, ASTM C33
    - d. Colors - Inorganic iron oxide pigments, ASTM C979
    - e. Admixtures - ASTM C494
    - f. Water - potable

##### **2.02 Color and Finish:**

- A. Color: Refer to color schedule.
- B. Exposed surfaces, unless otherwise specified, shall exhibit a fine-grained texture similar to natural stone. No bug holes or air voids shall be permitted.
- C. Variation:
  1. ASTM color variation allowed - 2%, hue: 6% lightness, chroma and hue combined.

##### **2.03 Curing and Finishing:**

- A. Cure units in a warm, moist curing chamber at 95% relative humidity for 24 hours, or yard cure for 350°-days (i.e. 7 days @ 50°F or 5 days @ 70°F) prior to packaging for shipment.

##### **2.04 Reinforcing:**

- A. New billet steel reinforcing bars - ASTM A615.
  1. Reinforce units when necessary for safe handling and structural stress.
  2. Reinforcement shall be galvanized or epoxy coated when covered with less than 1-1/2" of material.
  3. Area of reinforcement in panels shall be not less than 1/4 percent of the cross-section area.

##### **2.05 Related Materials:**

- A. Anchors - non-corrosive: galvanized, brass or stainless steel type 304.
- B. Mortar - Type N, ASTM C270.



## **DIVISION 4 - MASONRY**

### **SECTION 04720 - Architectural Cast Stone**

#### **Part 3 - Execution**

##### **3.01 Tolerances:**

- A. Comply with Cast Stone Institute Technical Manual (current edition).
- B. Set stones 1/8" or less, within plane of adjacent unit.
- C. Joints, +1/16", -1/8".

##### **3.02 Jointing:**

- A. Joint Size:
  - 1. At stone/brick joints - 3/8".
  - 2. At stone/stone joints in vertical position - 1/4" (3/8" optional).
  - 3. Stone/stone joints exposed on top side - 3/8".
- B. Joint Material:
  - 1. Use a full bed of mortar at all bed joints.
  - 2. Flush vertical joints full with mortar.
  - 3. Leave all joints with exposed tops or under relieving angles open for sealant.
- C. Location of joints:
  - 1. As shown on approved shop drawings.
  - 2. Unless otherwise shown at control and expansion joints refer to Drawings for locations.

##### **3.03 Setting:**

- A. Drench stones with clear, running water just prior to setting.
- B. Fill all dowel holes and anchor slots completely with mortar or non-shrink grout.
- C. Set all stones in a full bed of mortar. Leave head joints in coping and similar stones open for sealant.
- D. Rake mortar joints 3/4" for pointing. Sponge the face of each stone to remove excess mortar.
- E. Tuck point stone joints to a slight concave.
- F. Sealant joints - Prime the ends of stones, insert properly sized foam backup rod and gun-in sealant.
- G. Protect stone while on ground (and after setting) from splashing, mortar, and damage from other trades.

##### **3.04 Cleaning and Repair:**

- A. Clean stone by wetting with clear running water and applying a solution of acidic detergent recommended by the manufacturer.
- B. Repair obvious chips with touchup material furnished by the manufacturer.

##### **3.05 Inspection and Acceptance:**

- A. Inspect according to Cast Stone Institute Technical Manual.

**End of Section**

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

#### **PART 1 - GENERAL**

##### **1.01 Related Documents:**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

##### **1.02 Summary**

- A. Section Includes:
  - 1. Concrete block.
  - 2. Clay facing brick.
  - 3. Mortar and grout.
  - 4. Reinforcement and anchorage.
  - 5. Lintels.
  - 6. Accessories.

##### **1.03 Related Sections:**

- A. Section 05500 - Metal Fabrications: Loose steel lintels and fabricated steel items.
- B. Section 07620 - Sheet Metal Flashing and Trim: Through-wall masonry flashings.
- C. Section 07900 - Joint Sealers: Backing rod and sealant at control and expansion joints.

##### **1.04 References:**

- A. ACI 530/ASCE 5/TMS 402 - Building Code Requirements for Masonry Structures; American Concrete Institute International; 2008.
- B. ACI 530.1/ASCE 6/TMS 602 - Specification For Masonry Structures; American Concrete Institute International; 2008.
- C. ASTM A 82/A 82M - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement; 2005a.
- D. ASTM A 153/A 153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2005.
- E. ASTM C 129 - Standard Specification for Nonloadbearing Concrete Masonry Units; 2006.
- F. ASTM C 144 - Standard Specification for Aggregate for Masonry Mortar; 2004.
- G. ASTM C 150 - Standard Specification for Portland Cement; 2005.
- H. ASTM C 207 - Standard Specification for Hydrated Lime for Masonry Purposes; 2006.  
ASTM C 270 - Standard Specification for Mortar for Unit Masonry; 2007.
- I. ASTM C 404 - Standard Specification for Aggregates for Masonry Grout; 2006.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

- J. ASTM C 476 - Standard Specification for Grout for Masonry; 2002.
- 1.05 Submittals:
  - A. Product Data: Provide data for masonry units, mortar, and masonry accessories.
  - B. Samples: Submit 10 samples of facing brick units to illustrate color, texture, and extremes of color range.
- 1.06 Quality Assurance:
  - A. Comply with provisions of ACI 530/ASCE 5/TMS 402 and ACI 530.1/ASCE 6/TMS 602, except where exceeded by requirements of the contract documents
- 1.07 Pre-Installation Meeting:
  - A. Convene one week before starting work of this section.
- 1.08 Delivery, Storage, and Handling:
  - A. Deliver, handle, and store masonry materials by means that will prevent mechanical damage and contamination by other materials.
- 1.09 Project Conditions:
  - A. Protection of Masonry: During construction, cover tops of walls, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed masonry when construction is not in progress.
  - B. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace unit masonry damaged by frost or by freezing conditions. Comply with cold-weather construction requirements contained in ACI 530.1/ASCE 6/TMS 602.
    - 1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F (4 deg C) and higher and will remain so until masonry has dried, but not less than seven days after completing cleaning.
  - C. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in ACI 530.1/ASCE 6/TMS 602.

## **PART 2 - PRODUCTS**

- 2.01 Concrete Masonry Units:
  - A. Type: Lightweight (Standard Modular Sizes).
  - B. Quality: ASTM C-90, Type 1, Grade N, steam cured for a minimum of 8 hours at 350 degrees Fahrenheit under 150 psi. CMU shall be made by the Johnson CO 2 or Autoclave method. Other methods shall have approval by the Architect.

## **DIVISION 4 – MASONRY**

### **SECTION 04810 – UNIT MASONRY ASSEMBLIES**

- C. Face Dimension: As indicated on the drawings.
  - D. Thickness: As indicated on the drawings.
  - E. Shapes: Provide all shapes as shown on the drawings or others as required.
  - F. Units shall be uniform in all dimensions and texture, straight and free from cracks, spalls and other defects.
- 2.02 Face Brick (Veneer):
- A. Type and Finish: Ruff Modular Brick.
  - B. Quality: ASTM C-216, Type FBS.
  - C. Size: Nominal 4" x 2 2/3" x 8" or as directed / approved by Architect.
  - D. Units shall be uniform in all dimensions and texture, straight and free from cracks, spalls and other defects.
  - E. Color: as manufactured by Acme Brick -
    - 1. Color A – 15% Onyx
    - 2. Color B – 15% Brownwood Mill
    - 3. Color C – 15% Denver Claret
    - 4. Color D – 55% CR RedConfirm colors, blend, and layout with Architect.
- 2.03 Mortar and Grout Materials:
- A. Portland Cement: ASTM C 150, Type I.
    - 1. Hydrated Lime: ASTM C 207, Type S.
    - 2. Mortar Aggregate: ASTM C 144.
    - 3. Grout Aggregate: ASTM C 404.
  - B. Water: Clean and potable.
- 2.04 Reinforcement and Anchorage (where applicable):
- A. Manufacturers of Joint Reinforcement and Anchors:
    - 1. Dur-O-Wal: [www.dur-o-wal.com](http://www.dur-o-wal.com).
    - 2. Hohmann & Barnard, Inc: [www.h-b.com](http://www.h-b.com).
    - 3. Masonry Reinforcing Corporation of America: [www.wirebond.com](http://www.wirebond.com).
    - 4. Substitutions: as approved by Architect / Engineer.
  - B. Reinforcing Steel: ASTM A 615/A 615M Grade 40 (280) deformed billet bars; galvanized.
  - C. Single Wythe Joint Reinforcement: Truss type; ASTM A 82/A 82M steel wire, mill galvanized to ASTM A 641/A 641M, Class 3; 0.1483 inch (3.8 mm) side rods with 0.1483 inch (3.8 mm) cross rods; width as required to provide not more than 1 inch (25 mm) and not less than 1/2 inch (13 mm) of mortar coverage on each exposure.
  - D. Flexible Anchors: 2-piece anchors that permit differential movement between masonry and building frame, sized to provide not more than 1 inch (25 mm) and not less than 1/2 inch (13 mm) of mortar coverage from masonry face.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

- E. Masonry Veneer Anchors: 2-piece anchors that permit differential movement between masonry veneer and structural backup, hot dip galvanized to ASTM A 153/A 153M, Class B.
    - 1. Anchor plates: Not less than 0.075 inch (1.91 mm) thick, designed for fastening to structural backup through sheathing by two fasteners; provide design with legs that penetrate sheathing and insulation to provide positive anchorage.
    - 2. Wire ties: Triangular shape, 0.1875 inch (4.75 mm) thick.
    - 3. Vertical adjustment: Not less than 3-1/2 inches (89 mm).
  - 2.05 Flashings:
    - A. Metal Flashing Materials: Galvanized Steel / Prefinished Metal as specified in Section 07600.
  - 2.06 Accessories:
    - A. Preformed Control Joints: Rubber material. Provide with corner and tee accessories, fused joints.
    - B. Compressible Filler: Pre-molded filler strips complying with ASTM D 1056, Grade 2A1; compressible up to 35%; formulated from neoprene, urethane or PVC.
    - C. Bond Breaker Strips: Asphalt-saturated, organic roofing felt complying with ASTM D 226, Type 1 (No. 15 asphalt felt).
    - D. Weeps: Free-draining mesh made from polyethylene strands, full height and width of head joint and depth 1/8 inch less than depth of outer wythe.
      - 1. Manufacturers:
        - a. Mortar Net USA, Ltd; Product - Mortar Net Weep Vents: [www.martarnet.com](http://www.martarnet.com)
        - b. Substitutions: as approved by Architect / Engineer.
- Cleaning Solution: Non-acidic, not harmful to masonry work or adjacent materials.
- 2.07 Mortar and Grout Mixes:
  - A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds or other admixtures, unless otherwise indicated.
    - 1. Do not use calcium chloride in mortar or grout.
    - 2. Limit cementitious materials in mortar to portland cement and lime.
  - B. Mortar for Unit Masonry: ASTM C 270, using the Proportion Specification.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

1. All masonry: Type S.
  - a. Portland Cement Mixture: One part Grey Portland Cement; 1/4 to 1/2 part lime; sand, not less than 2-1/4 and not more than three times the sum of the volumes of cement and lime used, measured in damp, loose conditions.
  - b. Exterior Mortar Color: SM270 Tanglewood as manufactured by SPEC MIX.
- C. Grout for Unit Masonry: Comply with ASTM C 476.
  1. Use grout of type (fine or coarse) that will comply with Table 1.15.1 in ACI 530.1/ASCE 6/TMS 602 for dimensions of grout spaces and pour height.
  2. Provide grout with a slump of 8 to 11 inches (200 to 280 mm) as measure according to ASTM C 143/C 143M.
- D. Mortar Mixing
  1. All mortars shall be machine mixed in equipment that is free of dirt, oil or grease and which is thoroughly cleaned and rinsed after each day's use. Mix no more mortar than can be used before setting takes place.
  2. Mortars shall be mixed placing all dry ingredients in the mixer first and mixing until uniform in color. Then mixed for 3 to 5 minutes with the maximum amount of water to provide workable consistency.
  3. No add-mixtures shall be used at any time in the mortar on this project, unless approved in writing by the Engineer.
  4. A waterproofing additive will be used in the mortar for brick.
  5. Construct one or two wooden boxes 12"x12"x6" deep and use them to measure the sand required in a batch. Add the cement or lime by the bag. Then add water, measuring by pail. When the desired consistency of mix is determined, mark the level of the mortar in the mixing drum. Use that as the mark for later batches when sand will be added by the shovel full. Repeat the measuring process halfway through the day or whenever the inspector requests it.
  6. Testing: General Contractor will observe a minimum of three (3) observed mixing sessions to verify that the quantities are being mixed as described in the proportions paragraph for Type "S" mortar.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

#### **PART 3 - EXECUTION**

##### **3.01 Examination:**

- A. Verify that field conditions are acceptable and are ready to receive masonry.
- B. Verify that related items provided under other sections are properly sized and located.
- C. Verify that built-in items are in proper location, and ready for roughing into masonry work.

##### **3.02 Erection:**

- A. Construction Requirements (Masonry Being Worked On)
  - 1. Air Temperature 40 F to 32 F: Heat sand or mixing water to minimum of 70 F and maximum of 160 F.
  - 2. Air Temperature 32 F to 25 F: Heat sand and mixing water to minimum of 70 F and maximum of 160 F.
  - 3. Air Temperature 25 F to 20 F: Heat sand and mixing water to minimum of 70 F and maximum of 160 F. Use salamanders or other sources of heat on both sides of walls under construction. Employ windbreaks when wind is in excess of 15 mph.
  - 4. Air Temperature 20 F and Below: Heat sand and mixing water to minimum of 70 F and maximum of 160 F. Provide enclosure and auxiliary heat to maintain air temperature above 32 F. Temperature of units when laid shall be not less than 20 F.
- B. Protection Requirements (Completed Masonry or Sections Not Being Worked On)
  - 1. Mean Daily Air Temperature 40 F to 32 F: Protect masonry from rain or snow for 24 hrs.
  - 2. Mean Daily Air Temperature 32 F to 25 F: Completely cover masonry for 24 hrs.
  - 3. Mean Daily Air Temperature 25 F to 20 F: Completely cover masonry with insulating blankets for 24 hrs.
  - 4. Mean Daily Air Temperature 20 F and Below: Maintain masonry temperature above 32 F for 24 hrs. by enclosure and supplementary heat, by electric heating blankets, infrared heat lamps or other approved method.
- C. No masonry shall be laid when the ambient temperature is below 40 degrees F. All masonry shall be laid plumb, true to line and level, with accurately spaced courses, with each course breaking joints with the course below, unless noted otherwise on the drawings. A story pole and template shall be used and work checked with a surveying instrument

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

- to maintain level coursing.
- D. Work required to be built into masonry, including anchors, frames, bolts, sleeves, inserts, compressible fillers, expansion joints and flashing shall be built in as erection progresses. Concrete block into which anchor bolts will be installed shall be filled solid with mortar.
  - E. Laying Out Block Work: All concrete block work shall be laid out with uniform joints approximately 3/8" thick and shall be bonded at corners where possible and as consistent with good appearance. Where cutting is required, the cuts shall be made symmetrical above openings and as a general rule with no cuts less than 4" with power equipment designed for purpose.
  - F. Corners shall be made using half blocks in order to maintain head joints centered over block in adjoining courses above and below. Where intersecting masonry partitions occur, galvanized Durowall Joint Reinforcing shall be used at every 2<sup>nd</sup> course.
    - 1. Concrete blocks shall be laid dry in a full bed of mortar and ends buttered on both edges. Care shall be used to prevent smearing mortar on exposed faces of the blocks and such accumulations that occur shall be removed immediately. The exposed face of blocks shall be wiped clean with burlap as the work proceeds. Those surfaces exposed to sight in their final position shall be further cleaned to provide for the application of finishes as required.
    - 2. Joints in block work shall be tooled concave in such a manner as to squeeze the mortar back into the joints and to ensure complete contact is made along the edges of the units, compressing and sealing the surface of the joints.
    - 3. Control joints shall be provided in concrete block partitions at door heads where masonry extends above the door frames, where partitions abut exterior walls and elsewhere as noted on the drawings. Joints shall be raked out 3/8" deep and caulked as specified in Division 7. Bond beams shall be installed as indicated and shall be filled with concrete and reinforced with two (2) No. 4 bars unless noted otherwise.
  - G. Lintels shall be provided where shown and for all openings in masonry work where other types of lintels have not been provided. Concrete block lintels shall bear not less than



## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

six inches (6") on each jamb. Lintel blocks shall be solid bottom trough block filled with concrete and reinforced as detailed on drawings.

- H. Masonry Reinforcement: Joint reinforcement shall be installed in all concrete block partitions in the joints of every second block course for the full height of the wall.
- I. Brick: Provide a 3/8" mortar bed with concave tooled horizontal and vertical joints. Refer to drawings for vertical coursing as related to openings and other features. Brickwork is to be brushed down daily to remove large pieces of mortar slag. At completion of brick masonry work, all exposed masonry surfaces shall be thoroughly cleaned and washed down with clean water and a stiff bristled brush or as recommended by the brick manufacturer and as approved by the Design/Builder. The brick masonry work shall be left in a state exhibiting properly and fully pointed joints and completely clean surfaces. Subcontractor shall build-in all features of brickwork as shown or indicated on the drawings including weeps, special coursing and or patterned elements.
- J. The Subcontractor shall be responsible for furnishing all required labor, tools, and equipment as required to complete all areas of masonry work on the project. This shall be inclusive of all scaffolding, walk-boards and bracing as required to support the work until fully incorporated into the structure.
- K. Subcontractor shall also furnish all materials save for the brick units as called out above. These materials include concrete block, mortar, reinforcing, ties and other accessories necessary for the execution of the masonry work.

#### **3.03 Preparation:**

- A. Direct and coordinate placement of metal anchors supplied for installation under other sections.
- B. Provide temporary bracing during installation of masonry work. Maintain in place until building structure provides permanent bracing.

#### **3.04 Coursing:**

- A. Establish lines, levels, and coursing indicated. Protect from displacement.
- B. Maintain masonry courses to uniform dimension. Form vertical and horizontal joints of uniform thickness.
- C. Concrete Masonry Units:
  - 1. Bond: Running.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

- 2. Coursing: One unit and one mortar joint to equal 8 inches (200 mm).
  - 3. Mortar Joints: Concave.
- D. Brick Units:
  - 1. Bond: Running.
  - 2. Coursing: Three units and three mortar joints to equal 8 inches (200 mm).
  - 3. Mortar Joints: Concave.
- 3.05 Placing and Bonding:
  - A. Lay solid masonry units in full bed of mortar, with full head joints, uniformly jointed with other work.
  - B. Masonry work shall be laid true to dimensions, plumb, square and in bond and properly anchored with vertical joints in line, plumb and true.
  - C. Select and arrange units for exposed unit masonry to produce a uniform blend of colors and textures.
  - D. Buttering corners of joints or excessive furrowing of mortar joints is not permitted.
  - E. Remove excess mortar and mortar smears as work progresses.
  - F. Interlock intersections and external corners.
  - G. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.
  - H. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.
  - I. Provide a 3/8" joint around hollow metal door jambs and window frames to allow for sealant and expansion.
- 3.06 Weeps/Cavity Vents:

Install weeps in veneer walls at 24 inches on center horizontally above through-wall flashing, above shelf angles and lintels, and at bottom of walls.
- 3.07 Reinforcement and Anchorage - General:
  - A. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Unless otherwise indicated on drawings or closer spacing is indicated under specific wall type, space anchors at maximum of 36 inches (900 mm) horizontally and 24 inches (600 mm) vertically.
  - B. Install additional anchors within 12 inches (305 mm) of openings and at intervals, not exceeding 36 inches (900 mm) around perimeter.
  - C. Locate anchor sections to allow maximum vertical differential movement of ties up and down.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

#### **3.08 Reinforcement And Anchorage - Concrete Masonry Units:**

- A. Unless otherwise indicated on drawings or specified under specific wall type, install horizontal joint reinforcement 8 inches on center.
- B. Place masonry joint reinforcement in first and second horizontal joints above and below openings. Extend minimum 16 inches each side of opening.
- C. Place continuous joint reinforcement in first and second joint below top of walls.
- D. Lap joint reinforcement ends minimum 6 inches (150 mm).
- E. Reinforce joint corners and intersections with strap anchors 16 inches on center.

#### **3.09 Reinforcement and Anchorage - Masonry Veneer:**

- A. Stud Back-Up: Secure veneer anchors to stud framed back-up and embed into masonry veneer at maximum 16 inches on center vertically and 24 inches on center horizontally. Place additional anchors at perimeter of openings and ends of panels, so maximum spacing of anchors is 8 inches on center.

#### **3.10 Masonry Flashings:**

- A. Whether or not specifically indicated, install masonry flashing to divert water to exterior at all locations where downward flow of water will be interrupted.
  - 1. Extend flashings full width at such interruptions and at least 4 inches into adjacent masonry or turn up at least 4 inches to form watertight pan at non-masonry construction.
  - 2. Remove or cover protrusions or sharp edges that could puncture flashings.
  - 3. Seal lapped ends and penetrations of flashing before covering with mortar.
- B. Extend metal flashings through exterior face of masonry and turn down to form drip. Install joint sealer below drip edge to prevent moisture migration under flashing.
- C. Lap end joints of flashings at least 4 inches and seal watertight with mastic or elastic sealant.

#### **3.11 Lintels:**

- A. Install loose steel lintels over openings.

#### **3.12 Control Joints:**

- A. Do not continue horizontal joint reinforcement through control joints.
- B. Install preformed control joint device in continuous lengths. Seal butt and corner joints in accordance with manufacturer's instructions.

## **DIVISION 4 - MASONRY**

### **SECTION 04810 - UNIT MASONRY ASSEMBLIES**

- C. Size control joint in accordance with Section 07900 for sealant performance.
- 3.13 Built-In Work:
  - A. As work progresses, install built-in metal door frames and other items to be built into the work and furnished under other sections.
  - B. Install built-in items plumb, level, and true to line.
  - C. Bed anchors of metal door frames in adjacent mortar joints. Fill frame voids solid with grout.
  - D. Do not build into masonry construction organic materials that are subject to deterioration.
- 3.14 Tolerances:
  - A. Maximum Variation from Alignment of Columns: 1/4 inch.
  - B. Maximum Variation From Unit to Adjacent Unit: 1/16 inch.
  - C. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft and 1/2 inch in 20 ft or more.
  - D. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.
  - E. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 10 ft; 1/2 inch in 30 ft.
  - F. Maximum Variation of Joint Thickness: 1/8 inch in 3 ft.
  - G. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.
- 3.15 Cutting And Fitting:
  - A. Cut and fit for pipes and conduit. Coordinate with other sections of work to provide correct size, shape, and location.
  - B. Obtain approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.
- 3.16 Cleaning:
  - A. Remove excess mortar and mortar droppings.
  - B. Clean soiled surfaces with cleaning solution.
- 3.17 Protection Of Finished Work:
  - A. Without damaging completed work, provide protective boards at exposed external corners that are subject to damage by construction activities.

**End of Section**

## DIVISION 5 - STRUCTURAL STEEL

### SECTION 05120 - STRUCTURAL STEEL FRAMING

#### PART 1 - GENERAL

##### 1.01 Section Includes

- A. Structural steel framing members.
- B. Base plates, shear stud connectors and anchor rods.
- C. Grouting under base plates.

##### 1.02 Related Requirements

- A. Section 05 2100 - Steel Joist Framing.
- B. Section 05 3100 - Steel Decking: Support framing for small openings in deck.
- C. Section 05 5000 - Metal Fabrications: Steel fabrications affecting structural steel work.

##### 1.03 Reference Standards

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. AISC (MAN) - Steel Construction Manual.
- C. AISC 303 - Code of Standard Practice for Steel Buildings and Bridges.
- D. AISC 360 - Specification for Structural Steel Buildings.
- E. ASTM A6/A6M - Standard Specification for General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
- F. ASTM A29/A29M - Standard Specification for Steel Bars, Carbon Alloy, Hot-Wrought, General Requirements.
- G. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- H. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- I. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- J. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- K. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
- L. ASTM A325 - Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength.
- M. ASTM A500/A500M - Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
- N. ASTM A563 - Standard Specification for Carbon and Alloy Steel Nuts.
- O. ASTM A563M - Standard Specification for Carbon and Alloy Steel Nuts (Metric).

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05120 - STRUCTURAL STEEL FRAMING**

- P. ASTM A572/A572M - Standard Specification for High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
  - Q. ASTM A992/A992M - Standard Specification for Structural Steel Shapes.
  - R. ASTM A1064/A1064M - Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
  - S. ASTM C827/C827M - Standard Test Method for Change in Height at Early Ages of Cylindrical Specimens of Cementitious Mixtures.
  - T. ASTM E94/E94M - Standard Guide for Radiographic Examination Using Industrial Radiographic Film.
  - U. ASTM E164 - Standard Practice for Contact Ultrasonic Testing of Weldments.
  - V. ASTM E165/E165M - Standard Test Method for Liquid Penetrant Examination for General Industry.
  - W. ASTM E709 - Standard Guide for Magnetic Particle Testing.
  - X. ASTM F436/F436M - Standard Specification for Hardened Steel Washers Inch and Metric Dimensions.
  - Y. ASTM F1554 - Standard Specification for Anchor Bolts, Steel, 36, 55, and 105-ksi Yield Strength.
  - Z. ASTM F1852 - Standard Specification for "Twist Off" Type Tension Control Structural Bolt/Nut/Washer Assemblies, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength.
  - AA. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination.
  - AB. AWS D1.1/D1.1M - Structural Welding Code - Steel.
  - AC. ICC (IBC)-2015 - International Building Code.
  - AD. MPI #79 - Primer, Alkyd, Anti-Corrosive for Metal.
  - AE. RCSC (HSBOLT) - Specification for Structural Joints Using High-Strength Bolts; Research Council on Structural Connections.
  - AF. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").
  - AG. SSPC-SP 3 - Power Tool Cleaning.
  - AH. SSPC-SP 6 - Commercial Blast Cleaning.
- 1.04 Submittals
- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
  - B. Shop Drawings:
    - 1. Indicate profiles, sizes, spacing, locations of structural members, openings, attachments, and fasteners.
    - 2. Connections.
    - 3. Indicate cambers and loads.
    - 4. Indicate welded connections with AWS A2.4 welding symbols. Indicate net weld lengths.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05120 - STRUCTURAL STEEL FRAMING**

- C. Manufacturer's Mill Certificate: Certify that products meet or exceed specified requirements.
- D. Product Data: For shop primers, include manufacturer's technical information including basic materials analysis and application instructions.
- E. Welders Certificates: Certify welders employed on the Work, verifying AWS qualification within the previous 12 months.
- F. Delegated Connection Design Submittal: Provide delegated connection design submittals as required by the General Notes included in the Project Drawings.
- G. Erection Sequence: Provide erection sequence submittal as required by the General Notes included in the Project Drawings.

#### **1.05 Quality Assurance**

- A. Fabricate structural steel members in accordance with AISC (MAN) "Steel Construction Manual."
- B. Fabricator Qualifications:
  - 1. A steel fabricator specializing in performing the work of this section with minimum 10 years of experience.
- C. Erector Qualifications:
  - 1. An erector specializing in performing the work of this section with minimum 5 years of experience.
- D. Delegated Connection Designer Qualifications: Design connections not detailed on drawings under direct supervision of a Professional Structural Engineer experienced in design of steel connections and licensed in the State in which the Project is located.

#### **1.06 Delivery, Storage And Handling**

- A. Comply with the requirements of the General Conditions and of ASTM A6/A6M, including the following.
- B. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.
  - 1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.
- C. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.
  - 1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
  - 2. Clean and relubricate bolts and nuts that become dry or rusty before use.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05120 - STRUCTURAL STEEL FRAMING**

3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F1852 fasteners and for retesting fasteners after lubrication.

### **PART 2 - PRODUCTS**

#### **2.01 Materials**

- A. Steel Angles, Plates, and Channels: ASTM A36/A36M.
- B. Steel W Shapes and Tees: ASTM A992/A992M.
- C. Cold-Formed Structural Tubing: ASTM A500/A500M, Grade C.
- D. Pipe: ASTM A53/A53M, Grade B, Finish black.
- E. Headed Stud Anchors: AWS D1.1 Type B, ASTM A29 Grades 1010 through 1020.
- F. Structural Bolts and Nuts: Carbon steel, ASTM A307, Grade A and galvanized in compliance with ASTM A153/A153M, Class C.
- G. High-Strength Structural Bolts, Nuts, and Washers: ASTM A325, Type 1, heavy-hex steel structural bolts; ASTM A563, Grade C heavy-hex carbon-steel nuts; and ASTM F436/F436M, Type 1, hardened carbon-steel washers; all with plain finish.
- H. Tension Control Bolts: Twist-off type: ASTM F1852.
- I. Unheaded Anchor Rods: ASTM F1554, Grade 55, Supplementary Requirement S1, Weldable, plain, with matching ASTM A563 or ASTM A563M nuts and ASTM F436/F436M Type 1 washers.
- J. Deformed Bar Anchors: AWS D1.1/D1.1M Type C, ASTM A1064 Grade 70.
- K. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
- L. Grout: ASTM C1107/C1107M; Non-shrink; premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents.
  1. Minimum Compressive Strength at 48 Hours: 3000 pounds per square inch.
  2. Minimum Compressive Strength at 28 Days: 7,000 pounds per square inch.
  3. Height Change, Plastic State; when tested according to ASTM C827/C827M:
    - a. Maximum: Plus 4 percent.
    - b. Minimum: Plus 1 percent.
- M. Shop and Touch-Up Primers: As required below, complying with VOC limitations of authorities having jurisdiction.
  1. Steel Exposed to Exterior Weather or an Uncontrolled Environment: Two-component, high performance, zinc-rich, aromatic urethane, compatible with topcoat and complying with SSPC-Paint 20.



## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05120 - STRUCTURAL STEEL FRAMING**

- 2. Interior Steel: Fabricator's standard lead- and chromate-free, non-asphaltic, rust-inhibiting primer complying with MPI #79 and compatible with topcoat.
- N. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, complying with VOC limitations of authorities having jurisdiction.
- 2.02 Fabrication
  - A. Shop fabricate to greatest extent possible. Fabricate according to AISC 303 and to AISC 360.
  - B. Fabricate connections for bolt, nut, and washer connectors.
  - C. Develop required camber for members.
  - D. Fabricated uncambered beams with rolling camber up.
- 2.03 Finish
  - A. Prepare structural component surfaces in accordance with SSPC-SP3 for interior steel or SSPC-SP6 for all steel exposed to exterior weather or an uncontrolled environment.
  - B. Shop prime structural steel members:
    - 1. Do not prime surfaces that will be galvanized, fireproofed, field welded, in contact with concrete, or [in slip surfaces of slip-critical connections].
    - 2. All steel exposed to exterior weather or an uncontrolled environment shall be blast cleaned and primed with a submitted and approved zinc-rich primer.
    - 3. Interior steel shall be shop primed with the fabricators standard shop primer.
  - C. Galvanize structural steel members to comply with ASTM A123/A123M.
- 2.04 Source Quality Control & Quality Assurance
  - A. Unless the fabricator is designated an AISC-Certified Plant, Category STD, or is accredited by the IAS Fabricator Inspection Program for Structural Steel, an independent testing agency will perform Special Inspections and field quality control and quality assurance tests in the fabricator's shop as required by Chapter 17 of ICC (IBC)-2015 and Chapter N of AISC 360. Refer to the following parts of the structural drawings for additional Special Inspection requirements.
    - 1. Statement of Special Inspection Notes
    - 2. Two tables titled "Required Verification and Inspection of Steel Construction"

## **PART 3 - EXECUTION**

### **3.01 Examination**

- A. Verify that conditions are appropriate for erection of structural steel and that the work may properly proceed.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05120 - STRUCTURAL STEEL FRAMING**

#### **3.02 Erection**

- A. Erect structural steel in compliance with AISC 303.
- B. Allow for erection loads and provide sufficient temporary bracing to maintain structure in safe condition, plumb, and in true alignment until completion of erection and installation of permanent bracing. Refer to the "Construction Loads and Stability" section of the General Notes in the Project Drawings for additional information and requirements.
- C. Field weld components, deformed bar anchors and shear studs indicated on shop drawings.
- D. Use carbon steel bolts only for temporary bracing during construction, unless otherwise specifically permitted on drawings. Install high-strength bolts in accordance with RCSC (HSBOLT) "Specification for Structural Joints Using High-Strength Bolts".
- E. Do not field cut or alter structural members without approval of Structural Engineer.
- F. After erection, prime welds, abrasions, and surfaces not shop primed, except surfaces to be in contact with concrete.
- G. Grout solidly between column plates and bearing surfaces, complying with manufacturer's instructions for non-shrink grout. Trowel grouted surfaces smooth, splaying neatly to 45 degrees.

#### **3.03 Field Quality Control & Quality Assurance**

- A. An independent testing agency will perform Special Inspections and field quality control and quality assurance tests as required by Chapter 17 of ICC (IBC)-2015 and Chapter N of AISC 360. Refer to the following parts of the structural drawings for additional Special Inspection requirements:
  - 1. Statement of Special Inspection Notes
  - 2. Two tables titled "Required Verification and Inspection of Steel Construction"

END OF SECTION

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05210 - STEEL JOIST FRAMING**

#### **PART 1 - GENERAL**

##### **1.01 Section Includes**

- A. Open web steel joists, with bridging, attached seats and anchors.
- B. Loose bearing members, such as plates or angles, and anchor bolts for site placement.
- C. Supplementary framing for floor and roof openings greater than 8 inches.

##### **1.02 Related Requirements**

- A. Section 05 1200 - Structural Steel Framing: Grouting base plates and bearing plates. Superstructure framing.
- B. Section 05 1200 - Structural Steel Framing: Superstructure framing.
- C. Section 05 3100 - Steel Decking: Bearing plates and angles.
- D. Section 05 5000 - Metal Fabrications: Non-framing steel fabrications attached to joists.

##### **1.03 Reference Standards:**

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- C. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- D. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
- E. ASTM A325 - Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength.
- F. ASTM A436 - Standard Specification for Austenitic Gray Iron Castings.
- G. ASTM A563 - Standard Specification for Carbon and Alloy Steel Nuts.
- H. AWS B2.1/B2.1M - Specification for Welding Procedure and Performance Qualification.
- I. AWS D1.1/D1.1M - Structural Welding Code - Steel.
- J. IAS AC172 - Accreditation Criteria for Fabricator Inspection Programs for Structural Steel.
- K. ICC (IBC)-2015 - International Building Code.
- L. SJI JG-10 - Standard Specification for Joist Girders.
- M. SJI K-10 - Standard Specification for Open Web Steel Joists, K-Series.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05210 - STEEL JOIST FRAMING**

- N. SJI LH/DLH-10 - Standard Specification for Longspan Steel Joists, LH-series and Deep Longspan Steel Joists, DLH-series.
- O. SJI Technical Digest No. 9 - Handling and Erection of Steel Joists and Joist Girders.
- P. SSPC-Paint 15 - Steel Joist Shop Primer/Metal Building Primer.
- Q. SSPC-SP 2 - Hand Tool Cleaning.
- 1.04 Submittals
  - A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
  - B. Shop Drawings: Indicate standard designations, joist coding, configurations, sizes, spacings, cambers, locations of joists, joist leg extensions, bridging, connections, and attachments.
  - C. Welders' Certificates: Submit manufacturer's certificates, certifying welders employed on the Work, verifying AWS qualification within the previous 12 months.
  - D. Manufacturer's Qualification Statement.
  - E. Comprehensive engineering analysis of all joists signed and sealed by the qualified professional engineer licensed in the state of the project responsible for its preparation.
  - F. Manufacturer's Certification: At completion of manufacture, the steel joist manufacturer shall submit a certificate of compliance to the owner's authorized agent for submittal to the building official as specified in Section 1704.5 of ICC (IBC)-2015 stating that work was performed in accordance with approved construction documents and with the SJI specifications listed herein.
- 1.05 Quality Assurance
  - A. Perform Work, including that for headers and other supplementary framing, in accordance with SJI JG-10, SJI K-10, and SJI LH/DLH-10 and SJI Technical Digest No. 9.
  - B. Manufacturer Qualifications: Company specializing in performing the work of this section with minimum 5 years documented experience.
- 1.06 Delivery, Storage, And Handling
  - A. Transport, handle, store, and protect products to SJI requirements.

### **PART 2 - PRODUCTS**

#### **2.01 Materials**

- A. Open Web Joists: Types as indicated on drawings:
  - 1. Minimum End Bearing on Steel Supports: Comply with referenced SJI standard.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05210 - STEEL JOIST FRAMING**

- 2. Minimum End Bearing on Concrete or Masonry Supports: Comply with referenced SJI standard.
  - 3. Finish: Shop primed.
  - B. Anchor Bolts, Nuts and Washers: ASTM A307, hot-dip galvanized per ASTM A153/A153M, Class C.
  - C. High-Strength Structural Bolts, Nuts, and Washers: ASTM A325 with matching compatible ASTM A563 nuts and ASTM A436 washers.
  - D. Headed Stud Anchors: [AWS D1.1 Type B, ASTM A29 Grades 1010 through 1020].
  - E. Structural Steel For Supplementary Framing and Joist Leg Extensions: ASTM A36/A36M.
  - F. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
  - G. Shop and Touch-Up Primer: SSPC-Paint 15, complying with VOC limitations of authorities having jurisdiction.
- 2.02 Finish
- A. Shop prime joists as specified.
    - 1. Do not prime surfaces that will be fireproofed.
  - B. Prepare surfaces to be finished in accordance with SSPC-SP2.
- 2.03 Source Quality Control
- A. Welded Connections: Visually inspect all shop-welded connections.

### **PART 3 - EXECUTION**

- 3.01 Examination
- A. Verify existing conditions prior to beginning work.
- 3.02 Erection
- A. Erect joists in compliance with SJI Technical Digest No. 9 and all applicable provisions of OSHA safety standards.
  - B. Erect joists with correct bearing on supports.
  - C. Allow for erection loads. Provide sufficient temporary bracing to maintain framing safe, plumb, and in true alignment.
  - D. Coordinate the placement of anchors for securing loose bearing members furnished as part of the work of this section.
  - E. After joist alignment and installation of framing, field weld joist seats to steel bearing surfaces.
  - F. Position and field weld joist chord extensions and wall attachments as detailed.
  - G. Install supplementary framing for floor and roof openings greater than 8 inches.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05210 - STEEL JOIST FRAMING**

- H. Do not permit erection of decking until joists are braced, bridged, and secured or until completion of erection and installation of permanent bridging and bracing.
- I. Do not field cut or alter structural members without approval of joist manufacturer.
- J. After erection, prime welds, damaged shop primer, and surfaces not shop primed, except surfaces specified not to be primed.

#### **3.03 Tolerances**

- A. Maximum Variation From Plumb: 1/4 inch.
- B. Maximum Offset From True Alignment: 1/4 inch.

#### **3.04 Field Quality Control**

- A. An independent testing agency will perform Special Inspections and field quality control as required by Chapter 17 of ICC (IBC)-2015. Refer to the following parts of the structural drawings for additional Special Inspection requirements.
  - 1. Statement of Special Inspection Notes
  - 2. Table 1705.2.3 titled "Required Special Inspections of Open-Web Steel Joists and Joist Girders"

END OF SECTION

## DIVISION 5 - STRUCTURAL STEEL

### SECTION 05310 - STEEL DECKING

#### PART 1 - GENERAL

##### 1.01 Section Includes

- A. Roof deck.
- B. Composite floor deck.
- C. Supplementary framing for openings up to and including 8 inches.
- D. Bearing plates and angles.

##### 1.02 Related Requirements

- A. Section 05 1200 - Structural Steel Framing: Support framing for openings larger than 8 inches and shear stud connectors.
- B. Section 05 2100 - Steel Joist Framing: Support framing for openings larger than 8 inches.
- C. Section 05 5000 - Metal Fabrications: Steel angle concrete stops at deck edges.
- D. Section 03 3300 - Cast-in-Place Concrete: Concrete fill in composite metal deck.

##### 1.03 Reference Standards

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- C. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- D. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- E. AWS D1.1/D1.1M - Structural Welding Code - Steel.
- F. AWS D1.3/D1.3M - Structural Welding Code - Sheet Steel.
- G. ICC (IBC)-2015 - International Building Code.
- H. SDI (DM) - Publication No.30, Design Manual for Composite Decks, Form Decks, and Roof Decks.
- I. SDI (QA/QC) - Standard for Quality Control and Quality Assurance for Installation of Steel Deck.
- J. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").

##### 1.04 Submittals

- A. See Section 01 3000 - Administrative Requirements, for submittals procedures.
- B. Product Data: Provide deck profile characteristics, dimensions, structural properties, and finishes.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05310 - STEEL DECKING**

- C. Shop Drawings: Indicate deck plan, support locations, projections, openings, reinforcement, pertinent details, and accessories.
- D. Submit manufacturer's installation instructions.
- E. Welders Certificates: Certify welders employed on the Work, verifying AWS qualification within the previous 12 months.

#### **1.05 Quality Assurance**

- A. Special inspections and qualification of welding special inspectors for cold-formed steel floor and roof deck shall be in accordance with the quality assurance inspection requirements of SDI (QA/QC).
- B. Installer Qualifications: Company specializing in performing the work of this Section with minimum 5 years of experience.

#### **1.06 Delivery, Storage, And Handling**

- A. Cut plastic wrap to encourage ventilation.
- B. Separate sheets and store deck on dry wood sleepers; slope for positive drainage.

## **PART 2 - PRODUCTS**

### **2.01 Steel Deck**

- A. Roof Deck: Non-composite type, fluted steel sheet:
  - 1. Galvanized Steel Sheet: ASTM A653/A653M, Structural Steel (SS) Grade 33/230, with G60/Z180 galvanized coating.
  - 2. Structural Properties: As indicated in General Notes.
- B. Composite Floor Deck: Fabricate panels, with integrally embossed or raised pattern ribs and interlocking side laps, to comply with "SDI Specifications and Commentary for Composite Steel Floor Deck," in SDI Publication No. 30, with the minimum section properties indicated, and with the following:
  - 1. Galvanized Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33, G60 zinc coating.
  - 2. Profile Depth: As indicated.
  - 3. Design Uncoated-Steel Thickness: As indicated.
  - 4. Span Condition: As indicated.

### **2.02 Accessory Materials**

- A. Bearing Plates and Angles: ASTM A36/A36M steel, galvanized per ASTM A123/A123M.
- B. Welding Materials: AWS D1.1/D1.1M.
- C. Mechanical Fasteners: Steel; hex washer head, self-drilling, self-tapping.



## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05310 - STEEL DECKING**

- D. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, complying with VOC limitations of authorities having jurisdiction.
  - E. Flute Closures: Closed cell foam rubber, 1 inch thick; profiled to fit tight to the deck.
  - F. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck, unless otherwise indicated.
  - G. Recessed Sump Pans: Single-piece steel sheet, 0.0747 inch thick, of same material and finish as deck, with 3-inch-wide flanges and level recessed pans of 1-1/2-inch minimum depth. For drains, cut holes in the field.
  - H. Flat Sump Plate: Single-piece steel sheet, 0.0747 inch thick, of same material and finish as deck. For drains, cut holes in the field.
  - I. Galvanizing Repair Paint: ASTM A 780.
- 2.03 Fabricated Deck Accessories
- A. Sheet Metal Deck Accessories: Metal closure strips, wet concrete stops, and cover plates, 20 gauge, 0.0359 inch thick sheet steel; of profile and size as indicated; finished same as deck.
  - B. Roof Sump Pans: Formed sheet steel, 14 gauge, 0.0747 inch minimum thickness, flat bottom, sloped sides, recessed 1-1/2 inches below roof deck surface, bearing flange 3 inches wide, sealed watertight.

### **PART 3 - EXECUTION**

#### **3.01 Examination**

- A. Verify existing conditions prior to beginning work.

#### **3.02 Installation**

- A. Erect metal deck in accordance with SDI Design Manual and manufacturer's instructions. Align and level.
- B. On concrete and masonry surfaces provide minimum 4 inch bearing.
- C. On steel supports provide minimum 2 inch bearing at discontinuous ends of deck and minimum 3 inch bearing length of continuous roof deck over interior supports.
- D. Fasten deck to steel support members as indicated at spacings indicated on the drawings using methods specified.
- E. Drive mechanical sidelap connectors completely through adjacent lapped sheets; positively engage adjacent sheets with minimum three-thread penetration.
- F. Where roof deck changes direction, install 6 inch minimum wide sheet steel cover plates, of same thickness as deck. Attach both sides of cover plate to roof deck below with

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05310 - STEEL DECKING**

the same fasteners and spacings as required for deck to supports.

- G. Close openings above walls and partitions perpendicular to deck flutes with single row of foam cell closures.
- H. Position roof drain pans with flange bearing on top surface of deck. Fusion weld at each deck flute.

#### **3.03 Field Quality Control**

- A. An independent testing agency will perform Special Inspections and field quality control tests as required by Chapter 17 of ICC (IBC)-2015 and SDI (QA/QC). Refer to the following parts of the structural drawings for additional Special Inspection requirements:
  - 1. Statement of Special Inspection Notes
  - 2. Table titled "Required Inspection of Cold-Formed Steel Deck"
- B. Concurrent with the submittal of special inspection reports to the Owner's Representative, the special inspector shall submit to the Owner's Representative and the Installer a list of nonconforming items.

END OF SECTION

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

#### **PART 1 - GENERAL**

##### **1.01 Related Documents**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

##### **1.02 Summary**

- A. This Section includes the following:
  - 1. Exterior and interior non-load-bearing wall framing.
  - 2. Soffit joist framing.
- B. Related Sections include the following:
  - 1. Division 5 Section "Metal Fabrications" for masonry shelf angles and connections.
  - 2. Division 9 Section "Gypsum Board Assemblies" for interior non-load-bearing, metal-stud framing and ceiling-suspension assemblies.

##### **1.03 Performance Requirements**

- A. Structural Performance: Provide cold-formed metal framing capable of withstanding design loads within limits and under conditions indicated.
  - 1. Design Loads: Design loads shall be calculated components and cladding load per ASCE/SEI 7 edition indicated on the drawings.
  - 2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:
    - a. Exterior Non-Load-Bearing Framing: Horizontal deflection of  $1/600$  of wall height at areas backing up brick veneer, and  $1/240$  of wall height at areas backing up other materials.
    - b. Soffit Joist Framing: Vertical deflection of  $1/240$  of the span.
  - 3. Design framing system to maintain clearances at openings, to allow for construction tolerances, and to accommodate live load deflection of primary building structure as follows:
    - a. Upward and downward movement of 1 inch.
- B. Cold-Formed Steel Framing, General: Design according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions."
  - 1. Headers: Design according to AISI's "Standard for Cold-Formed Steel Framing - Header Design."
  - 2. Design exterior non-load-bearing wall framing to accommodate horizontal deflection without regard for contribution of sheathing materials.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

#### **1.04 Submittals**

- A. Product Data: For each type of cold-formed metal framing product and accessory indicated.
- B. Shop Drawings: Show layout, spacings, sizes, thicknesses, and types of cold-formed metal framing; fabrication; and fastening and anchorage details, including mechanical fasteners. Show reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.
  - 1. For cold-formed metal framing indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Welding certificates.
- D. Research/Evaluation Reports: For cold-formed metal framing.

#### **1.05 Quality Assurance**

- A. Engineering Responsibility: Preparation of Shop Drawings, design calculations, and other structural data by a qualified professional engineer.
- B. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of cold-formed metal framing that are similar to those indicated for this Project in material, design, and extent.
- C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code--Steel," and AWS D1.3, "Structural Welding Code--Sheet Steel."
- D. AISI Specifications and Standards: Comply with AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members" and its "Standard for Cold-Formed Steel Framing - General Provisions."
  - 1. Comply with AISI's "Standard for Cold-Formed Steel Framing - Truss Design."
  - 2. Comply with AISI's "Standard for Cold-Formed Steel Framing - Header Design."

#### **1.06 Delivery, Storage, And Handling**

- A. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling.
- B. Store cold-formed metal framing, protect with a waterproof covering, and ventilate to avoid condensation.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

#### **PART 2 - PRODUCTS**

##### **2.01 Manufacturers**

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering cold-formed metal framing that may be incorporated into the Work include, but are not limited to, the following:
1. Allied Studco.
  2. AllSteel Products, Inc.
  3. California Expanded Metal Products Company.
  4. Clark Steel Framing.
  5. Consolidated Fabricators Corp.; Building Products Division.
  6. Craco Metals Manufacturing, LLC.
  7. Custom Stud, Inc.
  8. Dale/Incor.
  9. Design Shapes in Steel.
  10. Dietrich Metal Framing; a Worthington Industries Company.
  11. Formetal Co. Inc. (The).
  12. Innovative Steel Systems.
  13. MarinoWare; a division of Ware Industries.
  14. Quail Run Building Materials, Inc.
  15. SCAFCO Corporation.
  16. Southeastern Stud & Components, Inc.
  17. Steel Construction Systems.
  18. Steeler, Inc.
  19. Super Stud Building Products, Inc.
  20. United Metal Products, Inc.

##### **2.02 Materials**

- A. Steel Sheet: ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:
1. Grade: ST33H (ST230H).
  2. Coating: G60 (Z180).
- B. Steel Sheet for Vertical Deflection Clips: ASTM A 653/A 653M, structural steel, zinc coated, of grade and coating as follows:
1. Grade: 50 (340), Class 1 or 2.
  2. Coating: G90 (Z275).

##### **2.03 Exterior Non-Load-Bearing Wall Framing**

- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:
1. Minimum Base-Metal Thickness: 0.0428 inches (1.09 mm).
  2. Flange Width: 1-5/8 inches (41 mm).

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

- B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:
  - 1. Minimum Base-Metal Thickness: 0.0538 inches (1.37 mm)
  - 2. Flange Width: 1-1/2 inches.
- C. Vertical Deflection Clip Option: Manufacturer's standard head clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.
  - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Dietrich Metal Framing; a Worthington Industries Company.
    - b. MarinoWare, a division of Ware Industries.
    - c. SCAFCO Corporation
    - d. The Steel Network, Inc.
- D. Single Deflection Track Option: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
  - 1. Minimum Base-Metal Thickness: 0.0538 inch (1.37 mm).
  - 2. Flange Width: 1 inch (25 mm) plus the design gap for 1-story structures and 1 inch (25 mm) plus twice the design gap for other applications.
- E. Double Deflection Track Option: Manufacturer's double, deep-leg, U-shaped steel tracks, consisting of nested inner and outer tracks; unpunched, with unstiffened flanges.
  - 1. Outer Track: Of web depth to allow free vertical movement of inner track, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
    - a. Minimum Base-Metal Thickness: 0.0538 inch (1.37 mm).
    - b. Flange Width: 1 inch (25 mm) plus the design gap for 1-story structures and 1 inch (25 mm) plus twice the design gap for other applications.
  - 2. Inner Track: Of web depth indicated, and as follows:
    - a. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).
    - b. Flange Width: Equal to sum of outer deflection track flange width plus 1 inch.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

#### **2.04 Soffit Joist Framing**

- A. Steel Ceiling Joists: Manufacturer's standard C-shaped steel sections, of web depth indicated, unpunched, with stiffened flanges, and as follows:
  - 1. Minimum Base-Metal Thickness: As indicated on drawings.
  - 2. Flange Width: 1-5/8 inches (41 mm) minimum.

#### **2.05 Framing Accessories**

- A. Fabricate steel-framing accessories from steel sheet, ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of same grade and coating weight used for framing members.
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
  - 1. Supplementary framing.
  - 2. Bracing, bridging, and solid blocking.
  - 3. Web stiffeners.
  - 4. Anchor clips.
  - 5. End clips.
  - 6. Foundation clips.
  - 7. Gusset plates.
  - 8. Stud kickers, knee braces, and girts.
  - 9. Joist hangers and end closures.
  - 10. Hole reinforcing plates.
  - 11. Backer plates.

#### **2.06 Anchors, Clips, And Fasteners**

- A. Anchor Bolts: ASTM F 1554, Grade 55, threaded carbon-steel headless bolts, with encased end threaded, and carbon-steel nuts; and flat, hardened-steel washers; zinc coated by hot-dip process according to ASTM A 153/A 153M, Class C or mechanically deposition according to ASTM B 695, Class 50.
- B. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times design load, as determined by testing per ASTM E 488 conducted by a qualified independent testing agency.
- C. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times design load, as determined by testing per ASTM E 1190 conducted by a qualified independent testing agency.
- D. Mechanical Fasteners: ASTM C 1513, corrosion-resistant-coated, self-drilling, self-tapping steel drill screws.
  - 1. Head Type: Low-profile head beneath sheathing, manufacturer's standard elsewhere.
- E. Welding Electrodes: Comply with AWS standards.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

#### **2.07 Miscellaneous Materials**

- A. Galvanizing Repair Paint: ASTM A 780.
- B. Nonmetallic, Nonshrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, portland cement, shrinkage-compensating agents, and plasticizing and water-reducing agents, complying with ASTM C 1107, with fluid consistency and 30-minute working time.
- C. Shims: Load bearing, high-density multimonomer plastic, nonleaching.
- D. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch (6.4 mm) thick, selected from manufacturer's standard widths to match width of bottom track or rim track members.

#### **2.08 Fabrication**

- A. Fabricate cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.
  - 1. Fabricate framing assemblies using jigs or templates.
  - 2. Cut framing members by sawing or shearing; do not torch cut.
  - 3. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.
    - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
    - b. Locate mechanical fasteners and install according to Shop Drawings, with screw penetrating joined members by not less than three exposed screw threads.
  - 4. Fasten other materials to cold-formed metal framing by welding, bolting, or screw fastening, according to Shop Drawings.
- B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies to prevent damage or permanent distortion.
- C. Fabrication Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
  - 1. Spacing: Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening



## **DIVISION 5 - METALS**

### **SECTION 05400 - COLD-FORMED METAL FRAMING**

requirements of sheathing or other finishing materials.

2. Squareness: Fabricate each cold-formed metal framing assembly to a maximum out-of-square tolerance of 1/8 inch (3 mm).

### **PART 3 - EXECUTION**

#### **3.01 Examination**

- A. Examine supporting substrates and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance.
  1. Proceed with installation only after unsatisfactory conditions have been corrected.

#### **3.02 Installation, General**

- A. Cold-formed metal framing may be shop or field fabricated for installation, or it may be field assembled.
- B. Install cold-formed metal framing according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions" and to manufacturer's written instructions unless more stringent requirements are indicated.
- C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.
  1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch (1.6 mm).
- D. Install cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened.
  1. Cut framing members by sawing or shearing; do not torch cut.
  2. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.
    - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
    - b. Locate mechanical fasteners and install according to Shop Drawings, and complying with requirements for spacing, edge distances, and screw penetration.
- E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.
- F. Install temporary bracing and supports to secure framing and support loads comparable in intensity to those for

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

- G. Do not bridge building expansion and control joints with cold-formed metal framing. Independently frame both sides of joints.
- H. Install insulation, specified in Division 7 Section "Building Insulation," in built-up exterior framing members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.
- I. Fasten hole reinforcing plate over web penetrations that exceed size of manufacturer's standard punched openings.
- J. Erection Tolerances: Install cold-formed metal framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
  - 1. Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

#### **3.03 Exterior Non-Load-Bearing Wall Installation**

- A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure as indicated.
- B. Fasten both flanges of studs to bottom track, unless otherwise indicated. Fast both flanges to top track if required by deflection option selected. Space studs as follows:
  - 1. Stud Spacing: 16 inches (406 mm).
- C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.
- D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.
  - 1. Single Deflection Track Option: Install single-leg deflection tracks and anchor to building structure.
  - 2. Double Deflection Track Option: Install double deep-leg deflection tracks and anchor outer track to building structure.
  - 3. Deflection Clip Option: Connect vertical deflection clips to infill studs and anchor to building structure.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

- E. Install horizontal bridging in wall studs, spaced in rows indicated on Shop Drawings but not more than 48 inches (1220 mm) apart. Fasten at each stud intersection.
    - 1. Top Bridging for Single Deflection Track Option:  
Install row of horizontal bridging within 12 inches (305 mm) of single deflection track. Install a combination of flat, taut, steel sheet straps of width and thickness indicated and stud or stud-track solid blocking of width and thickness matching studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
      - a. Install solid blocking at maximum 96-inch (2440-mm) centers and as shown on approved Shop Drawings.
    - 2. Bridging Options:
      - a. Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
      - b. Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
      - c. Proprietary bridging bars installed according to manufacturer's written instructions.
  - F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, fasteners, and stud girts, to provide a complete and stable wall-framing system.
- 3.04 Joist Installation
- A. Install perimeter joist track sized to match joists. Align and securely anchor or fasten track to supporting structure at corners, ends, and spacings indicated on Shop Drawings.
  - B. Install joists bearing on supporting frame, level, straight, and plumb; adjust to final position, brace, and reinforce. Fasten joists to both flanges of joist track.
    - 1. Unless shown otherwise in drawings, install joists over supporting frame with a minimum end bearing of 1-1/2 inches (38 mm).
    - 2. Reinforce ends and bearing points of joists with web stiffeners, end clips, joist hangers, steel clip angles, or steel-stud sections as indicated on drawings.
  - C. Space joists not more than 2 inches (51 mm) from abutting walls, and as follows:
    - 1. Joist Spacing: As indicated.

## **DIVISION 5 – METALS**

### **SECTION 05400 – COLD-FORMED METAL FRAMING**

- D. Frame openings with built-up joist headers consisting of joist and joist track, nesting joists, or another combination of connected joists if indicated.
- E. Install bridging at intervals indicated. Fasten bridging at each joist intersection as follows:
  - 1. Bridging: Joist-track solid blocking of width and thickness indicated, secured to joist webs.
- F. Install miscellaneous joist framing and connections, including web stiffeners, closure pieces, clip angles, continuous angles, hold-down angles, anchors, and fasteners, to provide a complete and stable joist-framing assembly.

#### **3.05 Field Quality Control**

- A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Field and shop welds will be subject to testing and inspecting.
- C. Testing agency will report test results promptly and in writing to Contractor and Architect.
- D. Remove and replace work where test results indicate that it does not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

#### **3.06 Repairs And Protection**

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed metal framing with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and installer that ensures the cold-formed metal framing is without damage or deterioration at time of Substantial Completion.

**END OF SECTION**

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05500 - METAL FABRICATIONS**

#### **PART 1 - GENERAL**

##### **1.01 Section Includes**

- A. Shop fabricated steel items.

##### **1.02 Related Requirements**

- A. Section 03 3000 - Cast-in-Place Concrete: Placement of metal fabrications in concrete.
- B. Section 04 2000 - Unit Masonry: Placement of metal fabrications in masonry.
- C. Section 05 1200 - Structural Steel Framing: Structural steel column anchor bolts.
- D. Section 05 2100 - Steel Joist Framing: Structural joist bearing plates, including anchorage.
- E. Section 05 3100 - Steel Decking: Bearing plates for metal deck bearing, including anchorage.
- F. Section 05 5100 - Metal Stairs.

##### **1.03 Reference Standards**

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- C. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- D. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- E. ASTM A283/A283M - Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates.
- F. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
- G. ASTM A501/A501M - Standard Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing.
- H. ASTM F3125/F3125M - Standard Specification for High Strength Structural Bolts and Assemblies, Steel and Alloy Steel, Heat Treated, Inch Dimensions 120 ksi and 150 ksi Minimum Tensile Strength, and Metric Dimensions 830 MPa and 1040 MPa Minimum Tensile Strength.
- I. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination.
- J. AWS D1.1/D1.1M - Structural Welding Code - Steel.
- K. MPI #79 - Primer, Alkyd, Anti-Corrosive for Metal.
- L. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05500 - METAL FABRICATIONS**

#### **1.04 Submittals**

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories. Include erection drawings, elevations, and details where applicable.
  - 1. Indicate welded connections using standard AWS A2.4 welding symbols. Indicate net weld lengths.
  - 2. Design data: Submit drawings and supporting calculations, signed and sealed by a qualified professional structural engineer.
    - a. Include the following, as applicable:
      - 1) Design criteria.
      - 2) Engineering analysis depicting stresses and deflections.
      - 3) Member sizes and gauges.
      - 4) Details of connections.
      - 5) Support reactions.
      - 6) Bracing requirements.

### **PART 2 - PRODUCTS**

#### **2.01 Materials - Steel**

- A. Steel Sections: ASTM A36/A36M.
- B. Steel Tubing: ASTM A501/A501M hot-formed structural tubing.
- C. Plates: ASTM A283/A283M.
- D. Pipe: ASTM A53/A53M, Grade B Schedule 40, black finish.
- E. Mechanical Fasteners: Same material as or compatible with materials being fastened; type consistent with design and specified quality level.
- F. Bolts, Nuts, and Washers: ASTM A307, Grade A, plain.
- G. Bolts, Nuts, and Washers: ASTM F3125/F3125M, Type 1, plain.
- H. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.
- I. Shop and Touch-Up Primer: As required below, complying with VOC limitations of authorities having jurisdiction.
  - 1. Steel Exposed to Exterior Weather or an Uncontrolled Environment: Two-component, high performance, zinc-rich, aromatic urethane, compatible with topcoat and complying with SSPC-Paint 20.
  - 2. Interior Steel: Fabricator's standard lead- and chromate-free, non-asphaltic, rust-inhibiting primer complying with MPI #79 and compatible with topcoat.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05500 - METAL FABRICATIONS**

- J. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, complying with VOC limitations of authorities having jurisdiction.

#### **2.02 Fabrication**

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- B. Fabricate items with joints tightly fitted and secured.
- C. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- D. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

#### **2.03 Fabricated Items**

- A. Ledge Angles, Shelf Angles, Channels, and Plates Not Attached to Structural Framing: For support of metal decking and joists; prime paint finish.
- B. Lintels: As detailed; prime paint finish.
- C. Door Frames for Overhead Door Openings and Wall Openings: Channel sections; prime paint finish.
- D. Elevator Hoistway Divider Beams: Beam sections; prime paint finish.
- E. Toilet Partition Suspension Members: Steel channel sections; prime paint finish.

#### **2.04 Finishes - Steel**

- A. Prime paint steel items.
  - 1. Exceptions: Galvanize items to be embedded in concrete and items to be embedded in masonry.
  - 2. Exceptions: Do not prime surfaces in direct contact with concrete, where field welding is required, and items to be covered with sprayed fireproofing.
- B. Prepare surfaces to be primed in accordance with SSPC-SP3 for interior steel or SSPC-SP6 for all steel exposed to exterior weather or an uncontrolled environment.
- C. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- D. Prime Painting: One coat.
- E. Galvanizing of Structural Steel Members: Galvanize after fabrication to ASTM A123/A123M requirements. Provide minimum 1.7 oz/sq ft galvanized coating.
- F. Galvanizing of Non-structural Items: Galvanize after fabrication to ASTM A123/A123M requirements.

#### **2.05 Fabrication Tolerances**

- A. Squareness: 1/8 inch maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch.

## **DIVISION 5 - STRUCTURAL STEEL**

### **SECTION 05500 - METAL FABRICATIONS**

- C. Maximum Misalignment of Adjacent Members: 1/16 inch.
- D. Maximum Bow: 1/8 inch in 48 inches.
- E. Maximum Deviation From Plane: 1/16 inch in 48 inches.

### **PART 3 - EXECUTION**

#### **3.01 Examination**

- A. Verify that field conditions are acceptable and are ready to receive work.

#### **3.02 Preparation**

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply setting templates to the appropriate entities for steel items required to be cast into concrete or embedded in masonry.

#### **3.03 Installation**

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Field weld components as indicated on drawings.
- D. Perform field welding in accordance with AWS D1.1/D1.1M.
- E. Obtain approval prior to site cutting or making adjustments not scheduled.
- F. After erection, prime welds, abrasions, and surfaces not shop primed, except surfaces to be in contact with concrete.

#### **3.04 Tolerances**

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.
- C. Maximum Out-of-Position: 1/4 inch.

**END OF SECTION**



## DIVISION 5 - STRUCTURAL STEEL

### SECTION 05510 - METAL STAIRS

#### PART 1 - GENERAL

##### 1.01 SECTION INCLUDES

- A. Stairs with concrete-filled steel pan treads.
- B. Stairs with metal treads.
- C. Structural steel stair framing and supports.
- D. Handrails and guards.

##### 1.02 RELATED REQUIREMENTS

- A. Section 03 3000 - Cast-in-Place Concrete: Concrete fill in stair pans and landings; mesh reinforcement for landings.
- B. Section 04 2000 - Unit Masonry: Placement of metal fabrications in masonry.
- C. Section 05 5000 - Metal Fabrications.

##### 1.03 REFERENCE STANDARDS:

- A. For all reference standards listed below, comply with the version year in the governing building code adopted by the Authority Having Jurisdiction. For those reference standards that are not directly referenced by the building code, use the latest edition unless noted otherwise.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel.
- C. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- D. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- E. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- F. ASTM A500/A500M - Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
- G. ASTM A501/A501M - Standard Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing.
- H. ASTM A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
- I. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.

- J. ASTM F3125/F3125M - Standard Specification for High Strength Structural Bolts and Assemblies, Steel and Alloy Steel, Heat Treated, Inch Dimensions 120 ksi and 150 ksi Minimum Tensile Strength, and Metric Dimensions 830 MPa and 1040 MPa Minimum Tensile Strength.
  - K. AWS A2.4 - Standard Symbols for Welding, Brazing, and Nondestructive Examination.
  - L. AWS D1.1/D1.1M - Structural Welding Code - Steel.
  - M. NAAMM AMP 510 - Metal Stairs Manual.
  - N. NAAMM AMP 521 - Pipe Railing Systems Manual.
  - O. SSPC-Paint 15 - Steel Joist Shop Primer/Metal Building Primer.
  - P. SSPC-Paint 20 - Zinc-Rich Primers (Type I, "Inorganic," and Type II, "Organic").
  - Q. SSPC-SP 2 - Hand Tool Cleaning.
- 1.04 SUBMITTALS
- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
  - B. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories.
    - 1. Indicate welded connections using standard AWS A2.4 welding symbols. Indicate net weld lengths.
  - C. Delegated-Design Submittal: For stairs and railings, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
  - D. Welders' Certificates.
- 1.05 QUALITY ASSURANCE
- A. Structural Designer Qualifications: Professional Structural Engineer experienced in design of this work and licensed in the State in which the Project is located, or personnel under direct supervision of such an engineer.
  - B. Welder Qualifications: Show certification of welders employed on the Work, verifying AWS qualification within the previous 12 months.

## **PART 2 - PRODUCTS**

### **2.01 PERFORMANCE REQUIREMENTS**

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design stairs and railings.
- B. Structural Performance of Stairs: Metal stairs shall withstand the effects of gravity loads and the

following loads and stresses within limits and under conditions indicated:

1. Uniform Load: 100 lbf/sq. ft.
  2. Concentrated Load: 300 lbf applied on an area of 4 sq. in.
  3. Uniform and concentrated loads need not be assumed to act concurrently.
  4. Stair Framing: Capable of withstanding stresses resulting from railing loads in addition to loads specified above.
  5. Limit deflection of treads, platforms, and framing members to  $L/360$  or 1/4 inch (6.4 mm), whichever is less.
- C. Structural Performance of Railings: Railings shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:
1. Handrails and Top Rails of Guards:
    - a. Uniform load of 50 lbf/ft. applied in any direction.
    - b. Concentrated load of 200 lbf applied in any direction.
    - c. Uniform and concentrated loads need not be assumed to act concurrently.
    - d. Railing system load distribution shall be as recommended by NAAMM AMP 521.
  2. Infill of Guards:
    - a. Concentrated load of 50 lbf applied horizontally on an area of 1 sq. ft.
    - b. Infill load and other loads need not be assumed to act concurrently.

## 2.02 METAL STAIRS - GENERAL

- A. Metal Stairs: Provide stairs of the design specified, complete with landing platforms, vertical and horizontal supports, railings, and guards, fabricated accurately for anchorage to each other and to building structure.
1. Regulatory Requirements: Provide stairs and railings that comply with most stringent requirements of local, state, and federal regulations; where requirements of Contract Documents exceed those of regulations, comply with Contract Documents.
  2. Handrails: Comply with applicable accessibility requirements of ADA Standards.
  3. Dimensions: As indicated on drawings.

4. Shop assemble components; disassemble into largest practical sections suitable for transport and access to site.
  5. No sharp or rough areas on exposed travel surfaces and surfaces accessible to touch.
  6. Separate dissimilar metals using paint or permanent tape.
- B. Metal Jointing and Finish Quality Levels:
1. Architectural: All joints as inconspicuous as possible, whether welded or mechanical.
    - a. Welded Joints: Continuously welded and ground smooth and flush.
    - b. Mechanical Joints: Butted tight, flush, and hairline; concealed fastenings only.
    - c. Exposed Edges and Corners: Eased to small uniform radius.
    - d. Metal Surfaces to be Painted: Sanded or ground smooth, suitable for highest quality gloss finish.
  2. Commercial: Exposed joints as inconspicuous as possible, whether welded or mechanical; underside of stair not covered by soffit IS considered exposed to view.
    - a. Welded Joints: Intermittently welded on back side, filled with body putty, and sanded smooth and flush.
    - b. Welds Exposed to View: Ground smooth and flush.
    - c. Mechanical Joints: Butted tight, flush, and hairline.
    - d. Bolts Exposed to View: Countersunk flat or oval head bolts; no exposed nuts.
    - e. Exposed Edges and Corners: Eased to small uniform radius.
    - f. Metal Surfaces to be Painted: Sanded or ground smooth, suitable for satin or matte finish.
  3. Service: Exposed joints tight with face surfaces aligned; underside of stair not covered by soffit is not considered exposed to view.
    - a. Welded Joints: Welded on back side wherever possible.
    - b. Welds Exposed to View: Ground smooth; not required to be flush.
    - c. Bolts Exposed to View: Countersunk flat or oval head bolts; no exposed nuts or screw threads.

- d. Metal Surfaces to be Painted: Sanded smooth, suitable for satin or matte finish.
  - C. Fasteners: Same material or compatible with materials being fastened; type consistent with design and specified quality level.
  - D. Anchors and Related Components: Same material and finish as item to be anchored, except where specifically indicated otherwise; provide all anchors and fasteners required.
- 2.03 METAL STAIRS WITH CONCRETE-FILLED STEEL PAN TREADS
  - A. Jointing and Finish Quality Level: architectural, as defined above.
  - B. Risers: Closed.
  - C. Treads: Metal pan with field-installed concrete fill.
    - 1. Concrete Depth: 2 inches, minimum.
    - 2. Tread Pan Material: Steel sheet.
    - 3. Tread Pan Thickness: As required by design; 14 gauge, 0.075 inch minimum.
    - 4. Pan Anchorage to Stringers: Welded or bolted to carrier angles welded or bolted to stringers.
    - 5. Concrete Finish: Steel troweled.
  - D. Risers: Same material and thickness as tread pans.
  - E. Stringers: Rolled steel channels.
    - 1. Stringer Depth: As indicated on drawings.
    - 2. End Closure: Sheet steel of same thickness as risers welded across ends.
  - F. Landings: Same construction as treads, supported and reinforced as required to achieve design load capacity.
  - G. Railings: Steel pipe railings.
  - H. Finish: Shop- or factory-prime painted.
- 2.04 HANDRAILS AND GUARDS
  - A. Wall-Mounted Rails: Round pipe or tube rails unless otherwise indicated.
    - 1. Outside Diameter: 1-1/4 inch, minimum, to 1-1/2 inches, maximum.
  - B. Guards:
    - 1. Top Rails: Round pipe or tube rails unless otherwise indicated.
      - a. Outside Diameter: 1-1/4 inch, minimum, to 1-3/4 inches, maximum.
    - 2. Handrails: Round pipe or tube rails unless otherwise indicated.
      - a. Outside Diameter: 1-1/4 inch, minimum, to 1-3/4 inches, maximum.
    - 3. Infill at Picket Railings: Vertical pickets.

- a. Horizontal Spacing: Maximum 4 inches on center.
  - b. Material: Solid steel bar.
  - c. Shape: Square.
  - d. Size: 1/2 inch square.
  - e. Top Mounting: Welded to underside of top rail.
  - f. Bottom Mounting: Welded to top surface of stringer.
- 4. Infill at Pipe Railings: Pipe or tube rails sloped parallel to stair.
  - a. Outside Diameter: 1 inch.
  - b. Material: Steel pipe or tube, round.
  - c. Vertical Spacing: Maximum 4 inches on center.
  - d. Jointing: Welded and ground smooth and flush.
- 5. End and Intermediate Posts: Same material and size as top rails.
  - a. Horizontal Spacing: As required by design calculations prepared by delegated design engineer.
  - b. Mounting: Welded to top surface of stringer.

## 2.05 MATERIALS

- A. Steel Sections: ASTM A36/A36M.
- B. Steel Tubing: ASTM A500/A500M or ASTM A501/A501M structural tubing, round and shapes as indicated.
- C. Pipe: ASTM A53/A53M, Grade B Schedule 40, black finish.
- D. Ungalvanized Steel Sheet: Hot- or cold-rolled, except use cold-rolled where finished work will be exposed to view.
  - 1. Hot-Rolled Steel Sheet: ASTM A1011/A1011M, Designation CS (commercial steel).
  - 2. Cold-Rolled Steel Sheet: ASTM A1008/A1008M, Designation CS (commercial steel).
- E. Concrete Fill: See Section 03 3000.
- F. Concrete Reinforcement: Mesh type as detailed, galvanized.

## 2.06 ACCESSORIES

- A. Steel Bolts, Nuts, and Washers: ASTM F3125/F3125M, Type 1, and galvanized to ASTM A153/A153M where connecting galvanized components.
- B. Welding Materials: AWS D1.1/D1.1M; type required for materials being welded.

- C. Shop and Touch-Up Primer: SSPC-Paint 15, and comply with VOC limitations of authorities having jurisdiction.
  - D. Touch-Up Primer for Galvanized Surfaces: SSPC-Paint 20, Type I - Inorganic, and comply with VOC limitations of authorities having jurisdiction.
- 2.07 SHOP FINISHING
- A. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
  - B. Do not prime surfaces in direct contact with concrete or where field welding is required.
  - C. Prime Painting: Use specified shop- and touch-up primer.
    - 1. Preparation of Steel: In accordance with SSPC-SP 2, Hand Tool Cleaning.
    - 2. Number of Coats: One.
  - D. Galvanizing: Hot-dip galvanize to minimum requirements of ASTM A123/A123M.
    - 1. Touch up abraded areas after fabrication using specified touch-up primer for galvanized surfaces.

### **PART 3 - EXECUTION**

#### **3.01 EXAMINATION**

- A. Verify that field conditions are acceptable and are ready to receive work.

#### **3.02 PREPARATION**

- A. When field welding is required, clean and strip primed steel items to bare metal.
- B. Supply items required to be cast into concrete and embedded in masonry with setting templates.

#### **3.03 INSTALLATION**

- A. Install components plumb and level, accurately fitted, free from distortion or defects.
- B. Provide anchors, plates, angles, hangers, and struts required for connecting stairs to structure.
- C. Allow for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- D. Provide welded field joints where specifically indicated on shop drawings. Perform field welding in accordance with AWS D1.1/D1.1M.
- E. Other field joints may be either welded or bolted provided the result complies with the limitations specified for jointing quality levels.

- F. Obtain approval prior to site cutting or creating adjustments not scheduled.
- G. After erection, prime welds, abrasions, and surfaces not shop primed or galvanized, except surfaces to be in contact with concrete.

#### 3.04 TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.

**END OF SECTION**



## **DIVISION 11 - EQUIPMENT**

### **SECTION 05515 - ALUMINUM LADDERS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. The General Conditions and applicable sections of Division 1 shall apply to this entire section.
- B. All materials, labor, services, and incidentals necessary for the completion of this entire section of the work.

##### **1.02 Submittals:**

- A. Provide manufacturer's catalog cut and data sheets, complete parts list and installation requirements for each item specified.

##### **1.03 Product Delivery, Storage, and Handling:**

- A. Handle and store all items with care to prevent damage and injury to finish surfaces.

##### **1.04 Related Work Specified Elsewhere:**

- A. Section 06100 - Rough Carpentry.
- B. Section 07700 - Roof Accessories

#### **Part 2 - Products**

2.01 Products of the manufacturers listed below have been specified herein to simplify descriptions of design, construction, and materials only. All items have been selected for visual and performance design quality which shall serve as a basis for acceptance of equivalent products by other manufacturers.

##### **2.01 Manufacturer:**

- A. Acceptable Manufacturer: UPNOVR, Inc.; Hooksett, NH 03106.

##### **2.02 Aluminum Vertical Access Ladders:**

- A. Vertical Roof Hatch Rail Extension Ladder:
  - 1. Model Number: U-200.
  - 2. Materials: ASTM B221, Alloy 6063, Temper T-6, non-spark extruded aluminum and ASTM B209, Alloy 6063 Temper T-6 sheet aluminum.
  - 3. Aluminum Finish: Mill finish.
  - 4. Nominal Height: As indicated on the Drawings.
  - 5. Side Rails: 1-3/4 inches wide by 3 inch tubes with 1/8 inch wall thickness.
  - 6. Rungs: 1-1/4 inches wide by 1-1/4 inches tube with corrugated surfaces and capable of 1,000 pound load. Space 12 inches on center. Attach rungs in centerline of side rails by welding.
  - 7. Rung Length: 24 inches.
- B. Vertical Roof Access with Walk Thru Safety Handrail:
  - 1. Model Number: U-201.
  - 2. Materials: ASTM B221, Alloy 6063, Temper T-6, non-spark extruded aluminum and ASTM B209, Alloy 6063

## **DIVISION 11 - EQUIPMENT**

### **SECTION 05515 - ALUMINUM LADDERS**

- Temper T-6 sheet aluminum.
- 3. Aluminum Finish: Mill finish.
- 4. Nominal Height: As indicated on the Drawings.
- 5. Side Rails: 1-3/4 inches wide by 3 inch tubes with 1/8 inch wall thickness.
- 6. Rungs: 1-1/4 inches wide by 1-1/4 inches tube with corrugated surfaces and capable of 1,000 pound load. Space 12 inches on center. Attach rungs in centerline of side rails by welding.
- 7. Rung Length: 24 inches.
- C. Accessories:
  - 1. Wall Brackets: 2 inch by 1/4 inch minimum flat bar aluminum wall brackets.
  - 2. Safety Post Extension: Post extension for fixed ladders constructed of tubular aluminum sections with adjustable mounting brackets for attachment to top of ladder. Permanently mount operating instructions on safety post to be plainly visible to ladder users.

#### **Part 3 Execution**

##### **3.01 Preparation:**

- A. Do not begin installation until substrates have been properly prepared. Notify Architect of unsatisfactory conditions before commencing work.
- B. Field verify required dimensions. Coordinate with supporting construction to ensure adequate blocking and support.
- C. Coordinate with requirements of roof hatch to ensure height and position of ladder is compatible with roof hatch curb and required clearances.
- D. Isolate dissimilar metals to prevent electrolysis with bituminous paint or non-absorptive isolation pad to prevent contact.

##### **3.02 Installation:**

- A. Install ladders and accessories in accordance with manufacturer's instructions and approved submittals.
  - 1. Securely anchor support brackets with fasteners of type and size recommended by manufacturer.
  - 2. Place brackets at top and bottom and at 48 inches maximum intermediate points.
  - 3. Allow 7 inches minimum clearance from wall to center line of rungs.
  - 4. Inspect ladder to verify proper and secure installation.
  - 5. Hold ladder brackets a minimum of 6" above roofing

## **DIVISION 11 - EQUIPMENT**

### **SECTION 05515 - ALUMINUM LADDERS**

membrane.

- B. If applicable, install security door assembly and adjust for smooth operation.
- C. At roof hatch access ladder, install safety post extension by attaching to top 2 rungs of ladder, centered between side rails. Adjust post to extend 42 inches above top rung when roof hatch is open and post is fully extended.

#### **3.03 Cleaning:**

- A. Clean ladders as recommended by manufacturer. Do not use abrasive agents, steel wool or chemicals.

**End of Section**

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

#### **PART 1 - General**

- 1.01 Related Documents:
  - A. Drawings and general provisions of the Contract, including General and Supplementary Conditions Sections, apply to this Section.
- 1.02 Summary:
  - A. This Section includes the following:
    - 1. Steel pipe railings.
  - B. Related Sections include the following:
    - 1. Division 5 Section "Metal Stairs" for steel tube railings associated with metal stairs.
- 1.03 Performance Requirements:
  - A. General: In engineering railings to withstand structural loads indicated, determine allowable design working stresses of railing materials based on the following:
    - 1. Steel: 72 percent of minimum yield strength.
  - B. Structural Performance: Provide railings capable of withstanding the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:
    - 1. Handrails:
      - a. Uniform load of 50 lbf/ ft. applied in any direction.
      - b. Concentrated load of 200 lbf applied in any direction.
      - c. Uniform and concentrated loads need not be assumed to act concurrently.
    - 2. Top Rails of Guards:
      - a. Uniform load of 50 lbf/ ft. applied horizontally and concurrently with 100 lbf/ ft. applied vertically downward.
      - b. Concentrated load of 200 lbf applied in any direction.
      - c. Uniform and concentrated loads need not be assumed to act concurrently.
    - 3. Infill of Guards:
      - a. Concentrated load of 50 lbf applied horizontally on an area of 1 sq. ft.
      - b. Infill load and other loads need not be assumed to act concurrently.
- 1.04 Submittals:
  - A. Product Data: For the following:
    - 1. Anchoring accessories and cement, Architectural Wire Mesh, and paint products.

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
  - 1. For installed products indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Welding certificates.
- D. Qualification Data: For professional engineer.
- 1.05 Quality Assurance:
  - A. Source Limitations: Obtain each type of railing through one source from a single manufacturer.
  - B. Welding: Qualify procedures and personnel according to the following:
    - 1. AWS D1.1, "Structural Welding Code--Steel."
- 1.06 Project Conditions:
  - A. Field Measurements: Verify actual locations of walls and other construction contiguous with railings by field measurements before fabrication and indicate measurements on Shop Drawings.
    - 1. Provide allowance for trimming and fitting at site.
- 1.07 Coordination and Scheduling:
  - A. Coordinate installation of anchorages for railings. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete. Deliver such items to Project site in time for installation.
  - B. Schedule installation so wall attachments are made only to completed walls. Do not support railings temporarily by any means that do not satisfy structural performance requirements.

### **PART 2 - Products**

- 2.01 Metals, General:
  - A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.
  - B. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails, unless otherwise indicated.
- 2.02 Steel:
  - A. Pipe: ASTM A 53/A 53M, Type F or Type S, Grade A, Standard Weight (Schedule 40) for railings and Extra Strong (Schedule 80) for posts, unless another grade and weight are required by structural loads.

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

- B. Plates, Shapes, and Bars: ASTM A 36/A 36M.
- C. Castings: Either gray or malleable iron, unless otherwise indicated.
  - 1. Gray Iron: ASTM A 48/A 48M, Class 30, unless another class is indicated or required by structural loads.
  - 2. Malleable Iron: ASTM A 47/A 47M.
- 2.03 Fasteners:
  - A. General: Provide the following:
    - 1. Steel Railings: Plated steel fasteners complying with ASTM B 633, Class Fe/Zn 25 for electrodeposited zinc coating.
  - B. Fasteners for Anchoring Railings to Other Construction: Select fasteners of type, grade, and class required to produce connections suitable for anchoring railings to other types of construction indicated and capable of withstanding design loads.
  - C. Fasteners for Interconnecting Railing Components:
    - 1. Provide concealed fasteners for interconnecting railing components and for attaching them to other work, unless otherwise indicated.
  - D. Anchors:
    - 1. Provide cast-in-place chemical or torque-controlled expansion anchors, fabricated from corrosion-resistant materials with capability to sustain, without failure, a load equal to four times the load imposed when installed in concrete, as determined by testing per ASTM E 488 conducted by a qualified independent testing agency.
- 2.04 Miscellaneous Materials:
  - A. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.
  - B. Universal Shop Primer (Interior Railings): Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79.
    - 1. Use primer with a VOC content of 420 g/L (3.5 lb/gal.) or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
    - 2. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.
  - C. Zinc-Rich Primer (Exterior Railings): Complying with SSPC-Paint 20 or SSPC-Paint 29 and compatible with topcoat.
    - 1. Use primer with a VOC content of 420 g/L (3.5 lb/gal.) or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

2. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
  - a. Benjamin Moore & Co.; Epoxy Zinc-Rich Primer CM18/19.
  - b. Carboline Company; Carbozinc 621.
  - c. ICI Devoe Coatings; Catha-Coat 313.
  - d. International Coatings Limited; Interzinc 315 Epoxy Zinc-Rich Primer.
  - e. PPG Architectural Finishes, Inc.; Aquapon Zinc-Rich Primer 97-670.
  - f. Sherwin-Williams Company (The); Corothane I GalvaPac Zinc Primer.
  - g. Tnemec Company, Inc.; Tneme-Zinc 90-97.
- D. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D 1187.
- E. Architectural Welded Wire Mesh:
  1. Location: Provide at interior stairs as indicated on Drawings.
  2. Panel Description: minimum 6 gauge plain steel rods electrically welded at all intersections. Panel sides shall be trimmed and receive continuous angle for welding to pipe handrails. Mesh shall be shop primed and ready to receive painter's finish. Panels shall withstand a horizontally applied normal load of 50 pounds on an area equal to 1 square foot.
  3. Panel Sizes: refer to Drawings. Mesh panels shall meet "sphere pass test" as required by applicable codes.
  4. Manufacturer: equal to Welded Wire Cloth as manufactured by McNichols Designer Metals.
- 2.05 Fabrication:
  - A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.
  - B. Assemble railings in the shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for reassembly and coordinated installation. Use connections that maintain structural value of joined pieces.

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

- C. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch, unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- D. Form work true to line and level with accurate angles and surfaces.
- E. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.
- F. Connections: Fabricate railings with flush welded connections, unless otherwise indicated.
- G. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.
  - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  - 2. Obtain fusion without undercut or overlap.
  - 3. Remove flux immediately.
  - 4. At exposed connections, finish exposed surfaces smooth and blended so no roughness shows after finishing and welded surface matches contours of adjoining surfaces.
- H. Form changes in direction as follows:
  - 1. By bending or by inserting prefabricated elbow fittings.
- I. Close exposed ends of railing members with prefabricated end fittings.
- J. Provide wall returns at ends of wall-mounted handrails, unless otherwise indicated. Close ends of returns unless clearance between end of rail and wall is 1/4 inch or less.
- K. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work, unless otherwise indicated.
  - 1. At brackets and fittings fastened to plaster or gypsum board partitions, provide fillers made from crush-resistant material, or other means to transfer wall loads through wall finishes to structural supports and prevent bracket or fitting rotation and crushing of substrate.
- L. Provide inserts and other anchorage devices for connecting railings to concrete. Fabricate anchorage devices capable of withstanding loads imposed by railings. Coordinate anchorage devices with supporting structure.



## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

- M. For railing posts set in concrete, provide steel sleeves not less than 6 inches long with inside dimensions not less than 1/2 inch greater than outside dimensions of post, with steel plate forming bottom closure.
- 2.06 Finishes, General:
  - A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
  - B. Provide exposed fasteners with finish matching appearance, including color and texture, of railings.
- 2.07 Steel And Iron Finishes:
  - A. For nongalvanized steel railings, provide nongalvanized ferrous-metal fittings, brackets, fasteners, and sleeves, except galvanize anchors to be embedded in exterior concrete or masonry.
  - B. Preparation for Shop Priming: Prepare uncoated ferrous-metal surfaces to comply with minimum requirements indicated below for SSPC surface preparation specifications and environmental exposure conditions of installed railings:
    - 1. Exterior Railings (SSPC Zone 1B): SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
    - 2. Interior Railings (SSPC Zone 1A): SSPC-SP 7/NACE No. 4, "Brush-off Blast Cleaning."
  - C. Apply shop primer to prepared surfaces of railings, unless otherwise indicated. Comply with requirements in SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting. Primer need not be applied to surfaces to be embedded in concrete or masonry.

### **PART 3 - Execution**

- 3.01 Examination:
  - A. Examine plaster and gypsum board assemblies, where reinforced to receive anchors, to verify that locations of concealed reinforcements have been clearly marked for Installer. Locate reinforcements and mark locations if not already done.
- 3.02 Installation, General:
  - A. Fit exposed connections together to form tight, hairline joints.
  - B. Perform cutting, drilling, and fitting required for installing railings. Set railings accurately in location, alignment, and elevation; measured from established lines and levels and free of rack.

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

1. Do not weld, cut, or abrade surfaces of railing components that have been coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
  2. Set posts plumb within a tolerance of 1/16 inch in 3 feet.
  3. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet.
- C. Adjust railings before anchoring to ensure matching alignment at abutting joints.
- D. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.
- 3.03 Railing Connections:
- A. Nonwelded Connections: Use mechanical or adhesive joints for permanently connecting railing components. Use wood blocks and padding to prevent damage to railing members and fittings. Seal recessed holes of exposed locking screws using plastic cement filler colored to match finish of railings.
- B. Welded Connections: Use fully welded joints for permanently connecting railing components. Comply with requirements for welded connections in Part 2 "Fabrication" Article whether welding is performed in the shop or in the field.
- C. Expansion Joints: Install expansion joints at locations indicated but not farther apart than required to accommodate thermal movement. Provide slip-joint internal sleeve extending 2 inches beyond joint on either side, fasten internal sleeve securely to 1 side, and locate joint within 6 inches of post.
- 3.04 Anchoring Posts:
- A. Post anchorage shall be designed to support specified loads. Anchorage options include but may not be limited to the following:
1. If applicable, posts may be welded directly to supporting structural steel.
  2. If acceptable to Architect, posts may be welded to an embed plate cast into supporting concrete structure.
  3. Steel pipe sleeves preset and anchored into concrete may be used for installing posts. After posts have been inserted into sleeves, fill annular space between post and sleeve with nonshrink, nonmetallic grout,

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

mixed and placed to comply with anchoring material manufacturer's written instructions.

4. Form or core-drill holes must be not less than 5 inches deep and 3/4 inch larger than OD of post for installing posts in concrete. Clean holes of loose material, insert posts, and fill annular space between post and concrete with nonshrink, nonmetallic grout, mixed and placed to comply with anchoring material manufacturer's written instructions.
  - B. Cover anchorage joint with flange of same metal as post, attached to post with set screws.
  - C. Install removable railing sections, where indicated, in slip-fit metal sockets cast in concrete.
- 3.05 Anchoring Railing Ends:
- A. Anchor railing ends to concrete with round flanges connected to railing ends and anchored to wall construction with anchors and bolts.
  - B. Anchor railing ends to metal surfaces with flanges bolted to metal surfaces and welded to railing ends or connected to railing ends using nonwelded connections.
- 3.06 Attaching Handrails To Walls:
- A. Attach handrails to wall with wall brackets. Provide brackets with 1-1/2-inch clearance from inside face of handrail and finished wall surface.
    1. Use type of bracket with flange tapped for concealed anchorage to threaded hanger bolt.
  - B. Locate brackets as indicated or, if not indicated, at spacing required to support structural loads.
  - C. Secure wall brackets to building construction as follows:
    1. For concrete anchorage, use drilled-in expansion shields and hanger or lag bolts.
    2. For steel-framed gypsum board partitions, fasten brackets directly to steel framing or concealed steel reinforcements using self-tapping screws or toggle bolts of size and type required to support structural loads.
- 3.07 Adjusting And Cleaning:
- A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
- 3.08 Protection:
- A. Protect finishes of railings from damage during construction period with temporary protective coverings approved by railing manufacturer. Remove protective

## **DIVISION 5 – METALS**

### **SECTION 05521-PIPE AND TUBE RAILINGS**

coverings at time of Substantial Completion.

- B. Restore finishes damaged during installation and construction period so no evidence remains of correction work. Return items that cannot be refinished in the field to the shop; make required alterations and refinish entire unit, or provide new units.

**End of Section**

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06100 - ROUGH CARPENTRY**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Wood Treatment - Section 06300

##### **1.03 Quality Assurance:**

- A. Grades specified shall conform to the most recent grading rules as established by the following bureaus and associations.
  - 1. PS 20 - American Softwood Lumber Standard.
  - 2. Western Wood Products Association
  - 3. Southern Pine Inspection Bureau
- B. Grade and trade mark each piece of lumber or bundle on bundled stock. Use only the recognized official marks of association under whose rules it is graded. Grade and trade marks will not be required if each shipment is accompanied by certificate of inspection issued by grading association.

##### **1.04 Submittals:**

- A. Product Data: for each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
  - 1. Include data for wood preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used, net amount of preservative retained, and chemical treatment manufacturer's written instructions for handling, storing, installing and finishing treated material.
  - 2. As requested by authorities having jurisdiction include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials both before and after exposure to elevated temperatures when tested according to ASTM D5516 and ASTM D 5664.
  - 3. Include copies of warranties from chemical treatment manufacturers for each type of treatment.

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06100 - ROUGH CARPENTRY**

4. Research / evaluation reports - for the following, showing compliance with building code in effect for Project:
  - a. Fire-retardant treated wood.
  - b. Power-driven fasteners.
  - c. Power-actuated fasteners.
  - d. Expansion anchors.
  - e. Metal framing anchors.

#### **1.05 Delivery, Storage and Handling:**

- A. Stack lumber, plywood, sheathing, and other materials: provide spacers between each bundle to provide air circulation around bundled material. Provide proper air circulation between stacks and under coverings.

### **Part 2 - Products**

#### **2.01 General:**

- A. Provide best quality of respective grades and kinds. Lumber and plywood shall be produced from wood obtained from forests certified by an FSC-accredited certification body to comply with FSC STD-01-001, "FSC Principles and Criteria for Forest Stewardship". Factory mark each piece of lumber with grade stamp of grading agency.
- B. Maximum moisture content of lumber 19%.
- C. Provide dressed lumber (S4S) unless otherwise indicated.
- D. Where nominal sizes are indicated, provide actual sized required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry lumber.

#### **2.02 Grades and Applications of Lumber:**

- A. Framing lumber for the following shall be "Standard" grade Douglas Fir (WCLIB or WWP).
  1. Concealed blocking/nailers, cants, grounds, and miscellaneous wood items used in conjunction with the roofing work and as indicated on the Drawings.
  2. Provide dimension lumber of grades indicated according to the American Lumber Standards Committee National Grading Rule provisions of the Grading Agency indicated.

#### **2.03 Fire-retardant Treated Materials:**

- A. General - where fire-retardant treated materials are required by authorities having jurisdiction, provide materials that comply with performance requirements in AWP C20 (lumber) and AWP C27 (plywood). Identify fire-retardant treated wood with appropriate classification

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06100 - ROUGH CARPENTRY**

marking of UL, U.S. Testing, Timber Products Inspection, or another testing and inspecting agency acceptable to authorities having jurisdiction.

#### **2.04 Panel Products:**

- A. Miscellaneous Concealed Plywood: shear wall sheathing, span rating to suit framing in each location, and thickness indicated. Refer to Structural Drawings.
- B. Telephone and Electrical Equipment Backing Panels: DOC PS 1, C-D Plugged, fire-retardant treated, in thickness indicated, or if not indicated, not less than ½ inch thick.

#### **2.05 Fasteners:**

- A. All nails, spikes, bolts, connectors and other fasteners used in connections with this work shall be galvanized.
  - 1. Nails, wire, brads and staples - FS-FF-N-105.
  - 2. Power-driven Fasteners - CABO NER-272.
  - 3. Wood screws - ASME B18.6.1.
  - 4. Screws for fastening to cold formed metal framing: ASTM C954 length as recommended by screw manufacturer for material to be fastened.
  - 5. Lag bolts - ASME B18.2.1.
  - 6. Bolts - steel bolts complying with ASTM A 307, Grade A with ASTM C563 hex nuts and, where indicated, flat washers.
  - 7. Expansion anchors - anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.
    - a. Material for interior applications: carbon steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.
    - b. Material for exterior applications: stainless steel with bolts and nuts complying with ASTM F 593 and ASTM F 594, alloy group 1 or 2.

#### **2.06 Metal Framing Anchors:**

- A. General: provide galvanized steel framing anchors of structural capacity, type, and size indicated and acceptable to authorities having jurisdiction.
- B. Galvanized Steel Sheet: hot-dip, zinc-coated steel sheet complying with ASTM A 653/A 653M, G60 coating designation.

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06100 - ROUGH CARPENTRY**

#### **Part 3 - Execution**

##### **3.01 Sizes and Applications (General Framing):**

- A. Members shall be accurately cut and fitted, true to line and level, avoiding shims and wedges as much as possible. Discard material with defects that impair quality of carpentry and that are too small to use with minimum number of joints or optimum joint arrangement.
- B. Where applicable, apply field treatment complying with AWPA M4 to cut surfaces of preservative-treated lumber and plywood.
- C. At wood ground, blocking and nailer installation: install where indicated and required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
- D. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces, unless noted otherwise.

##### **3.02 Rough Hardware:**

- A. Provide all sufficient nails, screws, etc. to insure rigidity and structural soundness. Provide hot-dipped galvanized fasteners at all weather exposed locations.
- B. Spiking and nailing shall be done using largest size spikes and nails practicable and as indicated on the drawings. Securely attach carpentry according to applicable codes and recognized standards.
- C. Bolt nailers and blocking to steel or concrete members with bolts of proportionate strength of members attached, length required, spaced 4'-0" o.c. maximum and 4" from each end, except as otherwise indicated. Countersink fastener heads on exposed carpentry work and fill holes with wood fiber.
- D. Predrill members when necessary to avoid splitting of wood.

##### **3.03 Panel Product Installation:**

- A. Wood structural panels: comply with applicable recommendations contained in APA Form No. E30K, "APA Design/Construction Guide: Residential and Commercial", for types of structural-use panels and applications indicated. Comply with "Code Plus" provisions in above referenced guide.

**End of Section**



## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06200 - FINISH CARPENTRY**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.
- B. The erection of wall and partition wood finish materials, installation of door and hardware, and shelving incidentals necessary to finish the carpentry.

##### **1.02 Related Work Specified Elsewhere:**

- A. Wood Doors - Section 08200
- B. Hardware and Specialties - Section 08700
- C. Painting - Section 09900

##### **1.03 Quality Assurance:**

- A. Standards:
  - 1. Architectural Woodwork Institute:
    - a. Architectural Woodwork Quality Standards.
  - 2. National Electrical Manufacturers Association:
    - a. NEMA Publication LD-1.
  - 3. Western Wood Products Association:
    - a. Standard Grading Rules for Western Lumber.
  - 4. American Plywood Association:

##### **1.05 Product Delivery, Storage and Handling:**

- A. All finish materials, trim, etc. shall be inspected to ensure that no sub-grade, defective, or machine-marked pieces are installed.

#### **Part 2 - Products**

##### **2.01 General:**

- A. Grades specified shall conform to the most recent grading rules of the association or bureau under whose rules the lumber is produced.
- B. Quality standards specified shall conform to the latest edition of the Architectural Woodwork Institute's "Quality Standards".
- C. Lumber shall be kiln-dried to 10% to 12% moisture content which shall be maintained during the fabrication of millwork and cabinetry.

#### **Part 3 - Execution**

##### **3.01 Miscellaneous Trim and Frames:**

- A. Install all trim in longest possible lengths. Stagger joints in adjacent member. Cope at returns and miter at corners. Attach securely in place with fine finishing nails where exposed; set for filling.

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06200 - FINISH CARPENTRY**

- B. Immediately prior to final inspection of building, the contractor shall repair or replace all millwork or cabinetry items which have been damaged in any way.

**End of Section**

## **DIVISION 6 - WOOD & PLASTIC**

### **SECTION 06300 - WOOD TREATMENT**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

- A. Standards:
  - 1. American Wood Preservers Association:
    - a. AWPB Standard P-5 (Preservative)
    - b. AWPB Standard Commodity Standards (Treating Process).
  - 2. Federal Specifications:
    - a. TT-W-550 (Preservative).
    - b. TT-W-571 (Treating Process).
- B. All lumber and plywood receiving wood treatment shall bear the trademark of the process used.
- C. Submit certificate and guarantee of the lumber treated.

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Description: Waterborne chemical salts intended for pressure impregnation as a wood preservative. Preservatives with a petroleum vehicle are not permitted.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Location of treated lumber:
  - 1. All blocking, plates, nailers and curbs used in conjunction with gravel guards, roof edges and all other wood components used in the roofing project.
- B. Materials shall be pressure treated in accordance with the standards of the American Wood Preservers Institute and the chemical manufacturer's specifications.
- C. Treated material shall conform to AWPB LD-2 and treated to a maximum retention of 0.23 pound of oxide per cubic foot.
- D. Moisture content of finish products shall not exceed 19%.

**End of Section**

## DIVISION 6 - WOOD & PLASTICS

### SECTION 06410 - CUSTOM CASEWORK

#### Part 1 - General

##### 1.01 Section Includes:

- A. Special fabricated cabinet units as indicated on drawings.
- B. Countertops.
- C. Hardware
- D. Preparation for site finishing.
- E. Preparation for installing utilities.
- F. Related Documents: The Contract Documents apply to the Work of this Section. Additional requirements and information necessary to complete the Work of this Section may be found in other Documents.
- G. **NOTE: FRAMELESS CABINETS / EUROPEAN CONSTRUCTION STYLE CABINETS ARE ACCEPTABLE. Provide proposed details, etc. during shop drawing submittal phase for approval by Architect.**

##### 1.02 Related Sections:

- A. Section 06100-Rough Carpentry: Grounds and support framing.
- B. Section 06200-Finish Carpentry: Related trim not specified in this section.
- C. Section 09900- Paints and Coatings: Finishing cabinet exterior and interior where applicable.

##### 1.03 References:

- A. ANSI/BHMA A156.9-Cabinet Hardware.
- B. AWI-Quality Standards
- C. FS L-F 508-Plastic Sheet, Laminated, Decorative and non-Decorative.
- D. FS MM-L-736-Lumber, Hardware.
- E. FS MMM-A- 130-Adhesive, Contact.
- F. NEMA LD-3-High Pressure Decorative laminates.
- G. PS 1-Construction and Industrial Plywood.
- H. PS 20-American Softwood Lumber Standard.
- I. PS 51-Hardwood and Decorative Ply.

##### 1.04 Submittals:

- A. Shop Drawings: Indicated materials, component profiles and elevations, assembly methods, joint details, fastening methods, accessory listings, hardware location, and schedule of finishes.

##### 1.05 Quality Assurance: Perform work in accordance with AWI Custom quality.

##### 1.06 Qualifications: Manufacturer: Company specializing in manufacturing the products specified in this section with minimum three years of experience.

##### 1.07 Delivery, Storage, and Handling:

- A. Protect units from moisture damage.

## DIVISION 6 - WOOD & PLASTICS

### SECTION 06410 - CUSTOM CASEWORK

- B. Store materials in ventilated, interior locations under constant, minimum temperatures of 60 degrees F. And maximum relative humidity of 55 percent.
- 1.08 Field Measurements: Verify that field measurements are as indicated on shop drawings.
- 1.09 Coordination: coordinate work with plumbing and electrical rough-in.

### Part 2 - Products

#### 2.01 Wood Materials:

- A. Softwood Lumber:PS20; graded in accordance with AWI Custom; average moisture content of 6 percent; species and grades as follows:

| <u>Item</u>           | <u>Species</u> | <u>Cut</u> |
|-----------------------|----------------|------------|
| Cabinet Frame         | Douglas Fir    | Economy    |
| Internal Construction | Douglas Fir    | Economy    |
| Miscellaneous framing | Douglas Fir    | Economy    |
| Sub-Tops              | Douglas Fir    | Economy    |

- B. Hardwood Lumber FS MM-L-736; graded in accordance with AWI Custom; average moisture content of 6 percent; species and grade as follows:

| <u>Item</u>              | <u>Species</u> | <u>Cut</u> |
|--------------------------|----------------|------------|
| Exposed Stiles and Rails | Red Oak        | Economy    |
| Miscellaneous Trim       | Red Oak        | Economy    |

#### 2.02 Sheet Materials:

- A. Softwood Plywood: PS 1; graded in accordance with; core material of veneer or lumber, species and cut as follows:

| <u>Item</u>                | <u>Face</u> | <u>Cut</u> |
|----------------------------|-------------|------------|
| Drawer Construction        | Douglas Fir | Economy    |
| Gables and Backs           | Douglas Fir | Custom     |
| Sub-tops                   | Douglas Fir | Economy    |
| Non-sight exposed shelving | Douglas Fir | Custom     |
| Miscellaneous              | Douglas Fir | Custom     |

- B. Hardwood Plywood: PS 51; AM graded in accordance with AWI; core material for veneer or lumber; type of glue recommended for application; face veneer and cuts as follows:

## DIVISION 6 - WOOD & PLASTICS

### SECTION 06410 - CUSTOM CASEWORK

| <u>Item</u>            | <u>Face Species</u> | <u>Cut</u> |
|------------------------|---------------------|------------|
| Door and Drawer Fronts | Red Oak             | Economy    |
| Drawer Construction    | Red Oak             | Economy    |
| Gable and Backs        | Red Oak             | Economy    |

- C. Wood Particles-PS 1;AM standard, composed of wood= chips, medium density, made with high waterproof resin binders; of grade to suit application; sanded faces, located as follows:

Item  
Drawer Construction

- D. Hardboard: Pressed wood fiber with resin binder, tempered grade, 1/4 inch thick, smooth one side, located as follows:

Item  
Drawer Bottoms

2.03 Laminated Materials: Plastic Laminated: NEW LD-T; 00550 inch General Purpose Grade; suede surface finish, color and pattern as selected by Architect. All sight exposed surfaces (excluding countertops and backsplash) for cabinets to be laminate finished.

2.04 Accessories:

- A. Adhesive: FS MMM-A-130 contact adhesive, water base type, recommended by laminate manufacturer to suit application.
- B. Fasteners: Size and type to suit application.
- C. Bolts, Nuts, Washers, Lags, Pins and Screws: Of size and type to suit application; galvanized finish in concealed locations and cadmium plated finish in exposed locations.
- D. Concealed Joint Fasteners: Threaded steel.
- E. Lumber for Shimming, Blocking, and Miscellaneous Applications: Softwood lumber of Douglas Fir species.
- F. Primer. Alkyd primer sealer type.
- G. Wood filler: Solvent base, tinted to match surface finish color.
- H. Plastic Grommets: provide at openings in countertop as indicated on the Drawings. Color to be "black".

2.05 Architectural Cabinet Solid Surface Tops (Countertops):

- A. Design Load: deflection limited to 1/360.
- B. Type of Top: homogeneous solid sheets of filled plastic resin complying with the following:
  - 1. Colors and Patterns: as selected by Architect from manufacturer's full range.
  - 2. Special Features: eased edge treatment.
  - 3. Accessories:

## DIVISION 6 - WOOD & PLASTICS

### SECTION 06410 - CUSTOM CASEWORK

- a. Adhesives: for seams and drop edges, Formica Solid Surfacing Seaming Cartridges, 9 ounce, color to blend with sheet material.
  4. Fabrication: assemble work at shop and deliver to job ready for installation. Manufacture in largest practical pieces for handling and shipping without seams.
    - a. Fabricate work square and to required lines.
    - b. Recess and conceal fasteners connections and reinforcing.
    - c. Design, construction, and installation: details to allow for expansion and contraction of materials. Properly install material with hairline joints held rigidly in place.
    - d. Fabricate countertops and vanities with back splash and side splash pieces to profiles and sizes indicated.
    - e. Fabricate items to profiles shown with connections and supports as indicated or as required for complete installation in accordance with manufacturer's written instruction sand approved submittals.
    - f. Provide cut-outs for plumbing fixtures and trim, washroom accessories, appliances, and related items: confirm layout with manufacturer's cut-out templates before beginning work. Round corners of cut-outs and sand edges smooth.
    - g. Do not exceed manufacturer's recommended unsupported overhang distances.
    - h. Finish exposed surfaces smooth and polish to low sheen.
    - i. Radius corners and edges.
    - j. Tolerances: variations in size or openings shall not exceed +/-1/4".
  5. Acceptable manufacturer: Formica Solid Surfacing as manufactured by Formica Group / Fabrications, Cincinnati, Ohio **or approved equal.**
- 2.06 Factory Finishing of Interior Architectural Woodwork:
- A. Quality Standard: Comply with AWI Section 1500 unless otherwise indicated.
  - B. The finish of custom casework is included under this Section, regardless of whether factory applied or applied after installation.
  - C. Preparations for Finishing: Comply with referenced quality standard for sanding, filling countersunk fasteners, sealing concealed surfaces and similar preparations for finishing of

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06410 - CUSTOM CASEWORK**

custom casework, as applicable to each unit of work.

- D. Factory Finishing: The extent to which the final finish is applied to architectural woodwork a factory is Contractor's option, except factor apply at least prime/base coat to the greatest extent possible before delivery.
- E. Transparent finish for Open-Grain Woods: Comply with requirements indicated below for grade Finish system, staining, effect, and sheen, with sheen measured on 60 degree gloss meter per ASTM D 523.
  - 1. Grade: Custom
  - 2. AWI Finish System No. 5: Catalyzed polyurethane.
  - 3. Staining: Match Architect=s sample.
  - 4. Effect: Closed grain (filled finish).
  - 5. Sheen: Medium-gross ribbed effect 35-45 deg.
- F. Transparent Finish for Closed-grain Woods: Comply with requirements indicated below for grade, finish system staining, effect, and sheen.
  - 1. Grade: Custom
  - 2. AWI Finish System No. 5: Catalyzed polyurethane.
  - 3. Staining: Match Architect's sample.
  - 4. Effect: Closed grain.
  - 5. Sheen: Medium-gloss rubbed effect 35-45 deg.

#### **2.07 Fabrication:**

- A. Shop assemble casework for delivery to site in units easily handled and to permit passage through building openings.
- B. Fit shelves, doors and exposed edges with 3/8 inch matching hardwood edging. Use full length pieces only.
- C. Cap exposed plastic laminate finish edges with material of same finish and pattern.
- D. Door and Drawer Fronts: 3/4 inch thick; overlay style.
- E. When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and site cutting.
- F. Apply plastic laminate finish in full uninterrupted sheets consistent with manufactured sizes. Fit corners and joints hairline; secure with concealed fasteners. Slightly bevel arises. Locate counter butt joints minimum 2 feet from sink cut-outs.
- G. Mechanically fasten back splash to countertops with sleet brackets at 16 inches on center.
- H. Provide cutouts for plumbing fixtures, inserts, appliances, outlet boxes; and fixtures and fitting. Verify locations of cutouts from on-site dimensions. Prime paint contact surfaces of cut edgy.



## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06410 - CUSTOM CASEWORK**

#### **2.08 Finishing:**

- A. Sand work smooth and set exposed nails and screw.
- B. Apply wood filler in exposed nail (and screw) indentations.
- C. On items to receive transparent finishes, use wood filler which matches surrounding surfaces and of types recommended for applied finishes.
- D. Seal, stain and varnish exposed to view surfaces. Brush apply only.
- E. Seal and varnish internal exposed to view and semi-concealed surfaces. Brush apply only.
- F. Seal internal surfaces of cabinets with one coat of shellac. Brush apply only.
- G. Seal surfaces in contact with cementitious materials.

#### **2.09 Hardware:**

- A. Shelf Standard and Supports: KV-256 and KV-255.
- B. Drawer and Door Pulls: Chrome, U-shaped wire pulls.
- C. Cabinet Locks: Keyed cylinder, two keys per lock, master keyed.
- D. Catches: Magnetic, Stanley SF-45 and SP-46. Provide other types required for special conditions.
- E. Drawer Slides: Knappe and Vogt: KV1284 typical with KV1485 full extension ball bearing tracks.
- F. Hinges: Blum Model 170-concealed hinges with 170 degree opening or Grass System 1200 (176 degree opening) self-closing with 1000-80 base plate. Two hinges per door up to 36" and 3 hinges per door up to 48" and 4 per door up to 60" high.
- G. Grommets: Provide plastic grommets at all penetrations through countertop for cabling, power cords, etc. as indicated on the Drawings.

### **Part 3 - Execution**

#### **3.01 Examination: Verify adequacy of backing and support framing.**

#### **3.02 Installation:**

- A. Install woodwork to comply with AWI Section 1700 for same grade specified above for type of casework involved.
- B. Set and secure casework in place; rigid, plumb, and level.
- C. Use fixture attachments in concealed locations for waif mounted components.
- D. Use concealed joint fasteners to align and secure adjoining cabinet units and counter tops.
- E. Carefully scribe casework abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim for this purpose.
- F. Secure cabinet and counter bases to floor using appropriate

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06410 - CUSTOM CASEWORK**

- angles and anchorages.
  - G. Countersink anchorage devices at exposed locations. Conceal with solid wood plugs of species to match surrounding wood; finish flush with surrounding surfaces.
  - H. Install without distortion so that doors and drawers fit openings properly and are accurately aligned.
  - I. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete the finishing work specified in this section to whatever extent not completed at shop or before installation of woodwork.
  - J. Complete the finishing work specified in this section to whatever extent not completed at shop or before installation of woodwork,
- 3.03 Adjusting:
- A. Adjust moving or operating parts to function smoothly and correctly.
- 3.04 Cleaning:
- A. Clean casework, counters, shelves, hardware, fittings and fixtures.
- 3.05 Schedules:
- A. Furnish and install all items listed in this schedule at location indicated on the Drawings, complete as to function intended.
  - B. Casework indicated on the Drawings; custom grade construction.
    - 1. Counter Tops.
    - 2. Base Cabinets.
    - 3. Overhead Cabinets.
    - 4. Wall Cabinets.
    - 5. Shelving-adjustable and fixed.
    - 6. Other items such as shims and fillers as indicated on the Drawings or as required for a complete cabinetwork installation.

**END OF SECTION**

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

#### **PART 1 - GENERAL**

##### **1.01 SECTION INCLUDES**

- A. Fixed modular laminate clad casework and components.
- B. Flexible rail mounted laminate clad casework and components.
- C. Solid Surface countertops and backsplash.

##### **1.02 RELATED SECTIONS**

- A. Blocking within walls where indicated: Section 06100 Rough Carpentry.
- B. Millwork, trim, etc.: Section 06200 Finish Carpentry.
- C. Hardware: Section 06410 Custom Casework.
- D. Glass: not applicable.
- E. Base molding: Division 9.
- F. Appliances: Division 11 and drawings.
- G. Sinks and service fixtures, service waste lines, connections, and vents: Division 15.
- H. Electrical service fixtures: Division 16.

##### **1.03 DEFINITIONS**

- A. Identification of casework components and related products by surface visibility.
  - 1. Open Interiors: Any open storage unit without solid door or drawer fronts, units with full glass insert doors and/or acrylic doors, and units with sliding solid doors.
  - 2. Closed Interiors: Any closed storage unit behind solid door or drawer fronts.
  - 3. Exposed Ends: Any storage unit exterior side surface that is visible after installation.
  - 4. Other Exposed Surfaces: Faces of doors and drawers when closed, and tops of cabinets less than 72 inches above furnished floor.
  - 5. Semi-Exposed Surfaces: Interior surfaces which are exposed to view when doors or drawers are opened, bottoms of wall cabinets and tops of cabinets 72 inches or more above finished floor.
  - 6. Concealed Surfaces: Any surface not visible after installation.

##### **1.04 QUALITY ASSURANCE**

- A. Manufacturer: Minimum of 5 years experience in providing manufactured casework systems for similar types of projects, produce evidence of financial

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

stability (if requested), bonding capacity, and adequate facilities and personnel required to perform on this project.

- B. Manufacturer: Provide products certified as meeting or exceeding ANSI-A 161.1-2000 testing standards.
- C. Single Source Supplier / Subcontractor: Casework, countertops and architectural millwork products must all be engineered and built by a single source subcontractor in order to ensure consistency and quality for these related products. Splitting casework, countertops and/or architectural millwork between multiple subcontractors will not be permitted.
- D. Quality Standard: Unless otherwise indicated, comply with AWI's Architectural Woodwork Quality Standards for grades of interior architectural woodwork, construction, finishes and other requirements.

#### **1.05 SUBMITTALS**

- A. Comply with Special Conditions, unless otherwise indicated.
- B. Product Data: Manufacturer's catalog with specifications and construction details.
- C. Shop Drawings: Indicate dimensions, description of materials and finishes, general construction, specific modifications, component connections, anchorage methods, hardware, and installation procedures, plus the following specific requirements.
  - 1. Include section drawings of typical and special casework, work surfaces and accessories.
  - 2. Indicate locations of plumbing and electrical service field connection by others.
  - 3. Provide one set of shop drawings which includes all products within this section, engineered and built by a single source manufacturer, with seamless coordination amongst all products.
- D. Casework Samples (To be available upon request):
  - 1. Base cabinet: Cabinet conforming to specifications, with drawer and door.
  - 2. Wall cabinet: Cabinet conforming to specifications, with door.
  - 3. Cabinet samples shall be complete with specified hardware for doors, drawers and shelves.
  - 4. Component samples: Two sets of samples for each of the following:

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

- a. Decorative laminate color charts / PVC and ABS edgings.

#### **1.06 PRODUCT HANDLING**

- A. Deliver completed laminate clad casework, countertops, and related products only after wet operations in building are completed, store in ventilated place, protected from the weather, with relative humidity range of 25 percent to 55 percent.
- B. Protect finished surfaces from soiling and damage during handling and installation with a protective covering.

#### **1.07 JOB CONDITIONS**

- A. Environmental Requirements: Do not install casework until permanent HVAC systems are operating and temperature and humidity have been stabilized for at least 1 week.
  - 1. Manufacturer/Supplier shall advise Contractor of temperature and humidity requirements for architectural casework installation areas.
  - 2. After installation, control temperature and humidity to maintain relative humidity between 25 percent and 55 percent.
- B. Conditions: Do not install casework until interior concrete work, masonry, plastering and other wet operations are complete.

#### **1.08 WARRANTY**

- A. All materials and workmanship covered by this section will carry a five (5) year warranty from date of acceptance.

## **PART 2 - PRODUCTS**

#### **2.01 ACCEPTABLE MANUFACTURERS:**

- A. Manufacturer - Basis for Design:
  - 1. TMI Systems Corporation.
    - a. Specifications are based on manufacturer's literature from TMI SYSTEMS CORPORATION, 50 South Third Avenue West, Dickinson, North Dakota, 58601, Phone: 800-456-6716, fixed modular, flexible rail mounted, and mobile casework and accessories.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

- b. Other manufacturers shall comply with the minimum levels of material and detailing indicated on the drawings or as specified.

#### **2.02 MATERIALS**

- A. Core Materials:
  - 1. Particleboard up to 7/8 inch thick: Industrial Grade average 45-pound density particleboard, ANSI A 208.1-2009, M-2 requirements.
  - 2. Particleboard 1 inch thick and thicker: Industrial Grade average 45-pound density particle-board, ANSI A 208.1-2009, M-2 requirements.
  - 3. Medium Density Fiberboard 1/4 inch thick: Minimum average density 45-50 lbs., ANSI A208.2-2009 requirements.
  - 4. MR Moisture Resistant Particleboard: Average 45-pound density particleboard, ANSI A208.1 1-2009, M-2 requirements.
  - 5. Toe Base Plywood: 3/4 inch thickness, CC/CD/CDC grades, of western softwood veneers, with NAUF exterior fully water resistant phenolic glues.
- B. Decorative Laminates: GREENGUARD Indoor Air Quality Certified
  - 1. High-pressure decorative laminate VGS (.028), NEMA Test LD 3-2005.
  - 2. High-pressure decorative laminate HGS (.048), NEMA Test LD 3-2005.
  - 3. High-pressure decorative laminate HGP (.039), NEMA Test LD 3-2005.
  - 4. High-pressure cabinet liner CLS (.020), NEMA Test LD 3-2005.
  - 5. High-pressure backer BKH (.048), (.039), (.028), NEMA Test LD3-2005.
  - 6. Thermally fused melamine TFM laminate, NEMA Test LD 3-2005. (TFM allowed on casework interiors only, as specified below. Utilization of TFM on any exterior casework surfaces, including door and drawer faces and finished ends, will not be permitted.)
- C. Laminate Color Selection: Maximum 1 color per unit face and 5 colors per project. (See Color Selection in section 3.05).
- D. Edging Materials:
  - 1. 1mm PVC banding, machine applied.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

- 2. 3mm PVC banding, machine applied and machine profiled to 1/8 inch radius.
- E. Glass:  
Not applicable.

#### **2.03 SPECIALTY ITEMS**

- A. Support Members:
  - 1. Countertop support brackets: Epoxy powder coated, 11 gauge steel with integral cleat mount opening and wire management opening.
  - 2. Undercounter support frames: Epoxy powder coated.
  - 3. Legs: Epoxy powder coated.

#### **2.04 CABINET HARDWARE**

- F. Refer to Section 06410 Custom Casework for cabinet hardware.

#### **2.05 FABRICATION:**

- A. Fabricate casework, countertops and related products to dimensions, profiles, and details shown.
- B. All casework panel components must go through a supplemental sizing process after cutting, producing a panel precisely finished in size and square to within 0.010 inches, ensuring strict dimensional quality and structural integrity in the final fabricated product.
- C. Cabinet Body Construction:
  - 1. Tops and bottoms are glued and doweled to cabinet sides and internal cabinet components such as fixed horizontals, rails and verticals. Minimum 6 dowels each joint for 24 inch deep cabinets and a minimum of 4 dowels each joint for 12 inch deep cabinets. (Mechanical or metal hardware fasteners joining cabinet top and bottom panels to the sides will not be accepted.)
    - a. Tops, bottoms and sides of all cabinets are particleboard core.
  - 2. Cabinet backs: 1/4 inch thick medium density fiberboard panel fully captured by the cabinet top, bottom and side panels. Finish to match cabinet interior. 3/4 inch x 4 inch particleboard rails will be placed behind the back panel at the top and bottom, and doweled to the sides utilizing 10mm hardwood fluted dowels. A third intermediate rail will be included on all cabinets taller than 56 inches. Utilize hot melt

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

glue to further secure back and increase overall strength.

- a. Exposed back on fixed or movable cabinets:  
3/4 inch thick particleboard with the exterior surface finished in VGS laminate as selected.
3. Fixed base and tall units have an individual factory-applied base, constructed of 3/4 inch thick plywood. Base is 102mm (nominal 4 inch) high unless otherwise indicated on the drawings.
4. Base units, except sink base units: Full sub-top glued and doweled to cabinet sides. (Mechanical or metal hardware fasteners joining cabinet sub-top panel to the sides will not be accepted.)
  - a. Sink base units are provided with open top and a stretcher at the front, attached to the sides. Back to be split removable access panel.
5. Side panels and vertical dividers shall receive adjustable shelf hardware at 32mm line boring centers. Mount door hinges, drawer slides and pull-out shelves in the line boring for consistent alignment.
6. Exposed and semi exposed edges.
  - a. Edging: 1mm PVC machine applied.
7. Adjustable Shelves in Cabinets
  - a. Core: Particleboard.
  - b. Core Thickness: 3/4 inch up to 30 inches wide, 1 inch over 30 inches wide.
  - c. Edge: 1mm PVC on Front Edge Only.
8. Interior finish, units with open Interiors:
  - a. Top, bottom, back, sides, horizontal and vertical members, and adjustable shelving faces with TFM Thermally Fused Melamine laminate.
9. Interior finish, units with closed Interiors:
  - a. Top, bottom, back, sides, horizontal and vertical members, and adjustable shelving faces with TFM Thermally Fused Melamine laminate.
10. Exposed ends:
  - a. Faced with high-pressure decorative VGS laminate. Use of TFM on exposed ends will not be permitted.



## DIVISION 6 - WOOD & PLASTICS

### SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)

11. Wall unit bottom:
    - a. Faced with thermally fused melamine laminate.
  12. Balanced construction of all laminated panels is mandatory. Unfinished core stock surfaces, even on concealed surfaces (excluding edges), are not permitted.
- D. Drawers:
1. Sides, back and sub front: Minimum 1/2 inch thick particleboard, laminated with TFM Thermally Fused Melamine doweled and glued into sides. Top edge banded with 1mm PVC.
  2. Drawer bottom: Minimum 1/2 inch thick particleboard laminated with TFM Thermally Fused Melamine, screwed directly to the bottom edges of drawer box.
  3. Paper storage drawers: Minimum 3/4 inch thick particleboard sides, back, and sub front laminated with TFM Thermally Fused Melamine. Minimum 1/2 inch thick particleboard drawer bottoms screwed directly to the bottom edges of the drawer box. Provide PVC angle retaining bar at the rear of the drawer.
- E. Door/Drawer Fronts:
1. Core: 3/4 inch thick particleboard.
  2. High-pressure decorative VGS laminate exterior, balanced with high-pressure cabinet liner CLS. Use of TFM on exterior or interior surfaces of door/drawer fronts will not be permitted.
  3. Edges: 3mm PVC, machine applied, external edges and outside corners machine profiled to 1/8 inch radius.
  4. Provide double doors in opening in excess of 24 inches wide.
- F. Door Fronts with Glass Insert captured by Retainer Clips (CUSTOM GRADE):
1. Core: 3/4 inch thick particleboard.
  2. High-pressure decorative VGS laminate exterior, balanced with high-pressure VGS laminate. Use of TFM on exterior or interior surfaces of door fronts will not be permitted.
  3. Edges: 3mm PVC, machine applied, external edges and outside corners machine profiled to 1/8 inch radius.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

4. Provide cutout in door panel resulting in 3-3/8 inch frame. Exposed cutout edge to be finished with 1mm PVC edgebanding.
5. Notch cutout 3/8 inch x 1/4 inch for glass panel to set into, mounting flush with the back side (interior side) of the door panel. Interior cutout edge to be painted a compatible color to the interior surface.
6. Glass panel to be captured and held in place utilizing glass retainer clips, screwed in place. Minimum eight clips per glass panel located in the four corners of the cutout.
- G. Miscellaneous Shelving (not in Cabinets):
  1. Core material: 1 inch thick particleboard.
  2. High-pressure decorative VGS laminate on both faces.
  3. Edges: 3mm PVC, external edges and outside corners machine profiled to 1/8 inch radius.

#### **2.06 ARCHITECTURAL CABINET SOLID SURFACE TOPS (Countertops):**

- A. Design Load: deflection limited to 1/360.
- B. Type of Top: homogeneous solid sheets of filled plastic resin complying with ISSFA-2 and the following:
  1. Colors and Patterns: as selected by Architect from manufacturer's full range.
  2. Special Features: eased edge treatment.
  3. Accessories:
    - a. Adhesives: for seams and drop edges, Formica Everform Solid Surfacing Seaming Cartridges, 9 ounce, color to blend with sheet material.
  4. Fabrication: assemble work at shop following manufacturer's printed instructions and deliver to job ready for installation. Manufacture in largest practical pieces for handling and shipping without seams.
    - a. Fabricate work square and to required lines.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

- b. Recess and conceal fasteners connections and reinforcing.
  - c. Design, construction, and installation: details to allow for expansion and contraction of materials. Properly install material with hairline joints held rigidly in place.
  - d. Fabricate countertops and vanities with back splash and side splash pieces to profiles and sizes indicated.
  - e. Fabricate items to profiles shown with connections and supports as indicated or as required for complete installation in accordance with manufacturer's written instruction and approved submittals.
  - f. Provide cut-outs for plumbing fixtures and trim, washroom accessories, appliances, and related items: confirm layout with manufacturer's cut-out templates before beginning work. Round corners of cut-outs and sand edges smooth.
  - g. Do not exceed manufacturer's recommended unsupported overhang distances.
  - h. Finish exposed surfaces smooth and polish to low / matte sheen. Remove / repair ALL scratches, etc. to the Architect's satisfaction prior to turning over to the Owner.
  - i. Radius corners and edges.
  - j. Tolerances: variations in size or openings shall not exceed +/-1/4".
5. Acceptable manufacturer: Formica Solid Surfacing Everform as manufactured by Formica Group / Fabrications, Cincinnati, Ohio **or approved equal.**

### **PART 3- EXECUTION**

#### **3.01 INSPECTION:**

- A. The casework contractor must examine the job site and the conditions under which the work under this section is to be performed and notify the building owner in writing of unsatisfactory conditions. Do not proceed

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

with work under this Section until satisfactory conditions have been corrected in a manner acceptable to the installer.

#### **3.02 PREPARATION:**

- A. Condition casework to average prevailing humidity conditions in installation areas prior to installing.

#### **3.03 INSTALLATION:**

- A. Erect casework, plumb, level, true and straight with no distortions. Shim as required. Where laminate clad casework abuts other finished work, scribe and cut to accurate fit.
- B. Adjust casework and hardware so that doors and drawers operate smoothly without warp or bind.
- C. Repair minor damage per plastic laminate / solid surface manufacturers' recommendations.

#### **3.04 CLEANING:**

- A. **Do not permit construction near unprotected surfaces. CM and/or Subcontractor shall replace ALL materials damaged prior to turning over the project to the Owner.**
- B. Remove and dispose of all packing materials and related construction debris.
- C. Clean cabinets inside and out. Wipe off fingerprints, pencil marks, and surface soil etc., in preparation for final cleaning by the building owner.

#### **3.05 COLOR SELECTION:**

- A. Laminate Color Selection:
  - 1. Provide as per Color Schedule and/or Architect's selection.
  - 2. Thermally fused melamine laminate matched to White color.
- B. Hardware Color Selection:
  - 1. Hinge: epoxy powder coating stock color matched to Chrome.
  - 2. Pulls: Selection by Architect from design specific finish options available in the TMI Vendor Stock Pull Program.
  - 3. Miscellaneous Hardware (support brackets, metal components, etc.): Selection by Architect from epoxy powder coating stock colors matched to White, Beige, Gray, Black and Chrome.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06420 - CUSTOM LAMINATE CASEWORK (CONTRACTOR OPTION)**

- C. PVC Edge Banding Color Selection:
  - 1. 3mm PVC: Selection by Architect from the TMI Vendor Stock PVC Program, including over 200 pattern, woodgrain and solid colors matched to Wilsonart® and Formica® laminates.
  - 2. 1mm PVC: Selection by Architect from the TMI Vendor Stock PVC Program, including over 200 pattern, woodgrain and solid colors matched to Wilsonart® and Formica® laminates.

**End of Section**

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

#### **PART 1 – GENERAL**

##### **1.01 SECTION INCLUDES**

- A. FRP Products and Fabrications for FRP Building Panel System to be adhered to unfinished gypsum wallboard.

##### **1.02 SCOPE OF WORK**

- A. Furnish all labor, materials, equipment and incidentals governed by this section necessary to install the fiberglass reinforced polymer (FRP) products as specified herein.

##### **1.03 RELATED DOCUMENTS**

- A. Drawings and general provisions of Project Specifications including the Special Conditions, apply to work of this section.

##### **1.04 QUALITY ASSURANCE**

- A. The material covered by these specifications shall be furnished by an ISO 9001 certified manufacturer of proven ability who is regularly engaged in the manufacture, fabrication, and installation of FRP systems.
- B. Substitutions of any component or modification of system shall be made only when approved by the Architect.
- C. Fabricator Qualifications: firm experienced in successfully producing FRP fabrications similar to that indicated for this project, with sufficient production capacity to produce required units without causing delay in the work.
- D. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.
- E. Material shall conform to building code requirements for interior finish for smoke and flame spread requirements as tested in accordance with ASTM E84 (method of test for surface burning characteristics of building materials) Wall Required Rating – Class C.
- F. Sanitary Standards: system components and finishes to comply with:
  - 1. United States Department of Agriculture (USDA) / Food Safety & Inspection Services (FSIS) requirements for food preparation facilities, incidental contact.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

2. Food and Drug Administration (FDA) 2013 Food Code 6-101.11.
- G. References – American Society for Testing and Materials: Standard Specifications (ASTM)
  1. ASTM D 256 - Izod Impact Strengths (ft #/in)
  2. ASTM D 570 - Water Absorption (%)
  3. ASTM D 638 - Tensile Strengths (psi) & Tensile Modulus (psi)
  4. ASTM D 790 - Flexural Strengths (psi) & Flexural Modulus (psi)
  5. ASTM D 2583- Barcol Hardness
  6. ASTM D 5319 - Standard Specification for Glass-Fiber Reinforced Polyester Wall and Ceiling Panels.
  7. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

#### **1.05 DESIGN CRITERIA**

- A. The design of fiberglass building panel system, the fiberglass support structure, and associated structural connections, shall be in accordance with the governing building code(s) and approved standards as applicable.

#### **1.06 SUBMITTALS**

- A. Comply with Special Conditions, unless otherwise indicated.
- B. Product Data: Manufacturer's catalog with specifications and construction details including manufacturer's Safety Data Sheets (SDS) for adhesives, sealants, and other pertinent materials prior to their delivery to the site.
- C. Shop Drawings: Submit elevations indicating dimensions, description of materials and finishes, general construction, specific modifications, component connections, anchorage methods, hardware, and installation procedures, plus the following specific requirements:
  1. Storage, handling and preparation instructions and recommendations.
  2. Installation instructions.
  3. Indicate locations of plumbing and electrical service field connection by others.
  4. Selection Samples: Submit manufacturer's standard color pattern selection samples

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

representing manufacturer's full range of available colors and patterns including exposed trim molding, etc.

#### **1.06 PRODUCT HANDLING**

- A. Deliver materials factory packaged on strong pallets.
- B. Store panels and trim lying flat, under cover and protected from the elements. Allow panels and adhesive to acclimate to room temperature (range of 60 to 75°F) for 48 hours prior to installation.
- C. Protect finished surfaces from soiling (including over exposure to sunlight) and damage during handling and installation. Any material which, in the opinion of the Architect, has become damaged and is unfit for use, shall be promptly replaced by the Construction Manager at no additional cost to the Owner.

#### **1.07 JOB CONDITIONS**

- A. Environmental Requirements: Do not install panels until permanent HVAC systems are operating and temperature and humidity have been stabilized for at least 48 hours prior to and during installation as required by type of adhesive used and the manufacturer's recommendation.
  - 1. Manufacturer/Supplier shall advise Contractor of temperature and humidity requirements for FRP panel installation areas.
  - 2. After installation, control temperature and humidity to maintain relative humidity between 25 percent and 55 percent.
- B. Conditions: Do not install panels until interior concrete work, masonry, plastering and other wet operations are complete.
- C. Provide ventilation to disperse fumes during application of adhesive.

#### **1.08 WARRANTY**

- A. All materials and workmanship covered by this section will carry a one (1) year warranty from date of final acceptance.



## DIVISION 6 - WOOD & PLASTICS

### SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM

#### PART 2 – PRODUCTS

##### 2.01 ACCEPTABLE MANUFACTURERS:

- A. Marlite; 1 Marlite Drive, Dover, OH 44622. 800-377-1221 FAX (330) 343-4668 Email: [info@marlite.com](mailto:info@marlite.com)  
[www.marlite.com](http://www.marlite.com).
- B. Product:  
Standard FRP Panels with Smooth Surface with Greenguard Certification for low chemical emissions.

##### 2.02 PANELS

- A. Fiberglass reinforced thermosetting polyester resin panel sheets complying with ASTM D5319.
  - 1. Dimensions:
    - a. Thickness – 0.090" (2.29mm) nominal
    - b. Width – 4'-0" (1.22m) nominal
    - c. Length – As indicated on the drawings.
  - 2. Tolerance:
    - a. Length and Width: +/-1/8" (3.175mm)
    - b. Square – Not to exceed 1/8" for 4' (1.2m) panels, 8' (2.4m) panels or 5/32" (3.96mm) for 10' (3.0m) panels
- B. Properties: Resistant to rot, corrosion, denting, peeling, and splintering.
  - 1. Flexural Strength –  $1.7 \times 10^4$  psi per ASTM D 790.
  - 2. Flexural Modulus –  $6.0 \times 10^6$  psi per ASTM D 790.
  - 3. Tensile Strength –  $8.0 \times 10^3$  psi per ASTM D 638.
  - 4. Tensile Modulus –  $9.43 \times 10^6$  psi per ASTM D 638.
  - 5. Barcol Hardness (scratch resistance) – 30 per ASTM D 2583.
  - 6. Izod Impact Strength – 7.0 ft. lbs./in ASTM D 256
  - 7. Thermal Coefficient of Lineal Expansion –  $2.22 \times 10^{-5}$  in/in/F per ASTM D 696
  - 8. Water Absorption – 0.17% per ASTM D 570.
  - 9. Specific Gravity – 1.8 per ASTM D 792.
  - 10. Cross-cut Adhesion – 0 removed per ASTM D 3359
  - 11. Mold & Mildew – Pass per ASTM D 3273.

Standard Specification for FRP Wall Panels – per ASTM D 5319

Standard Test Method Surface Burning Characteristics of Building Materials – Class C per ASTM E 84.
- C. Back Surface: Smooth. Imperfections which do not affect functional properties are not cause for rejection.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

- D. Front Finish and Color: finish to be smooth / color to be selected by Architect.
  - 1. Fire Rating: Class "C".
  - 2. Size: 48" x 128" [1.2m x 3m] x .090" (3mm) nom.
- E. Ceiling Panels: not applicable.

#### **2.03 BASE**

- A. Marlite Base Molding for 0.090" (2.29mm) thick FRP Panels
  - 1. Color: Black
  - 2. Profiles:
    - a. M 612 FRP Base Molding, 10' length
    - b. M 651 Inside Corner
    - c. M 660 Outside Corner
    - d. M 620 LH End Cap
    - e. M 625 RH End Cap

#### **2.04 MOLDINGS**

- A. Aluminum Anodized Trim: Heavy weight extruded aluminum 6063-T5 alloy prefinished at the factory.
  - 1. Color: Brite Satin Anodized
  - 2. Profiles:
    - a. F 550 Inside Corner, 8' length
    - b. F 561 Outside Corner, 8' length
    - c. F 565 Division, 8' length
    - d. F 570 Edge, 8' length
- B. Outside Corner Guard:
  - 1. F 560SS Stainless Corner Guard, 10'-8" length
  - 2. Finish: #4 brushed satin

#### **2.05 ACCESSORIES**

- A. Fasteners: Non-staining nylon drive rivets.
  - 1. Match panel colors.
  - 2. Length to suit project conditions.
- B. Adhesive: Either of the following construction adhesives complying with ASTM C 557.
  - 1. Marlite C-551 FRP Adhesive - Water- resistant, non-flammable adhesive.
  - 2. Marlite C-915 Construction Adhesive - Flexible, water-resistant, solvent based adhesive, formulated for fast, easy application.
  - 3. Titebond Advanced Polymer Panel Adhesive - VOC compliant, non-flammable, environmentally safe adhesive.

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 – FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

#### **C. Sealant:**

1. Marlite Brand - Color Match Sealant.

### **PART 3- EXECUTION**

#### **3.01 PREPARATION**

- A. Examine backup surfaces to determine that corners are plumb and straight, surfaces are smooth, uniform, clean and free from foreign matter, nails countersunk, joints and cracks filled flush and smooth with the adjoining surface.
- B. Verify that stud spacing does not exceed 16" (61cm) on-center.
- C. Repair defects prior to installation.
- D. Level wall surfaces to panel manufacturer's requirements. Remove protrusions and fill indentations.
- E. Coordinate and furnish anchorages, setting drawings, diagrams, templates, instructions and directions for installation of anchorage materials and miscellaneous items to be mounted to walls / panels.

#### **3.02 INSTALLATION**

- A. Comply with manufacturer's recommended procedures and installation sequence.
- B. Cut panels to meet supports allowing 1/8" (3 mm) clearance for every 8 foot (2.4m) of panel. Cut with carbide tipped saw blades.
- C. Pre-drill fastener holes 1/8" (3mm) oversize with high speed drill bit.
  1. Space at 8" (200mm) maximum on center at perimeter, approximately 1" from panel edge.
  2. Space at in field in rows 16' (40.64cm) on center, with fasteners spaced at 12" (30.48 cm) maximum on center.
- D. Apply panels to board substrate, above base, vertically oriented with seams plumb and pattern aligned with adjoining panels. Install panels with manufacturer's recommended gap for panel field and corner joints. Adhesive trowel and application method to conform to adhesive manufacturer's recommendations. Drive fasteners for snug fit – do not over-tighten.
- E. Apply panel moldings to all panel edges using silicone sealant providing for required clearances. All moldings must provide for a minimum 1/8" (3mm) of

## **DIVISION 6 - WOOD & PLASTICS**

### **SECTION 06700 - FIBERGLASS REINFORCED POLYMER (FRP) PANEL SYSTEM**

panel expansion at joints and edges, to insure proper installation. Apply sealant to all moldings, channels and joints between the system and different materials to assure watertight installation.

#### **3.03 CLEANING**

- A. Remove excess sealant from panels and moldings. Wipe panel down using a damp cloth and mild soap solution or cleaner.
- B. Refer to manufacturer's specific cleaning recommendations Do not use abrasive cleaners.

**End of Section**

## **DIVISION 7 -THERMAL & MOISTURE PROTECTION**

### **SECTION 07100 - WATERPROOFING**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

- A. Standards:
  - 1. Federal Specifications:
    - a. SS-C-153B, Cement, Bituminous, Plastic.
    - b. SS-A-701B, Asphalt, Weatherproofing.
    - c. LLL-1-535A, Insulation Board, Thermal.

##### **1.03 Submittals:**

- A. Provide submittals in the form of samples, and documentation, to the Architect for review.

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Solvent Based Asphalt Water Barrier: FS-SS-A-701B.
- B. Flashing Membrane: 20 mil elastomeric modified sheet vinyl.
- C. Asphalt Plastic Cement: SS-C-153B, Type 1.
- D. Accessories: As recommended by manufacturer.
- E. Protection Board: Insulation Board, FS-LLL-1-535A, Class A.
- F. Vapor Barrier under floor slab: refer to Section 07195 - Vapor Retarder.

#### **Part 3 - Execution**

##### **3.01 Installation - Wall Waterproofing:**

- A. Location: Apply to all exterior concrete and masonry wall surfaces below grade.
- B. General:
  - 1. Repoint all holes cracks and joints and allow to dry before waterproofing.
  - 2. Do not apply until all surfaces are completely dry and clean. Apply only during favorable weather conditions.
- C. Joint Membrane:
  - 1. Location: Apply to all joints in exterior concrete walls below grade.
  - 2. Embed a strip of flashing membrane in plastic cement. Membrane shall be a minimum of 12" wide.
- D. Water Barrier:
  - 1. Hold 4" down from finish grade line so that at no time is the mastic or membrane exposed to view.
  - 2. Apply two (2) coats to form a membrane water barrier, allowing the first coat to dry before applying the second

## **DIVISION 7 -THERMAL & MOISTURE PROTECTION**

### **SECTION 07100 - WATERPROOFING**

coat. Apply in strict accordance with manufacturer's instructions. Do not apply until surfaces are completely dry.

3. Apply in a continuous unbroken film free from pin holes or other surface breaks. Take care to seal around all ties, inserts, anchor slots, conduit, pipes, electrical boxes, etc.

#### **E. Protection:**

1. Install protection board over all waterproofing prior to backfilling.
2. All back filling shall be carefully done to protect waterproofing. Repair all damaged areas.

#### **3.02 Under Slab Vapor barrier:**

- A. Refer to Section 07260 - Vapor Barrier.

**End of Section**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07150 - DAMPPROOFING**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Waterproofing - Section 07100
- B. Sealants - Section 07900

##### **1.03 Quality Assurance**

- A. Standards:
  - 1. Federal Specifications:
    - a. SS-C-153B, Cement, Bituminous, Plastic.
    - b. SS-A-701B, Asphalt, Weatherproofing.
  - 2. American Society for Testing and Materials:
    - a. ASTM D-250, Asphalt Saturated Asbestos Felts.

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Solvent Based Asphalt Water Barrier: FS-SS-A-701B
- B. Flashing Membrane: 20 mil elastomeric modified sheet vinyl.
- C. Asphalt Plastic Cement: SS-C-153B, Type 1.
- D. Asphalt Saturated Felt: ASTM D-250, Un-perforated, #15.
- E. Accessories: As recommended by manufacturer.

#### **Part 3 - Execution**

##### **3.01 Installation - Cavity Wall Dampproofing:**

- A. General - Masonry and Concrete:
  - 1. Repoint all holes, cracks and mortar joints and allow to dry before waterproofing and dampproofing.
  - 2. Sweep wall base, including concrete slab, clean of dirt and mortar droppings immediately prior to application of waterproofing and dampproofing cavity walls.
  - 3. Do not apply until all surfaces are completely dry and clean.
  - 4. Do not apply until all surfaces are completely dry and clean.
  - 5. Sight exposed mastic and membrane not allowed.
- B. Wall Base Waterproofing:
  - 1. Location: Apply at base of outer face of concrete walls and outer face of inner wythe at all exterior masonry cavity walls.
  - 2. At intersection of outer face of inner wythe with concrete slab, provide a 2" radius cove built up with asphalt plastic cement.

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07150 - DAMPPROOFING**

3. At wall base, embed a strip of plastic flashing in Plastic Cement. Lap all joints 8" minimum and seal with joint sealant. Seal completely around piping, conduit, etc. provide minimum joints using longest sheets of flashing practicable. Seal all punctures. Top edge of membrane shall be a minimum of 8" above concrete slab, worked into curve of plastic cement cover, down, and outward on concrete slab or steel shelf angle to outer wythe.
- C. Cavity Wall Dampproofing:
  1. Apply to outer face of inner wythe masonry cavity walls.
  2. Apply two (2) coats to form a membrane water barrier, allowing the first coat to dry before applying the second coat. Apply in strict accordance with manufacturer's instructions. Do not apply until surfaces are completely dry.
  3. Apply in a continuous unbroken film free from pin holes or other surface breaks. Take care to seal around all masonry ties, inserts, anchor slots, conduit, pipes, electrical boxes, etc.

**End of Section**



## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07200 - INSULATION

#### Part 1 - General

##### 1.01 Work Included:

- A. All materials, labor and services and incidentals necessary for the completion of this section of work.

##### 1.02 Quality Assurance:

###### A. Standards:

###### 1. Federal Specifications:

- a. HH-I-524C, Type IV, Class C, Rigid Insulation.
- b. ASTM C 665-84, Type 1, Insulation Blankets.
- c. ASTM D1621, Compressive Strength.
- d. ASTM E84, Flame Spread and Smoke Developed.

###### B. Submittals:

- 1. Provide submittals in the form of samples, and documentation, to the Architect for review.

##### 1.03 Product Delivery, Storage and Handling:

- A. Rigid insulation board is combustible. During storage and insulation, observe good fire safety practice, including job site housekeeping.

##### 1.04 **Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### Part 2 - Products

##### 2.01 Materials:

- A. Rigid Insulation: FS-HH-I-1972/1, Class 2 Rigid Insulation.
  - 1. Type: Glass fiber reinforced polyisocyanurate core with foil facing each side (glass fiber facing at roof insulation), and a compressive strength of 25 p.s.i. and a maximum water vapor transmission rate of >.03 perm-inch.
    - a. Application: 2 layers of rigid insulation. First layer shall be 2" thick / second layer shall be 1.5" thick for a total thickness of 3.5" with a minimum total thermal resistance of R-20, for installation above metal decking, concrete deck, and exterior wall at cavities. Refer to Drawings.
  - 2. Type: expanded polystyrene insulation.
    - a. Application: 2" thick with a thermal resistance of R-10.4, **for foundation wall perimeter below grade installation only.**
  - 3. Adhesive: as recommended by manufacturer of rigid insulation board.

## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07200 - INSULATION

- B. Fibrous Insulation: ASTM C 665-84, Type 1
  - 1. Type:
    - a. 6" thick (approx.) mineral wool or fiberglass fire resistant insulating blanket or batt, with kraft paper facing. Thermal resistance R-19. Refer to Drawings for locations.
- C. Foam-In-Place Insulation: refer to Section 07219.
- D. Vapor Retarder:
  - 1. Roof Deck Installation:
    - a. Two layers of high strength kraft paper laminated with an adhesive, and reinforced at edges with fiberglass yarns.
    - b. Type Example: Permstop - Owens Corning.

### Part 3 - Execution

#### 3.01 Installation - Rigid Insulation:

- A. Install rigid insulation horizontally against back-up wall, or to roof deck, as shown on the Drawings.
- B. **Rigid insulation and other components applied to metal decking at membrane roofing shall be fastened with approved fasteners at the rate of 1 per 2 square feet to meet FM I-90 requirements.**
- C. Install 2 layers of rigid insulation to metal roof deck and at wall cavity. Stagger joints of insulation to provide continuous insulation coverage.
- D. Cut insulation by means of a saw, knife, or other sharp tool to fit around obstructions across the wall, such as vents, louvers, pipes and conduit.
- E. If mastic adhesive is used to supplement holding the insulation in place, observe label directions.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

#### **PART 1 - GENERAL**

##### **1.1 SUMMARY**

###### **A. Section Includes:**

1. Closed-cell spray polyurethane foam.
2. Intumescent Coating.

###### **B. Related Requirements:**

1. Section 07200 "Thermal Insulation" for foam-plastic board insulation.

##### **1.2 REFERENCES**

###### **A. Abbreviations and Acronyms:**

1. CPI: Center for the Polyurethane Industry.
2. SPF: Spray-polyurethane foam.
3. SPFA: Spray Polyurethane Foam Alliance.
4. UES/IAMPO: Uniform Evaluation Service and International Association of Plumbing and Mechanical Officials.

##### **1.3 ACTION SUBMITTALS**

###### **A. Product Data: For each type of product.**

##### **1.4 INFORMATIONAL SUBMITTALS**

###### **A. Qualification Data:**

1. Individual Applicator: Submit the following:
  - a. CPI - American Chemistry Council High-Pressure Safety Training: Submit current CPI ID numbers for each worker.
  - b. Current copy of SPFA Professional Certification Program (PCP) Master Installer Certification card, or certificate of completion of training for SPF.

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

2. Contractor Company Accreditation: Submit copy of current Carlisle Spray Foam Insulation (CSFI) applicator information program certificate.
  - B. Product Test Reports: For each product, for tests performed by a qualified testing agency.
  - C. Evaluation Reports: For spray-applied polyurethane foam-plastic insulation, from UES/IAPMO.
- 1.5 QUALITY ASSURANCE
- A. Installer Qualifications:
    1. CPI - American Chemistry Council High-Pressure Safety Course: Each worker to have current CPI ID number.
    2. SPFA/PCP Individual Certification:
      - a. SPF insulation applied by **SPFA/PCP - Certified Closed-Cell Insulation Master Installer.**
    3. Contractor Company Accreditation: SPF insulation applied by Contractor company holding accreditation from SPF insulation manufacturer.

## **PART 2 - PRODUCTS**

- 2.1 CLOSED-CELL SPRAY POLYURETHANE FOAM, ABAA LISTED
- A. Closed-Cell Spray Polyurethane Foam: ASTM C1029, Type II, minimum density of 2.0 lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.9 deg F x h x sq. ft./Btu at 75 deg F.
    1. Basis-of-Design Product: Subject to compliance with requirements, provide Carlisle Spray Foam Insulation; SealTite PRO Closed Cell or comparable product by one of the following:
      - a. BASF Corporation.
      - b. Gaco Western LLC.
      - c. Icynene Inc.
    2. Surface-Burning Characteristics: Report surface-burning characteristics in accordance with ASTM E84;

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

- a. Flame-Spread Index: 25 or less.
- b. Smoke-Developed Index: 450 or less.

#### **3. Fire Propagation Characteristics:**

- a. Passes NFPA 285 testing as part of an approved assembly.
- b. Passes NFPA 286 testing when covered with intumescent coating approved by SPF insulation manufacturer or product as listed in UES/IAMPO report.

- 4. Compressive Strength: 47 psi.
- 5. Air Permeance per 1 Inch: 0.004 cfm/sq. ft. at 1.57 lbf/sq. ft. or less.
- 6. Water Vapor Permeance: In accordance with ASTM E96 water method.
  - a. 0.8 perms or less at 1 inch.
  - b. 0.23 perms or less at 3.5 inches.
- 7. Dimensional Stability: Less than 9 percent change in volume per ASTM D2126.

### **2.2 MISCELLANEOUS MATERIALS**

- A. Intumescent Paint Coating: Water-based material recommended by SPF insulation manufacturer in areas required to comply with alternative thermal and ignition barrier requirements for SPF plastics and to comply with interior finish requirements of tested assemblies.
  - 1. Intumescent Coating to be a single component, water-based coating tested to meet Building Code requirements for the fire protection of foam insulation. Coating shall be tested and evaluated in the USA by UL and ICC-ES.
  - 2. V.O.C.: 10.3 g/l TVOC
  - 3. Type of Cure: coalescence
  - 4. Flash Point: none
  - 5. Finish: flat
  - 6. Color: charcoal black

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

7. Equal to DC315 Intumescent Coating as manufactured by International Fireproof Technology, Inc. in Irvine, CA, telephone - 949-975-8588.

### **PART 3 - EXECUTION**

#### **3.1 EXAMINATION**

- A. Verify that substrates are clean, dry, and free of dust, debris, oil, solvents, and other materials that may adversely affect SPF adhesion.

#### **3.2 PREPARATION**

- A. Do not begin installation until substrates have been properly prepared.
- B. Clean surfaces thoroughly prior to installation.
- C. Mask and protect adjacent surfaces from fugitive overspray.
- D. Establish measures to protect non-SPF trade workers and building occupants.
  1. Non-SPF trade workers are recommended to vacate building during SPF installation.
  2. For large structures, all non-SPF workers and occupants shall vacate building unless SPF Installer establishes enclosures to isolate work area. For SPF enclosure assistance, see CPI Spray Foam Coalition's "Guidance of Ventilation during Installation of Interior Applications of High-Pressure Spray Polyurethane Foam."
  3. Properly ventilate SPF work areas.
  4. Continue ventilation for 24 hours after interior application of SPF insulation, with a minimum outdoor air exchange rate of one air change per hour.
  5. Recommended re-occupancy times after completion of SPF insulation installation are as follows:
    - a. Non-SPF Trade Workers: 12 hours.
    - b. All Others: One-hour reentry with minimum 20 ACH.

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

- E. Prepare surfaces using SPF manufacturer's written instructions for achieving best result for substrate under Project conditions. Surfaces shall be clean, dry, and firmly anchored.

- 1. Steel Surfaces:

- a. Primed: Clean primed metal surfaces free of loose scale, rust, weathering, or chalking paint. Remove grease, oil, or other contaminants with proper cleaning solutions.
  - b. Previously Painted: Clean painted metal surface using hand or power tools to remove loose scale and dirt. Remove grease, oil, and other contaminants using a power wash technique or proper cleaning solutions.

- 2. Concrete and Masonry Surfaces: Cured with loose dirt and other contaminants, including asphaltic materials, removed.

- 3. Sheathing Board: None.

- F. Priming: Prime substrates where recommended by insulation manufacturer. Apply primer to comply with insulation manufacturer's written instructions. Confine primers to areas to be insulated; do not allow spillage or migration onto adjoining surfaces.

### **3.3 INSTALLATION**

- A. Comply with insulation manufacturer's written instructions applicable to products and applications, as found on drum labels, product data sheets, and application guidelines. Specific care is directed to the following:

- 1. Schedule installation for times when substrate is dry, and dew point is more than 5 deg F cooler than ambient temperatures.

- B. Spray insulation to envelop entire area to be insulated and fill voids.

- C. Exothermic Caution:

- 1. Spray closed-cell polyurethane in minimum single-pass lifts of 1/2 inch or up to a maximum of 5.5 inches.

## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

2. System may be applied in a double pass of 3.5 and 3.75 inches without the need to allow for cooling. Allow surface to cool for 10 minutes or until surface temperature is below 100 deg F between subsequent passes.
  3. When applying SPF on CPVC, the lift thickness must be limited to 1/2 inch on the first lift and 2 inches on additional lifts.
- D. Framed Construction: Spray initial pass around perimeter of frame cavity as a "picture frame." Install SPF in framed construction in accordance with SPF manufacturer's written instructions.
  - E. Cavity Walls: Install into cavities to thickness indicated on Drawings.
  - F. Miscellaneous Voids: Apply in accordance with manufacturer's written instructions.
  - G. Ventilate enclosed spray areas during installation and for 24 hours after spray application has ended.
- 3.4 FIELD QUALITY CONTROL
- A. Field inspection and testing performed under required regulations and standards.
  - B. Quality Inspection: In reference to California Title 24, SPF QII, program inspected as follows:
    1. Average Minimum Thickness: Equal to or greater than that listed in Table 1 of UES/IAPMO Evaluation Report No. 645 for required R-value. Closed-cell SPF minimum thickness, no more than 1/2 inch less than required thickness for R-value.
    2. Measure thickness in six random locations, including high and low spots. Must be within 1/2 inch of the minimum required depth.
    3. Average depth of those six locations is referenced in Table 1 of UES/IAPMO Evaluation Report No. 645.
    4. For SPF cavity walls, depressions in the foam insulation surface are no more than 1/2 inch less than required minimum thickness, provided these depressions do not exceed 10 percent of surface area being insulated.



## **DIVISION 9 - FINISHES**

### **SECTION 07219 - FOAMED-IN-PLACE INSULATION**

#### **3.5 PROTECTION**

- A. Protect installed insulation from damage due to harmful weather exposures, exposure to UV sunlight for more than 48 hours, physical abuse, and other causes, until Project completion.

**End of Section**

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07260 - VAPOR BARRIER**

#### **PART 1 - GENERAL**

##### **1.01 Work Included**

- A. Furnish all labor, materials, services and equipment required in conjunction with or properly incidental to the installation of under-slab vapor barriers described herein and/or as shown on the drawings.

##### **1.02 Related Work**

- A. Section 03300: Cast-In-Place Concrete.

##### **1.03 Job Conditions**

- A. Subbase: Smooth and level, free from damaging protrusions that would puncture vapor barrier.

##### **1.04 References**

- A. ASTM E 1643 - Standard Practice for Installation of Water Vapor Barriers Used in Contact with Earth or Granular Fill Under Concrete Slabs.
- B. ASTM E 1745 - Standard Specification for Plastic Water Vapor Barriers Used in Contact with Soil or Granular Fill under Concrete Slabs: Exceeds Class B
- C. ASTM E 96 - Standard Test Methods for Water Vapor Transmission of Materials.
- D. ASTM E 154 - Standard Test Methods for Water Vapor Barriers Used in Contact with Earth Under Concrete Slabs, on Walls, or as Ground Cover
- E. ASTM D 1709 - Standard Test Methods for Impact Resistance of Plastic Film by the Free-Falling Dart Method.
- F. ASTM F 1249 - Standard Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor
- G. ACI 302.1R - Vapor barrier component (plastic membrane) not less than 10 inches thick.

##### **1.05 Submittals**

- A. Submit in accordance with Division 1 requirements.
- B. Product Data: Provide manufacturers printed product literature and description, including tests and standards that have been performed on the vapor barrier material.
- C. Samples: Submit two, 8 1/2 x 11 inch in size, illustrating the vapor barrier and two (2) 8-1/2-in long sample strips of the joint tape.
- D. One each of all accessories that will be used in the installation.
- E. Verification by Independent testing labs indicating that materials comply with specified requirements.
- F. Certificates: Certify that products of this section meet or exceed specified requirements.

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07260 - VAPOR BARRIER**

- G. Manufacturer's Instructions: Indicate complete installation instructions.

#### **PART 2 - PRODUCTS**

##### **2.01 Available Products**

- A. Stego Wrap 15 mil Vapor Barrier by Stego Industries, L.L.C.
- B. Perminator™ 15 mil by W.R. Meadows .
- C. Vapor Block 15 (mil) by Raven Industries, Inc.
- D. Moistop Ultra 15 (mil) by Fortifiber Building Systems Group
- E. Viper Vaporcheck II 15 mil by Insulation Solutions, Inc.

##### **2.02 Source Quality Control And Testing**

- A. Vapor barrier membrane shall have following properties:
  - 1. Water Vapor Barrier: Meets or exceeds Class A according to ASTM E 1745.
  - 2. Water Vapor Transmission Rate: 0.012 grains/ft<sup>2</sup>/hour or lower according to ASTM E 96.
  - 3. Water Vapor Permeance: 0.01 perms or lower according to ASTM E 154 Sec. 7 or F 1249 (max.).
  - 4. Tensile Strength: 45.0 lbf/in according to ASTM E 154 Sec. 9.
  - 5. Puncture Resistance: 2200 g according to ASTM D 1709, Method B

##### **2.03 Accessories**

- A. Tape:
  - 1. High Density Polyethylene Tape with pressure sensitive adhesive. Minimum width 4".
- B. Pipe Boot:
  - 1. Construct pipe boots from vapor barrier material and pressure sensitive tape per manufacturer's instructions.

#### **PART 3 - EXECUTION**

##### **3.01 Examination**

- A. Verify that conditions are acceptable for the placement of the vapor barrier.

##### **3.02 Preparation**

- A. Ensure that subsoil is approved by Geotechnical Engineer.
  - 1. Vapor Barrier shall be installed on top of the aggregate, sand or tamped earth base or carton forms. At carton forms provide a vertical leg down to grade and adhered the vapor barrier to the grade beam at or just below the dirt line. Vapor barrier may be placed either above or beneath any carton form slip sheet.

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07260 - VAPOR BARRIER**

#### **3.03 Installation**

- A. Install vapor barrier per manufacturer's instructions, illustrations and ASTM E 1643 Standard Practice for Installation of Water Vapor Barriers Used in Contact with Earth or Granular Fill Under Concrete Slabs.
  - 1. Level and tamp or roll granular base.
  - 2. Place Vapor Barrier with the longest dimension parallel with the direction of the pour.
  - 3. Lap Vapor Barrier over footings and seal to foundation walls. Seal all penetrations.
  - 4. Lap joints 6 inches and seal with the recommended pressure sensitive tape.
  - 5. Seal pipe penetrations with pipe boot made from vapor barrier and tape.
  - 6. Protect vapor barrier from damage during installation of reinforcing steel and utilities.
  - 7. Repair damaged areas by cutting patches of vapor barrier, overlapping damaged area 6 inches and taping all four sides with pressure sensitive tape.

#### **3.04 Interface With Other Work**

- A. Coordinate work of all other trades related to the slab base and utility services.

**END OF SECTION**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07415 - PREFINISHED METAL SOFFIT PANELS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. The General Conditions and applicable sections of Division 1 shall apply to this entire section.
- B. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Metal Fabrications - Section 05500
- B. Modified Bitumen Membrane Roofing System - Section 07550
- C. Flashing and Sheet metal - Section 07600

##### **1.03 Quality Assurance:**

- A. Qualifications of Installer: Competent and skilled sheet metal applicator familiar with this type installation with successful completion of projects of familiar scope. Applicator shall have at least two years of experience in prefinished sheet metal applications.

##### **1.04 Shop Drawings:**

- 1.1 Submit complete shop drawings on all prefinished metal applications, showing layouts of seams, joints, details, and installation methods. Show details of weatherproofing at edges, terminations and penetrations in metal work.

##### **1.05 Applicator and Guarantee:**

- C. All work shall be done by one contractor with 5 years minimum experience in this type of metal work.
- B. Provide ten (10) years guarantee written on contractor's letterhead for work of this Section.

##### **1.06 Warranty:**

- A. Provide a 20-year manufacturer's warranty covering color fade, chalk and film integrity at no charge.

##### **1.07 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only.**

#### **Part 2 - Products**

##### **2.01 Acceptable Manufacturers:**

- A. Quality of Manufacturers: The products, colors and finishes herein are of AEP-Span products to establish standards of quality and appearance. The products of other manufacturers are acceptable subject to meeting or exceeding the requirements of these specifications, and the approval of the contracting officer.

##### **2.02 Materials -**

- A. Prefinished Metal Soffits:
  - 1. Flush Panel, (FP 12-2) 24 gauge steel with embossed finish.

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07415 - PREFINISHED METAL SOFFIT PANELS**

2. Color: match existing or as selected by Architect.
3. Flashings, Closures, and Trim shall be fabricated from same material, gauge, and finish as panels.
4. Finish: Kynar 500.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Fabricate and install prefinished metal facings in accordance with drawings and recognized sheet metal practices using conventional hand or power tools. Keep cut edges sharp, clean, properly dressed and closely aligned. Exercise care during fabrication and erection to avoid damage.
- B. Structural framing members and fasteners shall be sized and located as recommended by the panel manufacturer. The applicator shall insure that the correct fastener has been chosen for size and length necessary for loading requirements. Special care shall be exercised installing fasteners so as not to overdrive or misdirect fasteners which could cause damage to panels or trim. Use colored pop rivets on trim items and where exposed fasteners are necessary. Keep exposed fasteners to very minimum.
- C. Only minor scratches and abrasions will be allowed to be touched up. Any other damaged material shall be replaced.

**End of Section**

## DIVISION 7 - THERMAL AND MOISTURE PROTECTION

### SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM

#### Part 1 - General

##### 1.01 Section Includes:

- A. Preparation of Substrate to Receive Roofing Materials
- B. Roof Insulation Application to Prepared Substrate
- C. Roof Membrane Application
- D. Roof Flashing Application
- E. Incorporation of Sheet Metal Flashing Components and Roofing Accessories into the Roof System

##### 1.02 Products Installed But Not Furnished Under This Section:

- A. Sheet Metal Flashing and Trim
- B. Sheet Metal Roofing Specialties

##### 1.03 Related Sections:

- A. Roof Decks - Section 05310
- B. Rough Carpentry - Section 06100
- C. Insulation - Section 07200
- D. Flashing & Sheet Metal Section 07600

##### 1.04 Reference Standards:

References in these specifications to standards, test methods and codes, are implied to mean the latest edition of each such standard adopted. The following is an abbreviated list of associations, institutions, and societies which may be used as references throughout these specifications.

|        |                                                                                     |
|--------|-------------------------------------------------------------------------------------|
| ASTM   | American Society for Testing and Materials<br>Philadelphia, PA                      |
| FM     | Factory Mutual Engineering and Research<br>Norwood, MA                              |
| NRCA   | National Roofing Contractors Association<br>Rosemont, IL                            |
| OSHA   | Occupational Safety and Health Administration<br>Washington, DC                     |
| SMACNA | Sheet Metal and Air Conditioning Contractors<br>National Association, Chantilly, VA |
| UL     | Underwriters Laboratories, Northbrook, IL                                           |

##### 1.05 Description Of Work:

- A. **Project Type:** New installation.  
Deck: Metal      Slope: **3/8 inch ±** per foot.
- B. **Rigid Insulation:**
  - 1. Top and Bottom Layers: Polyisocyanurate, having a total thickness of **4"** - top layer of 2" and bottom layer of 2". Refer to Section 07200, Insulation.
  - 2. Crickets: Polyisocyanurate (tapered) providing a roof slope to roof drains (refer to Drawings.)
- C. **Gypsum sheathing panel:** having a thickness of 1/2 inch, mechanically attached, as per FM I-90 requirements.
- D. **Roof System:** Modified Bitumen Base, applied in cold adhesive; stripping and Flashing, applied in cold adhesive.

## DIVISION 7 – THERMAL AND MOISTURE PROTECTION

### SECTION 07550 – MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM

Modified Bitumen Finish Ply applied in cold adhesive.

- E. **Flashing System:** SBS with continuous metal-foil surfacing, torch applied.

#### 1.06 Submittals:

- A. Submittals Prior to Contract Award:
  - 1. Letter from the proposed primary roofing manufacturer confirming that the bidder is an acceptable Contractor authorized to install the proposed system.
  - 2. Letter from the primary roofing manufacturer stating that the proposed application will comply with the manufacturer's requirements in order to qualify the project for the specified guarantee.
- B. Submittals Prior to Project Close-out:
  - 1. Manufacturer's printed recommendations for proper maintenance of the specified roof system including inspection frequencies, penetration addition policies, temporary repairs, and leak call procedures.

#### 1.07 Quality Assurance:

- A. Acceptable Products: Primary roofing products, including each type of sheet, all manufactured in the United States, shall be supplied by a single manufacturer which has been successfully producing the specified types of primary products for not less than 10 years. The primary roofing products shall have maintained a consistent composition for a minimum of five years.
- B. Agency Approvals: The proposed roof system shall conform to the following requirements. No other testing agency approvals will be accepted.
  - 1. Underwriters Laboratories Class A acceptance of the proposed roofing system without additional requirements for coatings.
- C. Acceptable Contractor: Contractor shall have a minimum of 10 years of experience in successfully installing the same or similar roofing materials and be certified in writing by the roofing materials manufacturer to install the primary roofing products for a minimum of 5 years prior to the date of bid opening.
  - 1. Torch Applicators: Contractor shall employ torch applicators who have successfully passed the CERTA (Certified Roofing Torch Applicator) program requirements as provided by the National Roofing Contractors Association (NRCA).
  - 2. The Contractor shall have an office, warehouse with supplies, and permanent roofing crews within a 50 mile radius of Moore, Oklahoma. Contractor shall have had "NDL" (No Dollar Limit) approval for 5 years AT THIS AREA OFFICE from manufacturer and shall perform a



## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

minimum of ten (10) NDL manufacturer guarantees per year.

- 3. Owner's Roofing Contractor (Universal Roofing and Sheet Metal located in Moore, Oklahoma) shall be utilized on this project. The bid shall be based on the provided drawings, specifications, and agreed-to pricing.**

- D. Scope of Work: The work to be performed under this specification shall include but is not limited to the following: Attend necessary job meetings and furnish competent and full-time supervision, experienced roof mechanics, all materials, tools, and equipment necessary to complete, in an acceptable manner, the roof installation in accordance with this specification. Comply with the latest written application instructions of the manufacturer of the primary roofing products. In addition, application practice shall comply with requirements and recommendations contained in the latest edition of the Handbook of Accepted Roofing Knowledge (HARK) as published by the National Roofing Contractors Association, amended to include the acceptance of a phased roof system installation.
- E. Local Regulations: Conform to regulations of public agencies, including any specific requirements of the city and/or state of jurisdiction.
- F. Manufacturer Requirements: Ensure that the primary roofing materials manufacturer provides direct trained company personnel to attend necessary job meetings, perform periodic inspections as necessary, and conducts a final inspection upon successful completion of the project.
- G. Contractor shall have one of the following approved Contractor Certification levels prior to bid opening:
  - Johns Manville - Peak Advantage Contractor
  - Soprema - Soprema Certified Applicator
  - Siplast - Siplast Select Applicator
  - GAF - Master Select Contractor

#### **1.08 Product Delivery Storage And Handling:**

- A. Delivery: Deliver materials in the manufacturer's original sealed and labeled containers and in quantities required to allow continuity of application.
- B. Storage: Store materials out of direct exposure to the elements. Store roll goods on a clean, flat and dry surface. All material stored on the roof overnight shall be stored on pallets. Rolls of roofing must be stored on ends. Store materials on the roof in a manner so as to preclude overloading of deck and building structure. Store materials such as solvents, adhesives, and asphalt cutback products away from open flames, sparks, or excessive heat.

## **DIVISION 7 – THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 – MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

Cover all material using a breathable cover such as a canvas. Polyethylene or other non-breathable plastic coverings are not acceptable.

- C. Handling: Handle all materials in such a manner as to preclude damage and contamination with moisture or foreign matter. Handle rolled goods to prevent damage to edges or ends.
- D. Damaged Material: Any materials that are found to be damaged or stored in any manner other than stated above will be automatically rejected, removed, and replaced at the Contractor's expense.

#### **1.09 Project/Site Conditions:**

##### **A. Requirements Prior to Job Start**

- 1. Notification: Give a minimum of 5 days notice to the Owner and manufacturer prior to commencing any work and notify both parties on a daily basis of any change in work schedule.
- 2. Permits: Obtain all permits required by local agencies and pay all fees which may be required for the performance of the work.
- 3. Safety: Familiarize every member of the application crew with all fire and safety regulations recommended by OSHA, NRCA and other industry or local governmental groups.

##### **B. Environmental Requirements:**

- 1. Precipitation: Do not apply roofing materials during precipitation or in the event there is a probability of precipitation during application. Take adequate precautions to ensure that materials, applied roofing, and building interiors are protected from possible moisture damage or contamination.
- 2. Temperature Restrictions: At ambient temperatures between 40F and 50F, prepare / warm adhesive as directed by manufacturer.

##### **C. Protection Requirements:**

- 1. Membrane Protection: Provide protection against staining and mechanical damage for newly applied roofing and adjacent surfaces throughout this project.
- 2. Torch Safety: Designate one person on each crew to perform a daily fire watch. The designated crew member shall watch for fires or smoldering materials on all areas of roof construction. Continue the fire watch after roofing material application has been suspended for the day.
- 3. Limited Access: Prevent access by the public to materials, tools, and equipment during the course of the project.

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

4. Debris Removal: Remove all debris daily from the project site and take to a legal dumping area authorized to receive such materials.
5. Site Condition: Complete, to the owner's satisfaction, all job site clean-up including building interior, exterior and landscaping where affected by the construction.

#### **1.10 Guarantee/Warranty:**

- A. Roof Membrane Guarantee: Upon successful completion of the project, and after all post installation procedures have been completed, furnish the Owner with **the manufacturer's ten year labor and materials membrane guarantee**. The guarantee shall be a term type, without deductibles or limitations on coverage amount, and shall be issued at no additional cost to the Owner. This guarantee shall not exclude random areas of ponding from coverage.

#### **1.11 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Only the four systems listed in 2.02 Description of Systems below will be accepted for installation on this project.**

### **Part 2 - Products:**

#### **2.01 Roofing System Assembly/Products:**

- A. Rigid Roof Insulation: Roof insulation shall be UL and FM approved. Insulation shall be approved in writing by the insulation manufacturer for intended use and for use with the specified roof assembly. Refer to Section 07200.
- B. Recover Board Sheathing Panel for Roof Membrane Substrate: A panel composed of high density fiberboard, non-structural water resistant core material integrally bonded having a nominal thickness of 1/2 inch.
  1. Acceptable Manufacturer: Fiberboard Coated High Density Roof Insulation, by Huebert.
- C. Gypsum Sheathing Panel for Wood/Plywood Surfaces to Receive Flashing Coverage: A panel composed of a gypsum based, non-structural water resistant core material integrally bonded with fiberglass mats on both sides having a nominal thickness of 1/2 inch. The panel surface shall be factory primed with a non-asphaltic primer.
  1. Acceptable Manufacturer: DensDeck Prime Gypsum Roof Board, by Georgia Pacific Corporation; Atlanta, GA

#### **2.02 Description Of Systems:**

- A. Roofing Membrane Assembly: A roof membrane assembly consisting of two plies of a prefabricated, reinforced, homogeneous Styrene-Butadiene-Styrene (SBS) block copolymer modified asphalt membrane, applied over a prepared

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

substrate. Both reinforcement mats shall be impregnated/saturated and coated each side with an SBS modified bitumen blend. The roof system shall pass 500 cycles of ASTM D 5849 Resistance to Cyclic Joint Displacement (fatigue) at 14F - or show evidence of other independent testing indicating resistance fatigue, membrane cracking and delamination. Passing results shall show no signs of membrane cracking or interply delamination after 500 cycles. The roof system shall pass 200 cycles of ASTM D 5849 after heat conditioning performed in accordance with ASTM D 5147. The assembly shall possess waterproofing capability, such that a phased roof application, with only the modified bitumen base ply in place, can be achieved for prolonged periods of time without detriment to the watertight integrity of the entire roof system.

1. Acceptable Manufacturer: Johns Manville roof system:
  - a. Modified Bitumen Base, Stripping, and Flashing Reinforcing Ply.  
JM DynaBase
  - b. Modified Bitumen Finish Ply  
JM DynaGlas FR
  - c. Stripping Ply and Flashing Reinforcing Sheet  
JM DynaPly
- B. Flashing Membrane Assembly: A flashing membrane assembly consisting of a prefabricated, reinforced, Styrene-Butadiene-Styrene (SBS) block copolymer modified asphalt membrane with a continuous, channel-embossed metal-foil surfacing. The finish ply shall conform to ASTM D 6298 and the following physical and mechanical property requirements.
  1. Acceptable Manufacturer: Johns Manville flashing system, aluminum finish
    - a. Cant Backing Sheet for Wood/Plywood Surfaces to Receive Flashing Coverage: applicable JM product.
    - b. Metal-Clad Modified Bitumen Flashing Sheet: JM DynaClad Flashing
    - c. Cant Strip: JM FesCant Plus Cant Strips
- C. Catalyzed Acrylic Resin Flashing System: A specialty flashing system consisting of a liquid-applied, fully reinforced, multi-component acrylic membrane installed over a prepared or primed substrate. The flashing system consists of a catalyzed acrylic resin primer, basecoat and topcoat, combined with a non-woven polyester fleece. The resin and catalyst are pre-mixed immediately prior to installation. The use of the specialty flashing system shall be specifically approved in advance by the membrane manufacturer for each application.

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

1. Acceptable Manufacturer: Flashing System by Johns Manville; Denver, CO
- D. Additional Roof Systems: The following additional roof systems are acceptable for use in lieu of the specified roof system.
  1. GAF Materials Corp., Wayne, NJ
    - Base Ply B Ruberoid Mop Smooth
    - Finish Ply B Ruberoid Mop FR - cap ply Plus
    - Flashing Sheet B Ruberoid Ultraclad SBS
    - Stripping Ply and Flashing Reinforcing Sheet - Ruberoid Mop Smooth
  2. Soprema, Inc., Wadsworth, OH
    - Base Ply - Elastophene Sanded 2.2
    - Finish Ply - Elastophene LS FR GR
    - Flashing Sheet - Sopralast 50 TV ALU
    - Stripping Ply and Flashing Reinforcing Sheet - Elastophene Sanded 2.2
- 2.03 Roofing Accessories:
  - A. Roofing Adhesives:
    1. Membrane Cold Adhesive: An asphalt, solvent blend conforming to ASTM D 3019, Type III requirements.
      - a. Acceptable Manufacturer: MBR Cold Application Adhesive by Johns Manville; Denver, CO
  - B. Bituminous Cutback Materials:
    1. Primer: An asphalt, solvent blend conforming to ASTM D 41 requirements.
    2. Mastics: An asphalt cutback mastic, reinforced with non-asbestos fibers, used as a base for setting metal flanges conforming to ASTM D 4586 Type II requirements.
  - C. Sealant: A moisture-curing, non-slump elastomeric sealant designed for roofing applications. The sealant shall be approved by the roof membrane manufacturer for use in conjunction with the roof membrane materials.
  - D. Ceramic Granules: No. 11 grade specification ceramic granules of color scheme matching the granule surfacing of the finish ply.
  - E. Metallic Powder: A finely graded metal dust as supplied or approved by the membrane manufacturer, used for covering of bitumen overruns over the foil surfaced membrane.
  - F. Perlite Cant Strips: A cant strip composed of expanded volcanic minerals combined with waterproofing binders. The top surface shall be pre-treated with an asphalt based coating. The face of the cant shall have a nominal 4 inch dimension.

## **DIVISION 7 – THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 – MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

#### **G. Fasteners:**

1. Gypsum Sheathing Panel Fasteners for Roofing Substrates and Wood/Plywood Flashing Surfaces: Gypsum sheathing panel fasteners and plates shall be FM Approved, and/or approved by the manufacturer of the primary roofing products. The fastening pattern for each panel to be used shall be as recommended by the panel manufacturer and approved by the manufacturer of the primary roofing products. Acceptable panel fastener manufacturers for specific substrate types are listed below.
  - a. Wood/Plywood Flashing Surfaces: Gypsum sheathing panel mechanical fasteners shall be factory coated for corrosion resistance. The fastener shall conform meet or exceed Factory Mutual Standard 4470 and when subjected to 30 Kesternich cycles, show less than 15% red rust. Acceptable fastener types for wood/plywood substrates are listed below.
    - 1) A fluorocarbon coated screw type roofing fastener having a minimum 0.220 inch thread diameter. Plates used in conjunction with the fastener shall be a metal type having a minimum 3 inch diameter, as supplied by the fastener manufacturer.
  - b. Acceptable Manufacturer=s:
    - 1) Ultrafast Fastener with UltraFast Round Metal Plates by Johns Manville; Denver, CO
    - 2) Dekfast #12 with Dekfast Steel Hexagonal Plates by Construction Fasteners, Inc.; Wyomissing, PA
    - 3) Standard Roofing Fastener by Olympic Manufacturing Group, Agawam; MA
2. Flashing Reinforcing Sheet Fasteners: Fasteners shall be approved by the manufacturer of the primary roofing products. Acceptable fasteners for specific substrate types are listed below.
  - a. Wood/Plywood Substrates
    - 1) A 12 gauge, spiral or annular threaded shank, zinc coated steel roofing fastener having a minimum 1 inch head.
    - 2) Square Cap by W.H. Maze Co.; Peru, IL
    - 3) 12 Gauge Simplex Nail by the Simplex Nail and Manufacturing Co., Americus, GA
  - 3) Fasteners shall be applied to meet FM-I90 requirements. At crickets, if insulation

## DIVISION 7 - THERMAL AND MOISTURE PROTECTION

### SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM

thickness prohibits satisfactory application of fasteners, use adhesive similar to Para-STIK insulation adhesive.

- H. Walktread: A prefabricated, puncture resistant polyester core reinforced, polymer modified bitumen sheet material topped with a ceramic-coated granule wearing surface.
  - 1. Thickness: 0.25 in
  - 2. Width: 32 in
  - 3. Acceptable Manufacturer: DynaTred Roof Walkway Pads by Johns Manville; Denver, CO
- I. Pipe Supports Typical:
  - 1. Roller System: A Aroller-bearing@ pipe support for roof-mounted gas pipes, RTU condensate lines, and electrical conduit up to 4" I.D. or 5"O.D. Pipes rest on a self-lubricating roller system which is made of a stainless steel or glass-filled nylon rod and a sturdy polycarbonate resin roller. Pipe support base shall be manufactured of polycarbonate resin with a roller rod of glass-filled nylon, and stainless steel metal parts.
  - 2. Load Weight: Maximum load weight may not exceed 125 lbs. per pipestand.
  - 3. Spacing: Not to exceed 10 foot centers. Do not exceed 125 lbs. load weight and adjust pipe stand in height to even load.
  - 4. Acceptable Manufacturer: Pillow Block Pipestand Model 4-R, Miro Industries, Inc., 1780 West 2300 South, Salt Lake City, Utah 84119.
- J. Pipe Supports at Turns In Large Piping:
  - 1. Pipe Support Hangers: A Aclevis hanger@ pipe support hanger for roof mounted gas pipes at all large (over 4" I.D.) piping corners, bends, and Atees@/pipe intersections. Pipes rest on a clevis hanger with a support base of stainless steel polycarbonate. All other metal parts are hot-dip galvanized steel.
  - 2. Load Weight: Maximum load weight not to exceed 310 lbs. per pipestand or 155 lbs. on each base.
  - 3. Spacing: Locate Aclevis@ type pipe hangers at all corners, bends, and Atees@/pipe intersections not to exceed 10'-0" o.c. maximum. Do not exceed 310 lbs. load weight (155 lbs. on each base) and make certain each pipestand is adjusted in height to even load at all pipestands.
  - 4. Acceptable Manufacturer: Pillow Block Pipestand Model 6-H, Miro Industries, Inc., 1780 West 2300 South, Salt Lake City, Utah 84119.

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

- K. Penetration Dam/Sealer Pockets shall be similar to:  
**ChemCurb System:** gray polyester resin exterior forms, structural sealant and One (1) part self-leveling moisture cure pourable sealer (gray).

#### **Part 3- Execution**

##### **3.01 Preparation:**

- A. General: Sweep or vacuum all surfaces, removing all loose aggregate and foreign substances prior to commencement of roofing.

##### **3.02 Substrate Preparation - Metal Deck / Insulation:**

- A. Preparation of Wood/Plywood Substrates to Receive Flashing Materials: Mechanically attach the gypsum sheathing panels to all wood/plywood substrates that will be covered with the specified flashing membrane, using the specified screws/plates, at 12 inches o.c. staggered. Cut the cant backing sheet into 12 inch widths and peel the release film from the back of the sheet. Set the sheet into place extending 6 inches onto the field of the roof area and 6 inches up the gypsum sheathing panel surface utilizing minimum 3 inch side laps. Set the cant into place prior to installation of the roof membrane base ply.
- B. Insulation Panel - two layers: Mechanically attach the insulation panels, using the specified fasteners, at a rate of 1 fastener for every 2.7 square feet of panel area (12 per 4' x 8' panel). Increase the fastening frequency by 50% at the perimeter of the roof area and by 75% at the corners. Meet FM I-90 requirements.
- C. Gypsum Sheathing Panels: Install sheathing panels, and any tapered insulation in hot asphalt, with end joints offset; edges of the panels shall be in moderate contact without forcing applied in strict accordance with the insulation manufacturer's requirements and the following instructions.

##### **3.04 Roof Membrane Installation:**

- A. Membrane Application: Apply roofing in accordance with roofing system manufacturer's instructions and the following requirements. Application of roofing membrane components shall immediately follow application of base sheet and/or insulation as a continuous operation.
- B. Aesthetic Considerations: An aesthetically pleasing overall appearance of the finished roof application is a standard requirement for this project. Make necessary preparations, utilize recommended application techniques, apply the specified materials including granules and metallic powder, and exercise care in ensuring that the finished application is acceptable to the Owner.



## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

- C. Priming: Prime metal and concrete and masonry surfaces with a uniform coating of the specified primer.
- D. Membrane Adhesive Application: Membrane adhesive can be applied by roller, squeegee or spray unit. Apply cold adhesive in a smooth, even, continuous layer without breaks or voids. Utilize an application rate of 2 to 2 1/2 gal/sq over irregular or porous substrates. Utilize an application rate of 1 1/2 to 2 gal/sq for interply applications. Double the adhesive application rate at the end laps of granule surfaced sheets. In the areas surrounding details that are to receive the catalyzed acrylic resin primer and flashing system, apply membrane plies in a full coating of the specified elastomeric sealant in lieu of the solvent based adhesive a minimum 8 inches from the base of the penetration or curb.
- E. Bitumen Consistency: Cutting or alterations of bitumen, primer, and sealants will not be permitted.
- F. Roofing Application: Apply all layers of roofing free of wrinkles, creases, or fishmouths. Exert sufficient pressure on the roll during application to ensure prevention of air pockets.
  - 1. Apply all layers of roofing perpendicular to the slope of the deck.
  - 2. Fully bond the base ply to the prepared substrate, utilizing minimum 3 inch side and end laps. Apply each sheet directly behind the asphalt applicator. Cut a dog ear angle at the end laps on overlapping selvage edges. Using a clean trowel, apply top pressure to top seal T-laps immediately following sheet application. Stagger end laps a minimum of 3 feet.
  - 3. Fully bond the finish ply to the base ply, utilizing minimum 3 inch side and end laps. Apply each sheet directly behind the cold adhesive applicator. Stagger end laps of the finish ply a minimum 3 feet. Cut a dog ear angle at the end laps on overlapping selvage edges. Using a clean trowel, apply top pressure to top seal T-laps immediately following sheet application. Stagger side laps of the finish ply a minimum 12 inches from side laps in the underlying base ply. Stagger end laps of the finish ply a minimum 3 feet from end laps in the underlying base ply.
  - 4. Maximum sheet lengths and special fastening of the specified roof membrane system may be required at various slope increments where the roof deck slope exceeds 1/2 inch per foot. The manufacturer shall

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

provide acceptable sheet lengths and the required fastening schedule for all roofing sheet applications to applicable roof slopes.

- G. Granule Embedment: Broadcast mineral granules over all bitumen overruns on the finish ply surface, while the bitumen is still hot or the adhesive is soft, to ensure a monolithic surface color.
- H. Flashing Application - masonry surfaces: Flash masonry parapet walls and curbs using the reinforcing sheet and the metal foil flashing membrane. After the base ply has been applied to the top of the cant, fully adhere the reinforcing sheet, utilizing minimum 3 inch side laps and extend a minimum of 3 inches onto the base ply surface and 3 inches up the parapet wall above the cant. After the final roofing ply has been applied to the top of the cant, prepare the surface area that is to receive flashing coverage by torch heating granular surfaces or by application of asphalt primer; allowing primer to dry thoroughly. Torch apply the metal foil-faced flashing into place using three foot widths (cut off the end of roll) always lapping the factory selvage edge. Stagger the laps of the metal foil flashing layer from lap seams in the reinforcing layer. Extend the flashing sheet a minimum of 4 inches beyond the toe of the cant onto the prepared surface of the finished roof and up the wall to the desired flashing height. Exert pressure on the flashing sheet during application to ensure complete contact with the wall/roof surfaces, preventing air pockets; this can be accomplished by using a damp sponge or shop rag. Check and seal all loose laps and edges. Nail the top edge of the flashing on 9 inch centers. (See manufacturer's schematic for visual interpretation).
- I. Flashing Application B surfaces sheathed with gypsum sheathing panels: After the gypsum sheathing panel and cant backing sheet have been installed, flash parapet walls and curbs with the specified reinforcing sheet and the metal foil flashing membrane. The reinforcing sheet shall have minimum 3 inch side laps and extend a minimum of 3 inches onto the base ply surface and to the top of the parapet wall or curb. Using the specified fasteners, mechanically attach the reinforcing sheet through the field of the sheet to the vertical flashing surface on 12 inch centers from the top of the cant to the top of the wall or curb. Fully adhere the remainder of the flashing reinforcing sheet that extends over the cant and roof level. Using a Leister Hand Welding Tool, seal the laps

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

between flashing reinforcing sheets. After the final roofing ply has been applied to the top of the cant, prepare the surface area that is to receive flashing coverage by torch heating granular surfaces or by application of asphalt primer; allowing primer to dry thoroughly. Torch apply the metal foil-faced flashing into place using three foot widths (cut off the end of roll) always lapping the factory selvage edge. Stagger the laps of the metal foil flashing layer from lap seams in the reinforcing layer. Extend the flashing sheet a minimum of 4 inches beyond the toe of the cant onto the prepared surface of the finished roof and up the wall to the desired flashing height. Exert pressure on the flashing sheet during application to ensure complete contact with the wall/roof surfaces, preventing air pockets; this can be accomplished by using a damp sponge or shop rag. Check and seal all loose laps and edges. Nail the top edge of the flashing on 9 inch centers. (See manufacturer's schematic for visual interpretation).

- J. Catalyzed Acrylic Resin Flashing System: Install the liquid-applied primer and flashing system in accordance with the membrane system manufacturer's printed installer's guidelines and other applicable written recommendations as provided by the manufacturer.
  - K. Use of Metallic Powder: Broadcast metallic powder over all bitumen overruns on the metal foil membrane surface while the bitumen is still hot to ensure a monolithic surface color.
  - L. Water Cut-Off: At end of day's work, or when precipitation is imminent, construct a water cut-off at all open edges. Cut-offs can be built using asphalt or plastic cement and roofing felts, constructed to withstand protracted periods of service. Cut-offs must be completely removed prior to the resumption of roofing.
- 3.05 Roof System Interface With Related Components:
- A. Walktread: Cut the walktread into maximum 5 foot lengths and allow to relax until flat. Adhere the sheet using the specified plastic cement. Apply the specified cement in a 3/8 inch thickness to the back of the product in 5 inch by 5 inch spots in accordance with the pattern as supplied by the walktread manufacturer. Walk-in each sheet after application to ensure proper adhesion. Use a minimum spacing of 2 inches between sheets to allow for proper drainage.
  - B. Sealant: Apply a smooth continuous bead of the specified sealant at the exposed finish ply edge transition to metal

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

### **SECTION 07550 - MODIFIED BITUMEN MEMBRANE ROOFING SYSTEM**

flashings incorporated into the roof system.

#### **3.06 Field Quality Control And Inspections:**

- A. Site Condition: Leave all areas around job site free of debris, roofing materials, equipment, and related items after completion of job.
- B. Notification Of Completion: Notify the manufacturer by means of manufacturer's printed Notification of Completion form of job completion in order to schedule a final inspection date.
- C. Final Inspection:
  - 1. Post-Installation Meeting: Hold a meeting at the completion of the project, attended by all parties that were present at the pre-job conference. A punch list of items required for completion shall be compiled by the Contractor and the manufacturer's representative. Complete, sign, and mail the punch list form to the manufacturer's headquarters.
- D. Issuance Of The Guarantee: Complete all post installation procedures and meet the manufacturer's final endorsement for issuance of the specified guarantee.

**End of Section**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07600 - FLASHING AND SHEET METAL**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Modified Bitumen Membrane Roofing System - Section 07550
- B. Sealants - Section 07900

##### **1.03 Quality Assurance:**

- A. Standards:
  - 1. American Society of Testing and Materials
    - a. ASTM A-526, Steel Sheet, Zinc-Coated (Galvanized), Commercial Quality.
    - b. ASTM B-32, Solder Metal
  - 2. Federal Specifications:
    - a. SS-C-153B, Cement, Bituminous, Plastics
  - 3. Sheet Metal and Air Conditioning Contractors National Association:
    - a. Architectural Sheet Metal Manual

##### **1.04 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Prefinished Sheet Metal overflow scuppers and Prefinished Metal Coping:
  - 1. Galvanized iron, prefinished one side.
  - 2. Gauge: 24 gauge, of design and width as detailed.
  - 3. Acceptable manufacturer: Color Klad - Vincent Brass and Aluminum Co.
  - 4. Finish: Kynar 500 - Refer Color Schedule
- B. Sheet Metal:
  - 1. Galvanized Sheet Steel: ASTM A-526, Commercial Quality.
  - 2. Gauge: 22 Gauge minimum or as required by Drawings or Specifications.
- C. Fasteners: Nails, screws, and other fasteners used in conjunction with this work shall be galvanized or cadmium plated.
- D. Solder: ASTM B-32, alloy grade 58, 50% tin, 50% lead.
- E. Flux: Muriatic acid with zinc.
- F. Sealants: Rubber based compound - refer to Section 07900.
- G. Bituminous Plastic Cement: FS SS-C-153B.

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07600 - FLASHING AND SHEET METAL**

- H. Accessories: Provide accessories as recommended by manufacturer or as indicated on Drawings.

#### **Part 3 - Execution**

##### **3.01 Fabrication:**

- A. Shape and install sheet metal as indicated on Drawings. Comply with recommendations of SMACNA "Architectural Sheet Metal Manual."
- B. Form exposed faces flat and free of buckles, excessive wave and tool marks. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
- C. Hem all exposed edges.
- D. Make waterproof corner joints by soldering solidly. Joints shall be full-lapped.
- E. Soldering: Shall be done slowly with well heated coppers to thoroughly heat the sheet and completely sweat the solder through the full width of the seam. Ample solder shall be used and the seam shall show a least one full inch of evenly flowed solder. Soldering coppers: Shall be heavy and blunt design, properly tinned before using. Neutralize all excess flux.
- F. Provide for thermal expansion of running trim, flashing and other items exposed for more than 15'-0" continuous length. Locate expansion seams at 10'-0" intervals and 2'-0" each side of corners and intersections.
- G. Angle bottom edges of exposed vertical surfaces to form drips.

##### **3.02 Installation and Application:**

- A. General:
  - 1. Furnish those items to be installed by other trades to proper grade for installation.
  - 2. Cooperate with and coordinate installation of sheet metal with roofing work as specified under Modified Bitumen Membrane Roofing System - Section 07550.
  - 3. Install work watertight, without waves, warps, buckles, fastening stresses or distortion, allowing for expansion and contraction.
  - 4. Embed all flashing in plastic cement. Coat dissimilar metals from contact with bituminous coating.
- B. Metal Coping:
  - 1. Material: 24 gauge, prefinished sheet metal.
  - 2. Fabricate and install in accordance with drawings, and recognized sheet metal practices.
  - 3. Secure coping bedded in plastic cement to blocking.
  - 4. At joints, bed coping in plastic cement and secure on side to backing strip by soldering solid. Do not use screws

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07600 - FLASHING AND SHEET METAL**

or nails in exposed face to coping.

5. Lower edge of coping to be securely hooked to hook strip. Secure to wood blocking with No. 8 x 1" galvanized sheet metal screws at 8 o.c.

**End of Section**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07700 - ROOF ACCESSORIES**

#### **Part 1 General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this entire section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Aluminum Ladders - Section 05515
- B. Modified Bitumen Membrane Roofing System - Section 07550

##### **1.02 Submittals:**

- A. Shop Drawings: Indicate details and dimensions of fabrication and installation including layouts and assemblies. Begin fabrication only after receiving approved shop Drawings.
- B. Manufacturer's Literature: Descriptive literature and installation instructions.

##### **1.03 Product Delivery, Storage and Handling:**

- A. Handle and store all items with care to prevent damage and injury to finish surfaces.

#### **Part 2 - Products**

##### **2.01 Type NB Roof Hatch:**

- A. Size and Construction: 2'-6" x 4'-6" (5'-1" x 3'-1" overall dimensions), single leaf type. Cover shall be 14 gauge paint bond galvanized steel with a 3" beaded flange, neatly welded. Insulation shall be glass fiber 1" in thickness, fully covered and protected by a 22 gauge paint bond steel (or 18 gauge aluminum) liner.
- B. Curb shall be 12" in height and of 14 gauge paint bond galvanized steel. It shall be formed with a 3-1/2" flange with holes provided for securing to the roof deck. Curb shall be equipped with an integral metal capflashing of the same gauge and material as the curb, full welded at the corners for weathertightness. Insulation on the exterior of the curb shall be rigid fiber board 1" in thickness.
- C. Scuttle shall be completely assembled with heavy piano hinges, compression spring operators enclosed in telescopic tubes, positive snap latch with turn handles and padlock hasps inside and outside, and thermoplastic rubber gasket. Cover shall be equipped with an automatic hold-open arm complete with vinyl grip handle to permit easy release. All hardware shall be zinc plated and chromate sealed.
- D. Provide LadderUp Safety Post - verify with Architect and Manufacturer.
- E. Manufacturer: The Bilco Company or approved equal.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Installation shall be in accordance with manufacturer's instructions.
- B. Coordinate installation of handrail to underside of hatch



## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07700 - ROOF ACCESSORIES**

- lid, to be used in conjunction with the ladder as detailed on the drawings.
- C. Coordinate with installation of roofing system and related flashings.

**End of Section**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

#### **Part 1 - General**

##### **1.01 Related Documents:**

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification Section, apply to work specified in this section.

##### **1.02 Definitions:**

- A. Firestopping: Material or combination of materials used to retain integrity of fire-rated construction by maintaining an effective barrier against the spread of flame, smoke, and hot gases through penetrations in, or construction joints between, fire rated wall and floor assemblies.

##### **1.03 General Description of the Work:**

- A. Only tested firestop systems shall be used in specific locations as follows:
  - 1. Penetrations for the passage of duct, cable, cable tray, conduit, piping, electrical busways and raceways through fire-rated vertical barriers (walls and partitions), horizontal barriers (floor/ceiling assemblies), and vertical service shaft walls and partitions.
  - 2. Safing slot gaps between edge of floor slabs and curtain walls.
  - 3. Openings between structurally separate sections of wall or floors.
  - 4. Gaps between the top of walls and ceilings or roof assemblies.
  - 5. Expansion joints in walls and floors.
  - 6. Openings and penetrations in fire-rated partitions or walls containing fire doors.
  - 7. Openings around structural members which penetrate floors or walls.

##### **1.04 Related Work Specified Elsewhere:**

- A. Coordinate work of this section with work of other sections as required to properly execute the work and as necessary to maintain satisfactory progress of the work of other sections, including:
  - 1. Section 03300 - Cast-In-Place Concrete
  - 2. Section 04810 - Masonry
  - 3. Section 07900 - Sealants
  - 4. Section 09250 - Gypsum Wallboard
  - 5. Section \*\*\*\*\* - Fire Suppression Piping
  - 6. Section \*\*\*\*\* - Common Work Results for Plumbing
  - 7. Section \*\*\*\*\* - Common Work Results for HVAC
  - 8. Section \*\*\*\*\* - HVAC Insulation
  - 9. Section \*\*\*\*\* - Basic Electrical Materials and Methods

## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07840 - FIRESTOPPING

#### 1.05 References:

- A. Test Requirements: ASTM E 814, "Standard Method of Fire Tests of Through Penetration Fire Stops".
- B. Test Requirements: UL 1479, "Fire Tests of Through-Penetration Firestops".
- C. Test Requirements: UL 2079, "Tests for Fire Resistance of Building Joint Systems".
- D. Underwriters Laboratories (UL) of Northbrook, IL publishes tested systems in their "FIRE RESISTANCE DIRECTORY" that is updated annually.
  - 1. UL Fire Resistance Directory:
    - a. Firestop Devices (XHJI)
    - b. Fire Resistance Ratings (BXRH)
    - c. Through-Penetration Firestop Systems (XHEZ)
    - d. Fill, Voids, or Cavity Material (XHHW)
    - e. Forming Materials (XHKU)
    - f. Joint Systems (XHBN)
    - g. Perimeter Fire Containment Systems (XHDG)
  - 2. Alternate Systems: "Omega Point Laboratories Directory" (updated annually).
- E. Test Requirements: ASTM E 1966, "Standard Test Method for Fire Resistive Joint Systems".
- F. Inspection Requirements: ASTM E 2174, "Standard Practice for On-site Inspection of Installed Fire Stops".
- H. ASTM E 84, "Standard Test Method for Surface Burning Characteristics of Building Materials".
- I. International Firestop Council Guidelines for Evaluating Firestop Systems Engineering Judgments.
- J. All major building codes: ICB0, SBCCI, BOCA, IBC
- K. NFPA 101 - Life Safety Code
- L. NFPA 70 - National Electric Code

#### THROUGH-PENETRATION UL CLASSIFICATION SYSTEM

Fire Stopping Systems

UL Classification System

|   |                                      | Construction<br>Penetrated | Type Of<br>Construction | System<br>Identification |
|---|--------------------------------------|----------------------------|-------------------------|--------------------------|
| 1 | No Penetrating Items:                | F, W, C                    | A, B, J, K,<br>L        | 0001-0999                |
| 2 | Metallic Pipes, Conduit or Tubing:   | F, W, C                    | A, B, J, K,<br>L        | 1001-1999                |
| 3 | Nonmetallic Pipe, Conduit or Tubing: | F, W, C                    | A, B, J, K,<br>L        | 2001-2999                |
| 4 | Electric Cables:                     | F, W, C                    | A, B, J, K,<br>L        | 3001-3999                |
| 5 | Cable, Trays with Electric Cables:   | F, W, C                    | A, B, J, K,<br>L        | 4001-4999                |
| 6 | Insulated Pipes:                     | F, W, C                    | A, B, J, K,<br>L        | 5001-5999                |

## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07840 - FIRESTOPPING

|   |                                                |         |                  |           |
|---|------------------------------------------------|---------|------------------|-----------|
| 7 | Electrical Bussduct Penetrations:              | F, W, C | A, B, J, K,<br>L | 6001-6999 |
| 8 | Mechanical Ductwork Penetrations:              | F, W, C | A, B, J, K,<br>L | 7001-7999 |
| 9 | Multiple Penetrations Through Common Openings: | F, W, C | A, B, J, K,<br>L | 8000-8999 |

#### Construction Penetration

|   |                                  |
|---|----------------------------------|
| F | Floor penetration                |
| W | Wall penetration                 |
| C | Either floor or wall penetration |

#### Type of Construction

|    |                                                                |
|----|----------------------------------------------------------------|
| A- | Concrete floors equal to or less than 5-inches thick           |
| B- | Concrete floors greater than 5-inches thick                    |
| J- | Concrete or masonry walls equal to or less than 8-inches thick |
| K- | Concrete or masonry walls greater than 8-inches thick          |
| L- | Framed walls                                                   |

#### JOINT UL CLASSIFICATION SYSTEM

| Fire-Resistant Joint Systems |                | UL Classification System |                     |             |
|------------------------------|----------------|--------------------------|---------------------|-------------|
|                              |                | Joint System             | Movement Capability | Joint Width |
| 1                            | Floor-to-Floor | FF                       | D                   | 0000-0999   |
| 2                            | Wall-to-Wall   | WW                       | D                   | 0000-0999   |
| 3                            | Floor-to-Wall: | FW                       | D                   | 0000-0999   |
| 4                            | Head of Wall:  | HW                       | D                   | 0000-0999   |

#### Movement Capability

|    |                         |
|----|-------------------------|
| D- | Has movement capability |
|----|-------------------------|

#### Joint Width

|           |                                |
|-----------|--------------------------------|
| 0000-0999 | Less than or equal to 2-inches |
|-----------|--------------------------------|

#### 1.06 Quality Assurance

- A. Installer Responsibilities: A firm experienced installing through-penetration firestop systems similar in material, design and extent to that indicated for this Project, whose

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

work has resulted in construction with a record of successful performance. Qualifications include having the necessary experience, staff, and training to install manufacturer's products per specified requirements.

- B. Firestop System installation must meet requirements of ASTM E 814, UL 1479 or UL 2079 tested assemblies that provide a fire rating equal to that of construction being penetrated.
- C. Proposed firestop materials and methods shall conform to applicable governing codes having local jurisdiction.
- D. Installation Responsibility: Assign installation of through-penetration firestop systems and fire-resistive joint systems in Project to a single qualified installer.
- E. Source Limitations: Obtain through-penetration firestop systems, for each kind of penetration and construction condition indicated, through one source from a single manufacturer.

#### **1.07 Submittals:**

- A. Submit Product Data: Manufacturer's specifications and technical data for each material including the composition and limitations, documentation of qualified tested firestop systems to be used and manufacturer's installation instructions.
- B. Submit Manufacturer's engineering judgment identification number and drawing details when no qualified tested system is available for an application. Engineering judgment must include both project name and contractor's name who will install firestop system as described in document.
- C. Submit material safety data sheets provided with product delivered to job-site.

#### **1.08 Installer Qualifications:**

- A. Engage an experienced Installer who is certified, licensed, or otherwise qualified by the firestopping manufacturer as having been provided the necessary training to install manufacturer's products per specified requirements.
- B. The work is to be installed by a contractor with at least one of the following qualifications:
  - 1. FM 4991 Approved Contractor
  - 2. UL Approved Contractor
  - 3. Hilti Accredited Fire Stop Specialty Contractor
- C. Installer shall have not less than 3 years of experience with fire stop installation.

#### **1.09 Delivery, Storage and Handling:**

- A. Deliver materials undamaged in manufacturer's clearly labeled, unopened containers, identified with brand, type, and UL label where applicable.
- B. Coordinate delivery of materials with scheduled installation date to allow minimum storage time at jobsite.
- C. Store materials under cover and protect from weather and

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

damage in compliance with manufacturer's requirements, including temperature restrictions.

- D. Comply with recommended procedures, precautions or remedies described in material safety data sheets as applicable.
- E. Do not use damaged or expired materials.

#### **1.10 Project Conditions:**

- A. Do not use materials that contain flammable solvents.
- B. Schedule installation of firestopping after completion of penetrating item installation but prior to covering or concealing of openings.
- C. Verify existing conditions and substrates before starting work. Correct unsatisfactory conditions before proceeding.
- D. Weather conditions: Do not proceed with installation of firestop materials when temperatures exceed the manufacturer's recommended limitations for installation printed on product label and product data sheet.
- E. During installation, provide masking and drop cloths to prevent firestopping materials from contaminating any adjacent surfaces.

#### **1.11 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers, providing they meet or exceed that specified.**

### **Part 2 – Products**

#### **2.01 Firestopping, General:**

- A. Provide firestopping composed of components that are compatible with each other, the substrates forming openings, and the items, if any, penetrating the firestopping under conditions of service and application, as demonstrated by the firestopping manufacturer based on testing and field experience.
- B. Provide components for each firestopping system that are needed to install fill material. Use only components specified by the firestopping manufacturer and approved by the qualified testing agency for the designated fire-resistance-rated systems.
- C. Firestopping Materials are either "cast-in-place" (integral with concrete placement) or "post installed." Provide cast-in-place firestop devices prior to concrete placement.

#### **2.02 Acceptable Manufacturers:**

- A. Subject to compliance with through penetration firestop systems (XHEZ), joint systems (XHBN), and perimeter firestop systems (XHDG) listed in Volume 2 of the UL Fire Resistance Directory; provide products of the following manufacturers

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

as identified below:

1. Hilti, Inc., Tulsa, Oklahoma  
800-879-8000 / [www.us.hilti.com](http://www.us.hilti.com)

#### **2.03 Materials:**

- A. Use only firestop products that have been UL 1479, ASTM E 814 or UL 2079 tested for specific fire-rated construction conditions conforming to construction assembly type, penetrating item type, annular space requirements, and fire-rating involved for each separate instance.
- B. Pre-installed firestop devices for use with noncombustible and combustible pipes (closed and open systems), conduit, and/or cable bundles penetrating concrete floors and/or gypsum walls, the following products are acceptable:
  1. Hilti CP 680-P Cast-In Place Firestop Device
    - a. Add Aerator adaptor when used in conjunction with aerator ("solvent") system.
  2. Hilti CP 681 Tub Box Kit for use with tub installations.
  3. Hilti CP 680-M Cast-In Place Firestop Device for use with noncombustible penetrants.
  4. Hilti CP 653 Speed Sleeve for use with cable penetrations.
- C. Sealants, caulking materials, or foams for use with non-combustible items including steel pipe, copper pipe, rigid steel conduit and electrical metallic tubing (EMT), the following products are acceptable:
  1. Hilti FS-ONE Intumescent Firestop Sealant
  2. Hilti CP 604 Self-leveling Firestop Sealant
  3. Hilti CP 620 Fire Foam
  4. Hilti CP 606 Flexible Firestop Sealant
  5. Hilti CP 601s Elastomeric Firestop Sealant
- D. Sealants or caulking materials for use with sheet metal ducts, the following products are acceptable:
  1. Hilti CP 601s Elastomeric Firestop Sealant
  2. Hilti CP 606 Flexible Firestop Sealant
  3. Hilti FS-ONE Intumescent Firestop Sealant
- E. Sealants, caulking or spray materials for use with fire-rated construction joints and other gaps, the following products are acceptable:
  1. Hilti CP 672 Speed Spray
  2. Hilti CP 601s Elastomeric Firestop Sealant
  3. Hilti CP 606 Flexible Firestop Sealant
  4. Hilti CP 604 Self-leveling Firestop Sealant
- F. Pre-formed mineral wool designed to fit flutes of metal profile deck and gap between top of wall and metal profile deck; as a backer for spray material.
  1. Hilti CP 777 Speed Plugs
  2. Hilti CP 767 Speed Strips

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

- G. Intumescent sealants, caulking materials for use with combustible items (penetrants consumed by high heat and flame) including insulated metal pipe, PVC jacketed, flexible cable or cable bundles and plastic pipe, the following products are acceptable:
  - 1. Hilti FS-ONE Intumescent Firestop Sealant
- H. Foams, intumescent sealants, or caulking materials for use with flexible cable or cable bundles, the following products are acceptable:
  - 1. Hilti FS-ONE Intumescent Firestop Sealant
  - 2. Hilti CP 620 Fire Foam
  - 3. Hilti CP 601s Elastomeric Firestop Sealant
  - 4. Hilti CP 606 Flexible Firestop Sealant
- I. Non-curing, re-penetrable intumescent putty or foam materials for use with flexible cable or cable bundles, the following products are acceptable:
  - 1. Hilti CP 618 Firestop Putty Stick
  - 2. Hilti CP 658T Firestop Plug
- J. Wall opening protective materials for use with U.L. listed metallic and specified nonmetallic outlet boxes, the following products are acceptable:
  - 1. Hilti CP 617 Firestop Putty Pad
  - 2. Hilti Firestop Box Insert
- K. Firestop collar or wrap devices attached to assembly around combustible plastic pipe (closed and open piping systems), the following products are acceptable:
  - 1. Hilti CP 643N Firestop Collar
  - 2. Hilti CP 644 Firestop Collar
  - 3. Hilti CP 648E/CP648S Wrap Strips
- L. Materials used for large openings and complex penetrations made to accommodate cable trays and bundles, multiple steel and copper pipes, electrical busways in raceways, the following products are acceptable:
  - 1. Hilti CP 637 Firestop Mortar
  - 3. Hilti FS 657 FIRE BLOCK
  - 4. Hilti CP 620 Fire Foam
  - 5. Hilti CP 675T Firestop Board
- M. Non curing, re-penetrable materials used for large size/complex penetrations made to accommodate cable trays and bundles, multiple steel and copper pipes, electrical busways in raceways, the following products are acceptable:
  - 1. Hilti FS 657 FIRE BLOCK
  - 2. Hilti CP 675T Firestop Board
- N. Sealants or caulking materials used for openings between structurally separate sections of wall and floors, the following products are acceptable:
  - 1. Hilti CP 672 Speed Spray
  - 2. Hilti CP 601s Elastomeric Firestop Sealant



## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

- 3. Hilti CP 606 Flexible Firestop Sealant
- 4. Hilti CP 604 Self-Leveling Firestop Sealant
- 0. For blank openings made in fire-rated wall or floor assemblies, where future penetration of pipes, conduits, or cables is expected, the following products are acceptable:
  - 1. Hilti FS 657 FIRE BLOCK
  - 2. Hilti CP 658T Firestop Plug
- P. Provide a firestop system with a "F" Rating as determined by UL 1479 or ASTM E814 which is equal to the time rating of construction being penetrated.
- Q. Provide a firestop system with an Assembly Rating as determined by UL 2079 which is equal to the time rating of construction joint assembly.

### **Part 3 - Execution**

#### **3.01 Preparation:**

- A. Verification of Conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.
  - 1. Verify penetrations are properly sized and in suitable condition for application of materials.
  - 2. Surfaces to which firestop materials will be applied shall be free of dirt, grease, oil, rust, laitance, release agents, water repellents, and any other substances that may affect proper adhesion.
  - 3. Provide masking and temporary covering to prevent soiling of adjacent surfaces by firestopping materials.
  - 4. Comply with manufacturer's recommendations for temperature and humidity conditions before, during and after installation of firestopping.
  - 5. Do not proceed until unsatisfactory conditions have been corrected.

#### **3.02 Coordination:**

- A. Coordinate location and proper selection of cast-in-place Firestop Devices with trade responsible for the work. Ensure device is installed before placement of concrete.
- B. Responsible trades to provide adequate spacing of field run pipes to allow for installation of cast-in-place firestop devices without interferences.

#### **3.03 Installation:**

- A. Regulatory Requirements: Install firestop materials in accordance with UL Fire Resistance Directory or Omega Point Laboratories Directory.
- B. Manufacturer's Instructions: Comply with manufacturer's instructions for installation of through-penetration and construction joint materials.
  - 1. Seal all holes or voids made by penetrations to ensure

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07840 - FIRESTOPPING**

an air and water resistant seal.

2. Consult with mechanical engineer, project manager, and damper manufacturer prior to installation of UL firestop systems that might hamper the performance of fire dampers as it pertains to duct work.
3. Protect materials from damage on surfaces subjected to traffic.

#### **3.04 Field Quality Control:**

- A. Examine sealed penetration areas to ensure proper installation before concealing or enclosing areas.
- B. Keep areas of work accessible until inspection by applicable code authorities.
- C. Inspection of through-penetration firestopping shall be performed in accordance with ASTM E 2174, "Standard Practice for On-Site Inspection of Installed Fire Stops" or other recognized standard.
- D. Perform under this section patching and repairing of firestopping caused by cutting or penetrating of existing firestop systems already installed by other trades.

#### **3.05 Identification:**

- A. Identify through-penetration firestop systems with pressure-sensitive, self-adhesive, preprinted vinyl labels. Attach labels permanently to surfaces of penetrated construction on both sides of each firestop system installation where labels will be visible to anyone seeking to remove penetrating items or firestop systems. Include the following information on labels:
  1. The words: "Warning -Through Penetration Firestop System-Do Not Disturb. Notify Building Management of Any Damage."
  2. Contractor's Name, address, and phone number.
  3. Through-Penetration firestop system designation of applicable testing and inspecting agency.
  4. Date of Installation.
  5. Through-Penetration firestop system manufacturer's name.
  6. Installer's Name.

#### **3.06 Adjusting and Cleaning:**

- A. Remove equipment, materials and debris, leaving area in undamaged, clean condition.
- B. Clean all surfaces adjacent to sealed holes and joints to be free of excess firestop materials and soiling as work progresses.

**End of Section**

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07900 - SEALANTS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor services, and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

- A. Standards:
  - 1. TT-S-00230C, Sealing Compound, One Component.
  - 2. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.

##### **1.03 Submittals:**

- A. Submit manufacturer's specifications and color chart for each type of sealant.
- B. Samples: For each kind and color of joint sealant required.
- C. Joint-Sealant Schedule: Include the following information:
  - 1. Joint-sealant application, joint location, and designation.
  - 2. Joint-sealant manufacturer and product name.
  - 3. Joint-sealant formulation.
  - 4. Joint-sealant color.
- D. Product test reports.
- E. Preconstruction compatibility and adhesion test reports.
- F. Preconstruction field-adhesion test reports.
- G. Field-adhesion test reports.

##### **1.04 Warranty:**

- A. All work done under this section of the work shall be guaranteed for a period of two years from date of final acceptance of the building. Guarantee shall include materials and workmanship required to repair any leaks or the repairs thereof.
- B. Special Warranty: Manufacturer's standard form in which joint sealant manufacturer agrees to furnish joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section for a period of 10 years from date of final acceptance.

##### **1.05 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Building Sealant: One part high performance polyurethane waterproofing sealant, FS-TT-S-00230C.
  - 1. Acceptable Manufacturer: Sonneborn NP1 Building Sealant.
  - 2. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system shall

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07900 - SEALANTS**

comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):

- a. Architectural Sealants: 250 gIL.
- b. Sealant Primers for Nonporous Substrates: 250 gIL.
- c. Sealant Primers for Porous Substrates: 775 gIL.
3. Liquid-Applied Joint Sealants: Comply with ASTM C 920 and other requirements indicated for each liquid-applied joint sealant specified, including those referencing ASTM C 920 classifications for type, grade, class, and uses related to exposure and joint substrates.
  - a. Suitability for Immersion in Liquids. Where sealants are indicated for Use I for joints that will be continuously immersed in liquids, provide products that have undergone testing according to ASTM C 1247. Liquid used for testing sealants is deionized water, unless otherwise indicated.
4. Stain-Test-Response Characteristics: Where sealants are specified to be nonstaining to porous substrates, provide products that have undergone testing according to ASTM C 1248 and have not stained porous joint substrates indicated for Project.
5. Suitability for Contact with Food: Where sealants are indicated for joints that will come in repeated contact with food, provide products that comply with 21 CFR 177.2600.
- B. Silicone Joint Sealants:
  1. Mildew-Resistant Neutral-Curing Silicone Joint Sealant: ASTM C 920.
    - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      1. BASF Building Systems.
      2. Dow Corning Corporation.
      3. GE Advanced Materials - Silicones.
      4. Pecora Corporation.
      5. Sika Corporation; Construction Products Division.
      6. Tremco Incorporated.
- C. Urethane Joint Sealants: Urethane Joint Sealant: ASTM C 920.
  1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work

## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07900 - SEALANTS

- include, but are not limited to, the following:
  - a. BASF Building Systems.
  - b. Bostik, Inc.
  - c. Lyntal, International, Inc.
  - d. Pecora Corporation.
  - e. Sika Corporation; Construction Products Division.
  - f. Tremco Incorporated.
- D. Latex Joint Sealants: Latex Joint Sealant: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. BASF Building Systems.
    - b. Bostik, Inc.
    - c. Pecora Corporation.
    - d. Tremco Incorporated.
- E. Preformed Joint Sealants: Preformed Foam Joint Sealant: Manufacturer's standard preformed, precompressed, open-cell foam sealant manufactured from urethane foam with minimum density of 10 lb/cu. ft. and impregnated with a nondrying, water-repellent agent. Factory produce in precompressed sizes in roll or stick form to fit joint widths indicated; coated on one side with a pressure-sensitive adhesive and covered with protective wrapping.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Dayton Superior Specialty Chemicals.
    - b. EM SEAL Joint Systems, Ltd.
    - c. Sandell Manufacturing Co.
    - d. Schul International, Inc.
    - e. Willseal USA, LLC.
- F. Acoustical Joint Sealants: Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
  - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Pecora Corporation.
    - b. USG Corporation.

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07900 - SEALANTS**

- G. Joint Sealant Backing: cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin) Type 0 (open-cell material) or any of the preceding types, as approved in writing by joint sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
  - 1. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer.
- H. Miscellaneous Materials: as recommended by sealant manufacturer.
  - 1. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
  - 2. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials.
  - 3. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.
  - 4. Joint Cleaner
  - 5. Joint Primer/Sealer
  - 6. Bond Breaker Tape
  - 7. Joint Backer-Rod: Closed-cell compressible rod stock, size and shape as required by application.
- I. Caulking compound: Watertight, gun consistency, conforming to FS-TT-C-598, Type 1.
- J. Accessories: As recommended by sealant manufacturer.
- K. Color: to be selected from manufacturer's standard colors.

### **Part 3 - Execution**

- 3.01 Preparation:
  - A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions.
    - 1. Remove laitance and form-release agents from concrete.
    - 2. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
  - B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to

## DIVISION 7 - THERMAL & MOISTURE PROTECTION

### SECTION 07900 - SEALANTS

areas of joint sealant bond; do not allow spillage or migration onto adjoining surfaces.

- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.02 Installation: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.

- A. Do not leave gaps between ends of sealant backings.
- B. Do not stretch, twist, puncture, or tear sealant backings.
- C. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
  - 1. Place sealants so they directly contact and fully wet joint substrates.
  - 2. Completely fill recesses in each joint configuration.
  - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
  - 1. Remove excess sealant from surfaces adjacent to joints.
  - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
  - 3. Provide concave joint profile per Figure 8A in ASTM C 1193, unless otherwise indicated.
- G. Acoustical Sealant Installation: Comply with ASTM C 919 and with manufacturer's written recommendations.
- H. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning

## **DIVISION 7 - THERMAL & MOISTURE PROTECTION**

### **SECTION 07900 - SEALANTS**

materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

#### **3.03 Joint Sealant Schedule:**

- A. Joint-Sealant Application: Exterior joints in horizontal traffic surfaces.
- B. Joint-Sealant Application: Exterior joints in vertical surfaces and horizontal nontraffic surfaces.
- C. Joint-Sealant Application: Interior joints in horizontal traffic surfaces.
- D. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal non traffic surfaces.
- E. Joint-Sealant Application: Mildew-resistant interior joints in vertical surfaces and horizontal non-traffic surfaces.
- F. Joint-Sealant Application: Interior acoustical joints in vertical surfaces and horizontal non traffic surfaces.

#### **3.04 Additional Information:**

- A. Application: All sight exposed caulking, and all exterior applications.
- B. Comply with sealant manufacturer's printed instructions.
- C. Any surfaces requiring priming, shall be prepared according to manufacturer's recommendations.
- D. Install sealants to depths as shown or as recommended by sealant manufacturer. Smooth uneven surfaces.
- F. Do not disturb compound by touching, washing, or otherwise until it has cured tack free.
- G. Excess compound shall be removed from surfaces after curing.
- H. Follow manufacturer's recommendations for painting over sealant.

**End of Section**



## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All material labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Hardware and Specialties - Section 08700

##### **1.03 Quality Assurance:**

###### **A. Standards:**

1. American Society for Testing and Materials
  - a. ASTM A-366, Steel Sheets, Carbon, Cold-Rolled, Commercial Quality.
  - b. ASTM A-569, Steel, Carbon, Hot-rolled Sheet and strip, commercial quality.
2. Underwriters' Laboratories, Inc.
3. Steel Door Institute (SDI): Recommended specifications for Steel Doors and Frames.

- B. Installer Qualifications: An employer of workers trained and approved by manufacturer.

- C. Source Limitations: Obtain standard steel doors and frames through one source from a single manufacturer.

- D. Fire-Rated Door Frame Assemblies: Assemblies complying with IBC 2009 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire protection ratings indicated.

1. Test Pressure: Test according to NFPA 252. After 5 minutes into the test, the neutral pressure level in furnace shall be established at 40 inches (1000 mm) or less above the sill.
2. Temperature-Rise Rating: At exit enclosures, provide doors that have a temperature-rise rating of 450 deg F (250 deg C) maximum in 30 minutes of fire exposure.
3. Smoke-Control Door Assemblies: Comply with NFPA 105.

##### **1.04 Submittals:**

- A. Shop Drawings: Product Data: Include construction details, material descriptions, core descriptions, label compliance, and finishes for each type of steel door and frame specified.

1. Submit shop Drawings showing details for each frame and door type, elevations and details of construction. Provide a schedule of doors and frames referenced to detail and openings as shown on the Drawings.
  - a. Elevations of each door design.
  - b. Details of doors, including vertical and horizontal edge details.
  - c. Frame details for each frame type, including dimensioned profiles.
  - d. Details and locations of reinforcement and

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

- preparations for hardware.
    - e. Details of each different wall opening condition.
    - f. Details of anchorages, accessories, joints, and connections.
    - g. Details of glazing frames and stops showing glazing.
    - h. Details of conduit and preparations for electrified door hardware and controls.
  - 2. It is the manufacturer's responsibility to obtain templates of finish hardware. The shop Drawings must indicate all hardware applications to the doors and frames.
  - 3. Begin fabrication only after receiving approved shop Drawings.
  - 4. Qualification Data: For Installer.
- 1.05 Product Delivery, Storage and Handling:
- A. All materials shall be protected for shipping so that they may arrive at the job site without undue damage or damage from storage at the job.
  - B. Deliver doors and frames palletized, wrapped, or crated to provide protection during transit and Project-site storage. Do not use non-vented plastic.
  - C. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.
  - D. Store doors and frames under cover at Project site. Place units in a vertical position with heads up, spaced by blocking, on minimum 4-inch- high wood blocking. Avoid using non-vented plastic or canvas shelters that could create a humidity chamber.
    - 1. If wrappers on doors become wet, remove cartons immediately. Provide minimum 114-inch space between each stacked door to permit air circulation.
- 1.06 Project Conditions:
- A. Field Measurements: Verify openings by field measurements before fabrication and indicate measurements on Shop Drawings.
    - 1. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish opening dimensions and proceed with fabricating standard steel frames without field measurements. Coordinate wall construction to ensure that actual opening dimensions correspond to established dimensions.
- 1.07 Coordination:
- A. Coordinate installation of anchorages for standard steel frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves,

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in masonry. Deliver such items to Project site in time for installation.

1.08 Warranty: Provide manufacturer's standard warranty.

#### **Part 2 - Products**

##### **2.01 Acceptable Manufacturers:**

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CURRIES Company; an ASSA ABLOY Group Company.
2. Steelkraft; and Ingersoll-Rand Company.
3. Or Approved Equal.

##### **2.02 Materials:**

- A. Cold-Rolled Steel Sheet: ASTM A 100S/A 100SM, Commercial Steel (CS), Type B; suitable for exposed applications.
- B. Hot-Rolled Steel Sheet: ASTM A 1011A 1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.
- C. Metallic-Coated Steel Sheet: ASTM A 653/A 653M, Commercial Steel (CS), Type B; with minimum A40 zinc-iron-alloy (galvannealed) coating designation.
- D. Electrolytic Zinc-Coated Steel Sheet: ASTM A 591A 59 1M, Commercial Steel (CS), Class B coating; mill phosphatized.
- E. Supports and Anchors: After fabricating, galvanize units to be built into exterior walls according to ASTM A 153/A 153M, Class B.
- F. Inserts, Bolts, and Fasteners: Provide items to be built into exterior walls, hot-dip galvanized according to ASTM A 153/A 153M.
- G. Mineral-Fiber Insulation: ASTM C 665, Type I (blankets without membrane facing); consisting of fibers manufactured from slag or rock wool with 6- to 12-lb/cu. ft. density; with maximum flame-spread and smoke-developed indexes of 25 and 50 respectively; passing ASTM E 136 for combustion characteristics.
- H. Glazing: Comply with requirements in Division 5 Section "Glazing."
- I. Bituminous Coating: Cold-applied asphalt mastic, SSPC-Paint 12, compounded for 15-mil dry film thickness per coat. Provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.
- J. Grout: In masonry construction use grout for masonry as specified in Division 4. In stud walls use cementitious sprayed fire-resistive material manufactured by the following:

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08100 - METAL DOORS AND FRAMES

1. Monokote Type MK-6; W.R. Grace Construction Products.
  2. Cafco 300; Isolatek International Corp.
- 2.03 Requirements: Provide doors of design indicated, not less than thickness indicated; fabricated with smooth surfaces, without visible joints or seams on exposed faces, unless otherwise indicated. Comply with ANSI A250.8.
- A. Doors - Flush Panel: (SDI Door Type III, Style 2, Seamless):
1. Door, as indicated on the Drawings shall be constructed of 16 gauge cold-rolled, stretcher leveled sheet steel. Doors shall be insulated with foamed urethane, full length and width of doors. Construct doors with smooth, flush surfaces without visible joints or seams on exposed face or vertical edges. Doors shall be 1-3/4" thick unless noted otherwise.
  2. Close top and bottom edges with a recessed channel end closure or a flush end closure treatment.
  3. Vertical Edges for Single-Acting Doors: Square edge unless beveled edge is indicated.
    - a. Beveled Edge: 1/8 inch in 2 inches.
  4. Vertical Edges for Double-Acting Doors: Round vertical edges with 2-1/8-inch radius.
  5. Tolerances: Comply with SDI 117, "Manufacturing Tolerances for Standard Steel Doors and Frames."
  6. Provide weep-hole openings in bottom of exterior doors to permit moisture to escape. Seal joints in top edges of doors against water penetration.
- B. Frames:
1. Hollow metal frames shall be of 16 gauge cold-rolled, pickled steel, except that all frames for single doors over 3'-0" wide, frames for pairs of doors over 4'-0" wide and frames for doors over 9'-0" high shall be of 14 gauge steel. Frames shall be neatly mitered and continuously welded and ground smooth for invisible joints.
  2. Furnish anchors as shown on Drawings or as recommended by manufacturer, to secure frames to adjacent construction, formed of not less than 18 gauge galvanized steel. Install anchors at a maximum of 24" centers of jamb height.
  3. Frames against masonry or concrete are to be slush filled.
  4. Knock-down frames are not permitted.
  5. Frames against masonry or concrete are to be slush filled.
  6. Jamb Anchors:
    - a. Masonry Type: Adjustable strap-and-stirrup or T - shaped anchors to suit frame size, not less than 0.042 inch thick, with corrugated or perforated

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08100 - METAL DOORS AND FRAMES

- straps not less than 2 inches wide by 10 inches long; or wire anchors not less than 0.177 inch thick.
- b. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.
- c. Floor Anchors: Formed from same material as frames, not less than 0.042 inch thick, and as follows:
  - 1. Monolithic Concrete Slabs: Clip-type anchors, with two holes to receive fasteners.
  - 2. Separate Topping Concrete Slabs: Adjustable-type anchors with extension clips, allowing not less than 2-inch height adjustment. Terminate bottom of frames at finish floor surface. Fabricate concealed stiffeners and hardware reinforcement from either cold- or hot-rolled steel sheet.
- d. Ceiling Struts: Minimum 3/8-inch-thick by 2-inch-wide steel.
- e. Plaster Guards: Formed from same material as frames, not less than 0.016-inch thick.
- 7. Sidelight Frames: Provide closed tubular members with no visible face seams or joints; fabricated from same material as door frame. Fasten members at crossings and to jambs by butt welding.
- C. Hardware Reinforcement:
  - 1. Reinforcements for locks shall be 3/16" for fronts, with 14 gauge for roses and escutcheons. Hinge reinforcements shall be at least 10 gauge x 1 2" x 9". Provide steel strike and hinge reinforcement cover for frames.
- D. Jamb Anchors: Provide number and spacing of anchors as follows:
  - 1. Masonry Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
    - a. Two anchors per jamb up to 60 inches in height.
    - b. Three anchors per jamb from 60 to 90 inches in height.
    - c. Four anchors per jamb from 90 to 120 inches in height.
    - d. Four anchors per jamb plus 1 additional anchor per jamb for each 24 inches or fraction thereof more than 120 inches in height.
  - 2. Stud-Wall Type: Locate anchors not more than 18 inches

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08100 - METAL DOORS AND FRAMES

from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:

- a. Three anchors per jamb up to 60 inches in height.
  - b. Four anchors per jamb from 60 to 90 inches in height.
  - c. Five anchors per jamb from 90 to 96 inches in height.
  - d. Five anchors per jamb plus 1 additional anchor per jamb for each 24 inches or fraction thereof more than 96 inches in height.
  - e. Two anchors per head for frames more than 42 inches wide and mounted in metal-stud partitions.
- E. Door Silencers: Except on weather-stripped doors, drill stops to receive door silencers as follows. Provide plastic plugs to keep holes clear during construction.
1. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
  2. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
- F. Stops and Moldings:
1. Moldings for Glazed Lites in Doors: Minimum 0.032 inch thick, fabricated from same material as door face sheet in which they are installed.
  2. Fixed Frame Moldings: Formed integral with standard steel frames, minimum 5/8 inch high, unless otherwise indicated.
  3. Loose Stops for Glazed Lites in Frames: Minimum 0.032 inch thick, fabricated from same material as frames in which they are installed.
- G. Labeled Doors and Frames:
1. Where doors and frames are called for on Drawings as labeled, their construction shall conform to all requirements and bear the appropriate U.L. label.
- H. Steel Finishes
1. General: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
    - a. Finish standard steel door and frames after assembly.
  2. Metallic-Coated Steel Surface Preparation: Clean surfaces with nonpetroleum solvent so surfaces are free of oil and other contaminants. After cleaning, apply a conversion coating suited to the organic coating to be applied over it. Clean welds, mechanical connections, and abraded areas, and apply galvanizing repair paint specified below to comply with ASTM A 780.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

- a. Galvanizing Repair Paint: High-zinc-dust-content paint for regalvanizing welds in steel, complying with SSPC-Paint 20.
3. Steel Surface Preparation: Clean surfaces to comply with SSPC-SP 1, "Solvent Cleaning"; remove dirt, oil, grease, or other contaminants that could impair paint bond. Remove mill scale and rust, if present, from uncoated steel; comply with SSPC-SP 3, "Power Tool Cleaning," or SSPC-SP 6/NACE No.3, "Commercial Blast Cleaning."
4. Factory Priming for Field-Painted Finish: Apply shop primer specified below immediately after surface preparation and pretreatment. Apply a smooth coat of even consistency to provide a uniform dry film thickness of not less than 0.7 mils.
  - a. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with ANSI A250.10 acceptance criteria; recommended by primer manufacturer for substrate; compatible with substrate and field-applied finish paint system indicated; and providing a sound foundation for field-applied topcoats despite prolonged exposure.

### **Part 3 - Execution**

#### **3.01 Fabrication:**

- A. All doors, and frames shall be cleaned of rust, grease and other impurities, and all welds ground and filled smooth, Metallic filler to conceal defects is not acceptable.
- B. Doors and frames shall be mortised, reinforced, drilled, and tapped for all mortise hardware in accordance with Hardware schedule and templates furnished by the hardware supplier, except that drilling and tapping for surface door closers, door closer brackets, surface panic devices and/or other surface applied hardware shall be done in the field. Frames shall be accurate and done in a neat, workmanlike manner.

#### **3.02 Installation:**

- A. Standard Steel Frames: Install standard steel frames for doors sidelights borrowed lights and other openings, of size and profile indicated. Comply with SDI 105.
  1. Bituminous coating and grout: Any material lost, removed or damaged during transportation or installation shall be replaced.
  2. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

braces, leaving surfaces smooth and undamaged.

- a. At fire-protection-rated openings, install frames according to NFP A 80.
  - b. Install frames with removable glazing stops located on secure side of opening.
  - c. Install door silencers in frames before grouting.
  - d. Remove temporary braces necessary for installation only after frames have been properly set and secured.
  - e. Check plumb, squareness, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
3. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor and secure with post-installed expansion anchors.
    - a. Floor anchors may be set with powder-actuated fasteners instead of post installed expansion anchors if so indicated and approved on Shop Drawings.
  4. Metal-Stud Partitions: Solidly pack mineral-fiber insulation behind frames.
  5. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with mortar as specified in Division 4 Section "Unit Masonry Assemblies."
  6. Ceiling Struts: Extend struts vertically from top of frame at each jamb to supporting construction above, unless frame is anchored to masonry or to other structural support at each jamb. Bend top of struts to provide flush contact for securing to supporting construction above. Provide adjustable wedged or bolted anchorage to frame jamb members.
  7. Installation Tolerances: Adjust standard steel door frames for squareness, alignment, twist, and plumb to the following tolerances:
    - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
    - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
    - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
    - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.



## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08100 - METAL DOORS AND FRAMES**

- B. Standard Steel Doors: Fit hollow-metal doors accurately in frames, within clearances specified below. Shim as necessary.
    - 1. Non-Fire-Rated Standard Steel Doors:
      - a. Jambs and Head: 1/8 inch plus or minus 1/16 inch.
      - b. Between Edges of Pairs of Doors: 1/8 inch plus or minus 1/16 inch.
      - c. Between Bottom of Door and Top of Threshold: Maximum 3/8 inch.
      - d. Between Bottom of Door and Top of Finish Floor (No Threshold): Maximum 3/4 inch.
    - 2. Fire-Rated Doors: Install doors with clearances according to NFP A 80.
    - 3. Smoke-Control Doors: Install doors according to NFPA 105.
  - C. Glazing: Comply with installation requirements in Division 8 Section "Glazing" and with standard steel door and frame manufacturer's written instructions.
- 3.03 Adjusting and Cleaning:
- A. Final Adjustments: Check and readjust operating hardware items immediately before final inspection. Leave work in complete and proper operating condition. Remove and replace defective work, including standard steel doors or frames that are warped, bowed, or otherwise unacceptable.
  - B. Clean grout and other bonding material off standard steel doors and frames immediately after installation.
  - C. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying primer.
  - D. Galvannealed Surfaces: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions. Do not use abrasive, caustic or acid cleaning agents.
  - E. Protect doors and frames from damage until final acceptance by Architect. Replace/repair any damaged items as directed above.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08200 - WOOD DOORS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Finish Hardware - Section 08700

##### **1.03 Quality Assurance:**

- A. Standards:
  - 1. Architectural Woodwork Institute:
    - a. Architectural Woodwork Quality Standards
  - 2. Underwriter's Laboratories, Inc.
- B. Manufacturer Qualifications: A qualified manufacturer that is certified for chain of custody by an FSC-Accredited certification body.
- C. Source Limitations: Obtain flush wood doors from single manufacturer.
- D. Quality Standard: In addition to requirements specified, comply with AWI's "Architectural Woodwork Quality Standards Illustrated."
- E. Fire-Rated Wood Doors: Doors complying with NFPA 80 that are listed and labeled by a qualified testing agency, for fire-protection ratings indicated, based on testing at according to NFPA 252 and UL 10B.
  - 1. Oversize Fire-Rated Door Assemblies: For units exceeding sizes of tested assemblies, provide certification by a qualified testing agency that doors comply with standard construction requirements for tested and labeled fire-rated door assemblies except for size.
  - 2. Temperature-Rise Limit: At vertical exit enclosures and exit passageways, provide doors that have a maximum transmitted temperature end point of not more than 450 deg F above ambient after 30 minutes of standard fire-test exposure.
  - 3. Fire-Rated Doors must be provided with fire labels.

##### **1.04 Submittals:**

- A. Shop Drawings:
  - 1. It is the manufacturer's responsibility to obtain templates of finish hardware. The shop Drawings must indicate all hardware applications to the doors.
  - 2. Begin fabrication only after receiving approved shop Drawings.
  - 3. Indicate location, size, and hand of each door; elevation of each kind of door; construction details not covered in Product Data; location and extent of hardware blocking; and other pertinent data.
  - 4. Samples for Initial Selection: Color charts consisting

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08200 - WOOD DOORS**

of actual materials in small sections.

5. Samples for Verification:

- a. Factory finishes applied to actual door face materials, approximately 8 by 10 inches, for each material and finish. For each wood species and transparent finish, provide set of three samples showing typical range of color and grain to be expected in the finished work.

6. Frames for light openings, 6 inches long, for each material, type, and finish required.

1.05 Products Delivery, Storage and Handling:

- A. When doors are delivered to job site, doors shall receive first coat of finish. Store in a protected area.
- B. Comply with requirements of referenced standard and manufacturer's written instructions.
- C. Package doors individually in cardboard cartons and wrap bundles of doors in plastic sheeting.
- D. Mark each door on bottom rail with opening number used on Shop Drawings.

1.06 Warranty:

- A. General Warranty: Door manufacturer's warranty specified in this Article shall not deprive the Owner of other rights the Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by the Contractor under requirements of the Contract Documents.
- B. Door Manufacturer's Warranty: Submit written agreement on door manufacturer's standard form signed by manufacturer, Installer, and Contractor, agreeing to repair or replace defective doors that have warped (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section or that show telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span, or do not comply with tolerance limitations in referenced quality standard.
  1. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors.
  2. Warranty shall be in effect during the following period of time after date of Final Completion.
    - a. Solid Core Interior Doors: Life of installation.

### **Part 2 - Products**

2.01 Doors (non-labeled):

- A. Doors shall be 1 3/4" thick interior grade, veneered, with a particleboard core. Construction shall meet AWI 1300 PC, "Custom" standard. Doors shall have I.S. "Premium" grade

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08200 - WOOD DOORS**

faces - Plain Sliced Red Oak. Provide hardwood top, bottom, and side edges.

#### **2.02 Doors (labeled):**

- A. Doors shall be 1 3/4" thick interior grade, veneered, with a mineral core (refer to Drawings for ratings). Construction shall meet AWI 1300 FD, "Custom" standard. Doors shall have I.S. "Premium grade faces - Plain Sliced Red Oak. Provide hardwood top, bottom, and side edges.
- B. Where doors are called for on drawings as labeled their construction shall conform to all U.L. requirements and bear the appropriate U.L. label.

#### **2.03 Acceptable Manufacturers:** Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- 1. Algoma Hardwoods, Inc.
- 2. Ampco, Inc.
- 3. Buell Door Company Inc.
- 4. Chappell Door Co.
- 5. Eagle Plywood & Door Manufacturing, Inc.
- 6. Eggers Industries.
- 7. Graham; an Assa Abloy Group company.
- 8. Haley Brothers, Inc.
- 9. Ideal Architectural Doors & Plywood.
- 10. Ipik Door Company.
- 11. Lambton Doors.
- 12. Marlite.
- 13. Marshfield Door Systems, Inc.
- 14. Mohawk Flush Doors, Inc.; a Masonite company.
- 15. Oshkosh Architectural Door Company.
- 16. Poncraft Door Company.
- 17. Vancouver Door Company.
- 18. VT Industries Inc.

#### **2.04 Door Construction - General:**

- A. Particleboard-Core Doors:
  - 1. Particleboard: ANSI A208.1, Grade 1L-1, made with binder containing no ureaformaldehyde resin.
  - 2. Blocking - Provide wood blocking in particleboard-core doors as follows:
    - a. 5-inch top-rail blocking, in doors indicated to have closers.
    - b. 5-inch bottom-rail blocking, in exterior doors and doors indicated to have kick, mop, or armor plates.
  - 3. Provide doors with structural-composite-lumber cores instead of particleboard cores for doors indicated to receive exit devices.
- B. Fire-Protection-Rated Doors: Provide core specified or

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08200 - WOOD DOORS**

mineral core as needed to provide fire protection rating indicated.

1. Edge Construction: Provide edge construction with intumescent seals concealed by outer stile. Comply with specified requirements for exposed edges.
2. Pairs: Provide fire-retardant stiles that are listed and labeled for applications indicated without formed-steel edges and astragals. Provide stiles with concealed intumescent seals. Comply with specified requirements for exposed edges.
3. Pairs: Provide formed-steel edges and astragals with intumescent seals.
- C. Factory Finishing: Comply with referenced quality standard for factory finishing. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
  1. Finish faces, all four edges, edges of cutouts, and mortises. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.
  2. Finish doors at factory.
  3. Finish doors at factory that are indicated to receive transparent finish. Field finish doors indicated to receive opaque finish.
  4. Transparent Finish:
    1. Grade: Premium.
    2. Finish: WDMA TR-6 catalyzed polyurethane.
    3. Staining: Water-based stain with transparent ultraviolet cured catalyzed polyurethane. Color as selected by Architect from manufacturer's full range.
    4. Effect: Open-grain finish.
    5. Sheen: Semigloss.

### **Part 3 - Execution**

#### **3.01 Examination:**

- A. Examine doors and installed door frames before hanging doors.
  1. Verify that frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
  2. Reject doors with defects.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

#### **3.02 Installation:**

- A. Provide clean properly sized and accurately placed mortises

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08200 - WOOD DOORS**

and drilled holes for all mortise and surface mounted finish hardware, in accordance with Hardware Schedule and templates furnished by the hardware supplier.

- B. Comply with the tolerance requirements of AWI for prefitting. Install in accordance with the requirements of the NWMA Door Guarantee.
  - C. Repair or replace doors damaged during installation. Repair doors which do not swing or operate properly.
  - D. Hardware: For installation, see Division 08 Section "Door Hardware."
  - E. Installation Instructions: Install doors to comply with manufacturer's written instructions and the referenced quality standard, and as indicated.
    - 1. Install fire-rated doors in corresponding fire-rated frames according to NFPA 80.
  - F. Job-Fitted Doors: Align and fit doors in frames with uniform clearances and bevels as indicated below; do not trim stiles and rails in excess of limits set by manufacturer or permitted for fire-rated doors. Machine doors for hardware. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
    - 1. Clearances: Provide 1/8 inch at heads, jambs, and between pairs of doors. Provide 1 inch from bottom of door to top of decorative floor finish or covering unless otherwise indicated. Where threshold is shown or scheduled, provide 1/4 inch from bottom of door to top of threshold unless otherwise indicated.
      - a. Comply with NFP A 80 for fire-rated doors.
    - 2. Bevel non-fire-rated doors 1/8 inch in 2 inches at lock and hinge edges.
    - 3. Bevel fire-rated doors 1/8 inch in 2 inches at lock edge; trim stiles and rails only to extent permitted by labeling agency.
  - G. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
  - H. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.
- 3.03 Adjusting:
- A. Operation: Rehang or replace doors that do not swing or operate freely.
  - B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if work complies with requirements and shows no evidence of repair or refinishing.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08300 - SPECIAL DOORS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 System Description:**

- A. Design Requirements:
  - 1. Wind Loading: Design doors to withstand 20 psf (950 Pa) wind load pressure.

##### **1.03 Submittals:**

- A. Shop Drawings: Indicate details and dimensions of fabrications and installation, including any operators and controllers.
- B. Manufacturer=s Literature: Descriptive literature and installation instructions.

##### **1.04 Quality Assurance:**

- A. Qualifications:
  - 1. Manufacturer Qualifications: Minimum five years of experience in producing doors of the type specified.
  - 2. Installer Qualifications: Manufacturer's approval.

##### **1.05 Delivery Storage and Handling:**

- A. Follow manufacturer's instructions.

##### **1.06 Warranty:**

- A. Standard Warranty: two years from date of shipment against defects in material and workmanship.

##### **1.06 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 General:**

- A. Refer to Drawings for location, size, and details.

##### **2.02 Rolling Counter Door:**

- A. Acceptable Manufacturer:
  - 1. Manufacturer: Cornell Iron Works, Inc.
  - 2. Model: Rolling Counter Door ESC10 - Jamb Mounting.
- B. Materials:
  - 1. Curtain:
    - a. Slats: No. 1F, interlocked flat-faced slats, 1-1/2 inches high by 1/2 inch deep, 22 gauge AISI 304 series stainless steel with stainless steel angle bottom bar with lift handles and vinyl astragal.
    - b. Fabricate interlocking sections with high

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08300 - SPECIAL DOORS**

- strength molded nylon endlocks riveted to ends of alternate slats.
- c. Slat finish:
  - 1. Stainless Steel: No. 4 finish.
- d. Bottom Bar Finish:
  - 1. Stainless Steel: No. 4 finish.
- 2. Guides:
  - a. Stainless Steel: 12 gauge formed shapes.
  - b. Finish:
    - 1. Stainless Steel: No. 4 finish.
- 3. Counterbalance Shaft Assembly:
  - a. Barrel: Steel pipe capable of supporting curtain load with maximum deflection of 0.03 inches per foot (2.5 mm per meter) of width.
  - b. Spring Balance: Oil-tempered, heat-treated steel helical torsion spring assembly designed for proper balance of door to ensure that maximum effort to operate will not exceed 25 lbs (110 N). Provide wheel for applying and adjusting spring torque.
- 4. Brackets: Fabricate from reinforced steel plate with bearings at rotating support points to support counterbalance shaft assembly and form end closures.
  - a. Finish:
    - 1. Light gray shop prime coat; minimum 0.6 mils cured film thickness.
- 5. Hood: 24 gauge stainless steel with reinforced top and bottom edges, and fascia panel. Provide minimum 1/4 inch (6 mm) steel intermediate support brackets as required to prevent excessive sag.
  - a. Finish:
    - 1. Stainless Steel: No. 4 finish.
    - 2. Sill: Integral sill formed of 12 gauge 304 series stainless steel with No. 4 finish.
- 6. Weatherstripping:
  - Bottom Bar: Replaceable, 3-point, compressible vinyl gasket extending into guides.
- C. Accessories:
  - 1. Locking:
    - a. Manual Crank Hoist: Pad lockable slide bolt on coil side of bottom bar at each jamb extending into slots in guides.
- D. Operation:
  - 1. Manual Crank Hoist: Provide crank hoist operator including crank gear box, steel crank drive shaft and geared reduction unit. Fabricate gear box to completely enclose operating mechanism and be oil-



## DIVISION 8 - DOORS & WINDOWS

### SECTION 08300 - SPECIAL DOORS

tight.

- E. Fire Rating: 20 minutes or as required by applicable code.

#### Part 3 - Execution

##### 3.01 Installation:

- A. Verify that opening is prepared with headers level, jambs plumb, floor level, without projections, etc. and are correctly dimensioned to receive door. **Coordinate with kitchen equipment rack to be located at the door opening and adjust rack as necessary to clear coiling door.**
- B. Examine substrates upon which work will be installed and verify conditions are in accordance with approved shop drawings. Commencement of work by door installer is acceptance of substrate.
- C. Install in compliance with manufacturer's instructions. Hang straight, plumb and level, and adjust for smooth, quiet operation.
- D. Provide all accessories, etc. as required for a complete and functional installation.
- E. Prior to final acceptance of the project, inspect all work done under this section, and make all necessary adjustments, repairs or replacements of defective work.

##### 3.02 Cleaning and Demonstration:

- A. Clean surfaces soiled by work as recommended by the manufacturer.
- B. Remove surplus materials and debris from the site.
- C. Demonstrate proper operation and maintenance procedures to the Owner's Representative.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08310 - TORNADO DOORS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 System Description:**

- A. Design Requirements - Tornado Doors:
  - 1. ICC 500-2014 Tornado Doors.

##### **1.03 Submittals:**

- A. Shop Drawings: Indicate details and dimensions of fabrications and installation, including any operators and controllers.
- B. Manufacturer's Literature: Descriptive literature and installation instructions.

##### **1.04 Quality Assurance:**

- A. Qualifications:
  - 1. Manufacturer Qualifications: Minimum five years of experience in producing doors of the type specified.
  - 2. Installer Qualifications: Manufacturer's approval.
  - 3. Doors shall have fire resistance rating as per the drawings.

##### **1.05 Delivery Storage and Handling:**

- A. Follow manufacturer's instructions.

##### **1.06 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 General:**

- A. Refer to Drawings for location, size, and details.

##### **2.02 Tornado Door:**

- A. Locations: provide where indicated on the drawings (Doors #104 and 105).
- B. Acceptable Manufacturer:
  - 1. Manufacturer and model number:
    - a. Steelcraft - Ingersoll Rand Security Technologies / Paladin PW-Series Flush Doors and FP14 Frame.
    - b. Republic Doors and Frames, Inc. / DE Series - FEMA 361 Flush Doors.
    - c. Provide Underwriters Laboratories, Inc. label for the fire rating classification where applicable.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08310 - TORNADO DOORS**

#### **C. Materials:**

1. Door Construction:
  - a. Face Skins: 14 gage A-60 Galvannealed Steel.
  - b. Hinge and Rail Reinforcement: hinge edge is non-beveled and reinforced with a continuous 10 gage steel channel projection welded at 5" on center maximum.
  - c. Top and Bottom Channels: inverted steel channel - 14 gage at top and 16 gage at bottom, welded at 2.5" on center maximum.
  - d. Core: steel stiffened (both doors) with mineral filler as required to obtain applicable fire rating at DoorS #14 and 25.
  - e. Lock Rail: beveled and reinforced with continuous 14 gage steel channel welded at 5" on center maximum.
  - f. Closer Reinforcement: 14 gage.
  - g. Stiffeners: 18 gage, 4" wide spaces at 6" on center maximum and welded at 5" on center maximum vertically.
  - h. Top and Bottom Channels: 14 gage inverted steel channels with additional 12 gage flush channel.
  - i. Door Undercut: shall not exceed 3/4".
2. Provide factory applied baked-on rust inhibiting primer in accordance with ANSI A250.10-1998.
3. Refer to Section 08700 Finish Hardware for additional information concerning hardware for these doors and frames.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08310 - TORNADO DOORS**

#### **2.03 Hardware:**

A. Provide hardware as per the following:

**Hardware Group No. T1 - Door #104: Provide each PR exterior tornado door(s) with the following:**

| Quantity |     | Description        | Model Number                                      | Finish | Mfr |
|----------|-----|--------------------|---------------------------------------------------|--------|-----|
| 6        | EA  | HINGE              | 5BB1HW 4.5 X 4.5                                  | 652    | IVE |
| 2        | EA  | FIRE EXIT HARDWARE | WS9827/9927L 996L-R/V                             |        |     |
|          |     |                    | LENGTH AS REQUIRED                                | 626    | VON |
| 2        | EA  | RIM CYLINDER       | 20-057 ICX                                        | 626    | SCH |
| 1        | EA  | MORTISE CYLINDER   | 20-061 ICX                                        | 626    | SCH |
| 3        | EA  | CLASSIC CORE       | 30-001                                            | 626    | SCH |
| 1        | SET | ASTRAGAL           | 9115A HEIGHT AS REQ                               | AL     | NGP |
| 2        | EA  | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS,<br>SPCRS & PLATES AS REQ | 689    | LCN |
| 2        | EA  | KICK PLATE         | 8400 10" X 2" LDW                                 | 630    | IVE |
| 2        | EA  | FLOOR STOP         | WS407CCV OR FS436                                 |        |     |
|          |     |                    | AS REQ'D                                          | 628    | IVE |
| 1        | SET | SEALS              | 5050B H & J                                       | BLK    | NGP |
| 1        | EA  | DOOR SWEEP         | 101VA LGTH AS REQ'D.                              | AL     | NGP |
| 1        | EA  | THRESHOLD          | 892V LGTH AS REQ'D.                               | AL     | NGP |

SUPPLIER TO VERIFY HARDWARE SPECIFIED AND REVISE AS NECESSARY TO MEET THE REQUIREMENTS OF ICC 500-2014 OR CURRENT APPLICABLE CODES AND STANDARDS.

**Hardware Group No. T2 - Door #105: Provide each SGL exterior tornado door with the following:**

| Quantity |     | Description        | Model Number             | Finish | Mfr |
|----------|-----|--------------------|--------------------------|--------|-----|
| 3        | EA  | HINGE              | 5BB1HW 4.5 X 4.5         | 652    | IVE |
| 1        | EA  | FIRE EXIT HARDWARE | WS9827/9927L 996L-R/V    |        |     |
|          |     |                    | LENGTH AS REQUIRED       | 626    | VON |
| 1        | EA  | RIM CYLINDER       | 20-057 ICX               | 626    | SCH |
| 1        | EA  | MORTISE CYLINDER   | 20-061 ICX               | 626    | SCH |
| 2        | EA  | CLASSIC CORE       | 30-001                   | 626    | SCH |
| 1        | EA  | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS, |        |     |
|          |     |                    | SPCRS & PLATES AS REQ    | 689    | LCN |
| 1        | EA  | KICK PLATE         | 8400 10" X 2" LDW        | 630    | IVE |
| 1        | EA  | FLOOR STOP         | WS407CCV OR FS436        |        |     |
|          |     |                    | AS REQ'D                 | 628    | IVE |
| 1        | SET | SEALS              | 5050B H & J              | BLK    | NGP |
| 1        | EA  | DOOR SWEEP         | 101VA LGTH AS REQ'D.     | AL     | NGP |
| 1        | EA  | THRESHOLD          | 892V LGTH AS REQ'D.      | AL     | NGP |

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08310 - TORNADO DOORS**

SUPPLIER TO VERIFY HARDWARE SPECIFIED AND REVISE AS NECESSARY TO MEET THE REQUIREMENTS OF ICC 500-2014 OR CURRENT APPLICABLE CODES AND STANDARDS.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Verify that openings are prepared with headers level, jambs plumb, floor level, without projections, etc. and are correctly dimensioned to receive doors.
- B. Install in compliance with manufacturer's instruction. Hang straight, plumb and level, and adjust for smooth, quiet operation.
  - 1. At tornado doors, comply with FEMA Regulations and follow manufacturer's instructions. **Provide complete assembly to meet ICC 500-2014 or current applicable codes and standards.**
- C. Prior to final acceptance of the project, inspect all work done under this section, and make all necessary adjustments, repairs or replacements of defective work.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 – TORNADO RESISTANT COILING DOORS**

#### **PART 1 GENERAL**

##### **1.01 GENERAL REQUIREMENTS**

- A. Provide all materials, labor, equipment and services necessary to furnish, deliver and install all work under this section as shown on the contract documents, specified herein, and as specified by the job conditions.

##### **1.02 DESCRIPTION**

- A. Related work specified elsewhere:
  - 1. Metal Fabrication.      Section 05500
  - 2. Rough Carpentry.      Section 06100
  - 3. Painting:      Section 09900
  - 4. Electrical:      Division 26

##### **1.03 SUBMITTALS**

- A. Procedures: Furnish submittals in accordance with the general requirements specified.
- B. Shop Drawing: Furnish shop drawings for architect's approval. Include elevations, sections, and details indicating dimensions, materials, finishes, conditions for anchorage and support of each coiling door.
- C. Listings and Certifications:
  - 1. Listed, labeled and certified by an IAS accredited nationally recognized testing laboratory for product compliance with FEMA 361 Safe Rooms for Tornadoes.
  - 2. Listed, labeled and certified by an IAS accredited nationally recognized testing laboratory to ICC 500-2020 Standard for Design and Construction of Storm Shelters.
  - 3. Listed, labeled and certified by an IAS accredited nationally recognized testing laboratory for a wind pressure rating of 302psf (1.2 times the design wind pressure of 252psf) in accordance with ASTM E330.
  - 4. Listed, labeled and certified by an IAS accredited nationally recognized testing laboratory for Large Missile Impact rating in accordance with the requirements of ASTM E1886 for FEMA 361 Safe Rooms for Tornadoes.
- D. Product Literature: Submit manufacturer's technical literature describing the product to be used under this section.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 – TORNADO RESISTANT COILING DOORS**

- E. Maintenance and Operating Manuals: Furnish complete manuals describing the materials, devices and procedures to be followed in operating and maintaining all tornado and hurricane resistant coiling doors under this section. Include manufacturer's brochures and parts lists describing the actual materials used in the product.

#### **1.04 QUALITY ASSURANCE**

- A. Regulatory Requirements: Comply with applicable FEMA requirements as well as laws, codes, ordinances and regulations of federal, state and municipal authorities having jurisdiction.
- B. Manufacturer Requirements: Manufacturer shall have been in the business of and have experience in manufacturing wide span opening protective door assemblies as well as providing dependable credible service for a minimum of ten (10) years.
- C. Operational Cycle Life: Tornado resistant coiling doors shall be designed and constructed for a minimum 10,000 operating cycles for the life of the door assembly. Cycles shall be verifiable by a non-resettable cycle counter located within the door's motor operator control panel.

#### **1.05 DELIVERY, STORAGE AND HANDLING**

- A. General: Deliver and store materials in manufacturer's original packaging, labeled to show name, brand and type. Store materials in a protected dry location off the ground in accordance with manufacturer's instructions.

#### **1.06 WARRANTY**

- A. Tornado Resistant Coiling Door Warranty: Provide Two (2) Year, 10,000 Cycle Warranty signed by the manufacturer and installer agreeing to repair or replace work which has failed as a result of defects in materials or workmanship. Upon notification within the warranty period, such defects shall be repaired at no cost to the owner.

## **PART 2 PRODUCTS**

### **2.01 TORNADO AND HURRICANE RESISTANT COILING DOORS**

- A. Manufacturer: Tornado resistant coiling doors shall be the model SafeSpace™ SS500X-PC as manufactured by McKEON. Assembly shall

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 – TORNADO RESISTANT COILING DOORS**

be tested, listed and labeled by an IAS accredited nationally recognized testing laboratory, approved for use in FEMA 361 and ICC 500-2020 safe rooms and storm shelters.

#### **2.02 MATERIALS**

- A. Curtain: Shall be assembled of light weight extruded alloy interlocking slats. Curtain shall be formed of EX slat profile sections of gauge thickness as required to sustain the minimum required design wind pressure.
  - 1. Slat cross section shall not be less than 3" wide by 1-1/8" deep.
- B. Bottom Bar: Shall consist of a double 3" x 3" structural steel angle assembly formed to fit and engage the curtain assembly.
- C. Guides: Each guide assembly shall be fabricated of structural steel support angles no greater than 4" x 4" and guide retaining angles of a minimum 6" depth to retain curtain in the guides under the design wind pressure and impact forces specified.
- D. Mounting Brackets: Fabricated of hot rolled 3/16" minimum steel plates, brackets shall be provided to house ends of the counterbalance barrel assembly.
- E. Hood: Shall be provided to entirely enclose coiled curtain and counterbalance barrel assembly. Hood shall be fabricated of a minimum 22 gauge G90 galvanized steel, designed and formed to match brackets. Top and bottom shall be bent and reinforced to provide for proper stiffness.
- F. Counterbalance Assembly: Coiling door shall be counterbalanced by means of adjustable steel helical torsion springs attached to shaft enclosed in pipe with required mounting blocks or rings for attachment of curtain. Grease sealed bearings or self-lubricating graphite bearings shall be attached to the spring barrel which shall be fabricated of hot formed structural quality carbon steel seamless pipe.
- G. Electric Motor Operator: Door shall be provided with a compact power unit designed and laboratory listed by the door manufacturer. Operator shall be equipped with an adjustable screw-type limit switch to break the circuit at termination of travel. High efficiency planetary gearing running in an oil bath, shall be furnished together with a centrifugal governor, magnetic operated brake and a fail-safe magnetic release device,



## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 - TORNADO RESISTANT COILING DOORS**

completely housed to protect against damage, dust and moisture. An efficient overload protection device, which will break the power circuit and protect against damage to the motor windings shall be integral with the unit. Operator is to be housed in a NEMA type 1 enclosure.

- a. Motor: Shall be intermediate duty, thermally protected, ball bearing type with a class A or better insulation. Horsepower of motor is to be 1/2hp minimum or of manufacturer's recommended size, whichever is greater.
- b. Starter: Shall be size "0" magnetic reversing starter, across the line type with mechanical and electrical interlocks, with 10 amp continuous rating and 24 volt control circuit.
- c. Reducer: Planetary gear type, 80% efficiency minimum.
- d. Cycle Counter: Non-resettable operational cycle counter.

- H. NFS Operation: The operating system shall prevent the tornado storm door from closing during building power interruption to the motor operator for a period of up to six hours. Once the NFS cycle lapses, the door shall self-close at a controlled governed rate of closure not greater than 6" per second.
- I. Control Stations: Each tornado storm door shall be provided with three position push button control station marked open, close and stop that is active during normal and alarm conditions. The control station shall remain operable as long as there is no main power failure to the motor operator.
- J. Master Control Station: Provide a single master control station that can simultaneously activate all of the tornado storm doors in the facility to the emergency closed or open positions. The master control station shall remain operable as long as there is no main power failure to the door's motor operators.
- K. Emergency Alarm Activation: not applicable.
- L. Emergency Manual Operation: The door assembly shall be equipped with an emergency hand chain that shall remain operable during an emergency alarm condition. The emergency hand chain shall also remain operable during main power failure lasting up to six hours, after the six hours have lapsed, the door assembly shall automatically self-close and remain in the closed position until main power has been restored to the motor operator. The hold open sequence of the emergency manual operation mode shall be programable so that during an emergency alarm condition or main power failure, not exceeding six hours, the door assembly shall

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 – TORNADO RESISTANT COILING DOORS**

remain open for a period of five to thirty minutes after the hand chain has opened the door and before the door assembly begins to automatically self-close again.

- M. Obstruction Sensing Safety Edge: The obstruction sensing safety edge shall be programable to either stop or reverse upon coming in contact with an obstruction during the close cycle of the door. The obstruction sensing safety edge shall remain active and operable as long as there is no main power failure to the motor operator. During main power failure, if the obstruction sensing safety edge comes in contact with an obstruction during the self-closing mode, the door shall stop and remain in contact with the obstruction until it is removed and the door can continue to the fully closed position.
- N. True Test Panel: not applicable.
- O. Finish: After completion of fabrication, clean all metal surfaces to remove dirt and chemically treat to provide for powder coat adhesion. Provide powder coat finish of color as selected by architect from manufacturer's standard RAL powder coat selection chart.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Examine surfaces and field conditions to which this work is to be performed and notify architect if conditions of surfaces exist which are detrimental to proper installation and timely completion of work.
- B. Verify all dimensions taken at job site affecting the work. Notify the architect in any instance where dimensions vary.
- C. Coordinate and schedule work under this section with work of other sections so as not to delay job progress.

#### **3.02 INSTALLATION**

- A. Perform installation using only factory approved and certified representatives of the coiling door manufacturer.
- B. Install coiling door assemblies at locations shown in perfect alignment and elevation, plumb, level, straight and true.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08330 – TORNADO RESISTANT COILING DOORS**

- C. Adjust coiling door installation to provide uniform clearances and smooth non-binding operation.
- D. Install wiring in accordance with applicable local codes and the National Electrical Code Standard. Materials shall be UL listed.

#### **3.03 PROTECTION AND CLEANING**

- A. Protect installed work using adequate and suitable means during and after installation until accepted by owner.
- B. Remove, repair or replace materials which have been damaged in any way.
- C. Clean surfaces of grime and dirt using acceptable and recommended means and methods.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08331 - ROLLING GRILLES**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 System Description:**

- A. Design Requirements:
  - 1. Cycle Life:
    - a. Design grilles of standard construction for normal use of up to 5 cycles per day maximum, and an overall maximum of 50,000 operating cycles for the life of the grille.
  - 2. Headroom:
    - a. Fully coiled curtain with bracket not to exceed 11.75" in diameter

##### **1.03 Submittals:**

- A. Shop Drawings: Indicate details and dimensions of fabrications and installation, including any operators and controllers.
- B. Manufacturer's Literature: Descriptive literature and installation instructions.
- C. Closeout Submittals:
  - 1. Operation and Maintenance Manual.
  - 2. Certificate stating that installed materials comply with this specification.

##### **1.04 Quality Assurance:**

- A. Qualifications:
  - 1. Manufacturer Qualifications: Minimum five years of experience in producing doors of the type specified.
  - 2. Installer Qualifications: Manufacturer's approval.

##### **1.05 Delivery Storage and Handling:**

- A. Follow manufacturer's instructions.

##### **1.06 Warranty:**

- A. Standard Warranty: two years from date of shipment against defects in material and workmanship.

##### **1.06 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 General:**

- A. Refer to Drawings for location, size, and details.

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08331 - ROLLING GRILLES**

#### **2.02 Rolling Grilles:**

- A. Acceptable Manufacturer:
  - 1. Manufacturer: Cornell Iron Works, Inc.
  - 2. Model: Rolling Grille VisionAire Model ESG12C - Jamb Mounting.
- B. Materials:
  - 1. Curtain: Configuration - Brick Pattern
    - a. Horizontal Rods: Minimum solid 5/16 inch (8 mm) diameter, 5056 H32 aluminum alloy sleeved with horizontal aluminum or stainless steel tube spacers to separate vertical links on every rod with continuous end tube spacers.
    - b. Vertical Spacing: 2.5" to 3.7" on center
    - c. Vertical Chains: do not install but turn over to Owner's Rep. for potential future need/use.
    - d. Finish: Aluminum - Mill finish.
  - 2. Bottom Bar:
    - a. Fabrication: Extruded Aluminum Tubular Section - Minimum 1.5x1.5x.18 inch
    - b. Finish: Aluminum - Mill finish.
  - 3. Guides: Wall Mounted: Heavy duty (minimum .109 inch thick) extruded aluminum sections with snap-on cover to conceal fasteners and Santoprene runners on both sides of curtain. Provide steel mounting angle as required for face of wall installation. Also is 12 gauge bent stainless steel with UHMW overlaid on EPDM wear strips.
    - a. Fabrication - Aluminum Guide:
      - 1) Finish: Mill finish
    - b. Steel Mounting Mounting Angles, Finish:
      - 1) SpectraShield® Coating System - Color Selected by Architect: Phosphate treatment followed by baked-on polyester powder coat; minimum 2.5 mils (0.065 mm) cured film thickness; ASTM D-3363 pencil hardness: H or better
    - c. Corrosion Inhibitive: Phosphate treatment followed by a corrosion inhibitive baked-on zinc enriched gray polyester powder coat; minimum 2.5 mils (0.065 mm) cured film thickness
    - d. Hot-dip Galvanized: ASTM A 123, Grade 85 zinc coating, hot-dip galvanized after fabrication.
  - 4. Counterbalance Shaft Assembly:
    - a. Barrel: Steel pipe capable of supporting curtain load with maximum deflection of 0.03 inches per

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08331 - ROLLING GRILLES

- foot (2.5 mm per meter) of width.
- b. Spring Balance: Oil-tempered, heat-treated steel helical torsion spring assembly designed for proper balance of door to ensure that maximum effort to operate will not exceed 25 lbs (110 N). Provide wheel for applying and adjusting spring torque.
- 5. Brackets: Fabricate from reinforced steel plate with bearings at rotating support points to support counterbalance shaft assembly and form end closures.
  - a. Finish:
    - 1. Light gray shop prime coat; minimum 0.6 mils cured film thickness.
- 6. Hood: 24 gauge stainless steel with reinforced top and bottom edges, and fascia panel. Provide minimum 1/4 inch (6 mm) steel intermediate support brackets as required to prevent excessive sag.
  - a. Finish:
    - 1. Stainless Steel: No. 4 finish.
    - 2. Sill: Integral sill formed of 12 gauge 304 series stainless steel with No. 4 finish.
- 6. Weatherstripping:
  - Bottom Bar: Replaceable, 3-point, compressible vinyl gasket extending into guides.
- C. Accessories:
  - 1. Locking:
    - a. Keyed cylinder locking into both jambs operable from coil side of curtain.
- D. Operation:
  - 1. Supply Model MG Electric Motor Operator, industrial duty - rated for a maximum of 20 cycles per hour, cULus listed, Totally Enclosed Non Ventilated gear head operator(s) rated (1/3) (1/2) or (3/4) hp as recommended by door manufacture for size and type of door, \_\_\_\_Volts, \_\_\_\_Phase (refer to Electrical for power information). Provide complete with electric motor and factory pre-wired motor control terminals, maintenance free solenoid actuated brake, provisions for auxiliary push-up operation and control station(s). Motor shall be high starting torque, industrial type, protected against overload with an auto-reset thermal sensing device. Primary speed reduction shall be heavy-duty, lubricated gears with mechanical braking to hold the door in any position. Operator shall be equipped with a disconnect cable for auxiliary push-up operation. Operator drive and door driven sprockets shall be provided with #50 roller

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08331 - ROLLING GRILLES**

chain. Provide an integral Motor Mounted Interlock system to prevent damage to door and operator when mechanical door locking devices are provided. Operator shall be capable of driving the door at a speed of 6 to 9 inches per second (15 to 23 cm/sec). Fully adjustable, driven linear screw type cam limit switch mechanism shall synchronize the operator with the door. The electrical contractor shall mount the control station(s) and supply the appropriate disconnect switch, all conduit and wiring per the overhead door wiring instructions.

2. Control Station: Flush mounted, "Open/Close/Stop" push buttons, NEMA 1B.

E. Fire Rating: not applicable.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Verify that opening is prepared with headers level, jambs plumb, floor level, without projections, etc. and are correctly dimensioned to receive door.
- B. Examine substrates upon which work will be installed and verify conditions are in accordance with approved shop drawings. Commencement of work by door installer is acceptance of substrate.
- C. Install in compliance with manufacturer's instructions. Hang straight, plumb and level, and adjust for smooth, quiet operation.
- D. Provide all accessories, etc. as required for a complete and functional installation.
- E. Prior to final acceptance of the project, inspect all work done under this section, and make all necessary adjustments, repairs or replacements of defective work.

##### **3.02 Cleaning and Demonstration:**

- A. Clean surfaces soiled by work as recommended by the manufacturer.
- B. Remove surplus materials and debris from the site.
- C. Demonstrate proper operation and maintenance procedures to the Owner's Representative.

**End of Section**

## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08500 - METAL WINDOWS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. The General Conditions and applicable sections of Division 1 shall apply to this entire section.
- B. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Sections"**

- A. Section 07900 Sealants
- B. Section 08700 Hardware
- C. Section 08800 Glazing

##### **1.03 Quality Assurance:**

- A. AAMA/WDMA/CSA 101/I.S.2/A440 - Voluntary Specification for Aluminum, Vinyl (PVC) and Wood Windows and Glass Doors.
- B. AAMA 701/702 - Combined Voluntary Specifications for Pile Weather strip and Replaceable Fenestration Weather Seals.
- C. AAMA 907 - Voluntary Specification for Corrosion Resistant Coatings on Carbon Steel Components.
- D. AAMA 910 - Voluntary "Life Cycle" Specifications and Test Methods for Architectural Grade Windows.
- E. AAMA 1503.1 - Voluntary Test Method for Thermal Transmittance and Condensation Resistance of Windows, Doors and Glazed Wall Sections.
- F. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test/Consumer Products Safety Commission CPSC 16 CFR 1201.
- G. ASTM E 283 - Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls and Doors Under Specified Pressure Differences Across the Specimen.
- H. ASTM E 330; 1997 - Standard Test Method for Structural Performance of Exterior Windows, Curtain Walls and Doors by Uniform Static Air Pressure Difference.
- I. ASTM E 331 - Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference.
- J. ASTM E 547 - Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Cyclic Static Air Pressure Difference
- K. ASTM F 588 - Standard Test Methods for Measuring the Forced Entry Resistance of Window Assemblies, Excluding Glazing Impact.
- L. GSA TS - US General Services Administration Standard Test Method for Glazing and Window Systems Subject to Dynamic Overpressure Loadings.



## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08500 - METAL WINDOWS**

- M. LEED: The Leadership in Energy & Environmental Design; U.S. Green Building Council (USGBC).
  - N. ASTM E 1886 - Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors and Storm Shutters Impacted by Missiles and Exposed to Cyclic Pressure Differentials.
  - O. UFC 4-010-01 Unified Facilities Criteria (UFC) - Department of Defense Minimum Antiterrorism Standards for Buildings.
  - P. Manufacturer Qualifications: All windows and window hardware specified in this section will be supplied by a single manufacturer with a minimum of ten (10) years' experience.
  - Q. Installer Qualifications: All products listed in this section are to be installed by a single installer with a minimum of five (5) years demonstrated experience in installing windows of the same type and scope as specified.
- 1.04 Submittals:
- A. Product Data: Manufacturer's data sheets on each product to be used, including:
    - 1. Preparation instructions and recommendations.
    - 2. Storage and handling requirements and recommendations.
    - 3. Installation methods.
  - B. Shop Drawings:
    - 1. Elevation for each style window specified indicating its size, glazing type, muntin type and design.
    - 2. Manufacturer's head, jamb and sill details and section views for each window type specified.
  - C. Schedules:
    - 1. Provide a window schedule indicating the type, size, color, and operation of each unit specified. Coordinate with window mark types found in the Contract Drawings.
  - D. Selection Samples: For each finish product specified, two complete sets of color chips representing manufacturer's full range of available colors and patterns.
  - E. Verification Samples: For each finish product specified, two samples representing actual product, color, and patterns. Samples may be subsequently installed on the project.
  - F. Test Reports: Submit certified independent testing agency reports indicating window units meet or exceed specified performance requirements.
- 1.05 Delivery, Storage, and Handling:
- A. Store products in manufacturer's unopened packaging until ready for installation in accordance with manufacturer's

## DIVISION 8 - DOORS AND WINDOWS

### SECTION 08500 - METAL WINDOWS

- recommendations.
- B. Protect units against damage from the elements, construction activities and other hazards before, during, and after installation.
- 1.06 Project Conditions:
  - A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.
- 1.07 Warranty:
  - A. At project closeout, provide to Owner or Owners Representative an executed copy of the manufacturer's standard limited warranty against manufacturing defect, outlining its terms, conditions, and exclusions from coverage.
- 1.08 **Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

### Part 2 - Products

- 2.01 Materials:
  - A. Acceptable Manufacturer: Winco Window Co., 6200 Maple Ave., St. Louis, MO 63130-3305. ASD. Toll Free: 800-525-8089. Tel: 314-725-8088. Fax: 314-725-1419. Web: [www.wincowindow.com](http://www.wincowindow.com).
  - B. Requests for substitutions will be considered prior to bid opening by the Architect. Substitutions submitted after the bid opening will not be considered.
  - C. Aluminum:
    - 1. Frame: Extruded aluminum, 6063-T6 alloy and temper, tensile strength of 25,000 psi.
  - D. Ventilator: Extruded tubular aluminum, 6063-T6 alloy.
  - E. Acceptable Product:
    - 1. Winco 1150S Series: 2 inch Heavy Commercial Thermally Improved Window.
  - F. Performance: AAMA/WDMA/CSA 101/I.S.2/A440.
    - 1. Architectural Window: AW-80.
    - 2. Heavy Commercial: HC-80.
    - 3. Water Resistance, ASTM E 331: 12 psf (575 Pa).
    - 4. Water Resistance, ASTM E 547: 12 psf (575 Pa) for AW rated windows.
    - 5. Air Infiltration, ASTM E 283 at static air pressure of

## DIVISION 8 - DOORS AND WINDOWS

### SECTION 08500 - METAL WINDOWS

- 6.24 psf: 0.07 cfm/sf.
- 6. Uniform Load Structural Test, ASTM E 330: 120 psf (5748 Pa).
- 7. Condensation Resistance Factor (CRF), AAMA 1503.1:
  - a. Frame: 57.
  - b. Glass: 70.
- 8. Thermal Performance ("U" Value), AAMA 1503.1: 0.45 BTU/Hr-F°-Ft².
- G. Thermal Projected / Fixed Windows - Winco 1150S Series.
  - 1. Thermally broken.
    - a. Wall Thickness: 0.125 inches (3.2 mm).
    - b. Depth: 2 inches (51 mm).
  - 2. Corners: Closely fit and mechanically fastened with screws. Must be sealed using AAMA approved sealants in a multi-step process to provide sealant redundancy.
  - 3. Weather Strip:
    - a. All weather strips shall be double Santoprene® thermos plastic rubber or equal.
  - 4. Thermal Barrier:
    - a. Poured-in-place structural thermal barrier shall transfer during bending and provide composite action between frame components.
  - 5. Thermal barrier pocket on aluminum extrusions shall be Azo-Braded to create a mechanical lock to improve the adhesion properties between the polyurethane polymer and the surface of the thermal barrier pocket.
  - 6. Window manufacturer must provide a warranty from the manufacturer of the polyurethane thermal barrier that warrants against product failure as a result of thermal shrinkage beyond 1/8 inch (3.2 mm) from each end and fracturing of the polyurethane for a period not to exceed ten years from the date of window manufacture.
  - 7. Thermal barriers made of crimped in place polyamide (insulbar®) strips are not acceptable unless all strips are covered and tooled with Dow 795 silicone caulking to climate water migration.
- H. Hardware: refer to Section 08700 Finish Hardware.
- I. Trim and Pans (provide where applicable and confirmed by supplier / manufacturer):
  - 1. Provide trim and pans as indicated on Drawings.
  - 2. Sub Frame and Closure Plate.
  - 3. Sill Starter.
  - 4. Winco Sills: 4 inches.
  - 5. Sub-Sill: TB-502.
  - 6. Sill Extension: D33-124.

## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08500 - METAL WINDOWS**

- 7. Strap Anchor.
- 8. Snap Cover: Part # \_\_\_\_\_.
- 9. Base Clip: Part # \_\_\_\_\_.
- J. Mullions and Grids:
  - 1. Thermal Mullion: Part #TB-119.
    - a. Provide mullions as indicated on Drawings.
  - 2. Window Depth: 2 inches.
  - 3. Winco Window Series: 1150S.
  - 4. Non-Removable Grid Frames:
    - a. Non-Sloped.
- K. Finish:
  - 1. Paint Finish: Finish all exposed areas of aluminum windows and components with the following:
  - 2. 70 percent Kynar in accordance with AA-M12-C42-R1X, AAMA 2605-98
  - 3. 50 percent Kynar in accordance with AA-M12-C42-R1X, and AAMA 2604-98.
  - 4. Color: To be selected by the Architect from the manufacturer's standard colors (WHITE).
- L. GLAZING
  - 1. Refer to Section 08800, Glazing: Glass.
  - 2. Glazing: All units shall be factory glazed with butyl tape, silicone cap bead on the exterior, with glazing vinyl and extruded snap-in aluminum glazing bead on the interior.
  - 3. Glass Type: Insulating - refer to Section 08800 Glazing.

### **Part 3 - Execution**

#### **3.01 Examination:**

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

#### **3.02 Preparation:**

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

#### **3.03 Installation:**

- A. Install in accordance with manufacturer's instructions.

#### **3.04 Protection:**

- A. Protect installed products until completion of project.
- B. Final operating adjustment shall be made after glazing work

## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08500 - METAL WINDOWS**

- is complete. Operating sash and ventilator shall operate smoothly and shall be weathertight when in locked position
- C. Touch-up, repair or replace damaged products before Substantial Completion.

**End of Section**

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08700 - FINISH HARDWARE**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Finish Carpentry - Section 06200
- B. Custom Casework - Section 06410
- C. Metal Doors and Frames - Section 08100
- D. Wood Doors - Section 08200

##### **1.03 Quality Assurance:**

- A. This material shall be procured from a source of supply approved by the Architect as having a member of their firm registered by the American Society of Contracting Architectural Hardware Consultants, and with a proven record of several years of satisfactory experience in contract builder's hardware, both in furnishing material and properly servicing jobs. The supplier also must be an established contract builder's hardware firm who meets all the above requirements, and who maintains and operates an office, display room and stock.

##### **1.04 Submittals:**

- A. Prepare a complete schedule including all items processed for each opening and other miscellaneous item and submit four copies to the Architect for approval within 30 days submitted within that time, the supplier shall furnish the hardware specified by catalog number.
- B. Indicate on schedule name of manufacturer after each item.
- C. Upon receiving the approved schedule, the hardware supplier shall immediately forward a copy to the metal frame suppliers, when applicable; and as soon as they receive approved shop drawings, they will immediately forward a complete set to the hardware supplier who can then check the applications and make any necessary minor revisions. If revisions are necessary, notify Architect immediately.
- D. Mark each item of hardware for opening on which it is to be used and deliver a complete schedule to the contractor when hardware is delivered.

##### **1.05 Schedule:**

- A. This specification describes the quality, character and function that is required of items of hardware; however, it is not intended to mention each particular item.
- B. It is the responsibility of the supplier to thoroughly detail the entire project to assure that the items specified will properly function in the indicated locations.
- C. Quantities shall be determined by the bidder. Part 2, following, indicates the type and function of material applicable to the typical opening. Should an unlisted opening require different type of function of hardware than that specified, for similar opening, notify the Architect, and provide hardware for unlisted openings within the bid.

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08700 - FINISH HARDWARE

#### Part 2 - Products

##### 2.01 Finish Hardware:

###### A. Standards of Quality:

1. Codes, specifications and published recommendations, latest editions of the following are hereby made part of this section of the specifications in so far as they apply to the material or work called for.
  - a. National Builders Hardware Association (NBHA)
  - b. American Society for Testing Materials (ASTM)
  - c. Underwriters Laboratories (UL)
  - d. National Fire Protection Association (NFPA)
  - e. Code of Ethics of ASAH & NBHA
  - f. Federal Emergency Management Agency (FEMA)
2. Federal Specification, (ANSI Specifications):
  - a. Hinges: FF-H-116C (ANSI A156.1)
  - b. Locks and Door Trim: FF-H-106A (ANSI A 156.2)
  - c. Auxiliary Locks: FF-H-106A (ANSI A 156.5)
  - d. Exit Devices: FF-H-106A, FF-H-111B, FF-L486 (ANSI A156.3).
  - e. Door Closers: FF-H-121C (ANSI A 156.4)
  - f. Shelf and Miscellaneous Hardware: FF-H-00116 (ANSI A156.6).
  - g. All Door hardware: Comply with ADAAG where applicable.

###### B. General:

1. All hardware relating to hollow metal doors and frames shall be to standard templates of each respective hardware manufacturer for items furnished.
  - a. The related suppliers such as hollow metal doors and frames and such others as may be required will furnish the hardware supplier one copy of each of their approved shop drawings for proper coordination of their work and the finish hardware.

###### C. Manufacturers and Requirements:

1. Hardware manufacturers and brand names are for a guide as to type and standard required and all such hardware furnished must meet these standards as far as quality, weight, finish and design.

###### D. Keying:

1. All locks and cylinders to be masterkeyed as directed by the Architect/Owner. Supplier / Subcontractor shall be responsible for providing ALL materials for a complete and properly functioning installation.
2. Keys: Furnish the following keys:
  - a. 2 change keys each lock or cylinder
  - b. 6 masterkeys
  - c. **all EXTERIOR locks and cylinders shall be Primus Schlage Key System and keyed to Owner's Primus Master Key system. All remaining interior locks and cylinders shall be Classic Schlage and keyed to the Owner's Primus Master Key System.**

**DIVISION 8 - DOORS & WINDOWS****SECTION 08700 - FINISH HARDWARE****2.02 Hardware Sets:****Hardware Group No. 001: Provide each PR door(s) with the following:**

| <b>Quantity</b> | <b>Description</b> | <b>Model Number</b>                                          | <b>Finish</b> | <b>Mfr</b> |
|-----------------|--------------------|--------------------------------------------------------------|---------------|------------|
| 2               | EA                 | CONTINUOUS HINGE 224HD HEIGHT AS REQ                         | 628           | IVE        |
| 1               | EA                 | MULLION KR4954 HEIGHT AS REQ                                 | 689           | VON        |
| 1               | EA                 | PANIC HARDWARE CD99EO LENGTH AS REQUIRED                     | 626           | VON        |
| 1               | EA                 | PANIC HARDWARE CD99NL-OP LENGTH AS REQUIRED                  | 626           | VON        |
| 1               | EA                 | RIM CYLINDER 20-057 ICX                                      | 626           | SCH        |
| 3               | EA                 | MORTISE CYLINDER 20-061 ICX                                  | 626           | SCH        |
| 4               | EA                 | PRIMUS CORE ONLY 20-740                                      | 626           | SCH        |
| 2               | EA                 | SURFACE CLOSER 4040XP SHCUSH MTG BKTS, SPCRS & PLATES AS REQ | 689           | LCN        |
| 2               | EA                 | OFFSET DOOR PULL 8190-0-0                                    | 630           | IVE        |
| 2               | EA                 | KICK PLATE 8400 10" X 2" LDW                                 | 630           | IVE        |
| 1               | SET                | SEALS 700SA H & J (INSTALL PRIOR TO OTHER HARDWARE)          | AL            | NGP        |
| 2               | EA                 | DOOR SWEEP C627A LENGTH AS REQ                               | AL            | NGP        |
| 1               | EA                 | THRESHOLD 896V LENGTH AS REQ                                 | AL            | NGP        |

REFER TO ELECTRICAL FOR ACCESS, CARD READER, ETC. INFORMATION, ETC.

**Hardware Group No. 002: Provide each PR door(S) with the following:**

| <b>Quantity</b> | <b>Description</b> | <b>Model Number</b>                                          | <b>Finish</b> | <b>Mfr</b> |
|-----------------|--------------------|--------------------------------------------------------------|---------------|------------|
| 2               | EA                 | CONTINUOUS HINGE 224HD HEIGHT AS REQ                         | 628           | IVE        |
| 1               | EA                 | MULLION KR4954 HEIGHT AS REQ                                 | 689           | VON        |
| 1               | EA                 | PANIC HARDWARE CD99EO LENGTH AS REQUIRED                     | 626           | VON        |
| 1               | EA                 | PANIC HARDWARE CD99NL-OP LENGTH AS REQUIRED                  | 626           | VON        |
| 1               | EA                 | RIM CYLINDER 20-057 ICX                                      | 626           | SCH        |
| 3               | EA                 | MORTISE CYLINDER 20-061 ICX                                  | 626           | SCH        |
| 4               | EA                 | PRIMUS CORE ONLY 20-740                                      | 626           | SCH        |
| 2               | EA                 | SURFACE CLOSER 4040XP SHCUSH MTG BKTS, SPCRS & PLATES AS REQ | 689           | LCN        |
| 2               | EA                 | OFFSET DOOR PULL 8190-0-0                                    | 630           | IVE        |
| 2               | EA                 | KICK PLATE 8400 10" X 2" LDW                                 | 630           | IVE        |
| 1               | SET                | SEALS 700SA H & J (INSTALL PRIOR TO OTHER HARDWARE)          | AL            | NGP        |
| 2               | EA                 | DOOR SWEEP C627A LENGTH AS REQ                               | AL            | NGP        |
| 1               | EA                 | OVERHEAD RAIN DRIP 16A DW + 4"                               | AL            | NGP        |
| 1               | EA                 | THRESHOLD 896V LENGTH AS REQ                                 | AL            | NGP        |

REFER TO ELECTRICAL FOR ACCESS, CARD READER, ETC. INFORMATION, ETC.

**Hardware Group No. 003: Provide each SGL door(s) with the following:**

| <b>Quantity</b> | <b>Description</b> | <b>Model Number</b>                                           | <b>Finish</b> | <b>Mfr</b> |
|-----------------|--------------------|---------------------------------------------------------------|---------------|------------|
| 3               | EA                 | HINGE 5BB1 4.5 X 4.5                                          | 652           | IVE        |
| 1               | EA                 | STOREROOM LOCK L9080T 03N                                     | 626           | SCH        |
| 1               | EA                 | CLASSIC CORE 23-030                                           | 626           | SCH        |
| 1               | EA                 | SURFACE CLOSER 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ | 689           | LCN        |
| 1               | EA                 | KICK PLATE 8400 10" X 2" LDW                                  | 630           | IVE        |



## DIVISION 8 - DOORS & WINDOWS

### SECTION 08700 - FINISH HARDWARE

|   |     |       |                                                |     |     |
|---|-----|-------|------------------------------------------------|-----|-----|
| 1 | EA  | STOP  | WS407CCV OR FS436 AS REQUIRED                  | 628 | IVE |
| 1 | SET | SEALS | 5050BR H & J (USE SILENCERS @ NON-RATED DOORS) | CLR | NGP |

**Hardware Group No. 004: Provide each SGL door with the following:**

| Quantity | Description | Model Number   | Finish                                         | Mfr |     |
|----------|-------------|----------------|------------------------------------------------|-----|-----|
| 3        | EA          | HINGE          | 5BB1 4.5 X 4.5                                 | 652 | IVE |
| 1        | EA          | STOREROOM LOCK | L9466T 03N                                     | 626 | SCH |
| 1        | EA          | CLASSIC CORE   | 23-030                                         | 626 | SCH |
| 1        | EA          | STOP           | WS407CCV OR FS436 AS REQUIRED                  | 628 | IVE |
| 1        | SET         | SEALS          | 5050BR H & J (USE SILENCERS @ NON-RATED DOORS) | CLR | NGP |

**Hardware Group No. 005: Provide each PR door(s) with the following:**

| Quantity |     | Description        | Model Number                                    | Finish | Mfr |
|----------|-----|--------------------|-------------------------------------------------|--------|-----|
| 6        | EA  | HINGE              | 5BB1HW 4.5 X 4.5                                | 652    | IVE |
| 1        | SET | AUTO FLUSH BOLT    | FB31P OR FB41P AS REQUIRED                      | 630    | IVE |
| 1        | EA  | COORDINATOR        | COR X FL X MTG BRKTS X HW PREPS X LENGTH AS REQ | 628    | IVE |
| 1        | SET | ASTRAGAL           | 9605A HEIGHT AS REQ                             | AL     | NGP |
| 2        | EA  | FIRE EXIT HARDWARE | 99L-F-626-03N / 996L-BE-F-626-03N-499F          | 626    | VON |
| 3        | EA  | CLASSIC CORE       | 23-030                                          | 626    | SCH |
| 2        | EA  | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ  | 689    | LCN |
| 2        | EA  | KICK PLATE         | 8400 10" X 2" LDW                               | 630    | IVE |
| 2        | EA  | STOP               | WS407CCV OR FS436 AS REQ                        | 628    | IVE |
| 1        | SET | SEALS              | 5050B H & J                                     | BLK    | NGP |
| 2        | EA  | MAGNETIC HOLD      | SEM 7800 AL x VOLTAGE &                         | AL     | LCN |
|          |     | OPEN DEVICES       | TRANSFORMER REQ'D                               |        |     |

AT DOOR NO. 143 - OMIT MAGNETIC HOLD OPEN AND ADD THE FOLLOWING -

|   |    |                        |      |     |     |
|---|----|------------------------|------|-----|-----|
| 2 | EA | FLOOR STOP / HOLD OPEN | FS41 | 628 | IVE |
|---|----|------------------------|------|-----|-----|

**Provide ALL connections required to the fire alarm and electrical systems necessary for a fully functioning device meeting all applicable codes.**

**Hardware Group No. 006: Provide each SGL door(s) with the following:**

| Quantity |     | Description    | Model Number                                     | Finish | Mfr |
|----------|-----|----------------|--------------------------------------------------|--------|-----|
| 3        | EA  | HINGE          | 5BB1HW 4.5 X 4.5                                 | 652    | IVE |
| 1        | EA  | CLASSROOM LOCK | L9070T 03N                                       | 626    | SCH |
| 1        | EA  | CLASSIC CORE   | 23-030                                           | 626    | SCH |
| 1        | EA  | SURFACE CLOSER | 4041H OR P4041H MTG BRKTS, SPCRS & PLATES AS REQ | 689    | LCN |
| 1        | EA  | KICK PLATE     | 8400 10" X 1" LDW                                | 630    | IVE |
| 1        | EA  | STOP           | WS407CCV OR FS436 AS REQUIRED                    | 628    | IVE |
| 1        | SET | SILENCER       | SR64                                             | GRY    | IVE |

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08700 - FINISH HARDWARE

**Hardware Group No. 007 – T1 &/or T2: Refer to Section 08310 Tornado Doors for information regarding this Hardware Group.**

**Hardware Group No. 008: Provide each SGL door(s) with the following:**

| Quantity | Description  | Model Number                  | Finish | Mfr |
|----------|--------------|-------------------------------|--------|-----|
| 3 EA     | HINGE        | 5BB1 4.5 X 4.5                | 652    | IVE |
| 1 EA     | OFFICE LOCK  | L9050T 03N                    | 626    | SCH |
| 1 EA     | CLASSIC CORE | 23-030                        | 626    | SCH |
| 1 EA     | STOP         | WS407CCV OR FS436 AS REQUIRED | 628    | IVE |
| 3 EA     | SILENCER     | SR64                          | GRY    | IVE |

**Hardware Group No. 009: Provide each SGL door(s) with the following:**

| Quantity | Description | Model Number                  | Finish | Mfr |
|----------|-------------|-------------------------------|--------|-----|
| 3 EA     | HINGE       | 5BB1 4.5 X 4.5                | 652    | IVE |
| 1 EA     | PRIVACY SET | L9056R 03N OS-OCC             | 626    | SCH |
| 1 EA     | STOP        | WS407CCV OR FS436 AS REQUIRED | 628    | IVE |
| 3 EA     | SILENCER    | SR64                          | GRY    | IVE |

**Hardware Group No. 010: Provide each SGL door(s) with the following:**

| Quantity | Description    | Model Number                                   | Finish | Mfr |
|----------|----------------|------------------------------------------------|--------|-----|
| 3 EA     | HINGE          | 5BB1 4.5 X 4.5                                 | 652    | IVE |
| 1 EA     | PANIC HARDWARE | CD99L-03 LENGTH AS REQ'D                       | 626    | VON |
| 1 EA     | CLASSIC CORE   | 23-030                                         | 626    | SCH |
| 1 EA     | SURFACE CLOSER | 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ | 689    | LCN |
| 1 EA     | KICK PLATE     | 8400 10" X 2" LDW                              | 630    | IVE |
| 1 EA     | STOP           | WS407CCV OR FS436 AS REQUIRED                  | 628    | IVE |
| 1 SET    | SEALS          | 5050BR H & J (USE SILENCERS @ NON-RATED DOORS) | CLR    | NGP |

**Hardware Group No. 011: Provide each SGL door(s) with the following:**

| Quantity | Description        | Model Number                                   | Finish | Mfr |
|----------|--------------------|------------------------------------------------|--------|-----|
| 3 EA     | HINGE              | 5BB1 4.5 X 4.5                                 | 652    | IVE |
| 1 EA     | FIRE EXIT HARDWARE | 99L-F-BE / 996L-BE-03<br>LENGTH AS REQ'D       | 626    | VON |
| 1 EA     | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ | 689    | LCN |
| 1 EA     | KICK PLATE         | 8400 10" X 2" LDW                              | 630    | IVE |
| 1 EA     | OVERHEAD STOP      | 900S SERIES X SIZE & MOUNTING AS REQ'D         | 630    | GLY |
| 1 SET    | SEALS              | 5050B H & J                                    | CLR    | NGP |

**Hardware Group No. 012: Provide each SGL door(s) with the following:**

| Quantity | Description    | Model Number                                     | Finish | Mfr |
|----------|----------------|--------------------------------------------------|--------|-----|
| 3 EA     | HINGE          | 5BB1HW 4.5 X 4.5                                 | 652    | IVE |
| 1 EA     | CLASSROOM LOCK | L9070T 03N                                       | 626    | SCH |
| 1 EA     | CLASSIC CORE   | 23-030                                           | 626    | SCH |
| 1 EA     | SURFACE CLOSER | 4041H OR P4041H MTG BRKTS, SPCRS & PLATES AS REQ | 689    | LCN |
| 1 EA     | KICK PLATE     | 8400 10" X 1" LDW                                | 630    | IVE |

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08700 - FINISH HARDWARE

|   |     |                               |                                              |     |     |
|---|-----|-------------------------------|----------------------------------------------|-----|-----|
| 1 | EA  | STOP                          | WS407CCV OR FS436 AS REQUIRED                | 628 | IVE |
| 1 | SET | SILENCER                      | SR64                                         | GRY | IVE |
| 1 | EA  | MAGNETIC HOLD<br>OPEN DEVICES | SEM 7800 AL x VOLTAGE &<br>TRANSFORMER REQ'D | AL  | LCN |

**Provide ALL connections required to the fire alarm and electrical systems necessary for a fully functioning device meeting all applicable codes.**

**Hardware Group No. 013: Provide each SGL door(s) with the following:**

| Quantity | Description | Model Number   | Finish                                               | Mfr     |
|----------|-------------|----------------|------------------------------------------------------|---------|
| 3        | EA          | HINGE          | 5BB1 4.5 X 4.5                                       | 652 IVE |
| 1        | EA          | OFFICE LOCK    | L9050T 03N                                           | 626 SCH |
| 1        | EA          | CLASSIC CORE   | 23-030                                               | 626 SCH |
| 1        | EA          | SURFACE CLOSER | 4041H OR P4041H MTG BRKTS, SPCRS & PLATES AS REQ 689 | LCN     |
| 1        | EA          | STOP           | WS407CCV OR FS436 AS REQUIRED                        | 628 IVE |
| 3        | EA          | SILENCER       | SR64                                                 | GRY IVE |

**Hardware Group No. 014: Provide each PR door(s) with the following:**

| Quantity | Description | Model Number       | Finish                                                 | Mfr     |
|----------|-------------|--------------------|--------------------------------------------------------|---------|
| 6        | EA          | HINGE              | 5BB1HW 4.5 X 4.5                                       | 652 IVE |
| 1        | SET         | AUTO FLUSH BOLT    | FB31P OR FB41P AS REQUIRED                             | 630 IVE |
| 1        | EA          | COORDINATOR        | COR X FL X MTG BRKTS X HW PREPS X LENGTH AS REQ 628    | IVE     |
| 1        | SET         | ASTRAGAL           | 9605A HEIGHT AS REQ                                    | AL NGP  |
| 2        | EA          | FIRE EXIT HARDWARE | 99L-F-626-03N / 996L-BE-F-626-03N-499F LENGTH AS REQ'D | 626 VON |
| 3        | EA          | CLASSIC CORE       | 23-030                                                 | 626 SCH |
| 2        | EA          | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ 689     | LCN     |
| 2        | EA          | KICK PLATE         | 8400 10" X 2" LDW                                      | 630 IVE |
| 2        | EA          | STOP               | WS407CCV OR FS436 AS REQ                               | 628 IVE |
| 1        | SET         | SEALS              | 5050B H & J                                            | BLK NGP |

AT DOOR NO. 108 - PROVIDE KEY PAD & DOOR CONTACTS

REFER TO ELECTRICAL FOR ACCESS, CARD READER, ETC. INFORMATION, ETC.

**Hardware Group No. 015: Provide each SGL EXT door with the following:**

| Quantity | Description | Model Number     | Finish                                            | Mfr     |
|----------|-------------|------------------|---------------------------------------------------|---------|
| 1        | EA          | CONTINUOUS HINGE | 224HD HEIGHT AS REQ                               | 628 IVE |
| 1        | EA          | PANIC HARDWARE   | 99L-F-BE-03 LENGTH AS REQUIRED                    | 626 VON |
| 1        | EA          | RIM CYLINDER     | 20-057 ICX                                        | 626 SCH |
| 1        | EA          | MORTISE CYLINDER | 20-061 ICX                                        | 626 SCH |
| 2        | EA          | PRIMUS CORE ONLY | 20-740                                            | 626 SCH |
| 1        | EA          | SURFACE CLOSER   | 4040XP SHCUSH MTG BKTS, SPCRS & PLATES AS REQ 689 | LCN     |
| 1        | EA          | KICK PLATE       | 8400 10" X 2" LDW                                 | 630 IVE |

## DIVISION 8 - DOORS & WINDOWS

### SECTION 08700 - FINISH HARDWARE

|                                                                     |     |                    |                                               |    |     |
|---------------------------------------------------------------------|-----|--------------------|-----------------------------------------------|----|-----|
| 1                                                                   | SET | SEALS              | 700SA H & J (INSTALL PRIOR TO OTHER HARDWARE) | AL | NGP |
| 1                                                                   | EA  | DOOR SWEEP         | C627A LENGTH AS REQ                           | AL | NGP |
| 1                                                                   | EA  | OVERHEAD RAIN DRIP | 16A DW + 4"                                   | AL | NGP |
| 1                                                                   | EA  | THRESHOLD          | 896V LENGTH AS REQ                            | AL | NGP |
| REFER TO ELECTRICAL FOR ACCESS, CARD READER, ETC. INFORMATION, ETC. |     |                    |                                               |    |     |

**Hardware Group No. 016: Provide each PR door(s) with the following:**

| Quantity | Description | Model Number       | Finish                                          | Mfr     |
|----------|-------------|--------------------|-------------------------------------------------|---------|
| 6        | EA          | HINGE              | 5BB1HW 4.5 X 4.5                                | 652 IVE |
| 1        | SET         | AUTO FLUSH BOLT    | FB31P OR FB41P AS REQUIRED                      | 630 IVE |
| 1        | EA          | COORDINATOR        | COR X FL X MTG BRKTS X HW PREPS X LENGTH AS REQ | 628 IVE |
| 1        | SET         | ASTRAGAL           | 9605A HEIGHT AS REQ                             | AL NGP  |
| 2        | EA          | FIRE EXIT HARDWARE | 99L-F-626-03N / 996L-BE-F-626-03N-499F          | 626 VON |
| 3        | EA          | CLASSIC CORE       | 23-030                                          | 626 SCH |
| 2        | EA          | SURFACE CLOSER     | 4041 OR P4041 MTG BRKTS, SPCRS & PLATES AS REQ  | 689 LCN |
| 2        | EA          | KICK PLATE         | 8400 10" X 2" LDW                               | 630 IVE |
| 2        | EA          | STOP               | WS407CCV OR FS436 AS REQ                        | 628 IVE |
| 1        | SET         | SEALS              | 5050B H & J                                     | BLK NGP |

**Hardware Group No. 017: Provide each SGL EXT door with the following:**

| Quantity | Description | Model Number           | Finish                                        | Mfr     |
|----------|-------------|------------------------|-----------------------------------------------|---------|
| 1        | EA          | CONTINUOUS HINGE       | 224HD HEIGHT AS REQ                           | 628 IVE |
| 1        | EA          | CYLINDER LOCK          | L9464                                         | 626 SCH |
| 1        | EA          | CLASSIC CORE           | 23-030                                        | 626 SCH |
| 1        | EA          | OFFSET DOOR PULL       | 8190-0-0                                      | 630 IVE |
| 1        | SET         | SEALS                  | 700SA H & J (INSTALL PRIOR TO OTHER HARDWARE) | AL NGP  |
| 1        | EA          | DOOR SWEEP             | C627A LENGTH AS REQ                           | AL NGP  |
| 1        | EA          | THRESHOLD              | 896V LENGTH AS REQ                            | AL NGP  |
| 1        | EA          | FLOOR STOP / HOLD OPEN | FS41                                          | 628 IVE |

The following list of products and manufactures are acceptable for this project.

| <u>Product</u>       | <u>Manufacture and Approved Equals</u> |
|----------------------|----------------------------------------|
| 1. Hinges            | A. Ives<br>B. Hager<br>C. Bommer       |
| 2. Continuous Hinges | A. Pemko<br>B. Roton<br>C. Select      |
| 3. Key System        | A. <b>Schlage (No substitutions)</b>   |
| 4. Lock/Latch        | A. <b>Schlage (No substitutions)</b>   |

## **DIVISION 8 - DOORS & WINDOWS**

### **SECTION 08700 - FINISH HARDWARE**

- |                            |                                            |
|----------------------------|--------------------------------------------|
| 5. Closers                 | A. LCN (No substitutions)                  |
| 6. Exit Devices            | A. Von Duprin (No substitutions)           |
| 7. Push/Pull/Plates        | A. Ives<br>B. Rockwood<br>C. Trimco        |
| 8. Misc. Stop, Bolts, etc. | A. Ives<br>B. Glynn-Johnson<br>C. Rockwood |
| 9. Door Seal/Thresholds    | A. National Guard<br>B. Pemko<br>C. Reese  |

Each Product, by category, shall be the product of one manufacturer. Complete lockset, including keyed lock cylinder, shall be the product of one manufacturer unless noted otherwise.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. Install all finish hardware in strict accordance with the manufacturer's recommendations and printed instructions. Wherever cutting and fitting is required to install hardware onto or into surfaces which are later to be painted or finished in another way, install each item completely and then remove and store in a secure place during the finish application. After completion of the finishes, reinstall each item. Do not install surface mounted items until finishes have been completed on the substrate.
- B. All hardware relating to hollow metal and aluminum doors and frames shall be to standard templates of each respective hardware manufacturer for items furnished.
- C. Mounting Heights: Mount Hardware units at heights recommended by the National Builders Hardware Association, except as specifically indicated or required to comply with governing regulations, or as may be otherwise directed by the Architect.

#### **3.02 Prior to the Final Inspection:**

- A. The supplier shall check all closers for proper operation after they have been installed and adjusted by the Contractor. He shall verify the keying to ensure proper location of locksets and shall assist the Contractor in correcting faulty operation of any locks.
- B. Within 30 days after the acceptance of the entire project, the Contractor shall be responsible for this supplier meeting with the maintenance custodian at the job site for the purpose of instructing him thoroughly in the proper repair and adjustment of all finish hardware items, and items, and shall present to the custodian a full complement of tools to be used.

**End of Section**

## DIVISION 8 - DOORS AND WINDOWS

### SECTION 08800 - GLAZING

#### Part 1 - General

##### 1.01 Work Included:

- A. The General Conditions and applicable sections of Division 1 shall apply to this entire section.
- B. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### 1.02 Quality Assurance:

- A. Standards:
  - 1. Federal Specifications
    - a. DD-G-451d, Glass, Plate, Sheet (for glazing and other uses).
  - 2. Flat Glass Jobber Association: Glazing Manual.
  - 3. Underwriter's Laboratories, Inc.: UL 9, UL 10B, & UL 10C.
  - 4. National Fire Protection Association: NFPA 80 & NFPA 257.
- B. Comply with UBC 2406, and ANSI 97.1 with testing requirements of 16 CFR 1201, Cat II.

##### 1.03 **Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### Part 2 - Products

##### 2.01 Materials:

- A. Glass Types and Examples:
  - 1. 1/4" Tempered Glass:
    - a. Type example: 1/4" Clear Herculite - PPG.
  - 2. 1" Nominal Thickness Insulating Tempered Glass - 1/4" tinted glass @ exterior side and 1/4" 100 Low E glass @ interior side of 2" air space - **both sides tempered**. Low Emissivity coating on 3<sup>rd</sup> glass surface from building exterior.
    - a. Type Example: Solexia Insulated with Low-E, Solarban 60. **Note: Color will be a factor in approval.**
  - 3. Fire-Protection Rated Tempered Glazing Types:
    - a. 20- or 90-minute fire-rated glazing, monolithic ceramic glazing.
    - b. Provide safety glazing labeling.
    - c. Fire-Protection-Rated Glazing, General: listed and labeled by a testing agency acceptable to authority Having Jurisdiction, for fire-protection ratings indicated, based on testing

## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08800 - GLAZING**

according to NFPA 252 for door assemblies and NFPA 257 for window assemblies.

- d. Fire-Protection-Rated Tempered Glass: 1/4 inch thick (verify), fire protection rated tempered, complying with testing requirements in 16 CFR 1201 for Category II materials:
- e. Products: subject to compliance with requirements, available products that may be incorporated into the Work include but are not limited to, the following:
  - 1. TPG - Technical Glass Products, FireLite Standard Grade 20 / 90.
  - 2. InterEdge, Inc., a subsidiary of AFG Industries, Inc.; PyroEdge 20.
  - 3. Safti First, SuperLite 20.
- f. Vetrotech Saint-Gobain, SSG Pyroswiss.
- B. Glazing Compounds and Preformed Glaze Sealants: Suitable type as approved for the installation, in accordance with Glazing Materials section of the FGJA Glazing Manual.
- C. Glazing Accessories: Provide miscellaneous materials such as cleaners, primers, setting blocks, spacers, filler rods, beads, etc., as required for complete installation.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. Glazing-General:
  - 1. Items to be glazed may be field- or shop-glazed, using glass of the quality and thickness specified or indicated. Preparation of surrounds and glazing, unless otherwise specified, shall be in conformance with the details and general conditions governing glazing in the FGMA Glazing Manual, beads or stops which are furnished with the items to be glazed shall be used to secure the glass in place.
  - 2. All glass shall be set with the waves parallel to the sill. Glass that has been misordered, i.e. with the width and height dimensions not properly correlated with the Drawing process in manufacturing, resulting in pronounced waviness at right angles to the sill, will be rejected.
  - 3. Install plastic glass edging strips where indicated. Joints shall be as tight and imperceptible as possible.

## **DIVISION 8 - DOORS AND WINDOWS**

### **SECTION 08800 - GLAZING**

- B. Breakage: Replace all glass broken during or after setting. Breakage due to accident or carelessness or other will be charged to trade at fault.
- C. Inspection: Prior to final acceptance of project, inspect all work done under this section and make all necessary adjustments, repairs or replacements of defective work, and clean all glass surfaces.
- D. Clean-up: Remove all glass cuttings, scraps, packaging and rubbish upon completion of the work.

**End of Section**



## **DIVISION 9 - FINISHES**

### **SECTION 09120 - CEILING SUSPENSION SYSTEMS**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Gypsum Wallboard - Section 09250
- B. Acoustical Treatment - Section 09500

##### **1.03 Quality Assurance:**

- A. Standards:
  - 1. American Society for Testing and Materials
    - a. ASTM C-635, Metal Suspension Systems for Acoustical Tile and Lay-In-Panel Ceilings.
    - b. ASTM C-636, Recommended Practice of Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In-Panels.
  - 2. All materials to comply with NFPA 101, 16-3.3.2, where applicable.
- B. Submittals:
  - 1. Provide submittals in the form of samples, and documentation, to the Architect for review.

##### **1.04 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Suspended Acoustical Ceiling - Exposed Grid: ASTM C-635, intermediate structural classification.
  - 1. Main Beams, Cross Tees and Concealed Members: .015 cold rolled zinc coated steel.
  - 2. Wall Angle: .020 cold rolled zinc coated steel.
  - 3. Special Members: Provide special shaped members as shown on the Drawings.
  - 4. Member Finish: Exposed surfaces shall be flat white low-gloss grid.
  - 5. Hanger Wire: No. 12 gauge cold drawn, annealed, galvanized.
  - 6. Accessories: Provide wall clips, hold-down clips (shall be removable without damage to boards; two each panels opposite sides), beam clamps leveling splines, hanger clips, splice plates), (keep to a minimum), for a complete installation.

## **DIVISION 9 - FINISHES**

### **SECTION 09120 - CEILING SUSPENSION SYSTEMS**

7. Acceptable Manufacturer: 200 Snap-Grid System, Chicago Metallic Corporation
- B. Suspended Gypsum Board Ceilings:
  1. Structural Channels: Cold-rolled, 16 gauge, galvanized steel.
  2. Furring Channels: Roll-formed, hat sections, 20 gauge.

#### **Part 3 - Execution**

##### **3.01 General:**

- A. Coordinate with electrical and mechanical contractors in placement of light fixtures, grilles, etc. to conform with ceiling pattern.
- B. Construct necessary scaffolding, adequate and safe, in accordance with applicable laws and ordinances. Maintain during this work and remove after completion.
- C. Provide thorough and competent foreman and skilled mechanics.

##### **3.02 Installation:**

- A. Suspended Acoustical Ceiling:
  1. Deflection of any component shall not exceed 1/360 of the span.
  2. Main tees shall be suspended on 48" centers by 12 gauge wire spaced not more than 48" o.c. along main tee.
  3. Cross tees shall be placed at 24" o.c. or as required by the Drawings.
  4. Install wall angles at intersection of suspended ceiling and all vertical surfaces. Miter corners where wall molding intersects.
  5. Install grid system and ceiling panels with faces in a plane.
  6. Provide intersection clips at intersection of all tees.
  7. Provide additional hangar wire at four corners of light fixtures.
  8. Provide additional hangar wires to insure proper placement and alignment of grid system.
  9. Prior to the final acceptance of the building, examine and adjust water level to be certain that all planes and lines are plumb, square and smooth. Replace all marked, marred or otherwise damaged materials.
- B. Suspended Gypsum Board Ceilings:
  1. Coordinate location of hangars with other work.
  2. Install ceiling framing independent of walls, columns and above ceiling work.
  3. Install ceiling framing system in accordance with manufacturer's recommendations.
  4. Reinforce openings in ceilings in accordance with

## **DIVISION 9 - FINISHES**

### **SECTION 09120 - CEILING SUSPENSION SYSTEMS**

manufacturer's recommendations.

5. Laterally brace entire suspension system where required.

#### **3.03 Clean-Up:**

A. Completely remove from the job site, at the completion of the work, all cartons, packaging, etc., and all other scraps and waste caused by this trade.

**End of Section**

## DIVISION 9 - FINISHES

### SECTION 09250 - GYPSUM WALLBOARD

#### Part 1 - General

##### 1.01 Work Included:

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### 1.02 Quality Assurance:

###### A. Standards:

- 1. American Society for Testing and Materials:

- a. ASTM C-36, Gypsum Wallboard
  - b. ASTM C-475, Joint Treatment for Gypsum Wallboard Construction.

###### B. Federal Specifications:

- 1. FS-SS-L-30D, Type III, Grade X, Class 1, Gypsum Wallboard.

##### 1.03 Submittals:

- A. Provide submittals in the form of samples, and documentation, to the Architect for review.

##### 1.04 Product Delivery, Storage and Handling:

- A. All materials shall be delivered to the job site with manufacturer's labels intact and stored in an enclosed shelter providing protection from damage and exposure to the elements.

#### Part 2 - Products

##### 2.01 Gypsum Wallboard:

- A. Type: **Fire-rated**, ASTM C-36.
- B. Size: 5/8" thick x 48" wide x 96" or as required.
- C. Edges: Tapered.
- D. Location: All gypsum board.

##### 2.02 Gypsum Wallboard:

- A. Type: **Impact Resistant, Fire-rated**, ASTM C-36 / C-1396, Impact Resistance ASTM E-695, Indentation Resistance ASTM D-5420, Abrasion Resistance ASTM D-4977
- B. Size: 5/8" thick x 48" wide x 96" or as required.
- C. Edges: Tapered.
- D. Location: Where indicated on drawings and / or exposed in corridors.

##### 2.03 Gypsum Wallboard:

- A. Type: **Moisture / Mold-Resistant**, ASTM C-36 / C-1396, Moisture / Mold Resistant ASTM D3273, ASTM C-473 (B), core encased in moisture and mold resistant, 100% recycled green face and brown back papers.
- B. Size: 5/8" thick x 48" wide x 96" or as required.
- C. Edges: Tapered.
- D. Location: Where indicated on drawings and / or at substrate for ceramic tile and FRP substrates.

## **DIVISION 9 - FINISHES**

### **SECTION 09250 - GYPSUM WALLBOARD**

#### **2.04 Fasteners:**

- A. Screws: Self-drilling, self-tapping, bugle head, Type S.
- B. Nails: Annular ring: GWB-54.

#### **2.05 Joint Treatment Materials:**

- A. Joint Tape: Perforated Tape, ASTM C-475.
- B. Joint Compound: ASTM C-475.

#### **2.06 Accessories:**

- A. Metal Edge: Similar to United States Gypsum Trim No. 402.
- B. Interior Trim: ASTM C 1047.
  - 1. Material: Galvanized coated steel sheet.
  - 2. Shapes:
    - a. Cornerbead.
    - b. L-Bead: L-shaped; exposed long flange receives joint compound.
    - c. Expansion (control) joint.
    - d. Curved-Edge Cornerbead: With notched or flexible flanges.
- C. Hat-Shaped, Rigid Furring Channels: ASTM C 645, 7/8 inch deep.
  - 1. Minimum Base Metal Thickness: 0.0312 inch.
- D. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. Apply gypsum board to horizontal surfaces first, then to vertical.
- B. Install gypsum board parallel to studs at vertical surfaces.
- C. To minimize joints, use panels of maximum practical lengths.
- D. Position all ends and edges of gypsum board over nailing or fastening members. Fit ends and edges closely; do not force together. Stagger end joints.
- E. Cut ends, edges, scribe or make cutouts within field of panel in a workmanlike manner.
- F. Install trim at all intersections of gypsum board and other surfaces. Provide corner bead at all vertical or horizontal corners.
- G. Fasteners:
  - 1. Drive fasteners in field of panel first, work toward ends and edges.
  - 2. Perimeter fasteners shall be a least 3/8" from ends and edges.
  - 3. Attach panels to wood framing members with specified nails spaced out 8" for ceiling, and 8" o.c. at ends and 12" o.c. at each support.
  - 4. Drive nail head slightly below surface of panel in a

## **DIVISION 9 - FINISHES**

### **SECTION 09250 - GYPSUM WALLBOARD**

uniform dimple without breaking face paper.

5. Screw fasteners shall be spaced 12" o.c. at each support in the field of the board and 8" o.c. at all edges and ends.
6. Screws shall be power-driven with an electric screwdriver and screw heads shall provide a slight depression below surface of panel without breaking face paper.

#### **3.02 Joint Treatment:**

- A. Treat all exposed joints and trim with a three-coat approved system applied in strict accordance with manufacturer's recommendations.

#### **3.03 Applying Texture Finishes:**

- A. Surface Preparation and Primer: Prepare and apply primer to gypsum panels and other surfaces receiving texture finishes. Apply primer to surfaces that are clean, dry, and smooth.
- B. Texture Finish Application: Mix and apply finish using powered spray equipment, to produce a uniform texture matching approved mockup and free of starved spots or other evidence of thin application or of application patterns. Provide light orange peel finish.
- C. Prevent texture finishes from coming into contact with surfaces not indicated to receive texture finish by covering them with masking agents, polyethylene film, or other means. If, despite these precautions, texture finishes contact these surfaces, immediately remove droppings and overspray to prevent damage according to texture-finish manufacturer's written recommendations.

#### **3.04 Clean-Up:**

- A. Use all necessary care during execution of the Work of this Section to prevent undue scattering of drywall scraps and dust and to prevent tracking of joint and finishing compounds onto floor surfaces. On completion of each installation segment in a room or space, promptly pick up and remove from the working area all scraps, debris and surplus material.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 09260 - ARCHITECTURAL PLASTER SYSTEM**

#### **PART 1 - GENERAL**

##### **1.1 SUMMARY**

- A. Description of Work: Work of this Section includes, but is not limited to, the following:
  - 1. Preparation of masonry.
  - 2. Full coat gypsum plaster.

##### **1.2 RELATED WORK SPECIFIED ELSEWHERE**

- A. See Section 09900 PAINTING for gypsum plaster finishing and Section 04810 UNIT MASONRY ASSEMBLIES for concrete masonry unit information.

##### **1.3 SUBMITTALS**

- A. Product Data: Submit manufacturer's specifications and installation instructions with Project conditions and materials clearly identified or detailed for each required system.

##### **1.4 SYSTEM REQUIREMENTS**

- A. Performance Requirements: Fabricate and install systems as indicated but not less than that required to comply with AWC Tolerance Manual for flatness and surface irregularity under the following conditions:
  - 1. Masonry (CMU) partitions: refer to Section 04810 Unit Masonry Assemblies.
- B. Fire Resistance Ratings: Where fire resistance classifications are indicated, provide materials and application procedures identical to those listed by UL or tested according to ASTM E119 for type of construction shown.
- C. Acoustical Ratings: Where sound ratings are indicated, provide materials and application procedures identical to those tested by manufacturer to achieve Sound Transmission Class (STC) scheduled or indicated in accordance with ASTM E90.

##### **1.5 QUALITY ASSURANCE**

- A. Reference Standards:
  - 1. **ASTM C-28** Standard Specification for Gypsum Plasters
  - 2. **ASTM C-35** Standard Specification for Inorganic Aggregates in Gypsum Plaster

## **DIVISION 9 – FINISHES**

### **SECTION 09260 – ARCHITECTURAL PLASTER SYSTEM**

3. **ASTM C-206** Standard Specification for Finishing Hydrated Lime
4. **ASTM C-842** Standard Specification for Application of Interior Gypsum Plaster.

#### **1.6 DELIVERY, STORAGE AND HANDLING**

- A. Delivery:
  1. Deliver material to site promptly without undue exposure to weather.
  2. Deliver in manufacturer's unopened containers or bundles, fully identified with name, brand, type and grade.
- B. Storage:
  1. Store above ground in dry, ventilated space.
  2. Protect materials from soiling, rusting and damage.
  3. Store material to be directly applied to masonry walls at 70 degrees F for 24 hours prior to installation.

#### **1.7 PROJECT CONDITIONS**

- A. Environmental Requirements:
  1. Do not install plaster when ambient temperature is below 40 degrees F.
  2. Protect adjacent work of other trades from moisture damage, soiling, physical distress, etc.
  3. All glazing shall be completed and the building heated to minimum of 55F. Temperature of building shall be maintained in uniform range above 55F. for at least two weeks prior to application of plaster, while plastering is being done, and until plaster is dry. When required, heat shall be supplied by General Contractor. Heat shall be well distributed in all areas, with deflection or protective screens used to prevent concentrated or irregular heat on plaster near source.
  4. Ventilation shall be provided to properly dry plaster during and subsequent to its application.

## **PART 2 - PRODUCTS**

#### **2.1 PRODUCTS AND MANUFACTURERS**

- A. CMU Masonry: Company acceptable to Installer – coordinate with Architect.



## **DIVISION 9 – FINISHES**

### **SECTION 09260 – ARCHITECTURAL PLASTER SYSTEM**

#### **2.2 MATERIALS**

- A. Corner Bead: - as required by system to be used.
- B. Casing Beads: - as required by system to be used.
- C. Control Joint: - as required by system to be used.
- D. Basecoat Plaster: IMPERIAL BRAND VENEER BASECOAT Plaster
- E. Aggregate: (sand). Sand for basecoat per ASTM C35 passing a 30-20 mesh screen.
- F. Finish Lime: - as required by system to be used.
- G. Gauging Plaster: RED TOP Gauging
- H. Ready-mixed Plaster finish coat:
  - 1. Smooth trowel finish: Add water in accordance with manufacturer's instructions. Acceptable product: Equivalent to IMPERIAL Finish by USG or approved equal.
- I. Water: Potable without impurities that affect the setting of gypsum
- J. Bonding agent: USG Plaster Bonder
- K. Miscellaneous Accessories: Provide as required for complete installations.

### **PART 3 - EXECUTION**

#### **3.1 EXAMINATION**

- A. Examine substrates and adjoining construction and conditions under which Work is to be installed. Do not proceed with Work until unsatisfactory conditions are corrected.

#### **3.2 GENERAL INSTALLATION REQUIREMENTS**

- A. Install in accordance with reference standards and manufacturer's instructions.
- B. Tolerances:
  - 1. Do not exceed 1/8 inch in 8'-0" variation from plumb or level in exposed lines of surface.

## **DIVISION 9 - FINISHES**

### **SECTION 09260 - ARCHITECTURAL PLASTER SYSTEM**

2. Plaster thickness shall be as shown on plans but in no case shall the grounds be less than 5/8".

#### **C. Substrate Surface:**

1. Prepare surface of new CMU to accept plaster. Clean all loose debris and material.

### **3.3 PLASTER INSTALLATION - Two-coat work**

- #### **A. All CMU walls to receive new plaster system shall have all joints struck flush / level with face of cmu - no "tooled" joints.**

Over substrate surface, apply base (first) coat with sufficient material and pressure to form good bond to base and to cover well, and then double back to bring plaster out to grounds. Straighten to a true surface with rod and darby without use of additional water and leave rough to receive finish (second) coat. (If using Ready-mixed Plaster finish coat, leave open but not too rough.)

#### **B. Basecoat Plasters - Mix Proportions:**

1. Mix RED TOP Gypsum Plaster with sand 1 to 3 over block.
2. Use mechanical mixers for mixing plaster
3. Clean mechanical mixers, mixing containers and tools after mixing each batch; keep free of plaster from previous mixes.
4. Thoroughly mix plaster with proper amount of water until uniform in color and consistency.
5. Retempering not permitted; discard plaster which has begun to stiffen.

#### **C. Smooth Trowel Finish Coat:**

1. Mix Finish Coat in proportions of 1 part Lime to 1 part Gauging Plaster.
2. Scratch plaster in thoroughly and immediately double back to fill out to a smooth, dense surface for decoration, free of surface blemishes and irregularities. Apply finish coat as thin as possible; 1/16" to not more than 1/8" thick.

#### **D. Ready-mixed Plaster finish coat:**

1. Mix with water per manufacturer's recommendations.
2. Apply finish in as thin an application as possible. Final thickness shall not exceed 1/8". Hand-finish troweling is required to smooth and densify surface.

**END OF SECTION**

## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor services and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

###### **A. Standards:**

- 1. Tile Council of America:
  - a. Handbook for Ceramic Tile Installation.
- 2. American National Standards Institute:
  - a. ANSI A108.6, Ceramic Tile installed with Epoxy Mortar.
  - b. ANSI A108.4, Ceramic Tile installed water-resistant organic adhesive.
  - c. ANSI A108.5, Ceramic Tile installed with latex Portland Cement.
  - d. ANSI A118.4, Latex Portland Cement Mortar.
  - e. ANSI A118.3, Epoxy Mortar and Grout.
  - f. ANSI A136.1, Type 1 Organic Adhesive.
  - g. ANSI A137.1, Ceramic Tile.
  - h. ANSI A137.3, Porcelain Tiles and Porcelain Tile Panels/Slabs
- 3. American Society for Testing and Materials:
  - a. ASTM C-144, Aggregate.
  - b. ASTM C-150, Portland Cement, Type 1.
  - c. ASTM C-206, Special Finish Hydrated Lime.

- B. All materials shall meet IBC 2009, where applicable.

- C. Floor surfaces and elevation changes shall comply with ADAABAAG 302 and 303.

- D. Static Coefficient of Friction: For tile installed on walkway surfaces, provide products with the following values as determined by testing identical products per ASTM C 1028:

- 1. Level Surfaces: Minimum.
- 2. Step Treads: Minimum.
- 3. Ramp Surfaces: Minimum.

- E. Source Limitations for Tile: Obtain tile of each type and color or finish from one source or producer.

- 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.

- F. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from one manufacturer and each aggregate from one source or producer.

- G. Source Limitations for Other Products: Obtain each of the

## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

following products specified in this Section from a single manufacturer for each product:

1. Stone thresholds.
2. Joint sealants.
3. Cementitious backer units.
4. Metal edge strips.

#### **1.03 Submittals:**

- A. Submit samples of all tile and grout specified under this section for approval and color selection prior to installation.
- B. Submit a "Master Grade Certificate" bearing signatures of both manufacturer and contractor.
- C. Submit tile manufacturer's maintenance guides for owner's use in maintaining all tile work specified in this section.
- D. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.
- F. Samples for Initial Selection: For each type of tile and grout indicated. Include Samples of accessories involving color selection.
- G. Samples for Verification:
  1. Full-size units of each type and composition of tile and for each color and finish required.
  2. Assembled samples mounted on a rigid panel, with grouted joints, for each type and composition of tile and for each color and finish required. Make samples at least 24 inches square, but not fewer than 4 tiles. Use grout of type and in color or colors approved for completed Work.
  3. Full-size units of each type of trim and accessory for each color and finish required.
  4. Stone thresholds in 6-inch lengths.
  5. Metal edge strips in 6-inch lengths.
- H. Qualification Data: For qualified Installer.
- I. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.
- J. Product Certificates: For each type of product, signed by product manufacturer.
  1. Material Test Reports: For each tile-setting and -grouting product and special purpose tile.

#### **1.04 Product Delivery, Storage and Handling:**

- A. Deliver all materials to job site in manufacturer's unopened containers with grade seal unbroken and labels intact. Keep containers dry. Comply with requirements in

## DIVISION 9 - FINISHES

### SECTION 09300 - TILE

- ANSI A137.1 for labeling tile packages.
  - B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
  - C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
  - D. Store liquid materials in unopened containers and protected from freezing.
  - E. Handle tile that has temporary protective coating on exposed surfaces to prevent coated surfaces from contacting backs or edges of other units. If coating does contact bonding surfaces of tile, remove coating from bonding surfaces before setting tile.
- 1.05 Project Conditions:
- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.
- 1.05 **Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

### Part 2 - Products

- 2.01 General:
- A. All tile shall be standard grades conforming to ANSI 137.1 unless noted otherwise.
  - B. Both glazed and unglazed ceramic tile shall be manufactured by the same manufacturer.
  - C. **Refer to Color Schedule for tile color. Colors will a determining factor in tile approval.**
  - D. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCA installation methods specified in tile installation schedules, and other requirements specified.
  - E. Mounting: For factory-mounted tile, provide back- or edge-mounted tile assemblies as standard with manufacturer unless otherwise indicated.
  - F. Factory-Applied Temporary Protective Coating: Where indicated under tile type, protect exposed surfaces of tile against adherence of mortar and grout by precoating with continuous film of petroleum paraffin wax, applied hot. Do

## DIVISION 9 - FINISHES

### SECTION 09300 - TILE

not coat unexposed tile surfaces.

- G. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. American Olean; Division of Dal-Tile International Inc.
2. Crossville, Inc.
3. Daltile; Division of Dal-Tile International Inc.

#### 2.02 Ceramic Tile:

- A. Wall Tile and Floor Tile:

1. Type: Glazed porcelain - walls / matte porcelain - floors.
2. Nominal Face Size: 12" x 24" - orient as per Drawings.
3. Edge: All-purpose cushion.
4. Acceptable Manufacturer: Daltile - Synchronic.

- B. Trim Shapes and Bases:

1. Type: Same as floor tile.
2. Includes bases, caps, stops, returns, trimmers and other shapes to finish installation.
  - a. Base for Thin-Set Mortar Installations: Straight, module size 6 by 12 inches.
  - b. External Corners for Portland Cement Mortar Installations: provide metal corner trim as manufactured by Schluter Systems LP unless otherwise indicated.
  - c. External Corners for Thin-Set Mortar Installations: same as above.
  - d. Internal Corners: Field-buttet square corners. For base and cap use angle pieces designed to fit with stretcher shapes.

- C. Setting Materials:

1. Epoxy Mortar: ANSI A118.3
2. Organic Adhesive: ANSI A136.1
3. Latex Portland Cement Mortar: ANSI A118.4
4. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - a. Boiardi Products; a QEP company.
  - b. Bonsai American; an Oldcastle company.
  - c. Bostik, Inc.
  - d. C-Cure.
  - e. Custom Building Products.
  - f. Jamo Inc.
  - g. Laticrete International, Inc.
  - h. MAPEI Corporation.

## DIVISION 9 - FINISHES

### SECTION 09300 - TILE

- i. Southern Grouts & Mortars, Inc.
  - j. Summitville Tiles, Inc.
  - k. TEC; a subsidiary of H. B. Fuller Company.
- D. Grouting Materials:
  - 1. Floor Tile: Epoxy Grout.
  - 2. Wall Tile: Portland Cement Type.
  - 3. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Boiardi Products; a QEP company.
    - b. Bonsai American; an Oldcastle company.
    - c. Bostik, Inc.
    - d. C-Cure.
    - e. Custom Building Products.
    - f. Jamo Inc.
    - g. Laticrete International, Inc.
    - h. MAPEI Corporation.
    - i. Southern Grouts & Mortars, Inc.
    - j. Summitville Tiles, Inc.
    - k. TEC; a subsidiary of H. B. Fuller Company.
- E. Granite Thresholds:
  - 1. Type: Polished granite.
  - 2. Size: 1 1/4" wide x 1/2" high, double-beveled.
  - 3. Location: Provide marble threshold at centerline of doors at transition between ceramic tile flooring and exposed concrete.
- F. Accessories: Provide vitreous china accessories of type and size indicated, suitable for installing by same method as adjoining wall tile.
  - 1. Color and Finish: Match adjoining glazed wall tile.
- G. Elastomeric Sealants:
  - 1. General: Provide sealants, primers, backer rods, and other sealant accessories that comply with the following requirements and with the applicable requirements in Division 07 Section "Joint Sealants."
    - a. Use sealants that have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
    - b. Use primers, backer rods, and sealant accessories recommended by sealant manufacturer.
  - 2. Colors: Provide colors of exposed sealants to match colors of grout in tile adjoining sealed joints unless otherwise indicated.
  - 3. One-Part, Mildew-Resistant Silicone Sealant: ASTM C 920; Type S; Grade NS; Class 25;

## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

Uses NT, G, A, and, as applicable to nonporous joint substrates indicated, 0; formulated with fungicide, intended for sealing interior ceramic tile joints and other nonporous substrates that are subject to in-service exposures of high humidity and extreme temperatures.

- a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. DAP Inc.; 100 percent Silicone Kitchen and Bath Sealant.
  - 2. Dow Corning Corporation; Dow Corning 786.
  - 3. GE Silicones; a division of GE Specialty Materials; Sanitary 1700.
  - 4. Laticrete International, Inc.; Latasil Tile & Stone Sealant.
  - 5. Pecora Corporation; Pecora 898 Sanitary Silicone Sealant.
  - 6. Tremco Incorporated; Tremsil 600 White.

#### **H. Miscellaneous Materials:**

- 1. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.
- 2. Metal Edge Strips: Angle or L-shape, height to match tile and setting-bed thickness, metallic base, designed specifically for required applications; stainless-steel, ASTM A 666, 300 Series exposed-edge material.
  - a. Equal to products manufactured by Schluter Systems LP.
  - b. Provide in minimum lengths of 10' where possible and practical.
  - c. Provide at ALL exposed edges of ceramic wall tile - i.e. top, exterior corners, expansion joints, etc.
- 3. Temporary Protective Coating: Either product indicated below that is formulated to protect exposed surfaces of tile against adherence of mortar and grout; compatible with tile, mortar, and grout products; and easily removable after grouting is completed without damaging grout or tile.
  - a. Petroleum paraffin wax, fully refined and odorless, containing at least 0.5 percent oil with a melting point of 120 to 140 deg F per ASTM



## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

- D 87.
- b. Grout release in form of manufacturer's standard proprietary liquid coating that is specially formulated and recommended for use as temporary protective coating for tile.
- 4. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.
- 5. Grout Sealer: Manufacturer's standard silicone product for sealing grout joints and that does not change color or appearance of grout.
  - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
    - 1. Bonsai American; an Oldcastle company; Grout Sealer.
    - 2. Bostik, Inc.; CeramaSeal Grout & Tile Sealer.
    - 3. C-Cure; Penetrating Sealer 978.
    - 4. Custom Building Products; Grout Sealer.
    - 5. Jamo Inc.; Penetrating Sealer.
    - 6. MAPEI Corporation; KER 003, Silicone Spray Sealer for Cementitious Tile Grout and 004, Keraseal Penetrating Sealer for Unglazed Grout and Tile.
    - 7. Southern Grouts & Mortars, Inc.; Silicone Grout Sealer.
    - 8. Summitville Tiles, Inc.; SL-15, Invisible Seal Penetrating Grout and Tile Sealer.
    - 9. TEC; a subsidiary of H. B. Fuller Company; TA-256 Penetrating Silicone Grout Sealer.

### **Part 3 - Execution**

#### **3.01 Examination:**

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of installed tile.
  - 1. Verify that substrates for setting tile are firm, dry, clean, and free of coatings that are incompatible with tile-setting materials including curing compounds and other substances that contain soap, wax, oil, or

## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

- silicone; and comply with flatness tolerances required by ANSI A108.0 for installations indicated.
  - 2. Verify that concrete substrates for tile floors installed with adhesives or thin-set mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
    - a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
    - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
  - 3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
  - 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
  - B. Proceed with installation only after unsatisfactory conditions have been corrected.
- 3.02 Preparation:
- A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thin-set mortar with trowelable leveling and patching compound specifically recommended by tilesetting material manufacturer.
  - B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.
  - C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.
  - D. Field-Applied Temporary Protective Coating: If indicated under tile type or needed to prevent grout from staining or adhering to exposed tile surfaces, precoat them with continuous film of temporary protective coating, taking care not to coat unexposed tile surfaces.
- 3.02 Installation:
- A. All workmanship and materials shall conform in all respects to specifications and requirements and in accordance with the standard practice of the Tile Council of America.
  - B. All ceramic floor tile shall be installed using the following Tile Council of America specifications.

## DIVISION 9 - FINISHES

### SECTION 09300 - TILE

1. Floor Tile, TCA F131-2K (Concrete).
- C. Provide all required trim shapes required to module with field tile, unless otherwise noted on Drawings. All exterior corners shall have metal corner trim as manufactured by Schluter Systems LP.
- D. Layout all tile work as to minimize cuts less than one-half tile in size. Align all joints to give straight uniform grout lines, plumb and level or parallel with walls. Strike all joints with a rounded, non-staining tool.
  1. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
  2. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
  3. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Layout tile work and center tile fields in both directions in each space or on each wall area. Layout tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
    - a. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
    - b. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.
  4. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
    - a. Wall Tile: 1/16 inch.
    - b. Porcelain Wall Tile Panels: 1/16 inch.
  5. Layout tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
  6. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated or required by tile manufacturer. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-

## DIVISION 9 - FINISHES

### SECTION 09300 - TILE

- cut joints after installing tiles.
- a. Where joints occur in substrates, locate joints in tile surfaces directly above them.
- b. Prepare joints and apply sealants to comply with requirements in Division 07 Section "Joint Sealants."
- c. At Porcelain Wall Tile Panels: provide movement joint every 20' to allow for needed movement of tile layer.
- 7. Stone Thresholds: Install stone thresholds in same type of setting bed as adjacent floor unless otherwise indicated.
  - a. At locations where mortar bed (thickset) would otherwise be exposed above adjacent floor finishes, set thresholds in latex-portland cement mortar (thin set).
  - b. Do not extend cleavage membrane waterproofing or crack isolation membrane under thresholds set in dry-set portland cement mortar. Fill joints between such thresholds and adjoining tile set on crack isolation membrane with elastomeric sealant.
    - 1. Metal Edge Strips: Install where exposed edge of tile flooring meets carpet, wood, or other flooring that finishes flush with or below top of tile and no threshold is indicated.
- 8. Grout Sealer: Apply grout sealer to cementitious grout joints in tile floors according to grout sealer manufacturer's written instructions. As soon as grout sealer has penetrated grout joints, remove excess sealer and sealer from tile faces by wiping with soft cloth.
- E. Slope entire room or area to floor drains.
- 3.03 Tile Backing Panel Installation:
  - A. Install cementitious backer units and treat joints according to ANSI A108.11 and manufacturer's written instructions for type of application indicated. Use latex-portland cement mortar for bonding material unless otherwise directed in manufacturer's written instructions.
- 3.04 Waterproofing Installation:
  - A. Install waterproofing to comply with ANSI A108.13 and manufacturer's written instructions to produce waterproof membrane of uniform thickness and bonded securely to substrate.
  - B. Do not install tile or setting materials over waterproofing

## **DIVISION 9 - FINISHES**

### **SECTION 09300 - TILE**

until waterproofing has cured and been tested to determine that it is watertight.

#### **3.05 Cleaning and Protecting:**

- A. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
  - 1. Remove epoxy and latex-portland cement grout residue from tile as soon as possible.
  - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.
  - 3. Remove temporary protective coating by method recommended by coating manufacturer and that is acceptable to tile and grout manufacturer. Trap and remove coating to prevent drain clogging.
- B. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- C. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- D. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.
- E. Immediately prior to final inspection, replace all damaged tile.
- F. Contractor will supply 2% of the total quantity of each tile used. Contractor will supply 3% of the total quantity of each grout used. Place materials in clean marked containers for future use at building.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 09500 - ACOUSTICAL TREATMENT**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services, and incidentals necessary for the completion of this section of the work.

##### **1.02 Related Work Specified Elsewhere:**

- A. Ceiling Suspension Systems - Section 09120

##### **1.03 Quality Assurance:**

- A. Standards:
  - 1. American Society for Testing and Materials:
    - a. ASTM C-636 Recommended Practice of Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
    - b. ASTM E-84 Surface Burning Characteristics of Building Materials.
  - 2. Federal Specifications:
    - a. SS-S-118B, Sound Controlling Blocks and Boards. Underwriter's Laboratories, Inc.
- B. Submittals:
  - 1. Provide submittals in the form of samples, and documentation, to the Architect for review.

##### **1.04 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers**

#### **Part 2 - Products**

##### **2.01 Acoustical Ceiling Panels:**

- A. 2x2 Tile - Square Edge:  
Not applicable.
- B. 2x2 Tile - Tegular Edge:
  - 1. Type: FS-SS-S-118B, Class 25
  - 2. Size: 24" x 24" x 5/8". Provide special sizes as indicated on Drawings or as required by others.
  - 3. Finish: Board finish shall be a factory-applied white latex paint, medium textured non-direction fissured surface with a minimum light reflection of 80%.
  - 4. Noncombustibility: Board shall meet class 25-Federal Specification SS-S-118B, ASTM E-84; and, classified by Underwriter's Laboratories for Flame Spread Index 0-25.
  - 5. Type Example and Manufacturer:
    - a. Armstrong Fine Fissured No. 1732, beveled tegular 2x2.

## **DIVISION 9 - FINISHES**

### **SECTION 09500 - ACOUSTICAL TREATMENT**

- C. Acoustical Panel Ceilings - Kitchen Zone: refer to Section 0955113.
  - D. 2x2 Tile at Ceiling Devices (i.e. smoke detectors, intercom devices, etc.) - Square Edge:
    - 1. Genesis 24" x 24". Provide as noted in I.T. Specification or as required by MPS personnel.
    - 2. Finish: Board finish shall be a factory-applied Smooth Pro-White PVC.
    - 4. Noncombustibility: Board shall meet class 25-Federal Specification SS-S-118B, ASTM E-84; and, classified by Underwriter's Laboratories for Flame Spread Index 0-25.
    - 5. Type Example and Manufacturer:
      - a. Genesis No. 740-00 / Item #504856.
- 2.02 Aluminum Perimeter Trims:
- A. Trim Channel Straight: 6" wide face with 3/4 inch horizontal legs, straight sections with special bosses formed for attachment to the tee-bar connection clip or hanging clip, commercial quality, extruded aluminum, factory-finished to match ceiling grid color.
  - B. Outside & Inside Corner Posts: commercial quality extruded aluminum sections formed to match the straight channel profile, pre-assembled with build-in splice plates that connect to straight sections, factory-finished to match ceiling grid color.
  - C. Accessories: provide all accessories required for a completed and functional installation including - but not limited to - alignments clips, hanging clips, splice plates, etc.
  - D. Acceptable Product and Manufacturer: Axiom Classic Perimeter Trim as manufactured by Armstrong World Industries, Inc.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. Install in specified grid system per ASTM C-636 and manufacturer's recommendations, as shown on the Drawings.
- B. Provide ten (10) pieces of ceiling panels in cartons for future use. Panels shall be in perfect condition.

**End of Section**

## **SECTION 09 51 13**

### **ACOUSTICAL PANEL CEILINGS**

#### **KITCHEN ZONE**

#### **PART 1 – GENERAL**

##### **1.1 RELATED DOCUMENTS**

Drawings and general conditions of Contract, including General and Supplementary Conditions and Divisions-1 Specification sections apply to work of this section.

##### **1.2 SUMMARY**

###### **A. Section Includes**

1. Acoustical ceiling panels
2. Exposed grid suspension system – refer other sections.
3. Wire hangers, fasteners, main runners, cross tees, and wall angle moldings – refer other sections.
4. Perimeter Trim – refer other sections.

###### **B. Related Sections**

1. Section 09 500 – Acoustical Treatment
2. Section 09 120 - Ceiling Suspension Systems
3. Section 09 250 - Gypsum Wallboard
4. Division 23 - HVAC Air Distribution
5. Division 26 - Electrical

###### **C. ALTERNATES**

1. Prior Approval: Unless otherwise provided for in the Contract documents, proposed product substitutions may be submitted as approved by the Architect. Acceptability of a proposed substitution is contingent upon the Architect's review of the proposal for acceptability and approved products will be noted. If included in a Bid are substitute products that have not been approved by the architect and included in the Addenda, the originally specified products shall be provided without additional compensation.
2. Submittals that do not provide adequate data for the product evaluation will not be considered. The proposed substitution must meet all requirements of this section, including but not necessarily limited to, the following: Single source materials suppliers; Underwriters' Laboratories Classified Acoustical performance; Panel design, size, composition, color, and finish; Suspension system component profiles and sizes; Compliance with the referenced standards.



### 1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM):
  - 1. ASTM A 1008 Standard Specification for Steel, Sheet, Cold Rolled, Carbon, Structural, High-Strength Low-Alloy and High-Strength Low-Alloy with Improved Formability
  - 2. ASTM A 641 Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire
  - 3. ASTM A 653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the Hot-Dip Process
  - 4. ASTM C 423 Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
  - 5. ASTM C 635 Standard Specification for Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
  - 6. ASTM C 636 Recommended Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
  - 7. ASTM D 3273 Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber
  - 8. ASTM E 84 Standard Test Method for Surface Burning Characteristics of Building Materials
  - 9. ASTM E 580 Installation of Metal Suspension Systems in Areas Requiring Moderate Seismic Restraint
  - 10. ASTM E 1111 Standard Test Method for Measuring the Interzone Attenuation of Ceilings Systems
  - 11. ASTM E 1414 Standard Test Method for Airborne Sound Attenuation Between Rooms Sharing a Common Ceiling Plenum
  - 12. ASTM E 1264 Classification for Acoustical Ceiling Products
- B. International Building Code
- C. ASHRAE Standard 62.1-2004, Ventilation for Acceptable Indoor Air Quality
- D. NFPA 70 National Electrical Code
- E. ASCE 7 American Society of Civil Engineers, Minimum Design Loads for Buildings and Other Structures
- F. International Code Council-Evaluation Services - AC 156 Acceptance Criteria for Seismic Qualification Testing of Non-structural Components
- G. International Code Council-Evaluation Services Report - Seismic Engineer Report
  - 1. ESR 1308 - Armstrong Suspension Systems
- H. International Association of Plumbing and Mechanical Officials - Seismic Engineer Report
  - 1. 0244 - Armstrong Single Span Suspension System
- I. International Well Building Standard

- J. Mindful Materials
- K. Living Building Challenge
- L. U.S. Department of Agriculture BioPreferred program (USDA BioPreferred).
- M. Clean Rooms up to ISO Class 5 (Class 100)

#### **1.4 SYSTEM DESCRIPTION**

- A. Continuous/Wall-to-wall

#### **1.5 SUBMITTALS**

- A. Product Data: Submit manufacturer's technical data for each type of acoustical ceiling unit and suspension system required.
- B. Samples: Minimum 6-inch x 6-inch samples of specified acoustical panel; 8-inch-long samples of exposed wall molding and suspension system, including main runner and 4-foot cross tees.
- C. Shop Drawings: Layout and details of acoustical ceilings show locations of items that are to be coordinated with or supported by the ceilings.
- D. Acoustical Certifications: Manufacturer's certifications that products comply with specified requirements, including laboratory reports showing compliance with specified tests and standards. For acoustical performance, each carton of material must carry an approved independent laboratory classification, such as Underwriter's Laboratory (UL), of NRC, CAC, and AC.
  - 1. If the material supplied by the acoustical subcontractor does not have an independent laboratory classification of acoustical performance on every carton, subcontractor shall be required to send material from every production run appearing on the job to an independent or NVLAP approved laboratory for testing, at the architect's or owner's discretion. All products not conforming to manufacturer's current published values must be removed, disposed of, and replaced with complying product at the expense of the Contractor performing the work.

#### **1.6 SUSTAINABLE MATERIALS**

- A. Transparency: Manufacturers will be given preference when they provide documentation to support sustainable requirements for the following: Material ingredient transparency, Removal of Red List Ingredients per LBCV3, Life Cycle impact information, Low-Emitting Materials, and Clean Air performance.
  - 1. Health Product Declaration (HPD). The end use product has a published, complete Health Product Declaration with disclosure at a minimum of 1000ppm of known hazards in compliance with the Health Product Declaration Open Standard.

2. Declare Label. The end use product has a published Declare label by the International Living Future Institute with disclosure of 100 ppm with a designation of Red List Free or Compliant (less than 1% proprietary ingredients).
3. Low Emitting products with VOC emissions data. Preference will be given to manufacturers that can provide emissions data showing their products meet any of the following: CDPH/EHLB/Standard Method v1.2-2017; Indoor Air Quality Certified to SCS-105 v4.2-2023
4. Life cycle analysis. Products that have communicated lifecycle data through Environmental Product Declarations (EPDs) will be preferred.
5. End of Life Programs/Recycling: Where applicable, manufacturers that provide the option for recycling of their products into new products at end-of-life through take-back programs will be preferred.
6. Products meeting LEED V4 requirements including:
  - i. Storage & Collection of Recyclables
  - ii. Construction and Demolition Waste Management Planning
  - iii. Building Life-Cycle Impact Reduction
  - iv. Building Product Disclosure and Optimization Environmental Product Declarations
  - v. Building Product Disclosure and Optimization Sourcing of Raw Materials
  - vi. Building Product Disclosure and Optimization Material Ingredients
  - vii. Construction and Demolition Waste Management

## **1.7 QUALITY ASSURANCE**

- A. Single-Source Responsibility: Provide acoustical panel units and grid components by a single manufacturer to ensure fit and function.
- B. Installer Qualifications: Company specializing in performing specified work type, a minimum of three years of documented experience, and approved by the manufacturer.
- C. Fire Performance Characteristics: Identify acoustical ceiling components with appropriate markings of applicable testing and inspecting organization.
- D. Surface Burning Characteristics: Tested per ASTM E 84 and complying with ASTM E 1264 Classification.

## **1.8 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver acoustical ceiling units to project site in original, unopened packages and store them in a fully enclosed space where they will be protected against damage from moisture, direct sunlight, surface contamination, and other causes.

- B. Before installing acoustical ceiling units, permit them to reach room temperature and a stabilized moisture content.
- C. Handle acoustical ceiling units carefully to avoid chipping edges or damaging units in any way.

## **1.9 PROJECT CONDITIONS**

- A. Space Enclosure:
  - 1. HumiGuard Plus Ceilings: Building areas to receive ceilings shall be free of construction dust and debris. Products with HumiGuard Plus performance and hot dipped galvanized steel, aluminum or stainless-steel suspension systems can be installed up to 120°F (49°C) and in spaces before the building is enclosed, where HVAC systems are cycled or not operating. Cannot be used in exterior applications where standing water is present or where moisture will come in direct contact with the ceiling.

## **1.10 ALTERNATE CONSTRUCTION WASTE DISPOSAL**

- A. Ceiling material being reclaimed must be kept dry and free from debris.
- B. Before disposing of ceilings, contact the Armstrong Recycling Center at 877-276-7876, select option #1 then #8 to review with a consultant the condition and location of building where the ceilings will be removed. The consultant will verify the condition of the material and that it meets the Armstrong requirements for recycling. The Armstrong consultant will help facilitate the process to recycle the ceiling.
- C. Recycling may qualify for LEED Credits:
  - 1. LEED 2009 - Category 4: Material and Resources (MR)
    - i. Credit MRc2: Construction Waste Management
  - 2. LEEDv4 - MRp2
    - i. Construction Waste Management Planning Qualifies as a material stream (non-structural) targeted for diversion. Ceilings will be source-separated and diverted through the Armstrong Ceiling Recycling Program.

## **1.11 WARRANTY**

- A. Acoustical Panel: Submit a written warranty executed by the manufacturer, agreeing to repair or replace panels that fail within the warranty period. Failures include, but are not limited to the following:
  - 1. Acoustical Panels with HumiGuard® Max and HumiGuard® Plus performance: sagging and warping
  - 2. Acoustical panels with BioBlock® performance: growth of mold and mildew
  - 3. Grid System: rusting and manufacturer's defects

- B. Warranty Period:
  - 1. Ceiling System: Thirty (30) years from date of substantial completion
- C. The Warranty shall not deprive the Owner of other rights the Owner may have under other provisions of the Contract Documents and will be in addition to and run concurrent with other warranties made by the Contractor under the requirements of the Contract Documents.

## **1.12 MAINTENANCE**

- A. Extra Materials: Deliver extra materials to Owner. Furnish extra materials described below that match products installed. Packaged with protective covering for storage and identified with appropriate labels.
  - 1. Acoustical Ceiling Units: Furnish quality of full-size units equal to 5.0 percent of amount installed.
  - 2. Exposed Suspension System Components: Furnish quantity of each exposed suspension component equal to 2.0 percent of amount installed.

## **PART 2 – PRODUCTS**

### **2.1 MANUFACTURERS**

- A. Ceiling Panels:
  - 1. Armstrong World Industries, Inc.

### **2.2 ACOUSTICAL CEILING UNITS**

- A. Acoustical Panel Ceilings
  - 1. Surface Texture: Smooth Texture
  - 2. Composition: Mineral Fiber
  - 3. Color: White
  - 4. Size: 24 in x 24 in
  - 5. Edge Profile: Square Lay-in
  - 6. Ceiling Attenuation Class (CAC): ASTM E1414/E1414M; Classified with UL label on product carton: 33
  - 7. Flame Spread: ASTM E 1264; Class A
  - 8. Light Reflectance (LR) White Panel: ASTM E 1477; 0.89
  - 9. Dimensional Stability: HumiGuard Plus
  - 10. Recycle Content: Up to 36% total recycled content. (Total recycled content: pre-consumer, post-consumer and post-industrial)
  - 11. Material Ingredient Transparency: Health Product Declaration (HPD); Declare Label
  - 12. Life Cycle Assessment: Third Party Certified Environmental Product Declaration (EPD)
  - 13. Indoor Air Quality Certified to SCS-105 v4.2-2023
  - 14. Basis of Design: **KITCHEN ZONE** as manufactured by Armstrong World Industries, Inc.

15. Substitutions: Refer to Alternates in Part 1.

## **PART 3 – EXECUTION**

### **3.1 EXAMINATION**

- A. Do not proceed with installation until all wet work such as concrete, terrazzo, plastering and painting has been completed and thoroughly dried out, unless expressly permitted by manufacturer's printed recommendations.

### **3.2 PREPARATION**

- A. Measure each ceiling area and establish layout of acoustical units to balance border widths at opposite edges of each ceiling. Avoid use of less than half width units at borders and comply with reflected ceiling plans. Coordinate panel layout with mechanical and electrical fixtures.
- B. Coordination: Furnish layouts for preset inserts, clips, and other ceiling anchors whose installation is specified in other sections.
  - 1. Furnish concrete inserts and similar devices to other trades for installation well in advance of time needed for coordination of other work.

### **3.3 INSTALLATION**

- A. Follow manufacturer installation instructions.
- B. Install suspension system and panels in accordance with the manufacturer's instructions, and in compliance with ASTM C 636 and with the authorities having jurisdiction.
- C. Suspend main beam from overhead construction with hanger wires spaced 4 feet on center along the length of the main runner. Install hanger wires plumb and straight.
- D. Install wall moldings at intersection of suspended ceiling and vertical surfaces. Miter corners where wall moldings intersect or install corner caps.
- E. For reveal edge panels: Cut and reveal or rabbet edges of ceiling panels at border areas and vertical surfaces.
- F. Install acoustical panels in coordination with suspended system, with edges resting on flanges of main runner and cross tees. Cut and fit panels neatly against abutting surfaces. Support edges by wall moldings.

### **3.4 ADJUSTING AND CLEANING**

- A. Replace damaged and broken panels.

- B. Clean exposed surfaces of acoustical ceilings, including trim, edge moldings, and suspension members. Comply with manufacturer's instructions for cleaning and touch up of minor finish damage. Remove any ceiling products that cannot be successfully cleaned and or repaired. Replace with attic stock or new product to eliminate evidence of damage.

**END OF SECTION**

## **DIVISION 9 - FINISHES**

### **SECTION 09650 - RESILIENT FLOORING**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services, and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

- A. Installation Qualification: contractors for floor covering installation shall be experienced in managing commercial flooring projects and provide professional installers, qualified to install the various flooring materials specified with a minimum of three years of documented experience. Installer shall be trained by flooring manufacturer and - if applicable - certified to install the specified flooring by the manufacturer.
- B. Manufacturer Qualifications: company specializing in manufacturing the specified flooring with minimum three years documented experience.

##### **1.03 Submittals:**

- A. Submit product data for each type of product indicated.
- B. Submit samples for color selection / verification.
- C. Maintenance Data and Instructions Furnish manufacturer's recommended maintenance methods and procedures.

##### **1.04 Delivery, Storage, and Handling:**

- A. Store resilient products and installation materials in dry spaces protected from the weather, at temperatures required by the product manufacturer. Store tiles on flat surfaces.

#### **Part 2 - Products**

##### **2.01 General:**

- A. Refer to color schedule - available tile colors WILL be a factor in product acceptance.

##### **2.02 Materials:**

- A. Resilient Floor Tile:
  - 1. Type Example: Luxury Vinyl Composition Tile (LVT-1 and LVT-2 if applicable) as manufactured by Interface LVT.
  - 2. Size: 25cm x 1m.
  - 3. Thickness: 4.5mm.
  - 4. Pattern: Level Set Natural Wood Grains.
  - 5. Location: as shown on the Drawings.
  - 6. Colors: refer to Drawings - Teak.
- B. Rubber Cove Base: ASTM F 1861, Type TP-Rubber as manufactured by Roppe Corporation or approved equal.
  - 1. Size: 4" high x .018 gauge.
  - 2. Provide preformed inside and outside corners.
- C. Stair Treads, Risers, and Stringers: size and length as



## **DIVISION 9 - FINISHES**

### **SECTION 09650 - RESILIENT FLOORING**

- required - Low Profile Raised Circular Design as manufactured by Roppe Corporation.
- D. Edging Strips and Tile Reducers: size and length as required.
- E. Smoothing compound: UZIN NC 888 or as required by flooring manufacturer.
- F. Primer and Adhesive: As recommended by manufacturer of LVT resilient floor tile (and approved by Architect) and base (Ultrabond ECO Premium Wall-Base Adhesive), etc. for this particular project. All wall base and reducer strips shall be applied with epoxy adhesive.
- G. Cleaner or other finishing material: As recommended by flooring manufacturer for the particular type of floor material.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Comply with manufacturer's written instructions for installing specified tile flooring.
- B. The Contractor shall be responsible for the manufacturer's representative making mat moisture and PH tests and reporting condition of concrete slab to the Architect in writing prior to placing floor materials.
- C. Carefully examine the surfaces on which the above materials are to be applied, report to Architect in writing any unsatisfactory surface and do not begin work until all defective surfaces have been corrected. Otherwise, the Contractor shall assume responsibility for all failures and defects resulting from such defective surfaces.
- D. Installation shall not begin until the work of all other trades, including painting, has been completed. The Contractor shall maintain all rooms and sub-floors at a minimum of 70 degrees F. for several days before and after application of tile.
- E. The floor shall be thoroughly cleaned and any pockets or cracks shall be filled in accordance with manufacturer's instructions flush with floor surface.
- F. The material shall be applied in a first class, workmanlike manner by skilled mechanics experienced in this type of work.
- G. Primer and adhesive shall be as recommended by the manufacturer of the flooring for this particular project. The adhesive for applying all materials shall be waterproof and shall be furnished and guaranteed by the flooring manufacturer.

## **DIVISION 9 - FINISHES**

### **SECTION 09650 - RESILIENT FLOORING**

- H. Lay tile from center of room or space, working toward perimeter, so that tile at opposite edges of room are of equal width. Adjust as necessary to avoid cut widths of less than 3 inches at room perimeter. Lay tile square to room axis.
  - I. Fit floor material neatly and tightly into breaks and recesses, against bases, around pipes and penetrations, under saddles or thresholds, and around permanent cabinets and equipment.
  - J. Install reducer at each transition from tile to concrete floor.
  - K. After the flooring has been installed and before the waterproof adhesive has thoroughly set, the surface shall be rolled both ways with rollers made for this purpose, and all excess adhesive on the surface or in the joints shall be removed and the entire surface shall be left perfectly clean.
- 3.02 Cleaning and Waxing:
- A. When, in the opinion of the Contractor, the flooring has sufficiently sealed itself to permit cleaning, the floors shall be thoroughly cleaned with a neutral cleaner as recommended by the manufacturer of the flooring used. After the floors have been cleaned, the Contractor shall protect the floors either with building paper or by keeping traffic off the floors until the building is ready for occupancy.
- 3.03 Replacement Tile and Base:
- A. Provide enough spare floor tile, of each major color, in cartons to cover 50 square feet for future use. Provide 20 linear feet of spare rubber wall base. Resilient floor tile and wall base shall be in perfect condition.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 09670 - RESINOUS FLOORING**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### **1.02 Quality Assurance:**

- A. The Manufacturer shall have a minimum of 10 years experience in the production, sales, and technical support of epoxy and urethane industrial flooring and related materials.
- B. The Applicator shall have experience in installation of the flooring system as confirmed by the manufacturer in all phases of surface preparation and application of the product specified.
- C. No requests for substitutions shall be considered that would change the generic type of the specified System.
- D. System shall be in compliance with requirements of United States Department of Agriculture (USDA), Food, Drug Administration (FDA), and local Health Department.
- E. System shall be in compliance with the Indoor Air Quality requirements of California section 01350 as verified by a qualified independent testing laboratory.
- F. A pre-installation conference shall be held between Applicator, General Contractor and the Architect for review and clarification of this specification, application procedure, quality control, inspection and acceptance criteria and production schedule.

##### **1.03 Submittals:**

- A. Provide submittals in the form of samples (3 x 3 inch square), and documentation, to the Architect for review.

##### **1.04 Product Delivery, Storage and Handling:**

- A. All materials shall be delivered to the job site with manufacturer's labels intact and stored in an enclosed dry storage area providing protection from damage, out of direct sunlight, and exposure to the elements in accordance with the manufacturer's recommendations and relevant health and safety regulations.

##### **1.05 System Description:**

- A. The work shall consist of preparation of the substrate, the furnishing and application of a cementitious urethane based self-leveling seamless flooring system with Q-Rok quartz aggregate broadcast and novolac epoxy topcoat.
- B. The system shall have the color and texture as specified by the Owner with a nominal thickness of 1/4 inch. It shall be applied to the prepared area(s) as defined in the plans strictly in accordance with the Manufacturer's recommendations.
- C. Cove base (if required) to be applied where noted on plans and

## **DIVISION 9 - FINISHES**

### **SECTION 09670 - RESINOUS FLOORING**

per manufacturers standard details unless otherwise noted.

#### **1.06 Project Conditions:**

##### **A. Site Requirements:**

1. Application may proceed while air, material and substrate temperatures are between 60 F and 85 F providing the substrate temperature is above the dew point. Outside of this range, the Manufacturer shall be consulted.
2. The relative humidity in the specific location of the application shall be less than 85 % and the surface temperature shall be at least 5 F above the dew point.
3. The Applicator shall be supplied with adequate lighting equal to the final lighting level during the preparation and installation of the system.

##### **B. Conditions of new concrete to be coated with cementitious urethane material.**

1. Concrete shall be moisture cured for a minimum of 7 days and have fully cured for 14 days in accordance with ACI-308 prior to the application of the coating system pending moisture tests. Outside of these parameters manufacturer shall be consulted.
2. Concrete shall have a flat rubbed finish, float or light steel trowel finish (a hard steel trowel finish is neither necessary nor desirable).
3. Sealers and curing agents should not to be used.
4. Concrete surfaces on grade shall have been constructed with a vapor barrier to protect against the effects of vapor transmission and possible delamination of the system.

##### **C. Safety Requirements:**

1. The Owner shall be responsible for the removal of foodstuffs from the work area.
2. Non-related personnel in the work area shall be kept to a minimum.

#### **1.07 Waste Disposal:**

- ##### **A. The Applicator shall be provided with adequate disposal facilities for non-hazardous waste generated during installation of the system.**

#### **1.08 Warranty:**

- ##### **A. Dur-A-Flex, Inc. warrants that material shipped to buyers at the time of shipment substantially free from material defects and will perform substantially to Dur-A-Flex, Inc. published literature if used in accordance with the latest prescribed procedures and prior to the expiration date.**
- ##### **B. Dur-A-Flex, Inc. liability with respect to this warranty is strictly limited to the value of the material purchase.**

## DIVISION 9 - FINISHES

### SECTION 09670 - RESINOUS FLOORING

#### Part 2 - Products

##### 2.01 Flooring:

A. Dur-A-Flex, Inc, Poly-Crete MDB (self leveling broadcast quartz), Novolac topcoat seamless flooring system.

##### 1. System Materials:

- a. Topping: Dur-A-Flex, Inc, Poly-Crete MD resin, hardener and MD aggregate.
- b. The aggregate shall be Dur-A-Flex, Inc. Q-Rok quartz aggregate.
- d. Topcoat: Dur-A-Flex, Inc. Dur-A-Glaze Novolac resin and hardener.

##### 2. Patch Materials:

- a. Shallow Fill and Patching: Use Dur-A-Flex, Inc. Poly-Crete MD (up to ¼ inch).
- b. Deep Fill and Sloping Material (over ¼ inch): Use Dur-A-Flex, Inc. Dur-A-Tex UM

##### 2.02 Manufacturer:

A. Dur-A-Flex, Inc., 95 Goodwin Street, East Hartford, CT 06108, Phone: (860) 528-9838, Fax: (860) 528-2802

B. Manufacturer of Approved System shall be single source and made in the USA.

##### 2.03 Product Requirements:

##### A. Topping Poly-Crete MD

1. Percent Reactive 100 %
2. VOC 0 g/L
3. Bond Strength to Concrete ASTM D 4541 >400 psi, substrates fails
4. Compressive Strength, ASTM C 579 9,000 psi
5. Tensile Strength, ASTM D 638 2,175 psi
6. Impact Resistance @ 125 mils, MIL D-3134, >160 inch lbs  
No visible damage or deterioration

##### B. Topcoat

1. Percent Solids Dur-A-Glaze Novolac 100 %
2. VOC 8 g/L
3. Flexural Strength, ASTM C 580 5,500 psi
4. Tensile Strength, ASTM D 638 2,500 psi
5. Flexural Modulus, ASTM D 790  $1.95 \times 10^6$  psi
6. Coefficient of thermal expansion ASTM D 696  $2.2 \times 10^{-5}$  in/in/F
7. Water Absorption ASTM D 570 0.05 %, 24 hrs in water
8. Abrasion Resistance, ASTM D 4060  
C-10 Wheel, 1,000 gm load, 1,000 cycles 0.075 mg weight loss
9. Flammability, ASTM D 636 Self-Extinguishing

## DIVISION 9 - FINISHES

### SECTION 09670 - RESINOUS FLOORING

|                                               |            |
|-----------------------------------------------|------------|
| 10. Potlife @ 70 F                            | 30 minutes |
| 11. Tack Free Time @ 70 F (ready for re-coat) | 8-10 hours |
| 12. Cure Time for Traffic @ 70 F              | 24 hours   |
| 13. Heat Resistance Limitation                | 250 F      |

#### Part 3 - Execution

##### 3.01 Examination:

- A. Examine substrates, areas and conditions, with Applicator present, for compliance with requirements for maximum moisture content, installation tolerances and other conditions affecting flooring performance.
  1. Verify that substrates and conditions are satisfactory for flooring installation and comply with requirements specified.

##### 3.02 Preparation:

###### A. General:

1. New and existing concrete surfaces shall be free of oil, grease, curing compounds, loose particles, moss, algae growth, laitance, friable matter, dirt, and bituminous products.
2. Moisture Testing: Perform tests recommended by manufacturer and as follows.
  - a. Perform anhydrous calcium chloride test ASTM F 1869-98. Application will proceed only when the vapor/moisture emission rates from the slab is less than and not higher than 20 lbs/1,000 sf/24 hrs.
  - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have a maximum 99% relative humidity level measurement.

###### 3. Mechanical surface preparation

- a. Shot blast all surfaces to receive flooring system with a mobile steel shot, dust recycling machine (Blastrac or equal). All surface and embedded accumulations of paint, toppings hardened concrete layers, laitance, power trowel finishes and other similar surface characteristics shall be completely removed leaving a bare concrete surface having a minimum profile of CSP 4-6 as described by the International Concrete Repair Institute.
- b. Floor areas inaccessible to the mobile blast machines shall be mechanically abraded to the same degree of cleanliness, soundness and profile using diamond grinders, needle guns, bush hammers, or other suitable equipment.
- c. Wherever a free edge will occur, including doorways, wall perimeters, expansion joints, columns, doorways, drains and equipment pads, a ¼ inch deep by 1/4 inch wide keyways shall be cut in.

## DIVISION 9 - FINISHES

### SECTION 09670 - RESINOUS FLOORING

d. Cracks and joints (non-moving) greater than 1/4 inch wide are to be chiseled or chipped-out and repaired per manufacturer's recommendations.

4. At spalled or worn areas, mechanically remove loose or delaminated concrete to a sound concrete and patch per manufactures recommendations.

#### 3.03 Applying Texture Finishes:

##### A. General:

1. The system shall be applied in three distinct steps as listed below:
  - a. Substrate preparation
  - b. Topping/overlay application with quartz aggregate broadcast.
  - c. Topcoat application
2. Immediately prior to the application of any component of the system, the surface shall be dry and any remaining dust or loose particles shall be removed using a vacuum or clean, dry, oil-free compressed air.
3. The handling, mixing and addition of components shall be performed in a safe manner to achieve the desired results in accordance with the Manufacturer's recommendations.
4. The system shall follow the contour of the substrate unless pitching or other leveling work has been specified by the Architect.
5. A neat finish with well-defined boundaries and straight edges shall be provided by the Applicator.

##### B. Topping:

1. The topping shall be applied as a self-leveling system as specified. The topping shall be applied in one lift with a nominal thickness of 3/16 inch.
2. The topping shall be comprised of three components, a resin, hardener and filler as supplied by the Manufacturer.
3. The hardener shall be added to the resin and thoroughly dispersed by suitably approved mechanical means. Aggregate shall then be added to the catalyzed mixture and mixed in a manner to achieve a homogenous blend.
4. The topping shall be applied over horizontal surfaces using a pin rake, trowels or other systems approved by the Manufacturer.
5. Immediately upon placing, the topping shall be degassed with a 15/16 inch spiked roller.
6. Quartz aggregate shall be broadcast to excess into the wet material at the rate of 1 lbs/sf.
7. Allow material to fully cure. Vacuum, sweep and/or blow to remove all loose aggregate.

## **DIVISION 9 - FINISHES**

### **SECTION 09670 - RESINOUS FLOORING**

#### **C. Topcoat:**

1. The topcoat shall be squeegee applied and back rolled with a coverage rate of 60 sf per kit
2. The topcoat shall be comprised of a liquid resin and a liquid hardener that is mixed as a kit in and installed per the manufacturer's recommendations.
3. The finish floor will have a nominal thickness of 1/4 inch.

#### **3.04 Field Quality Control:**

##### **A. Tests, Inspection:**

1. The following tests shall be conducted by the Applicator:
  - a. Temperature
    1. Air, substrate temperatures and, if applicable, dew point.
  - b. Coverage Rates
    1. Rates for all layers shall be monitored by checking quantity of material used against the area covered.

#### **3.05 Cleaning and Protection:**

- A. Cure flooring material in compliance with manufacturer's directions, taking care to prevent their contamination during stages of application and prior to completion of the curing process.
- B. Remove Masking - perform detail cleaning at floor termination, to leave cleanable surface for subsequent work of other sections.

**End of Section**



## **DIVISION 9 - FINISHES**

### **SECTION 09681 - CARPET TILE**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. Work includes but is not limited to providing carpet tile and installation.

##### **1.02 Quality Assurance:**

###### **A. Standards:**

- 1. The carpet manufacturer shall have no less than fifteen years of production experience with modular carpet similar to type specified. Published product literature of carpet manufacturer must clearly indicate compliance of products with requirements of this section.

###### **B. Installer Qualifications:**

- 1. The installation provider must be directly responsible for the quality of the completed floor covering installation, including both the quality of the materials and labor used in the installation. The installation provider must directly warrant to owner that all products, materials and services related to the floor covering installation (including any floor covering(s), adhesive(s) and/or other products or materials used in the installation) will meet specifications set forth herein. The product warranty required herein must be provided directly by the carpet manufacturer.
- 2. The installation provider must have successful carpet installation experience similar to the work of this Section and be recommended, trained, and approved by the carpet manufacturer.

##### **1.03 Submittals:**

- A. Manufacturer's Data - copies, as required, of carpet manufacturer's specifications and installation instructions for carpet and related items specified.
- B. Fiber Verification - Certification from the fiber producer verifying use of the premium branded, Post-Consumer Content Type 6 fiber in the submitted carpet product.
- C. All applicable product warranties provided by manufacturer.

##### **1.04 Delivery and Storage:**

- A. Deliver all materials to the installation site in the manufacturer's original packaging. Packaging to contain manufacturers name, identification number and related information.

## DIVISION 9 - FINISHES

### SECTION 09681 - CARPET TILE

- B. Product to be delivered as required by manufacturer. Store in pallet form as supplied by manufacturer. Do not stack pallets.
  - C. Store materials in area of installation for a minimum period of 48 hours prior to installation.
- 1.05 Installation Quality Assurance:
- A. Flooring contractor to be specialty contractor normally engaged in this type of work and shall have three (3) years minimum documented experience in the installation of these materials.
  - B. Flooring contractor and sub-contractors must be approved by the architect and/or the carpet manufacturer.
  - C. Flooring contractor will be responsible for the proper product installation, including floor preparation in all the areas indicated in the drawings to receive carpet. The carpet installation standard will be as listed in The Carpet and Rug Institute's **Standard for Installation of Commercial Carpet CRI-104**.
  - D. Flooring contractor to provide owner a written warranty that guarantees the completed installation to be free from defects in materials and workmanship for a period of no less than one (1) year after job completion.
  - F. Qualifications of Installers: All work shall be done by installation firms specializing in commercial carpet installation. It is required, that the firm shall be a member of the Floor Covering Installation Contractors Association (FCICA) and/or certified by the Floor Covering Installation Board (FCIB).
  - G. Floor temperatures must be a minimum of 65° for 24 hours prior to installation. Floor temperature can usually vary 5-10° lower than room temperature. Modules must be conditioned to room temperature for 24 hours prior to installation. Relative humidity must be between 10%-65% maximum for 24 hours prior to installation. These conditions must also be maintained for 48 hours after completion of installation.
  - H. All carpet modules must be installed in the order they were manufactured. Select pallets in sequential order and follow the numbers located on each carton of tiles. Typically, an installation will begin with the lowest carton numbers and progress through the highest numbers until project is complete.

## DIVISION 9 - FINISHES

### SECTION 09681 - CARPET TILE

- I. Full Spread Adhesive System: Requires a full spread adhesive system for the most trouble-free installation. Fully spread adhesive using a 1/32 x 1/16 x 1/16 "U" or "V" notch trowel. Allow to completely dry so adhesive does not transfer when touched. The proper amount of adhesive is mandatory to prevent the modules from shifting or moving.
- 1.06 Job Conditions:
  - A. Sub-floor preparation is to include all required work to prepare the concrete slab for installation of the product as specified in this document.
  - B. Carpet installation shall not commence until painting and finishing work is complete and ceiling and overhead work is tested, approved, and completed.
  - C. Site conditions shall include those specified in the carpet manufacturer's installation manual and shall also include sufficient heat, light, and power required for effective and efficient working conditions.
- 1.07 Extra Materials:
  - A. Provide five percent (5%) extra material for shelf stock of carpet for each color and type specified.
- 1.08 Warranty - Carpet:
  - A. Warranties must be the standard, printed warranties on the carpet manufacturer's letterhead. All warranty items to be full term, not pro-rated for the indicated period. All warranties must be issued by the manufacturer as standard published warranties on all types of carpet within this document. If the product fails to perform as warranted when properly installed and maintained according to procedures, the affected area will be repaired or replaced at the expense of the manufacturer. The carpet manufacturer, will provide standard published written performance warranties for the following:
    - 1. **Lifetime against excessive surface wear.**  
Excessive wear means no more than 10% loss of pile fiber weight measured before and after use as tested under ASTM D-3936.
    - 2. **Lifetime static protection,** meaning built-in protection below 3.0 kv as tested under AATCC-134.
  - B. Carpet manufacturer shall warrant carpet manufactured with secondary backing for the useful life of the original installation against product failure from:
    - 1. Tuft Bind (edge ravel, yarn pulls, zippering)

## **DIVISION 9 - FINISHES**

### **SECTION 09681 - CARPET TILE**

- 2. Delamination
  - 3. Moisture Penetration
  - 4. Dimensional Stability
  - C. All warranties to be sole source responsibility of the carpet manufacturer. Second source warranties that involve parties other than the carpet manufacturer are unacceptable.
  - D. Warranties shall not be written only for this purchase or purchaser. All warranties shall be standard issue nationally of official documents.
- 1.09 Performance Insurance General:
- A. Flammability Requirements:
    - 1. Pill Test / DOC-FF-1-70 (ASTM D-2589)  
Requirement: Pass
    - 2. Flooring Radiant Panel / ASTM E-648  
Requirement: Class 1 (Above .45 w/cm)
    - 3. Optical Smoke Density Test / NFPA-258 NBS Smoke Chamber (ASTM E-662)  
Requirement: Less than 450, Flaming Mode
    - 4. Comply with the Carpet and Rug Institute (CRI) VOC Chamber Test/Indoor Air Quality test (CRI-IAQ) Green Label Test
  - B. Face Fiber Characteristics for **all** Carpets
    - 1. Bulked Continuous Filament (BCF),
    - 2. Acceptable Fiber Systems: as manufactured by Aquafil.
  - C. Sustainable Carpet Assessment Standard:
    - 1. NSF - 140 Gold.
    - 2. Carpet manufacturer and/or fiber producer must be a signatory of the National Carpet Recycling Agreement memorandum of understanding.
- 1.10 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

### **Part 2 - Products**

- 2.01 General:
- A. Certified test reports shall be submitted by the carpet manufacturer, for all performance assurance specifications listed below.
  - B. Requirements listed below must be met by all products being submitted for approval.

## DIVISION 9 - FINISHES

### SECTION 09681 - CARPET TILE

- C. All submitted test numbers should represent average for standard production goods.
- 2.02 Product Specification - Modular carpet tile shall meet the following specifications:
  - A. Style: InterfaceFLOR
    - 1) Color "A" - Field: Open Air Neutrals 410 Colorline.
    - 2) Color "B" - Accent: Aerial Flying Colors AE317.
  - B. Yarn: 100% Nylon (with minimum 4% post-consumer content and +/- 60% total recycled content)
  - C. Dye Method: 100% Solution / Yarn Dyed
  - D. Pile Thickness: 0.093 inch
  - E. Density: 6,968
  - F. Backing System: CQuest GB
  - G. Color: refer to Room Finish Schedule.
  - H. Special Treatments: ProTekt
- 2.03 Minimum Construction Standards:
  - A. Nylon Specification - All nylon fiber shall be branded (premium) type 6 nylon from Aquafil with performance certification from the fiber manufacturer.
  - B. Antimicrobial, registered by the EPA for use in carpeting with broad spectrum efficacy against the growth of bacteria and fungi for a minimum of 15 years, assuming proper maintenance. The antimicrobial ingredient shall meet standards set by the U.S. General Services Administration (GSA) for Antimicrobial Carpet as supported by independent lab testing less than six months old.
    - 1. Intersept (AATCC 138 Washed).
    - 2. The preservative should be incorporated into the primary latex coating of the product during the manufacturing process, not topically applied to the carpet fibers.
    - 3. The antimicrobial treated carpet when new must pass GSA parameters for treated carpets via AATCC method 174 parts II and III. Initial performance must be 90% reduction of the microorganisms (Staphylococcus aureus 6538 and Klebsiella pneumoniae 4352) and no fungal growth on either the primary backing or fibers both on washed (AATCC method 174) and non-washed samples.
    - 4. The antimicrobial treated carpet must maintain, for the warranted life of the carpet, a minimum of 90% reduction of the microorganisms (Staphylococcus aureus 6538 and Klebsiella pneumoniae 4352) listed in AATCC

## **DIVISION 9 - FINISHES**

### **SECTION 09681 - CARPET TILE**

method 171 part II, provided the carpet is maintained as specified. Additionally, the antimicrobial treated carpet must maintain a "no macroscopic growth" rating against *Aspergillus niger* 6275 at the primary backing in accordance with AATCC 171 part III.

5. The preservative must be environmentally responsible i.e. (biodegradable and not toxic to non-target species).
6. Efficacy of the preservative should be documented in professional peer reviewed scientific publications.

#### **2.04 Related Carpet Materials:**

- A. Leveling compound - Latex type as recommended by carpet manufacturer. Must be compatible with carpet adhesive and curing/sealing compound on concrete.
- B. Releasable pressure sensitive type adhesive - Adhesive must be water-based and allow for removal of carpet tile at any time without damage to carpet or substrate. Adhesive must contain antimicrobial preservative and have "zero" calculated VOC's.
- C. Carpet edge guard, non-metallic - Extruded or molded heavy duty vinyl or rubber carpet edge guard of size and profile indicated, and with minimum two inch wide anchorage flange; colors selected by architect/designer from among standard colors available within the industry.
- D. Miscellaneous materials - As recommended by manufacturer of carpet. Other carpeting products to be selected by installation provider to meet project requirements.
- E. Electrostatic (Dissipation low-generation):
  1. < 3.0 KV (AATCC 16-E).
- F. Lightfastness:
  1.  $\geq$  4.0 @ 60 AFU's.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. General
  1. Comply with manufacturer's instructions and recommendations for uniformity of direction.
  2. Install carpet under open-bottom obstructions and under removable flanges and furnishings, and into alcoves and closets of each space.
  3. Provide cut outs where required. Conceal cut edges with protective edge guards or overlapping flanges.
  4. Run carpet under open bottom items such as heating convectors and install tight against walls, columns

## **DIVISION 9 - FINISHES**

### **SECTION 09681 - CARPET TILE**

and cabinets so that the entire floor area is covered with carpet. Cover over all floor type door closures.

5. Install edging guard at all openings and doors wherever carpet terminates, unless indicated otherwise.
6. Cutting shall be done in accordance with the manufacturer's recommendation, using the tools designed for the carpet being installed.
7. Use leveling compound where necessary. Any floor filling or leveling shall have a minimum of 4'0" of feather.
8. Expansion joints - Do not bridge building expansion joints with continuous carpeting.

#### **B. Installation**

1. Install carpet according to carpet manufacturer's printed instructions and in accordance with the Carpet and Rug Institute's Installation Standard.

#### **3.03 Cleaning and Protection:**

- A. On completion of the installation in each area, all dirt, carpet scraps, etc. must be removed from the surface of the carpet.
- B. Remove debris, and sort pieces to be saved from scraps to be redirected and recycled.
- C. Construction manager shall protect carpeting against damage during construction.

#### **3.04 Inspection:**

- A. Upon completion of the installation, verify that work is complete, properly installed and acceptable.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 09780 – STAINLESS STEEL WALL PANELS and TRIM**

#### **PART 1 – GENERAL**

##### **1.01 SECTION INCLUDES**

- A. Stainless steel wall panel protection.

##### **1.02 SCOPE OF WORK**

- A. Furnish all labor, materials, equipment and incidentals governed by this section necessary to install the products as specified herein.

##### **1.03 RELATED DOCUMENTS**

- A. Drawings and general provisions of Project Specifications including the Special Conditions, apply to work of this section.

##### **1.04 QUALITY ASSURANCE**

- A. The material covered by these specifications shall be furnished by a certified manufacturer of proven ability who is regularly engaged in the manufacture, fabrication, and installation of stainless steel systems.
- B. Substitutions of any component or modification of system shall be made only when approved by the Architect.
- C. Fabricator Qualifications: firm experienced in successfully producing stainless steel fabrications similar to that indicated for this project, with sufficient production capacity to produce required units without causing delay in the work.
- D. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.
- E. Material shall conform to building code requirements for interior finish for smoke and flame spread requirements as tested in accordance with ASTM E84 (method of test for surface burning characteristics of building materials) Wall Required Rating – Class C.
- F. Sanitary Standards: system components and finishes to comply with:
  - 1. United States Department of Agriculture (USDA) / Food Safety & Inspection Services (FSIS) requirements for food preparation facilities, incidental contact.
  - 2. Food and Drug Administration (FDA) 2013 Food Code 6-101.11.

##### **1.05 DESIGN CRITERIA**

- A. The design of stainless steel panel system, the support structure, and associated structural



## **DIVISION 9 - FINISHES**

### **SECTION 09780 – STAINLESS STEEL WALL PANELS and TRIM**

connections, shall be in accordance with the governing building code(s) and approved standards as applicable.

#### **1.06 SUBMITTALS**

- A. Comply with Special Conditions, unless otherwise indicated.
- B. Product Data: Manufacturer's printed product data for each type of stainless steel wall panel system specified.
- C. Detail Drawings: Mounting details with the appropriate adhesives, connections, anchorage methods, etc. for specific project substrates.
- D. Manufacturer's Installation Instruction: Printed installation instructions for stainless steel wall panels.

#### **1.07 PRODUCT HANDLING**

- A. Deliver materials in unopened factory packaging to the site.
- B. Inspect materials at delivery to assure that specified products have been received.
- C. Store in original packaging in an interior climate-controlled location away from the elements and direct sunlight.
- D. Protect finished surfaces from soiling (including over exposure to sunlight) and damage during handling and installation. Any material which, in the opinion of the Architect, has become damaged and is unfit for use, shall be promptly replaced by the Construction Manager at no additional cost to the Owner.

#### **1.08 JOB CONDITIONS**

- A. Environmental Requirements: Do not install panels until permanent HVAC systems are operating and temperature and humidity have been stabilized to less than 80% for 24 hours in advance of installation and maintained for at least 48 hours after installation as required by the manufacturer's recommendation.
  - 1. Manufacturer/Supplier shall advise Contractor of temperature and humidity requirements for stainless steel panel installation areas.
  - 2. After installation, control temperature and humidity to maintain relative humidity less than 80%.
- B. Conditions: Do not install panels until interior concrete work, masonry, plastering and other wet operations are complete.

## **DIVISION 9 - FINISHES**

### **SECTION 09780 – STAINLESS STEEL WALL PANELS and TRIM**

- C. Provide ventilation to disperse fumes during application of adhesive.

#### **1.09 WARRANTY**

- A. All materials and workmanship covered by this section shall carry a Standard IPC Limited Lifetime Warranty against material and manufacturing defects.

### **PART 2 – PRODUCTS**

#### **2.01 ACCEPTABLE MANUFACTURERS:**

- A. Inpro Corporation, IPC Door and Wall Protection Systems, P.O. Box 406, Muskego, WI 53150 USA; Telephone: 800-222-5556, Website: [www.inprocorp.com](http://www.inprocorp.com) or approved equal.
- B. Product:  
Standard FRP Panels with Smooth Surface with Greenguard Certification for low chemical emissions.

#### **2.02 WALL PANELS:**

- A. Stainless Steel Wall Panels: provide stainless steel wall panel systems that include panels, top cap, divider trim, inside and outside corner trim.
  - 1. Dimensions:
    - a. Thickness – 18 gauge – Type 304 nominal
    - b. Width – 4'-0" nominal
    - c. Length – 8'-0" nominal or as indicated on the drawings.

#### **2.03 BASE / MOLDINGS / TRIM:**

- A. Stainless Steel Inside and Outside Corner Trim, Stainless Steel Top Caps, and Stainless Steel Divider Trim:
  - 1. 1" x 1" / 1" sightline, 24 gauge, 120" height. Receives edge of adjacent panel and/or top edge of panels. Stainless steel – Type 304 (conforms to NSF Standard 51).
  - 2. Attachment: adhesive mount.

#### **2.04 MATERIALS:**

- A. Stainless Steel:
  - 1. Wall Panels -
    - a. Thickness – 18 and 20 gauge.
    - b. Type 304 (conforms to NSF Standard 51).
  - 2. Top Cap, Divider, Inside & Outside Corner Trim -
    - a. Thickness – 24 gauge.
    - b. Type 304 (conforms to NSF Standard 51).

## **DIVISION 9 - FINISHES**

### **SECTION 09780 – STAINLESS STEEL WALL PANELS and TRIM**

#### **2.05 COMPONENTS:**

- A. Attachment: Non-staining nylon drive rivets.
  - 1. Panels –
    - a. Panels shall be adhered with field applied heavy duty adhesive and foam tape.
  - 2. Trim Pieces –
    - a. Trim Pieces shall be adhered with field applied heavy duty adhesive.

#### **2.06 FINISH:**

- A. Stainless Steel: Panels and corner guards shall have a No.4 satin finish.

### **PART 3- EXECUTION**

#### **3.01 PREPARATION**

- A. Examine backup surfaces to determine that corners are plumb and straight, surfaces are smooth, uniform, clean and free from foreign matter, nails countersunk, joints and cracks filled flush and smooth with the adjoining surface.
- B. Verify that stud spacing does not exceed 16" (61cm) on-center.
- C. Repair defects prior to installation.
- D. Level wall surfaces to panel manufacturer's requirements. Remove protrusions and fill indentations.
- E. Coordinate and furnish anchorages, setting drawings, diagrams, templates, instructions and directions for installation of anchorage materials and miscellaneous items to be mounted to walls / panels.
- F. Surface Preparation: clean the substrate to remove dust, debris, and loose particles. Ensure the substrate is sound and per project plans.

#### **3.02 INSTALLATION**

- A. Comply with manufacturer's recommended procedures and installation sequence.
- B. General – locate the wall panels as indicated on the approved detail drawing for the appropriate substrate and in compliance with the installation instructions. Install wall panels level and plumb at the height indicated on the drawings.
- C. Apply panel moldings to all panel edges as required by manufacturer.

**DIVISION 9 - FINISHES**

**SECTION 09780 – STAINLESS STEEL WALL PANELS and TRIM**

**3.03 CLEANING**

- A. Refer to manufacturer's specific cleaning and maintenance instructions.

**End of Section**

## **DIVISION 9 - FINISHES**

### **SECTION 09900 - PAINTING**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this entire section of the work.
- B. Consult Drawings, finish schedules, details and specification section.

##### **1.02 Quality Assurance:**

- A. All painted surfaces shall be uniform in color, texture and finish to the satisfaction of the Architect.

##### **1.03 Submittals:**

- A. Submit manufacturer's specifications, including paint label analysis and application instructions for each material specified.
- B. Submit color samples for review of color and texture.
- C. Provide samples of all natural and stained wood finishes.
- D. Final samples: Prepare samples of finishes on the job to the satisfaction of the Architect. If required, a 4' x 8' portion of wall surface finished as final sample.

##### **1.04 Product Deliver, Storage and Handling:**

- A. Materials shall be delivered to the project site in strong, undamaged, waterproof containers with manufacturer's label intact. Materials in previously opened or unsealed containers, are not acceptable.
- B. Include on label of container: Manufacturer's name, type of paint, number and application instructions.
- C. Immediately upon delivery to the project site, all painter materials shall be stored and locked in a watertight shed with floor well off the ground. The shed shall remain locked at all times except for adding or removing materials.
- D. No materials of any manufacturer will be allowed on the project site any time during construction except those of the manufacturers specified or approved by the Architect.

##### **1.05 Job Conditions:**

- A. Comply with manufacturer's recommendations as to environmental conditions under which coating and coating systems can be applied.
- B. Do not apply finishes in areas where dust is being generated or where work in progress may affect finish quality.
- C. Protect finished work of other trades, and all surfaces not being painted concurrently, or not to be painted.

#### **Part 2 - Products**

##### **2.01 General:**

- A. The following specifications for Finishes is not intended to mention every particular item which will receive painter finish, but is intended to establish type and quality of finish which shall be required on various materials.
- B. **Products of Sherwin-Williams are specified herein to simplify descriptions of types and qualities of finishes required only.**

## DIVISION 9 - FINISHES

### SECTION 09900 - PAINTING

**Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

- C. Wherever the abbreviation "SW" appears in the following detailed specification, it shall be understood to mean Sherwin-Williams.
- D. Primers shall be as specified by manufacturers of finish paint used and as approved by the Architect.
- 2.02 Acceptable Manufacturers:
  - A. Sherwin-Williams.
  - B. PPG Industries.
  - C. Cook Paint and Varnish Co.
  - D. Pratt and Lambert.
  - E. Kelly-Moore.
- 2.02 Exterior Finishes:
  - A. Enamel on Ferrous Metals:
    - 1. One coat SW Kem Kromik Primer, (Alkyd primer).
    - 2. Two coats SW Industrial Enamel, (Alkyd gloss enamel).
  - B. Enamel on Exterior Door Frames and Doors:
    - 1. Shop coat by others-touch up as required.
    - 2. Two coats SW Industrial Enamel, (Alkyd gloss enamel).
  - C. Enamel on Galvanized Metal:
    - 1. One Coat SW Galvite primer.
    - 2. 2 Coats SW Industrial Enamel, (Alkyd gloss enamel).
  - D. Enamel on Exterior Concrete Block:
    - 1. One coat SW Promar Latex Block Filler B25W25.
    - 2. Two coats SW A-100 Semi-Gloss Latex Enamel.
- 2.03 Interior Finishes:
  - A. Enamel on Metal: All miscellaneous and ornamental metal items which are left exposed, hollow metal doors and frames.
    - 1. Shop coat by others - touch up as required.
    - 2. Two coats SW Promar 200 Semi-Gloss. Enamel, (Alkyd semi-gloss enamel).
  - B. Enamel on Concrete Block:
    - 1. One coat SW Promar 200 Block Filler (vinyl acrylic latex).
    - 2. Two coats SW Promar 200 Semi-Gloss Enamel.
  - C. Enamel on Gypsum Board Ceilings/Facias/Walls
    - 1. One coat SW Promar 200 Wall Primer with Medium Texture. (Vinyl Acrylic Latex Wall Primer.)
    - 2. Two coats SW Promar 200 Semi-Gloss Latex Enamel.
  - D. Tape and Float: Joints on Gypsum Board.
    - 1. As per manufacturer's instructions.
    - 2. All joints shall be sanded ready for primer's finish.
  - E. Interior Millwork and Cabinetry:
    - 1. One coat SW Promar 200 Alkyd Enamel Primer/Undercoat.
    - 2. Two coats SW Promar 200 Semi-Gloss Latex Enamel.
  - F. Enamel on Wood Trim:
    - 1. One coat SW Promar 200 Alkyd Enamel Primer/Undercoat.
    - 2. Two coats SW Promar 200 Semi-Gloss Latex Enamel.
  - G. Back-Painting, Interior Work:
    - 1. Two coats SW Promar 200 Alkyd Enamel Primer/Undercoat.

## **DIVISION 9 - FINISHES**

### **SECTION 09900 - PAINTING**

- H. Enamel on Exposed Metal Piping:
  - 1. One coat SW Galvite primer.
  - 2. Two coats SW Promar 200 Semi-Gloss Latex Enamel.

#### **Part 3 - Execution**

##### **3.01 Inspection:**

- A. Notify Contractor of any surface not in proper condition to be finished before proceeding with the work. Starting work will constitute the painter's acceptance of preceding work, and conditions under which finish will be applied and his assumption of responsibility for results to be obtained.

##### **3.02 Preparation of Surfaces:**

- A. Wood:
  - 1. Sand to a smooth even surface, then dust off.
  - 2. Touch-up knots, resinous spots, etc., on all surfaces with shellac 18 hours before applying prime coat.
  - 3. Fill nail holes, cracks and blemishes flush after priming coat has dried.
- B. Concrete Block and Concrete:
  - 1. Repair cracks and irregularities to provide uniform surface texture.
- C. Ferrous Metal Surfaces:
  - 1. Remove rust and scale, clean grease or oil surfaces with turpentine or benzine before painting.

##### **3.03 Application:**

- A. Number of coats and quality of finish shall be in accordance with these specifications, which requires the use of material which will product first quality finish if properly applied.
- B. Apply coats of material in strict accordance with manufacturer's currently published specifications, except where requirements of these specifications are in excess or manufacturer's requirements.
- C. Except as otherwise approved by the Architect, the first two coats of painter's finish shall be applied by roller or brush application. Finish coats may be applied by spray application.
- D. Comply with recommendation of product manufacturer for drying time between succeeding coats allow additional as required until finish is dry.
- E. All work where a coat of material has been applied must be inspected and approved before application of succeeding coat, otherwise, no credit for the coat well be given. Notify Architect when a particular coat has been completed for inspection and approval.
- F. Shellacs, oils, turpentine, etc., shall be of the highest quality and subject to approval of Architect. Materials shall be mixed in and applied directly from containers which they are purchased except when use of other containers is approved.
- G. First Coat of all finishes, except of varnish and stains, shall be white.
- H. Sand lightly between coats where shellac, varnish or enamel

## **DIVISION 9 - FINISHES**

### **SECTION 09900 - PAINTING**

- is used.
  - I. Remove all hardware, accessories, machined surfaces, and similar items in place and not to be finish-painted, or provide surface-applied protection prior to surface preparation and painting operations.
- 3.04 Clean-up:
- A. Clean and paint spots from work and touch-up or otherwise repair any defective or damaged work.
  - B. Remove all surplus materials and equipment after work is completed.
  - C. Leave entire job clean and acceptable to the Architect.

**End of Section**



## DIVISION 10 - SPECIALTIES

### SECTION 10100 - MARKERBOARDS AND TACKBOARDS

#### Part 1 - General

##### 1.01 Work Included:

- A. All materials, labor, services and incidentals necessary for the completion of this section of the work.

##### 1.02 Quality Assurance:

###### A. Standards:

- 1. American Society for Testing and Materials:
  - a. ASTM A-424, Steel Sheets for Porcelain Enameling.
- 2. Federal Specifications:
  - a. LL-B-810B, Hardboard.
- 3. Military Specifications:
  - a. MIL-C-15116C, Cork Sheet.

##### 1.03 Submittals:

- A. Shop Drawings: Submit dimensioned shop Drawings indicating location, type, size, arrangement, adhesive, backing, anchor or mounting details, trim, and accessories.
- B. Submit samples showing the full range of colors available for each unit.

#### Part 2 - Products

##### 2.01 Materials:

###### A. Porcelain Enamel Steel Markerboards:

- 1. Type: Factory-built aluminum framed unit.
- 2. Construction: Factory LCS face on 24 gauge steel laminated to 3/8" hardboard with .015 aluminum back-up.
- 3. Color: LCS faces shall be white.
- 4. Trim: Provide "H" bar joint cover at adjacent panels, color to match narrow leg showing, map rail with cork inserts and chalk trough.
- 5. Accessories: Provide two map hooks with paper clips at each chalkboard unit.
- 6. Mounting System: Concealed metal spline system. **At exterior walls provide "stand-off" mounting brackets to prevent condensation behind boards.**

###### B. Tackboard:

- 1. Type: Factory-built aluminum framed unit.
- 2. Construction: Vinyl covered surface bonded to a 2" thick insulation board core, with a 7/8" x 5/8" aluminum frame. Refer to Color Schedule.
- 3. Mount System: Manufacturer's standard.
- 4. Acceptable manufacturer: Best-Rite Vin-Tak tackboards.

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10100 - MARKERBOARDS AND TACKBOARDS**

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Install units straight, plumb, and level with metal splice system. Refer to Drawings.

**End of Section**

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10400 - INTERIOR SIGNAGE**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this entire section of the work.

##### **1.02 Quality Assurance:**

- A. Standards:
  - 1. UFAS Fed. Std. 795-Requirements for the physically handicapped.
  - 2. MIL Spec. L-P-387a, type NDP, rated self-extinguishing, for sign materials.

##### **1.03 Submittals:**

- A. Provide manufacturer's catalog cut and data sheets, complete parts list and installation requirements for each item specified.
- B. Schedules: Indicate location and placement for all graphic items.

##### **1.04 Product Delivery, Storage and Handling:**

- A. Handle and store all items with care to prevent damage and injury to finish surfaces.

#### **Part 2 - Products**

##### **2.01 Products of the manufacturers listed below have been specified herein to simplify descriptions of design, construction, and materials only. All items have been selected for visual and performance design quality which shall serve as a basis for acceptance of equivalent products by other manufacturers.**

##### **2.02 Signage System:**

- A. Material: 1/8 inch thick, type ES melamine plastic.
- B. Size: 8" x 8" x 1/8", with 1/2" radius corners. Custom design - refer to 2.04 for text and symbols.
- C. Mounting: All graphics shall be permanently mounted to wall or door surface with tamper resistant screws except where mounting to glazing is required. Provide adhesive for mounting and provide blank plates at opposite side of glass. Coordinate with Architect.
- D. Color: refer to Color Schedule, submit color samples with submittals, prior to approval. **Colors will be a factor in product acceptance.**
- E. Letter Style: Helvetica Medium.
- F. Standard Grade 2 braille shall be below all copy, all signs.
- G. All graphic material shall meet the requirements of UFAS Fed. Std. 795, and MIL spec L-P-387a.
- H. Acceptable Manufacturer: Series 200A, Type D format, Mohawk Sign systems.

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10400 - INTERIOR SIGNAGE**

2.03 Plaque Groupings Required (letter designation refers to 2.04):

| Quantity | Plaque | Mounting Location |
|----------|--------|-------------------|
|----------|--------|-------------------|

\*\*Coordinate location with Architect

| Plaque | Quantity | Location                                                                          |
|--------|----------|-----------------------------------------------------------------------------------|
| A      | 3        | @ doors no. 126, 148 & 207                                                        |
| B      | 3        | @ doors no. 127, 147 & 206                                                        |
| C      | 1        | @ door no. 228                                                                    |
| D      | 14       | @ doors no. 135, 136, 137, 138, 201, 202, 215, 222, 224, 225, 231, 232, 233 & 234 |
| E      | 3        | @ doors no. 144 & 230                                                             |
| F      | 2        | @ doors no. 123 & 142                                                             |
| G      | 3        | @ doors no. 125, 133 & 229                                                        |
| H      | 4        | @ doors no. 149, 150, 208 & 209                                                   |
| I      | 4        | @ doors no. 145, 146, 204 & 205                                                   |
| J      | 7        | @ doors no. 114, 118, 139, 155, 211, 220 & 237                                    |
| K      | 10       | @ doors no. 101, 102, 103, 104, 105, 106, 108, 124, 143 & 158                     |
| L      | 3        | @ doors no. 223, 226 & 235                                                        |
| M      | 4        | @ doors no. 112, 121, 141 & 216                                                   |
| N      | 1        | @ door no. 117                                                                    |
| O      | 1        | @ door no. 113                                                                    |
| P      | 2        | @ doors no. 110 & 217                                                             |
| Q      | 3        | @ doors no. 139, 140 & 142                                                        |
| R      | 5        | @ doors no. 151, 154, 203, 210 & 237                                              |

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10400 - INTERIOR SIGNAGE**

| <b>Plaque</b> | <b>Quantity</b> | <b>Location</b>       |
|---------------|-----------------|-----------------------|
| S             | 1               | @ door no. 134        |
| T             | 2               | @ door no. 129 & 130  |
| U             | 1               | @ door no. 215        |
| V             | 2               | @ door no. 109 & 111  |
| W             | 1               | @ doors no. 159       |
| X             | 1               | @ door no. 152        |
| Y             | 2               | @ doors no. 115 & 116 |
| Z             | 1               | @ door no. 214        |
| AA            | 2               | @ doors 212 & 213     |
| BB            | 1               | @ door no. 219        |
| CC            | 1               | @ door no. 218        |
| DD            | 2               | @ doors no. 126 & 131 |
| EE            | 2               | @ doors no. 132 & 227 |
| FF            | 2               | @ doors no. 156 & 157 |
| GG            | 1               | @ door no. 122        |


## DIVISION 10 - SPECIALTIES

### SECTION 10400 - INTERIOR SIGNAGE

#### 2.04 Signage Plaques Required:

|                                                                                                                                                      |                                                                                                                 |                                                                                                             |                                                                                                                                                                                                                             |                                                                                                                      |                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <br>MEN<br>A                                                        | <br>WOMEN<br>B                 | <br>I.T.<br>C              | <br>CLASSROOM<br>D                                                                                                                         | <br>CUSTODIAN<br>E                | <br>OFFICE<br>F     |
| <br>MECHANICAL<br>ELECTRICAL<br>G                                   | <br>MEN<br>H                   | <br>WOMEN<br>I             | <br>STORAGE<br>J                                                                                                                           | <br>EXIT<br>K                     | <br>EXIT<br>L       |
| <br>RESTROOM<br>M                                                   | <br>LIFE SKILLS<br>N           | <br>TESTING<br>O           | <br>PRINCIPAL<br>P                                                                                                                         | <br>FIRE RISER<br>Q               | <br>CHASE<br>R      |
| <br>ELEVATOR<br>EQUIPMENT<br>S                                      | <br>SERVING<br>T               | <br>BREAKROOM<br>U         | <br>RECEPTION<br>V                                                                                                                         | <br>CAFETERIA<br>W                | <br>CONFERENCE<br>X |
| <br>MVA<br>Y                                                       | <br>SMALL<br>GROUP<br>Z       | <br>COUNSELOR<br>AA       | <br>NIGHT<br>PRINCIPAL<br>BB                                                                                                              | <br>ASSISTANT<br>PRINCIPAL<br>CC | <br>*<br>DD        |
| <br>IN CASE OF FIRE DO<br>NOT USE ELEVATOR<br>USE STAIRWELL<br>EE | <br>STUDENT<br>STORAGE<br>FF | <br>LOCKER<br>ROOM<br>GG | <p>Note: all signage plaques shall have grade 2 braille translations under text.</p> <p>* INDICATES FLOOR LEVEL ( 1 THRU 2 STAIR WAY ( 2 TOTAL SIGNS )</p> <p>** INDICATES INFORMATION TO BE COORDINATED WITH ARCHITECT</p> |                                                                                                                      |                                                                                                        |

#### 2.05 Typical Mounting:

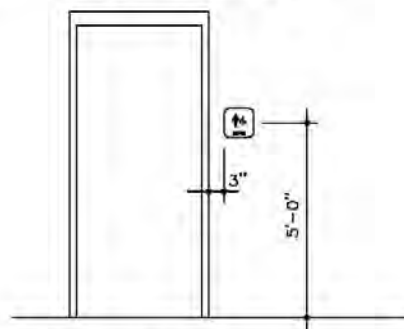

Mounting Height

Typical Wall Location

Verify location with architect.

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10400 - INTERIOR SIGNAGE**

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Comply with manufacturer's installation instructions and details on the Drawings. Set all units plumb and level in location indicated on the Drawings or as directed.
- B. Provide all necessary accessories: Items to support or attach Identifying Devices to result in a complete installation.
- C. Protect all signage plaques to prevent damage after installation.

**End of Section**

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10420 - LETTERS AND PLAQUES**

#### **Part 1 General**

##### **1.01 Work Included:**

- A. All materials, labor, services, and incidentals necessary for the completion of this entire section of the work.

##### **1.02 Submittals:**

- A. Shop Drawings: Indicate details and dimensions of fabrication and installation including layouts and assemblies. Begin fabrication only after receiving approved shop Drawings.
- B. Manufacturer's Literature: Descriptive literature and installation instructions.

##### **1.03 Product Delivery, Storage, and Handling:**

- A. Handle and store all items with care to prevent damage and injury to finish surfaces.

#### **Part 2 - Products**

##### **2.01 Cast Letters at exterior / interior locations:**

- A. Finish / Color: **CLEAR ANODIZED ALUMINUM.**
- B. Letter Style: **OPTIMA FONT.**
- C. Size: height – see below.
- D. Mounting: coordinate with Architect.
- E. Quantity: Sufficient letters to spell out the following (quantities in parentheses):

Exterior locations:

- 1. **MOORE PUBLIC SCHOOLS OLD SCHOOL (X 1 / 24" TALL / WALL MOUNTED)**
- 2. **201 NORTH BROADWAY (X 1 / 12" TALL / WALL MOUNTED)**

Interior locations: not applicable.

- F. Verify exact spelling/punctuation with Architect.
- G. Location: refer to the Drawings.
- H. Acceptable Manufacturer: A.R.K. Ramos, Oklahoma City.

##### **2.02 Cast Metal Plaque at interior location:**

- A. Castings shall be free from pits, scale, sand holes, or other defects. Comply with requirements specified for metal, border style, background texture, and finish, and with requirements shown for thickness, size, shape, and copy. Hand-tool and buff borders and raised copy to produce the manufacturer's standard satin polished finish. Coordinate final design with Architect.



## **DIVISION 10 - SPECIALTIES**

### **SECTION 10420 - LETTERS AND PLAQUES**

1. Metal: aluminum.
2. Border Style: Type 504.
3. Background Texture: manufacturer's standard No. 2 black pebble texture.
4. Letter Style: Helvetica upper case - raised satin aluminum finish.
5. Mounting Method: No. 4 concealed fasteners.
6. Finish: manufacturer's satin aluminum finish.
7. Size: 20 inches x 24 inches.
8. Content:

2026 OLD SCHOOL REPLACEMENT  
MOORE PUBLIC SCHOOLS

SUPERINTENDENT OF SCHOOLS:  
DR. ROBERT ROMINES

|                      |                |
|----------------------|----------------|
| BOARD OF EDUCATION:  |                |
| STACI PRUETT         | PRESIDENT      |
| MANDY KINCANNON      | VICE PRESIDENT |
| MATT PURSER          | MEMBER         |
| ERIN MORRISON        | MEMBER         |
| JENNY NGUYEN-STATLER | MEMBER         |

BOND CONSULTANT:  
JEFF HORN

ARCHITECT:  
AGP – THE ABLA GRIFFIN PARTNERSHIP LLC  
MOORE, OKLAHOMA

CONTRACTOR:  
OMNI CONSTRUCTION LLC  
MOORE, OKLAHOMA

9. Type Example: ARK-Ramos Manufacturing Company, Inc.

### **Part 3 - Execution**

#### **3.01 Installation:**

- A. Install units plumb and level in locations indicated on the Drawings, following manufacturer's recommendations.
- B. Provide all necessary accessories: Items to support or attach metal letters to result in a complete installation.

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10420 - LETTERS AND PLAQUES**

- C. Protect all finishes to prevent damage before, during and after installation.

**End of Section**

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10520 - FIRE PROTECTION SPECIALTIES**

#### **Part 1 General**

##### **1.01 Work Included:**

- A. All materials, labor, services and incidentals necessary for the completion of this entire section of the work.

##### **1.02 Submittals:**

- A. Submit Manufacturer's Literature: Descriptive literature, product data and installation instructions.

##### **1.03 Product Delivery, Storage and Handling:**

- A. Handle and store all items with care to prevent damage to equipment. Damaged equipment shall be rejected.

##### **1.04 Quality Assurance:**

- A. Standards:

- 1. Conform to NFPA 10 requirements for portable fire extinguishers.

- B. Provide fire extinguishers, cabinets and accessories by a single manufacturer.

##### **1.05 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 Materials:**

- A. Fire Extinguishers:

- 1. Model No. 10E - Cosmic multi-purpose dry chemical fire extinguisher. UL, 4A-60-BC.

- B. Fire Extinguisher Cabinets:

- 1. Model No.: Academy 1026V10 with return trim as required with rolled edge.
- 2. Door Style: Contemporary V, with flat trim.
- 3. Glazing: 1/4" clear acrylic.
- 4. Finish: Aluminum, mill finish, clear anodized.
- 5. Fire Rated Enclosure: provide fire stopping material to protect integrity of fire rated partition as required by applicable codes and standards.

#### **Part 3 - Execution**

##### **3.01 Installation:**

- A. Install equipment as located on the Drawings and comply with manufacturer's written instructions for equipment provided.
- B. Prepare recesses in walls for fire extinguisher cabinets as required for type and size of cabinet and style of trim, and

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10520 - FIRE PROTECTION SPECIALTIES**

- to comply with manufacturer's instructions.
- C. Securely fasten mounting brackets and fire extinguisher cabinets to the structure, square and plumb, to comply with manufacturer's instructions.
- D. Check extinguishers for proper charge operation.
- E. Remove and replace damaged, defective or under charged units.

**End of Section**

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10750 - FLAGPOLES**

#### **Part 1 - General**

##### **1.01 Description:**

- A. The General / Special Conditions and applicable sections of Division 1 shall apply to this entire section.
- B. Furnish all labor and materials necessary for the completion of work in this section as shown on the contract drawings and specified herein.
- C. Provide each flagpole as a complete unit produced by a single manufacturer, including fittings, accessories, bases and anchorage devices.
- D. Construct pole and ship to site in one piece, if possible. If more than one piece is necessary, provide snug fitting, precision joints with self-aligning, internal splicing sleeve arrangement for weather-tight, hairline field joints.
- E. Related work specified elsewhere shall include accessories, anchorage/blocking and concrete for installation of flagpoles.

##### **1.02 Related Work Specified Elsewhere**

- A. Section 03300 - Cast-In-Place Concrete.
- B. Section 07900 - Sealants.

##### **1.03 Quality Assurance:**

- A. American Architectural Manufacturers Association (AAMA)611 - Voluntary Specification for Anodized Architectural Aluminum.
- B. ASTM International (ASTM):
  - 1. A312 - Standard Specification for Seamless and Austenitic Stainless Steel Pipe.
  - 2. B241 - Standard Specification for Aluminum-Alloy Seamless Pipe and Seamless Extruded Tube.
  - 3. C94 - Standard Specifications for Ready-Mix Concrete.
  - 4. E527 - Standard Practice for Numbering Metals and Alloys.
- C. National Association of Architectural Metal Manufacturers (NAAMM) 503 - Finishes for Stainless Steel.
- D. American National Standards Institute/National Association of Architectural Metal Manufacturers (ANSI/NAAMM) - Guide Specifications for Design of Metal Flagpoles Manual.
- E. Product Delivery: Wrap poles in heavy paper to prevent damage during shipping and handling.

##### **1.04 Submittals:**

- A. Shop Drawings: provide product data Including pole and base dimensions, materials, finishes, and accessories.
- B. Sustainable Design Submittals:
  - 1. Regional materials.

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10750 - FLAGPOLES**

#### **1.05 Warranty:**

- A. Provide manufacturer's standard warranty.

#### **1.06 Project Conditions:**

- A. Field Measurements: Verify actual locations of flagpoles and concrete footings by field measurements before fabrication and indicate measurements on Shop Drawings.

#### **1.07 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

### **Part 2 - Products**

#### **2.01 Design Requirements:**

- A. Design flagpole and anchorage devices in accordance with ANSI/NAAMM FP 100197.
- B. Fabricate from seamless extruded tubing, having a minimum wall thickness of 0.188", tensile strength not less than 30,000 psi and a yield point of 25,000 psi. Heat-treat and age-harden flagpoles after fabrication.
- C. Description:
  - 1. Tapered pole - stainless steel, ASTM A312.
  - 2. Exposed Height: 45 feet.
  - 3. Overall Height: 48 feet.
  - 4. Butt Diameter: 6 inches.
  - 5. Top Diameter: 3.5 inches.

#### **2.02 Mounting:**

- A. Embedded:
  - 1. Foundation Tube: fabricate from 16 gauge, galvanized steel, with a steel base plate whose square dimension is at least the inside dimension of the sleeve plus 4". A setting plate 6" square shall be securely welded to the ground spike, at least 6" below the base plate. The ground spike shall be  $\frac{3}{4}$ " diameter, not less than 18" long.
  - 2. Provide a spun aluminum collar, Type FC-11, finish to match flagpole shaft. Diameter shall be at least 1" greater than diameter of the sleeve.
  - 3. Apply bituminous coating to that part of flagpole to be set in base, inside and out.

#### **2.03 Finish:**

- A. Aluminum: Deep Luster Finish (NAAMM-32).

#### **2.04 Fittings:**

- A. Finial: 14 gauge spun aluminum ball, finish to match pole with flush seam, sized to match butt diameter of shaft.
- B. Truck: cast aluminum revolving, non-fouling, complete with

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10750 - FLAGPOLES**

stainless steel ball bearings, and two  
2-3/8" diameter cast nylon sheaves.

- C. Halyards: two (2) sets of #10 (5/16") white waterproof polypropylene, each equipped with two (2) chrome swivel snaps to secure the flag. Provide cover.
  - D. Cleats: tow (2) 9" cast aluminum cleats, with stainless steel socket-head bolts included. Finish to match shaft. Provide locking cover.
- 2.05 Acceptable Manufacturers:
- A. American Flagpole, Inc.
  - B. Baartol Co., Inc.
  - C. Concord Industries, Inc.

### **Part 3 - Execution**

#### **3.01 Preparation:**

- A. Examine areas to receive flagpoles for correct elevation, subgrade preparation, etc. and report any discrepancies to the architect.
- B. Take complete and accurate measurements for location of flagpoles prior to starting work.
- C. Start installation only after all deficiencies are resolved to the approval of the Architect.

#### **3.02 Installation:**

- A. Excavation: excavate for foundation concrete to neat clean lines in undisturbed soil. Provide forms where required at unstable soil conditions. Remove loose soil and other foreign matter from excavation and moisten earth before placing concrete.
- B. Concrete: provide concrete as indicated in Section 03300 - Cast-in-Place Concrete.
- C. Install foundation sleeve in concrete footing. Center pole in sleeve using steel wedges and fill sleeve with clean, dry sand and top off with grout.
- D. Flagpole Installation: Install flagpoles as indicated and in compliance with approved shop drawings and manufacturer's instructions. Install flagpoles in a rigid, straight, plumb and level manner. Provide positive lightning ground for each flagpole installation. Paint portions of ground-set flagpole below grade with a heavy coat of bituminous paint.
- E. Apply joint sealer around pole at top of grout and collar.

**End of Section**

## **DIVISION 10 - SPECIALTIES**

### **SECTION 10800 - TOILET AND BATH ACCESSORIES**

#### **Part 1 - General**

##### **1.01 Work Included:**

- A. All materials, labor, services, and incidentals necessary for the completion of this section of the work.

##### **1.02 Submittals:**

- A. Provide manufacturer's catalog cut and data sheets, complete parts list and installation requirements for each accessory item specified.
- B. Where applicable, submit maintenance data, operating instructions and keys required for each type of equipment and lock.

##### **1.03 Products of certain manufacturers are specified herein to simplify descriptions of design, construction, and/or materials only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

#### **Part 2 - Products**

##### **2.01 The following model numbers refer to products of Bradley Corporation (except where noted otherwise).**

##### **2.02 Accessories:**

- A. Grab Bars:
  - 1. Model No. 8120-001360-36".
  - 2. Quantity: 1 each @ rooms 104, 117, 125, 126, 141, 144c, 144d, 203c, 203d, and 210
- B. Grab Bars:
  - 1. Model No. 8120-001420-42".
  - 2. Quantity: 1 each @ rooms 104, 117, 125, 126, 141, 144c, 144d, 203c, 203d, and 210
- C. Grab Bars:
  - 1. Model No. 8120-001180-18".
  - 2. Quantity: 1 each @ rooms 104, 117, 125, 126, 141, 144c, 144d, 203c, 203d, and 210
- D. Tilted Stainless Steel Mirror (Frame and Surface):
  - 1. Model No. 740-1830.
  - 2. Quantity: 1 each @ rooms 104, 115, 122, 123, 135, and 210  
4 total with 1 each side of rooms 144 and 203  
(above washfountains)
- E. Stainless Steel Mirror (Frame and Surface):
  - 1. Model No. 781-1830
  - 2. Quantity: 4 total with 1 each side of rooms 144 and 203  
(above washfountains)
- F. Custodian's Utility Shelf/With Mop & Broom Holder:
  - 1. Model No. 9984, 36" long.
  - 2. Quantity: 1 @ rooms 116, 143, and 226



## **DIVISION 10 - SPECIALTIES**

### **SECTION 10800 - TOILET AND BATH ACCESSORIES**

- G. Toilet Paper Dispensers to be provided by Owner and installed by Contractor.
- H. Paper Towel Dispenser to be provided by Owner and installed by Contractor.
- I. Soap Dispenser to be provided by Owner and installed by Contractor.

#### **Part 3 - Execution**

##### **3.01 General:**

- A. Install where noted on the Drawings and mount as indicated or per manufacturer's recommendations.
- B. Use concealed or tamper-proof fasteners of same material and finish as unit. Provide anchors, bolts, and other mounting devices and attach units securely.

**End of Section**

SECTION 11 40 00  
KITCHEN EQUIPMENT

PART 1 – GENERAL

1.01 SCOPE

- A. Include the work specified, shown or reasonably inferred as part of the foodservice equipment. Portions of the work may be subcontracted to those qualified to do the work as required by jurisdictional trade agreements and restrictions.
- B. Kitchen equipment furnished and installed by the Foodservice Contractor In the base bid.
- C. Provide itemized pricing providing both each pricing and total pricing for every item specified with a bid grand total.

1.02 RELATED SECTIONS

- A. Division 15 – Mechanical rough-ins, inter-connections of the equipment as required and final connections.
- B. Division 16 – Electrical rough-ins, inter-connections of the equipment as required and final connections.

1.03 QUALITY ASSURANCE

- A. All equipment and associated work must comply with all applicable laws, statutes, building codes and regulations of public authorities and comply with the following:
  - a. NSF (National Sanitation Foundation). All the equipment must bear the NSF label.
  - b. NEC (National electric Code).
  - c. UL (Underwriter's Laboratories, Inc.).
  - d. AGA (American Gas Association Laboratories).
  - e. NFPA (National Fire Protection Association).
- B. The following are approved fabricators for providing the fabricated food service equipment:

Jero Manufacturing, Inc.  
5117 South 100<sup>th</sup> East Avenue  
Tulsa, Oklahoma 74115

Stainless Innovations  
1110 Carnall  
Fort Smith, Arkansas 72901

1.04 SUBSTITUTIONS

- A. Equipment items and the components specified are intended to be the basis of the bid. All other manufactures, including manufactures which may be listed as "alternates" or "approved equals" must conform with the specifications, size, accessories, etc. of the original manufacture specified.
- B. Proposed substitutions will be substituted no later then fourteen (14) days prior to the bid date. Submit the proposed substitutions with the manufactures specification or catalog sheets, shop drawings, etc. indicating all modifications required to conform to the specified items.

- C. Approved substitutions will be addressed in an addendum(s). Approved substitutions will be noted on the bid form as a substitution. All costs and fees for any design and engineering services required to make adjustments to the space, systems, utilities, etc. will be the responsibility of the successful bidder. All costs incurred for modifications of the utilities or construction or professional services will be the responsibility of the successful bidder.
- D. The Owner reserves the right to accept or reject any or all of the substitutions proposed before the execution of the contract.

#### 1.05 DOCUMENT INTERPERTATION

- A. An addendum(s) will be issued addressing questions and comments from contractors, suppliers or vendors pertaining to the intent or clarity of the construction documents.
- B. All questions and comments will be submitted in writing by the contractors, suppliers and vendors for review.

#### 1.06 SUBMITTALS

- A. Submit brochure books, rough-in drawings, fabrication shop drawings and manufactures shop drawings. Refer to the general specifications for the required quantities.
  - a. Brochures:
    - 01 Provide with a front and rear cover. Label the front cover with the project name.
    - 02 Provide a cover sheet for each item number. The cover sheet will indicate the item number, the item name, the quantity, the manufacture, all optional equipment and accessories, specified modifications, the utility requirements and any special instructions.
    - 03 The manufactures catalog specification sheets.
  - b. Submittal drawings:
    - 01 Indicate all equipment shown on the contract documents drawn at a 1/4" scale.
    - 02 The contract documents are not to be traced or reproduced.
    - 03 Provide an equipment schedule indicating all the equipment shown on the contract documents.
    - 04 Drawings to be submitted on the same size drawing sheet as the Contract Documents in a PDF format. Provide the necessary required hard copies of the reviewed/stamped document to the General Contractor. Submit the drawings separately from the Brochure Book.
  - c. Rough-in drawings:
    - 01 Indicate all equipment shown on the contract documents drawn at a 1/4" scale.
    - 02 indicate all general use and convenience utilities indicated on the contract documents.
    - 03 Include utilities shown on the contract documents but connected to equipment not furnished in this section.
    - 04 Fully dimension all the utilities for the plumbing, electrical and mechanical from the finished room surface to the point of the stub-up through the floor and the stub-out through the wall or ceiling.
    - 05 Drawings to be submitted on the same size drawing sheet as the Contract Documents in a PDF format. Provide the necessary required hard copies of

the reviewed/stamped document to the General Contractor. Submit the drawings separately from the Brochure Book.

- d. Manufacture's and fabricators shop drawings:
  - 01 Indicate all equipment shown on the contract documents drawn at a 3/4" scale for the plan views and elevations. All sections and details to be drawn at a minimum of 1 1/2" scale.
  - 02 Include the equipment name, the item number and the quantity on the drawings.
  - 03 Include all required and necessary sections, details and elevations to reflect the drawings and the specifications.
  - 04 Indicate all adjacent equipment, walls and columns.
  - 05 Include all necessary plumbing and electrical schematic drawings.
  - 06 Include any ventilation or access panels as required by the manufactures of the built-in equipment.
  - 07 Drawings to be submitted on the same size drawing sheet as the Contract Documents in a PDF format. Provide the necessary required hard copies of the reviewed/stamped document to the General Contractor. Submit the drawings separately from the Brochure Book.

1.07 COORDINATION OF THE PROJECT AND DATA

- A. Review the contract documents, rough-in drawings, shop drawings and brochure books for accuracy and completeness.
  - a. Notify the Architect of any conflicts and required adjustments in writing.
  - b. Coordinate the work with this section with the other sub-contractors on the job.
  - c. Submit paint, stain, plastic laminate, vinyl coated surfaces, molded plastic, natural stone, man-made stone and solid surface material to the Owner for approval.
  - d. Obtain serviceware samples for sizing and weight information from the Owner for coordination of all self-leveling equipment.
  - e. Coordinate all mobile equipment will go through doors, wall openings and roll-in/roll-thru equipment. Notify the Architect of all conflicts or deviations from the approved submittals in writing.

1.08 FIELD VERIFICATION OF THE PROJECT AND DATA

- A. Review the contract documents, rough-in drawings, shop drawings and brochure books for accuracy and completeness.
  - a. Field verify all the under-slab rough-in locations and quantities before the concrete slab is poured. Notify the Architect in writing of all conflicts or omissions of the rough-ins.
  - b. Field verify all the in-slab recess locations, sizes, depths and quantities before the concrete slab is poured. Notify the Architect in writing of all conflicts or omissions of the in-slab recess.
  - c. Field verify all the in-wall rough-in locations and quantities before the drywall is installed. Notify the Architect in writing of all conflicts or omissions of the rough-ins.
  - d. Obtain actual field dimensions or guaranteed measurements from the general contractor to insure the proper fit of the equipment at the job site. The dimensions shown in the contract documents are approximate. The dimensions are for the bidding process only.
  - e. Field check all dimensions, measurements job site conditions before the fabrication and/or delivery of equipment to the job site. Notify the Architect of all conflicts or deviations from the approved submittals in writing.

## 1901-30 Kitchen Equipment 11 40 00 - 4

- f. Coordinate any exterior wall openings required for the delivery of all oversized equipment with the general contractor. The equipment must be manufactured to fit through standard door openings if this cannot be done.

### 1.09 WARRANTY

- A. Provide manufacture's warranty on each piece of specified equipment.
- B. The warranty period will be for one year after acceptance from the Owner for parts and labor.
- C. The warranty period will be for five years after acceptance from the Owner for compressor bodies for refrigeration equipment.
- D. The warranty period will be for ten years after acceptance from the Owner for the walk-in panels.

## PART 2 – PRODUCTS

### 2.01 MATERIALS

- A. Stainless steel.
  - a. All stainless steel to 18-8, type 304, polished to a 180 grit number 4 finish unless noted otherwise in the item specifications or in the drawings.
  - b. All seams and joints are to be heli-arc welded completely and free of flaws and pits. Grind the welds smooth and polish to a number 4 finish.
  - c. The grain of the stainless steel is to run the length of the equipment including the backsplash. Provide a polished miter look where the tops form a corner.
- B. Galvanized iron.
  - a. All seams and joints are to be heli-arc welded completely and free of flaws and pits. Grind the welds.
  - b. Thoroughly clean the welded and polished areas and prime and paint with Rustoleum in a color to match the metal.
- C. Sound deadening.
  - a. Apply 1/2" wide Schnee Butyl sealant rope continuously between all bracing/frame members and the underside of the table/counter tops, overshelves, wall shelves and undershelves.
  - b. Weld stud bolts to the underside of the tops, overshelves, wall shelves and undershelves. Tighten the stud bolts for maximum compression of the sound deadening. Trim any excess that extends from out of the bracing.
- D. Shop and field joints.
  - a. Field joints are to be used only when the equipment size must be limited for access into the building.
  - b. Indicate the field joint locations on the shop drawings.

## PART 3 – EXECUTION

### 3.01 INSPECTION

## 1901-30 Kitchen Equipment 11 40 00 - 5

- A. Verify and test that all equipment is plumbed, wired correctly, true and in good working order. Do not use until turned over to the Owner.
- B. Protect all appliances from construction dirt until the project is turned over to the Owner.

### 3.02 DELIVERY

- A. Coordinate with the construction progress and the Owner's operation schedule. Unless otherwise instructed by the general contractor or the Owner, the following procedures apply.
  - a. Items that integrate into the building, such as, walk-in coolers and freezers, ventilators, hoods, equipment supports, ceiling mounted utensil racks, etc. will be sent to the job site after the building is water tight and directed by the general contractor. Protect the equipment as required after installation is complete.
  - b. All the additional fixed equipment and mobile equipment requiring plumbing and electrical final connections will be delivered to the job site after the completion of the finished floor, wall finish, ceiling grid and tile or drywall and paint and the lighting system.
  - c. The remaining mobile equipment will be delivered to the job site after the equipment can be inventoried and secured in a lockable area. If a secured area is not available, deliver the equipment when the job site when the installation is completed and the equipment clean-up process have been completed.
  - d. Small counter item, pans, flatware containers, etc. will be delivered only when the Owner is ready to receive and inventory the items.

### 3.03 INSTALLATION

- A. Provide a competent supervisor at the job site during the entire installation process.
- B. Install the equipment per the manufacture's recommendations. Install the equipment square and level. All equipment shall be ready for the final connections.
- C. Protect the equipment after the installation process is complete.
  - a. Protect the custom fabricated equipment with fiberboard or plywood taped to the tops and exposed body surfaces.
  - b. Protect the buy-out equipment with fiberboard or plywood taped to the tops and exposed body surfaces.
  - c. The general contractor must insure the equipment is not used by other sub-contractors as work tables, scaffolding, tool and material storage, etc.
- D. Provide and install 18 gauge stainless steel trim at all gaps between the equipment and the walls and/or other high equipment when the gap is larger than 7/16 of an inch wide. Turn the trim down 90 degrees at the equipment splashes, top and/or turn downs. Attach the trim with hidden fasteners and seal with silicone caulking.

### 3.04 CLEAN AND ADJUST

- A. Leave the work area clean and free of debris.
- B. Remove or replace panels, parts or frames that are bowed, warped, dented or scratched as a result of manufacturing defects, shipping and delivery to the job site.
- C. The Foodservice Contractor is to deliver the foodservice equipment to the job sits, uncrate the equipment, remove all packing materials from the equipment, set the equipment into place per the floor plan and the job site conditions, level the equipment and make ready for

final connection by the Mechanical, Plumbing and/or Electrical Contractor. All crating materials are to be removed from the job site by the Foodservice Contractor.

- D. The Foodservice Contractor will final clean (not sanitizing) the foodservice equipment and seal the fixed foodservice equipment to the adjacent walls and/or fixed equipment with silicone caulking after all the utilities have been connected. The caulking will be neat, smooth and level with the foodservice equipment. Concaved caulking will be rejected. Remove any smeared caulking from the foodservice equipment and adjacent surfaces.

### 3.05 SERVICE MANUAL

- A. Provide manufacture's warranties and operating manuals on all appliances over to the Owner.
- B. Each appliance shall have operating instructions and maintenance information.
- C. The Foodservice Contractor will furnish to the Owner three (3) copies of an owner's and operations manual. The manual will be in three ring binders. The manuals will include a cover sheet for each equipment item, warranty information sheets, manufactures specification sheets and the service agent's name, address and telephone number.
- D. All warranties are not to begin until after the Owner accepts successful completion of the Start-up Demonstration and the kitchen.

### 3.06 EQUIPMENT DEMO AND START UP

- A. The Foodservice Contractor must test, adjust and regulate all the equipment per the manufacturer's instructions.
- B. The Foodservice Contractor will schedule, at the Owner's convenience, a date and time to demonstrate the foodservice equipment to the Owner. The Foodservice Contractor will start up and check out the foodservice equipment before the equipment is demonstrated to the Owner.

## PART 4 – EQUIPMENT

### ITEM NO. 01 - AIR CURTAIN (1 REQUIRED)

Mars Air Systems model NH248-1UA-TS with all the standard features. Mount with stainless screws per the manufactures requirements.

#### Accessories

- 1 ea. 120 volts, single phase with a cord and plug.
- 1 ea. Model 99-014 level 1 control package.
- 1 lot Model J2272 filter kit.

### ITEM NO. 02 - WALK-IN COOLER & FREEZER (1 REQUIRED)

The walk-in cooler & freezer to be manufactured by Thermo-Kool. The walk-in cooler & freezer to be 15'-8" x 7'-11" x 9'-3" high per the drawings and proposal number Q46554-55. Provide a 4" thick insulated panel floor. Provide stucco aluminum on the exterior and interior of the unit and white stucco aluminum on the ceiling.

#### Features

- 01 Provide two (2) hinges on the doors.

- 02 Two (2) vapor proof lights.
- 03 Foot treadle at the doors.
- 04 One (1) 14" x 24" heated peep window in each door.
- 05 Two (2) pressure relief vents.
- 06 EC motors on the evaporator coils.
- 07 Provide wall trim and a closure panel constructed of stucco aluminum.
- 08 Provide all necessary refrigeration lines (hard copper), refrigerant and labor from the evaporator to the refrigeration rack system located on the ground.
- 09 All refrigerant line runs to be on the exterior of the walk-in with short runs only from the evaporators to above the ceiling. Seal the holes for the lines with a spray foam insulation to make an air-tight seal. Provide stainless steel or chrome covers at all exposed penetrations.
- 10 14 Gauge fully welded stainless steel bumper rails pre drawings and details on the exposed exterior walls and doors.
- 11 Provide 14 Gauge fully welded stainless steel trim pre drawings and details around the opening in the building and the walk-in box.

Accessories

- 1 ea. ColdZone model MPL-2 refrigerated rack system per proposal number 25-0679. Locate the rack on the building roof. Verify the location at the job site.
- 1 ea. 208 volts, three phase.
- 2 ea. Berner model ASD36078 swing door. Install per the Manufactures requirements with stainless steel screws.
- 2 ea. Kason model 1810LCT40048" LED light fixtures with bulbs as located per the drawings. Conduit shall not be run on the interior of the units except what is required to connect to the lights. Seal the holes for the conduit and inside the conduit with a spray foam insulation to make an air-tight seal.

**ITEM NO. 03 - WALK-IN SHELVING (1 LOT REQUIRED)**

Quantum model WIRE storage shelves. Locate the bottom shelf at 10" above the finish floor and the remaining four (4) shelves at 17" O.C. at the balance of the shelving.

Accessories

- 44 ea. Model 2142P shelves.
- 8 ea. Model P74P posts.
- 32 ea. Model P86P posts.
- 8 ea. Model FP foot plates. Mount the foot plates to the floor with stainless steel fasteners. Locate the foot plates on the units at the ingredient bins.

**ITEM NO. 04 - MOBILE DUNNAGE RACKS (2 REQUIRED)**

New Age mobile dunnage racks with all the standard features.

Accessories

- 2 ea. Model 1204 with all the standard features.
- 2 sets. Provide with all swivel polyurethane tired casters with brakes.
- 2 ea. Model 1174 handles. Shorten the handle to 42" above the finished floor installed height.

**ITEM NO. 05 - CAN RACK (1 REQUIRED)**

New Age model 1250CK with all the standard features.



**ITEM NO. 06 - STORAGE SHELVING (1 LOT REQUIRED)**

Quantum model WIRE storage shelves. Locate the bottom shelf at 10" above the finish floor and the remaining four (4) shelves at 17" O.C. at the balance of the shelving.

Accessories

- 10 ea. Model 2142P shelves.
- 3 ea. Model 2154P shelves.
- 10 ea. Model 2160P shelves.
- 20 ea. Model P86P posts.
- 4 ea. Model FP foot plates. Mount the foot plates to the floor with stainless steel fasteners. Locate the foot plates on the units at the ingredient bins.

**ITEM NO. 07 - MOBILE DUNNAGE RACKS (1 REQUIRED)**

New Age mobile dunnage racks with all the standard features.

Accessories

- 1 ea. Model 1206 with all the standard features.
- 1 set. Provide with all swivel polyurethane tired casters with brakes.
- 1 ea. Model 1174 handles. Shorten the handle to 42" above the finished floor installed height.

**ITEM NO. 08 - MOBILE BREAD RACK BY THE VENDOR**

**ITEM NO. 09 - STAINLESS STEEL COLUMN COVERS (3 REQUIRED)**

Custom fabricated stainless steel column covers to be constructed per the drawings from fully welded 14 gauge type 304 stainless steel extending from the finish floor to 2" above the finished ceiling. Provide 2" flanges at the walls. Attach to the walls with stainless steel countersunk screws 6" from the top and bottom and 24" on center.

**ITEM NO. 10 - NUMBER NOT USED**

**ITEM NO. 11 - ICE MAKER (1 REQUIRED)**

Scotsman model MC0522SA-1 with all the standard features.

Accessories

- 1 ea. 120 volts, single phase.
- 1 ea. Model B322S bin.
- 1 ea. Model KLP8S stainless steel legs.
- 1 ea. Everpure model EV932422 water filter assembly. Mount on the side of the ice maker and bin with stainless steel screws.
- 1 pk. Everpure model EV9534-26 EC210 replace cartridge.

**ITEM NO. 12 - PREP TABLE (1 REQUIRED)**

Custom fabricated prep table to be constructed per the drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing.

Features

- 01 Provide with a 10" high x 2" thick backsplash at the rear and high equipment. Attach the back splash to the wall with stainless steel screws at a 4'-0" o.c. maximum spacing with 14 gauge stainless steel Z-clips.
- 02 Provide with a marine edge with a 2" turn down with a tight hem at the exposed sides.
- 03 Extend splash at pre-rinse faucet per drawings. Extend counter bracing up to top of extension. Fully weld bracing to counter bracing. Provide with a removable finished back where exposed.
- 04 Provide two (2) 18" x 18" x 10" deep 14 gauge type 304 stainless steel sinks fully welded into the top.
- 05 Provide 1 5/8" diameter type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel feet. Fully weld the leg sockets the underbracing.
- 06 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at rear. Fully weld the undershelves to the legs. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 07 Provide type 304 stainless steel crossrails in the locations shown by the drawings. Fully weld the crossrails to the legs.
- 08 Provide two (2) 1'-0" wide x length indicated on the drawing fully welded 16 gauge stainless steel wall mounted overshef. Provide 12 gauge fully welded type 304 stainless steel wall brackets. Mount the wall shelf 1'-6" above the work surface of the work table with stainless steel screws. Extend the back turn up of the shelves over the top of the overshelves of item 28 1/2" 90 degrees.

Accessories

- 1 ea. T & S model B-0133 pre-rinse faucet.
- 1 ea. T & S model B-0230-K installation kit.
- 1 ea. T & S model B-0156 add-on faucet.
- 1 ea. T & S model B-0109-01 wall bracket. Mount the bracket to the top extension with stainless steel screws.
- 2 ea. Component Hardware model DBN-8000 twist waste valve. Shorten the handle to be flush with the front of the sink bowl. Provide 14 gauge type 304 stainless steel brackets to support the handles. Attach to the sink bottom with stainless steel anchors.
- 1 ea. Edlund model G-2S can opener. Provide loose to the Owner. The Owner will mount the can opener to the table in the location shown on the drawings with stainless steel screws per the manufactures requirements. Widen the underbracing at the can opener to allow clearance for the mounting screws.
- 1 ea. Edlund model KR-699 knife rack. Provide a 14 gauge type 304 stainless steel bracket for the knife holder. Locate the knife holder per the drawings. Attach the rack to the bracket with Component Hardware model Q37-0250 stainless steel keyhole studs welded to the bracket at the top.
- 1 ea. Component Hardware model S90-0020 drawer assembly. Locate the drawer per the drawings.

**ITEM NO. 13 - TRASH CAN (5 REQUIRED)**

CFS Brands model 34103223 trash can in a gray color. NSF listed.

Accessories

- 5 ea. Model 34103323 GY lid for in a gray color. NSF listed.

5 ea. Model 3691003 dolly in a black color.

**ITEM NO. 14 - MOBILE PAN RACK (1 REQUIRED)**

Quantum Model mobile pan rack. Provide each unit four (4) shelves with 74" high posts. Mount the bottom shelf at 10" above the finish floor. Mount the remaining shelves at 17" on center.

Accessories

4 ea. Model 2448P shelves.  
4 ea. Model P74P posts.  
4 ea. Model WR-00HS casters with brakes.

**ITEM NO. 15 - MOBILE COOLING RACKS (2 REQUIRED)**

New Age model 1306 with all the standard features.

Accessories

2 sets Provide with polyurethane tired casters with brakes.  
2 sets Model PB - Perimeter bumpers.

**ITEM NO. 16 - HAND SINK (3 REQUIRED)**

Eagle Group model HSA-10 with all the standard features.

Accessories

3 ea. Model 300886 drain assembly.  
3 ea. Model LRS left and right hand splash on the sinks.  
3 ea. Component Hardware Group, Inc. model KL45-4002-RE1 faucets.  
3 ea. Component Hardware Group, Inc. model KN91-0100 quik-wash faucet control. Install on the faucets.

**ITEM NO. 17 - MEAL TRANSPORT CARTS (2 REQUIRED)**

Renfro Industries Inc. model SUCER1827-3 with all the standard features.

**ITEM NO. 18 - WORK TABLE (1 REQUIRED)**

Custom fabricated table to be constructed per the drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing.

Features

01 Provide with a 8" high x 1" thick backsplash at the rear and high equipment. Attach the back splash to the wall with stainless steel screws at a 4'-0" o.c. maximum spacing with 14 gauge stainless steel Z-clips.  
02 Provide with a 2" turn down with a tight hem at the exposed sides.  
03 Provide 1 5/8" diameter type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel flanged feet. Fully weld the leg sockets the underbracing. Anchor the feet to the floor with stainless steel fasteners.  
04 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at walls and high equipment. Fully weld the undershelves to the legs. Provide 12 gauge fully welded

- type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 05 Provide type 304 stainless steel crossrails per the drawings. Fully weld the crossrails to the legs.
- 06 Provide one (1) 1'-0" wide x length indicated on the drawing fully welded 16 gauge stainless steel wall mounted overshef. Provide 12 gauge fully welded type 304 stainless steel wall brackets. Mount the wall shelf 1'-6" above the work surface of the work table with stainless steel screws.

Accessories

- 1 ea. T & S model B-0320 faucets.
- 1 ea. Component Hardware model DBN-8000 twist waste valve. Shorten the handle to be flush with the front of the sink bowl. Provide 14 gauge type 304 stainless steel brackets to support the handles. Attach to the sink bottom with stainless steel anchors.
- 1 ea. Component Hardware model S90-0020 drawer assembly. Locate the drawer per the drawings.

**ITEM NO. 19 - NUMBER NOT USED**

**ITEM NO. 20 - NUMBER NOT USED**

**ITEM NO. 21 - MOBILE PROOF/HOT CABINET (1 REQUIRED)**

CresCor model 121-PH-UA-11D with all the standard features.

Accessories

- 1 ea. 120 volts, single phase.
- 1 ea. Model 1405-135 perimeter bumper
- 1 set Provide with 5" polyurethane casters with brakes on all the casters.

**ITEM NO. 22 - WORK TABLE (1 REQUIRED)**

Custom fabricated work table to be constructed per the drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing.

Features

- 01 Provide with an 8" high x 1" thick backsplash at the rear and high equipment. Attach the back splash to the wall with stainless steel screws at a 4'-0" o.c. maximum spacing with 14 gauge stainless steel Z-clips.
- 02 Provide with a 2" turn down with a tight hem at the exposed sides.
- 03 Provide 1 5/8" diameter type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel flanged feet. Fully weld the leg sockets the underbracing. Anchor the feet to the floor with stainless steel fasteners.
- 04 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at walls and high equipment. Fully weld the undershelves to the legs. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 05 Provide type 304 stainless steel crossrails per the drawings. Fully weld the crossrails to the legs.
- 06 Provide one (1) 1'-0" wide x length indicated on the drawing fully welded 16 gauge stainless steel wall mounted overshef. Provide 12 gauge fully

welded type 304 stainless steel wall brackets. Mount the wall shelf 1'-6" above the work surface of the work table with stainless steel screws.

Accessories

- 1 ea. Edlund model G-2S can opener. Provide loose to the Owner. The Owner will mount the can opener to the table in the location shown on the drawings with stainless steel screws per the manufactures requirements. Widen the underbracing at the can opener to allow clearance for the mounting screws.
- 1 ea. Edlund model KR-699 knife rack. Provide a 14 gauge type 304 stainless steel bracket for the knife holder. Locate the knife holder per the drawings. Attach the rack to the bracket with Component Hardware model Q37-0250 stainless steel keyhole studs welded to the bracket at the top.
- 1 ea. Component Hardware model S90-0020 drawer assembly. Locate the drawer per the drawings.

**ITEM NO. 23 - MOBILE COMBI-OVEN - EXISTING, RELOCATE**

**ITEM NO. 24 - 24 QUART TILTING KETTLE (1 REQUIRED)**

Groen model TDB-24C with standard features.

Accessories:

- 1 ea. Two year parts and labor warranty.
- 1 ea. 208 volts, three phase.
- 1 ea. Model 155237 316 stainless steel liner.
- 1 ea. Model Z005187 lip strainer.
- 1 ea. Model 128003 lift off cover.
- 1 ea. Provide with etch marks in gallon increments in kettle.
- 1 ea. Model FL FOOTKIT flanged feet. Attach to the floor with stainless steel anchors.
- 1 ea. T & S model B-0176 faucet.
- 1 ea. T & S model B-0970-01 back flow preventer.

**ITEM NO. 25 - MOBILE RANGE (1 REQUIRED)**

Imperial model IHR-2-12-M with all the standard features.

Accessories

- 1 ea. Natural gas
- 1 ea. 3/4" gas regulator.
- 1 ea. Advance Tabco model EL-LS-3015-Xmobile stand. Modify the height to make the range top at 36" AFF.
- 1 ea. Polyurethane tired casters with brakes.
- 1 ea. Dormont model 1675KIT2S48PS gas connector hose kit. Provide to the plumbing contractor for installation.

**ITEM NO. 26 - CONVECTION OVEN (1 REQUIRED)**

Blodgett Oven model DFG-100 DOUBLE with all the standard features. Provide with separate gas connections.

Accessories

- 1 ea. Natural gas.
- 1 ea. 120 volts, single phase.

- 2 ea. Model SSI-M controls.
- 1 set Polyurethane casters with brakes.
- 1 ea. Dormont model 1675KIT2S48 gas connector hose kit. Provide to the plumbing contractor for installation.
- 1 ea. Dormont model 1675KIT2S48PS gas connector hose kit. Provide to the plumbing contractor for installation.

#### ITEM NO. 27 - VENTILATOR (1 SECTION REQUIRED)

Compensating wall canopy ventilator per Captive-Aire proposal number 8170091. Construct from type 430 stainless steel where exposed.

##### Features

- 01 Provide stainless steel baffle filters with handles.
- 02 LED light fixtures with bulbs.
- 03 Half pint grease cups.
- 04 Provide a gas pipe chase in the corner per the drawings.
- 05 Seal the ventilator to the wall with silicone caulking.
- 06 Provide written test and balance forms to the Architect and Sturm Consulting, Inc.
- 07 Model SC-311110MA electrical controls. Locate in the fire suppression system cabinet.
- 08 Provide a touch screen control panel located per the drawings.

##### Accessories

- 1 ea. Provide a stainless steel enclosure extending from the top of the ventilator to the finish ceiling.
- 1 ea. Provide a stainless steel wall splash extending at the rear from 1" above the bottom of the ventilator to the finish floor or the wall base.
- 1 ea. Hang the ventilator from the roof structure above with 1/2" diameter all-thread rods per the manufactures requirements.
- 1 ea. Provide the labor to hang the ventilator per local codes and the manufactures requirements. Install the ceiling closure panels. Seal the ventilator and ceiling closures to the wall with clear silicone caulking in a neat manner. Seal the intersections of stainless steel with gray silicone caulking in a neat manner.
- 1 ea. The electrical connections will be by the electrical contractor.
- 1 ea. The ducts, curbs and fans will be by the mechanical contractor.

#### ITEM NO. 28 - FIRE SUPPRESSION SYSTEM (1 REQUIRED)

Ansul Fire Protection Model tank-SP-1 fire suppression system from Captive-Aire with all the standard features per Captive-Aire proposal number 8170091.

##### Features

- 1 ea. Mount the fire suppression in a cabinet against the ceiling at the location per the drawings.
- 1 ea. Install the fire suppression system per the current codes.
- 1 ea. Provide chrome-plated drops at the required locations.
- 1 ea. Locate the remote pull per all current codes.

##### Accessories

- 1 ea. Mechanical gas valve. Verify the size valve required and provide the valve to the plumbing contractor for installation.

**ITEM NO. 29 - 8 QUART MIXER (1 REQUIRED)**

Globe model SP08 with all the standard features.

Accessories

1 ea. 120 volts, single phase.

**ITEM NO. 30 - NUMBER NOT USED**

**ITEM NO. 31 - MOBILE MIXER STAND (1 REQUIRED)**

Jero Manufacturing model JSS-2831 with all the standard features.

**ITEM NO. 32 - COOK'S TABLE (1 REQUIRED)**

Custom fabricated cook's table to be constructed per the drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing.

Features

- 01 Provide with a 8" high x 2" thick backsplash at the rear.
- 02 Provide a 16 gauge type 304 stainless steel finished back on the exposed backsplash. Attach the finished back to the backsplash in a concealed manner with stainless steel fasteners.
- 03 Provide with a 2" turn down with a tight hem at the exposed sides.
- 03 Provide 1 5/8" diameter type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel flanged feet. Fully weld the leg sockets the underbracing. Anchor the feet to the floor with stainless steel fasteners.
- 04 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at walls and high equipment. Fully weld the undershelves to the legs. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 05 Provide type 304 stainless steel crossrails per the drawings. Fully weld the crossrails to the legs.
- 06 Provide one (1) 1'-0" wide x length indicated on the drawing fully welded 16 gauge stainless steel wall mounted overshef. Provide 12 gauge fully welded type 304 stainless steel wall brackets. Mount the wall shelf 1'-6" above the work surface of the work table with stainless steel screws.

Accessories

- 1 ea. T & S model B-0320 faucets.
- 1 ea. Component Hardware model DBN-8000 twist waste valve. Shorten the handle to be flush with the front of the sink bowl. Provide 14 gauge type 304 stainless steel brackets to support the handles. Attach to the sink bottom with stainless steel anchors.
- 1 ea. Advance Tabco model SWT-120 wall mounted pot rack. Modify the length per the drawings. Attach to the wall with stainless steel screws.
- 1 ea. Edlund model G-2S can opener. Provide loose to the Owner. The Owner will mount the can opener to the table in the location shown on the drawings with stainless steel screws per the manufactures requirements. Widen the underbracing at the can opener to allow clearance for the mounting screws.

- 1 ea. Edlund model KR-699 knife rack. Provide a 14 gauge type 304 stainless steel bracket for the knife holder. Locate the knife holder per the drawings. Attach the rack to the bracket with Component Hardware model Q37-0250 stainless steel keyhole studs welded to the bracket at the top.
- 1 ea. Component Hardware model S90-0020 drawer assembly. Locate the drawer per the drawings.
- 4 ea. Component Hardware Model R58-1010 electrical outlet box at the microwave oven. Attach the boxes to the overshelf with stainless steel fasteners per the manufacturer's requirements. Provide with stainless steel cover plates. Provide and install conduit in an unexposed manner from the box through the shelf upright to a 4x4 junction box mounted below the table top.

**ITEM NO. 33 - MOBILE UTILITY CART (1 REQUIRED)**

Renfro Industries Inc. model SUCER1827-3 with all the standard features.

**ITEM NO. 34 - MOBILE TRAY DISPENSERS (2 REQUIRED)**

Piper Products/Servolift Eastern model PT/1014MO with all the standard features. Verify the Owner's tray size before the unit is ordered.

Accessories

- 2 sets Model WB brakes.
- 2 ea. Model PB perimeter bumpers.
- 2 sets Polyurethane casters.

**ITEM NO. 35 - MOBILE MILK COOLERS (1 REQUIRED)**

True Mfg. model TMC-49-S-SS-HC with all the standard features.

Accessories

- 1 ea. 120 volts, single phase.
- 1 ea. Model 882506 corner bumpers.
- 1 ea. Provide with 5" polyurethane casters with brakes on all the casters.

**ITEM NO. 36 - SERVING COUNTER (1 REQUIRED)**

Custom fabricated serving counter to be constructed per the drawings with a fully welded 14 gauge type 304 stainless steel top with a 2" drop down at the cashier stand. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing.

Features

- 01 Provide with a 2" turn down with a tight hem at the sides.
- 02 Provide a 16 gauge type 304 stainless steel fully welded counter body with a 16 gauge type 304 stainless steel fully welded undershelves per the drawing elevations. Provide 12 gauge type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing. Notch the undershelf around the floor sink.
- 03 Provide a 16 gauge type 304 stainless steel double pan hinged doors per the elevations. Fully weld the corners on the panels.



## 1901-30 Kitchen Equipment 11 40 00 - 16

- |    |                                                                                                                                                                                                                                                            |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 04 | Provide a 16 gauge type 304 stainless steel double pan hinged doors with fully welded louvers per the elevations. Fully weld the corners on the panels.                                                                                                    |
| 05 | Provide a Component Hardware Group, Inc. model P46-1012 pull at the doors. Attach with stainless steel screws.                                                                                                                                             |
| 06 | Provide a Component Hardware Group, Inc. model M32-2401 magnetic catches at the doors. Install the catch per the manufactures requirements.                                                                                                                |
| 07 | Provide steel j-boxes on the counter body per the drawings and elevations for switches and controls. Provide with stainless steel cover plates. Weld the j-boxes to the counter.                                                                           |
| 08 | Provide removable 18 gauge stainless steel panels on the counter fronts and side per the elevations. Provide a 6" x 6" one piece panel at the corners. Attach the panels to the counter with 14 gauge stainless steel Z-clips at the bottom of the panels. |
| 09 | Provide a quarter-turn ball valve drain valve in an 18 gauge fully welded stainless steel recess per the drawings. Pre-pipe the hot well drain to the valve and the drain line to the floor drain per current codes.                                       |
| 10 | Provide polyurethane tired casters with brakes.                                                                                                                                                                                                            |
- Accessories
- |       |                                                                                                                                                                                               |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 ea. | T & S model B-0208 faucet. Provide a hot water indicator on the handle.                                                                                                                       |
| 1 Lot | Versa-Gard sneeze guards per quote # Q020877 the drawings in a brushed stainless steel finish. Provide an undercounter mount. Install into the counter top per the manufactures requirements. |

### **ITEM NO. 37 - DROP-IN COLD FOOD WELLS (1 REQUIRED)**

Low Temp Industries model DI-TA454-20-03with all the standard features.

- Accessories
- |       |                          |
|-------|--------------------------|
| 1 ea. | 120 volts, single phase. |
|-------|--------------------------|

### **ITEM NO. 38 - DROP-IN HOT FOOD WELLS (1 REQUIRED)**

Low Temp Industries model DI-TW-DW-20-05 with all the standard features.

- Accessories
- |       |                          |
|-------|--------------------------|
| 1 ea. | 208 volts, single phase. |
|-------|--------------------------|

### **ITEM NO. 39 - POS BY THE OWNER**

### **ITEM NO. 40 - NUMBER NOT USED**

### **ITEM NO. 41 - MOBILE CONDIMENT COUNTER (1 REQUIRED)**

Lakeside Manufacturing model 70410 with all the standard features. Verify the Owner's top/cutout requirements before the unit is ordered. Verify the Owner's laminate choices requirements before the unit is ordered.

### **ITEM NO. 42 - WASHER BY THE OWNER**

### **ITEM NO. 43 - DRYER BY THE OWNER**

### **ITEM NO. 44 - LINEN STORAGE SHELVING (1 LOT REQUIRED)**

Quantum model WIRE storage shelves. Locate the bottom shelf at 10" above the finish floor. Verify the location of the remaining four (4) shelves with the Owner prior to assembly.

Accessories

- 5 ea. Model 1230C shelves.
- 4 ea. Model P86C posts.

**ITEM NO. 45 - MOP SINK BY THE PLUMBING CONTRACTOR**

**ITEM NO. 46 - CHEMICAL STORAGE SHELVING (1 LOT REQUIRED)**

Quantum model WIRE storage shelves. Locate the bottom shelf at 10" above the finish floor. Verify the location of the remaining four (4) shelves with the Owner prior to assembly.

Accessories

- 5 ea. Model 1230C shelves.
- 4 ea. Model P86C posts.

**ITEM NO. 47 - SOILED DISHTABLE & POT SINK (1 REQUIRED)**

Custom fabricated soiled dishtable & pot sink to be constructed per drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under top with fully welded closed ends where they are exposed. Sound deadened between the top and the underbracing. Extend the top through the pass-through window. Provide a 1" high marine edge at the opening.

Features:

- 01 Provide with a 10" high x 2" thick backsplash at walls. Attach back splash to wall with stainless steel screws at a 4'-0" o.c. maximum spacing with 14 gauge stainless steel Z-clips.
- 02 Provide with a 3" high rolled rim at exposed sides. Locate top of rolled rim 3'-1" above finish floor.
- 03 Provide a 1'-9" x 1'-9" x 12" deep 14 gauge type 304 stainless steel scrap sink welded integrally into top and 12 gauge type 304 stainless steel fully welded rack guide.
- 04 Provide an 8" wide x depth per drawings scrap trough at scrap sink. Slope the trough to collector per drawings. Provided a hinged silver saver in trough located near scrap sink. Pre-pipe trough per drawings.
- 05 Provide a 6" wide x 2" deep 14 gauge type 304 stainless steel scupper drain welded integrally into top. Provide a removable fully welded stainless steel basket with a perforated bottom. Full weld two (2) 1/4" stainless steel grab rods across the width in two places.
- 06 Provide three (3) 26 1/2" front-to-back x 21" x wide x 11" deep sink compartments constructed with 14 gauge type 304 stainless steel fully welded integrally into the top.
- 07 Provide type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel bullet feet. Fully weld the leg sockets the underbracing.
- 08 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at rear and high equipment. Fully weld the undershelves to the legs. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 09 Provide type 304 stainless steel crossrails per the drawings. Fully weld the crossrails to the legs.
- 07 Provide trash can space under top per drawings.

- 08 Provide a 7'-1" long cantilevered 16 gauge type 304 stainless steel slanted rack shelf with a 7'-1" long x 1" diameter rail fully welded stainless steel cantilevered rack storage shelf. Provide adjustable socket mounts on uprights for shelves. Attach uprights to wall at upright top. Mount slant rack shelf 1'-4" above rolled rim and mount rack storage shelf 1'-9" above slanted rack shelf.
- 09 Provide 1'-1" wide x length indicated on the drawing x 1" diameter fully welded stainless steel three-bar wall shelf at the sinks. Mount the rail shelf 1'-9" above the work surface.
- 10 Support the shelf with 12 gauge type 304 stainless steel angled brackets fully welded to the uprights
- 11 Provide a 14 gauge type 304 stainless steel wall panel behind the shelf per the drawings. Attach the panel to the wall with industrial adhesive.

Accessories:

- 1 ea. Component Hardware model E38-1012 basket drain in scrap sink.
- 1 ea. Component Hardware model E18-1822 basket drain in scupper drain.
- 3 ea. Fisher model 2906 water inlets.
- 1 ea. Fisher model 2905 water inlet.
- 1 ea. T & S model B-0457 vacuum breaker.
- 2 ea. T & S model B-0290 faucets.
- 3 ea. Component Hardware model DBN-8000 twist waste valve. Shorten the handle to be flush with the front of the sink bowl. Provide 14 gauge type 304 stainless steel brackets to support the handles. Attach to the sink bottom with stainless steel anchors.
- 3 ea. Component Hardware model J19-4962 brackets.

**ITEM NO. 48 - MOBILE SILVERWARE SOAK SINK (2 REQUIRED)**

Piper Products/Servolift Eastern model 337-3474 with all the standard features.

**ITEM NO. 49 - HOSE REEL (1 REQUIRED)**

T & S Brass model B-1433-01M-QDS hose reel with standard features. Mount to wall with stainless steel fasteners near ceiling per manufacturer's requirements. Center spray valve over scrap sink.

Accessories:

- 2 ea. Model B-CVH1-2 check valves. Provide to plumbing contractor for installation into water lines.
- 2 ea. Model B-0109-01 wall brackets. Mount to wall with stainless steel screws.

**ITEM NO. 50 - NUMBER NOT USED**

**ITEM NO. 51 - DISHWASHER WITH BOOSTER HEATER (1 REQUIRED)**

CMA Dishmachines model 180-VL TALL with standard features.

Accessories:

- 1 ea. 480 volts, three phase.
- 1 ea. Built-in booster heater.
- 1 ea. Electric heat.
- 1 ea. Provide with a 3/4" brass pressure regulator.
- 1 ea. Model 117009 shock arrestor.
- 1 ea. Model 116751 drain water tempering kit.

**ITEM NO. 52 - CLEAN DISHTABLE (1 REQUIRED)**

Custom fabricated clean dishtable to be constructed per drawings with a fully welded 14 gauge type 304 stainless steel top. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under top with fully welded closed ends where they are exposed. Sound deadened between top and underbracing.

Features:

- 01 Provide with a 10" high x 2" thick backsplash at walls. Attach back splash to wall with stainless steel screws at a 4'-0" o.c. maximum spacing with 14 gauge stainless steel Z-clips.
- 02 Provide with a 3" high rolled rim at exposed sides. Locate top of rolled rim 3'-1" above finish floor.
- 03 Provide type 304 stainless steel legs with stainless steel leg sockets and adjustable stainless steel bullet feet. Fully weld the leg sockets the underbracing.
- 04 Provide a 16 gauge type 304 stainless steel undershelves per the drawings. Turn the undershelves up 2" at rear and high equipment. Fully weld the undershelves to the legs. Provide 12 gauge fully welded type 304 stainless steel channel underbracing under the undershelves. Sound deadened between the undershelves and the underbracing.
- 05 Provide type 304 stainless steel crossrails per the drawings. Fully weld the crossrails to the legs.

END OF SECTION

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

#### **PART 1 – GENERAL**

##### **1.1 SECTION INCLUDES**

A. Hydraulic passenger elevators.

##### **1.2 RELATED SECTIONS**

A. Section 02610 – Removal and Disposal of Contaminated Soils: Disposition of excavated material from cylinder well hole after drilling.

B. Section 03300 – Cast-in-Place Concrete: Elevator pits.

C. Section 05120 – Structural Steel (Structural Steel Framing): Support steel, divider beams, and hoist beams.

D. Section 09290 – Gypsum Board: Front walls.

E. Section 09681 – Flooring: Finished flooring in elevator cars.

F. Section 09900 – Paints and Coatings (Painting and Coating): Field painting of elevator entrances over primer.

G. Section (Division 23) – Heating, Ventilating, and Air Conditioning Equipment (Heating, Ventilating, and Air-Conditioning (HVAC)): Heating, cooling, and ventilation of machine room and machinery space.

H. Section (26 05 00) – Wiring Methods (Common Work Results for Electrical): Light outlets, convenience outlets, light switches, and conduits.

I. Section (26 24 00) – Switchboards, Panelboards, and Control Centers (Switchboards and Panelboards): Disconnect switches.

J. Section (26 50 00) – Lighting: Light fixtures.

K. Section (27 30 00) – Telephone and Intercommunication Equipment (Voice Communications): Telephone outlets and elevator telephones.

##### **1.3 REFERENCES**

A. ANSI/ASME A17.1 – Safety Code for Elevators and Escalators.

B. ISO 9001-2000 – Quality Management Systems – Requirements.

##### **1.4 DESIGN REQUIREMENTS**

A. Arrange elevator components in machine room so equipment can be removed for repairs or replaced without dismantling or removing other equipment components.

##### **1.5 SUBMITTALS**

A. Comply with Submittal Procedures.

B. Product Data: Submit manufacturer/installer's product data, including installation instructions.

C. Shop Drawings: Submit manufacturer/installer's shop drawings, including plans, elevations, sections, and

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

details, indicating location of equipment, loads, dimensions, tolerances, materials, components, fabrication, fasteners, hardware, finish, options, accessories, and other information to render totally functional elevators.

D. Samples: Submit manufacturer/installer's samples of standard colors and finishes of finish materials.

E. Operation and Maintenance Manual: Submit manufacturer/installer's operation and maintenance manual; including operation, maintenance, adjustment, and cleaning instructions; trouble shooting guide; renewal parts catalogs; and electrical wiring diagrams.

F. Warranty: Submit manufacturer/installer's standard warranty.

#### **1.6 QUALITY ASSURANCE**

A. Manufacturer/Installer's Qualifications: Specialize in manufacturing and installing elevator equipment, with a minimum of 5 years successful experience.

B. Regulatory Requirements:

a. Elevator design, clearances, construction, workmanship, materials, and installation, unless specified otherwise, shall be in accordance with ANSI/ASME A17.1, handicap accessibility, Americans with Disabilities Act, and other codes having legal jurisdiction.

b. ANSI/ASME A17.1 shall govern, except where codes having legal jurisdiction include more rigid requirements or conflict with ANSI/ASME A17.1.

c. Elevator shall follow design and manufacturing procedures certified in accordance with ISO 9001-2000 to meet product and service requirements for quality assurance for new products.

C. Pre-installation Meeting:

a. Convene pre-installation meeting before start of installation of elevators.

b. Require attendance of parties directly affecting work of this section, including Contractor, Architect, and elevator manufacturer/installer.

c. Review examination, installation, field quality control, adjusting, cleaning, protection, and coordination with other work.

#### **1.7 DELIVERY, STORAGE, AND HANDLING**

A. Delivery: Deliver materials to site in manufacturer/installer's original, unopened containers and packaging, with labels clearly identifying product name and manufacturer/installer.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

- B. Storage: Store materials in clean, dry area indoors in accordance with manufacturer/installer's instructions.
- C. Handling: Protect materials during handling and installation to prevent damage.

#### **1.8 PROJECT CONDITIONS**

- A. Temporary Electricity:
  - a. Owner will arrange for temporary 3-phase electricity to be available for installation of elevator components.
  - b. Comply with Section 01510 (01 51 00) – Temporary Utilities.
- B. Temporary Use of Elevator:
  - a. Owner will negotiate with manufacturer/installer for temporary use of elevator, if required.
  - b. Temporary use of elevator shall be in accordance with terms and conditions of manufacturer/installer's temporary acceptance form.

#### **1.9 SCHEDULING**

- A. Coordinate elevator work with work of other trades, for proper time and sequence to avoid construction delays.

#### **1.10 WARRANTY**

- A. Manufacturer/installer shall guarantee materials and workmanship of equipment installed under these specifications and make good, defects not due to ordinary wear or to improper use, which may develop within 1 year after completion of installation or acceptance thereof by beneficial use, whichever is earlier.

#### **1.11 MAINTENANCE SERVICE**

- A. Elevator maintenance service shall be performed by elevator manufacturer/installer.  
Elevators shall receive regular maintenance on each unit for period of 12 months after completion of work specified herein or acceptance thereof by beneficial use, whichever is earlier.
- B. Trained employees shall make periodic examinations and perform work including necessary adjusting, greasing, oiling, and replacing parts to keep elevators in operation, except parts that require replacement because of accidents, vandalism, misuse, or negligence by parties other than manufacturer/installer.  
Manufacturer/installer shall perform all work, except emergency minor adjustment call-back service, during regular work hours. Manufacturer/installer shall provide emergency minor adjustment call-back service, during regular working hours.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

C. Should Owner request that examinations, cleaning, lubrication, adjustments, repairs, replacements, or emergency minor adjustment call-back service, unless specified herein, be performed on other than manufacturer/installer's regular working hours of regular working days, manufacturer/installer shall absorb straight-time labor charges and Owner will compensate manufacturer/installer for overtime premium, travel time, and expense at normal billing rates.

D. Elevator Control System:

a. Include built-in remote diagnostic module to relay constant status of elevators and control system to a 24-hour, 7-days-a-week central-monitoring facility.

b. Remote Monitoring Device: Transmit information on current status of elevators, including malfunctions, system errors, and shutdown.

E. Maintenance Options

Regular Maintenance: During Regular Work Hours

## **PART 2 – PRODUCTS**

### **2.1 MANUFACTURER/INSTALLER**

A. Schindler Elevator Corporation, Website [www.us.schindler.com](http://www.us.schindler.com).

B. Elevator shall be installed by elevator manufacturer.

C. **Products of Schindler Elevator Corporation are specified herein to simplify descriptions of types and qualities of equipment and finishes required only. Proprietary names are not intended to imply that products of named manufacturer are required to the exclusion of equivalent products of other manufacturers.**

### **2.2 ELEVATOR SYSTEM AND COMPONENTS**

A. Hydraulic Passenger Elevators: Model 330A.

B. Elevator Equipment Summary:

a. Application: Holeless Dual Piston

b. Service: General Purpose Passenger- Class A Loading

c. Quantity: 1 Unit

d. Capacity: 3500 Lbs

e. Speed: 150 Fpm

f. Travel: 23' 4"

g. Landings: 3

h. Front Openings: 3

i. Rear Openings: 0



## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

- j. Operation: Microprocessor Single Car Automatic Operation
- l. Machine Room: Adjacent To Elevator Hoistway
- m. Platform Size: 7'-0" Wide X 6'-3" Deep
- n. Door Type: Single Speed Side Opening
- o. Cab Height: 8' 0"
- p. Guide Rails: Equivalent to 16 lb. per foot
- q. Hoistway Entrances: 3' 6" Wide X 7' 0" High doors
- r. Power Supply: 208 Volts 3 Phase 60 Hz
- C. Elevator Components:
  - a. Anti-stall feature.
  - b. Braille and audible signals.
  - C. Door open and close stall protection.
  - d. Emergency lighting.
  - e. Firefighter's Service: Sensors as specified in Section \_\_\_\_\_.
  - f. Independent service feature.
  - g. Infrared light curtain door protection.
  - h. Low oil return.
  - i. Overload sensors.
  - j. Phase protection.
  - k. Soft Start Electronic Starting
  - l. Elevator Management System Provisions.
  - m. Button Access Code.
  - n. Card Reader Provision.
  - o. Emergency Power.
  - p. Future Car Provision.
  - q. Future Floor.
  - r. Hoistway Access Switch at floors N/A
  - s. Heat Exchanger.
  - t. Heater for Power Unit.
  - u. Locking Service Panel in Car Operating Panel.
  - v. Parking at floors N/A.
  - w. Power Unit Noise Reduction.
  - x. Pressure Switch.
  - y. Pressure Switch.
  - z. Remote Monitoring Capable.
  - aa. Battery powered lowering Rescue Feature.
  - ab. Status Panel Indicator.
  - ac. Telephone (ADA compliant).
  - ad. Vandal Resistant Hall Fixtures.

#### **2.3 ELEVATOR MATERIALS**

- A. Finish:
  - a. Stainless Steel and Bronze: #4 satin or #8 mirror finish.
  - b. Baked Enamel Colors: Manufacturer/installer's standard color selections.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

- c. Exposed Aluminum Frames in Suspended Ceilings:  
Anodized.
- B. Plastic Laminates:
  - a. Type: General purpose.
  - b. Flame Spread Ratings: As required by code.
  - c. Pattern: Select from elevator  
manufacturer/installer's standard selection.
- C. UL or CSA Approved: Motors, pumps, valves, fluid  
tank, hydraulic fluid, microprocessor controller,  
controls, pushbuttons, and wiring.
- D. Spring Buffers, Attachment Brackets, and Anchors:  
Design and size according to building code with safety  
factors.
- E. Pump: Positive displacement screw type, design for  
steady discharge with minimal pulsations.
- F. Muffler: Reduce noise transmission.
- G. Telescopic Holeless Jack System:
  - a. Jack Cylinder: Two jacks, one located at each  
side of the car and mounted to the elevator car  
structure.
  - b. Synchronization of Jack Stages: Direct  
mechanical means to ensure elevator moves at steady  
speed and provides smooth ride.

#### **2.4 ELEVATOR CABS**

Height: 8' 0" from finished floor to underside of canopy.

- A. Elevator Car Enclosure Wall Sections:
  - a. Cab Wall: Steel - #4 Stainless Steel Finish.
  - b. Base, Frieze, and Reveals: #4 Stainless Steel.
- B. Ceiling:
  - a. Suspended with Exposed Frame With Plastic Lay-in  
Panels.
  - b. Lighting: Fluorescent Lighting.
- C. Cab Returns: Integral construction.  
Finish: #4 Stainless Steel.
- D. Transoms:
  - a. Run full width of cab.Finish: #4 Stainless Steel.
- H. Cab Doors:
- E.
  - a. Flush design both sides.
  - b. Rib construction.Finish: #4 Stainless Steel.
- F. Exhaust Fan:
  - a. Single speed.
  - b. Mount in cab transom or canopy.
- G. Handrail:  
1/2" X 2" Flat In Brushed Aluminum.  
Mount on Rear & Side Walls.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

Threshold: Aluminum.

H. Cab Finish Flooring: As specified in Section 09650  
Resilient Flooring.

#### **2.5 HOISTWAY ENTRANCES**

##### **A. Hoistway Doors and Frames:**

a. UL rated with required fire rating.

b. Doors: Rigid flush panel construction with  
sound-deadening material.

Frames: Securely fasten at corners to form unit  
frame. Frames shall be Bolted.

Exposed Areas of Corridor Frames: #4 Stainless Steel  
- All Floors

Doors: #4 Stainless Steel - All Floors

Sills: Aluminum

#### **2.6 CAB FIXTURES**

##### **A. Main Car Operating Panel:**

a. Mount in return.

b. Comply with handicap requirements.

c. Include pushbuttons and illuminating indications  
for each floor served.

d. Emergency Buttons and Switches: Provide in  
accordance with code.

e. Switches for car light and accessories.

f. Mount in return.

g. Comply with handicap requirements.

h. Include pushbuttons and illuminating indications  
for each floor served.

i. Emergency Buttons and Switches: Provide in  
accordance with code.

j. Switches for car light and accessories.

k. Mount in return.

l. Comply with handicap requirements.

m. Pushbuttons: Illuminate using long-lasting LED's  
included for each floor served.

n. Emergency Buttons and Switches: Provide in  
accordance with code.

o. Switches for car light and accessories.

##### **B. Cab Fixtures:**

a. Car Lantern(s).

b. Digital Car Position Indicator.

g. Telephone (ADA compliant).

#### **2.7 HALL FIXTURES**

##### **A. Pushbuttons:**

a. Up button and down button at intermediate floors.

b. Single button at each terminal floor.

c. Height: Comply with handicap requirements.

Digital Hall Position Indicator: At floors 1.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

Hall Fixture Finish: #4 Stainless Steel.

B. Fixture Cover Plates: Mount with tamper-resistant screws in same finish as fixture.

#### **2.8 PIT LADDER**

Provide pit ladder equal to Custom Retractable Pit Ladder as manufactured by Quality Elevator Products, Inc. or Retractable Ladder as manufactured by Smart Elevator Tech, LLC. Ladder side bars are to extend 48" above first floor sill elevation / outside of ladder to be a maximum of 2.75" from wall when retracted / maximum rung distance shall be 7" when extended (meet OSHA requirements) / rungs to be 5/8" diameter rungs at 12" o.c. max. and 12" wide min. / provide all safety switches, locks, spring assists, brackets, etc. as required for a fully functioning device. Locate as directed by elevator supplier (south of elevator – confirm) and mount as required by ladder supplier/manufacturer. Provide any additional solid substrate in stud portions of wall above pit concrete as required for mounting.

### **PART 3 – EXECUTION**

#### **3.1 EXAMINATION**

A. Examine hoistways, hoistway openings, pits, and machine rooms before starting elevator installation.

B. Verify hoistway, pit, machine room, and openings are of correct size, within tolerances, and are ready for work of this section.

C. Verify walls and sill supports are plumb, where openings occur.

Verify hoistway is clear and plumb, with maximum variation of 1/2" at any point.

D. Verify minimum 2-hour fire-resistance rating of hatch walls.

E. Notify Architect in writing of dimensional discrepancies or other conditions detrimental to proper installation or performance of elevators.

F. Do not proceed with elevator installation until unsatisfactory conditions have been corrected in a manner acceptable to manufacturer/installer.

#### **3.2 INSTALLATION**

A. Install elevators in accordance with manufacturer/installer's instructions and ANSI/ASME A17.1.

B. Set entrances in vertical alignment with car openings and aligned with plumb hoistway lines.

## **DIVISION 14 – CONVEYING SYSTEMS**

### **SECTION 14240 – HYDRAULIC ELEVATORS**

#### **3.3 FIELD QUALITY CONTROL**

- A. Perform tests of elevator as required by ANSI/ASME A17.1 and governing codes.

#### **3.4 ADJUSTING**

- A. Adjust elevators for proper operation in accordance with manufacturer/installer's instructions.
- B. Adjust elevators for smooth acceleration and deceleration of car so not to cause passenger discomfort.
- C. Adjust doors to prevent opening of doors at landing on corridor side, unless car is at rest at that landing, or is in leveling zone and stopping at that landing.
- D. Adjust automatic floor leveling feature at each floor to within 1/4 inch of landing.
- E. Repair minor damages to finish in accordance with manufacturer/installer's instructions and as approved by Architect.
- F. Remove and replace damaged components that cannot be successfully repaired as determined by Architect.

#### **3.5 CLEANING**

- A. Clean elevators promptly after installation in accordance with manufacturer/installer's instructions.
- B. Do not use harsh cleaning materials or methods that could damage finish.

#### **3.6 PROTECTION**

- A. Protect installed elevators from damage during construction.

**End of Section**

## SECTION 01 57 13

### EROSION AND SEDIMENT CONTROL GENERAL

#### 1.01 RELATED DOCUMENTS.

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

#### 1.02 SUMMARY

- A. Work under this section shall include all labor, materials and equipment necessary to meet all applicable requirements and as specified in the contract.
- B. Section Includes:
  - 1. Installation and maintenance of both temporary and permanent soil erosion and sediment control measures
  - 2. Slope protection and stabilization practices.
  - 3. Implementation of the Stormwater Pollution Prevention Plan (SWPPP) to protect surface water quality.
- C. Related Sections:
  - 1. Division 31 Section "Site Clearing" for site stripping, grubbing, stripping and stockpiling topsoil, and removal of above- and below-grade improvements and utilities.
  - 2. Division 31 Section "Dewatering" for lowering and disposing of ground water during construction.
  - 3. Division 32 Section "Turf and Grasses" for finish grading in turf and grass areas, including preparing and placing planting soil for turf areas.

#### 1.03 UNIT PRICES

- A. Work in this Section is affected by unit prices for erosion and sediment control specified in Division 01 Section "Unit Prices."

#### 1.04 DEFINITIONS

- A. Backfill: Soil material or controlled low-strength material used to fill an excavation.
- B. Baffles: Porous barriers installed inside a temporary sediment trap, rock dam sediment trap, sediment basin, or skimmer sediment basin used to reduce velocity (turbulent flow) of the water flowing through the measure and facilitate the settling of sediment from the water before discharge.
- C. Borrow Soil: Satisfactory soil imported from off-site for use as fill or backfill
- D. Check Dam: A small temporary stone dam constructed across a drainage way (such as a temporary diversion ditch) used to reduce erosion in the channel and trap sediment behind the dam.
- E. Construction Sequence: Schedule of work sequenced to control the timing of land disturbing activities and installation of erosion and sediment control measures.
- F. Excavation: Removal of material encountered above subgrade elevations and to the limits and dimensions indicated.
- G. Fill: Soil materials used to raise existing grades.
- H. Inlet Protection: A temporary measure used to prevent sediment from entering inlets and conduit systems during construction. Inlet protection allows protected early use of storm drainage system and provides sediment storage around inlets.
- I. Land Grading: Re-shaping the ground surface to designed proposed grades to accommodate development.
- J. Landscape Planting: Stabilizing disturbed areas by establishing vegetative cover with trees, shrubs, vines and/or ground cover.
- K. Level Spreader: A non-erosive outlet for concentrated runoff constructed to disperse flow uniformly over a long slope.
- L. Mulching: Application of a protective blanket of straw, wood chips, shredded bark, gravel or synthetic material to bare soil surface.
- M. Outlet Stabilization Structure (Riprap Apron): A structure designed to dissipate energy, reduce velocity and control erosion at the outlet of a pipe or channel.

- N. Permanent Seeding: Establishment of permanent perennial vegetative cover with seed to control runoff and minimize erosion.
- O. Rolled Erosion Control Products (RECP): Rolled erosion control products are manufactured or fabricated into rolls designed to reduce soil erosion and assist with the growth and establishment of vegetation. Products include mulch control netting, open weave textiles, erosion control blankets, and three dimensional turf reinforcement mats.
- P. Sediment (Silt) Fence: A temporary sediment control measure consisting of fabric buried at the bottom, stretched and supported by (sometimes wire and) posts. Measure retains sediment laden flow from small disturbed areas and allows sediment deposition.
- Q. Sediment Control Structure: A temporary (or permanent only when used in conjunction with a permanent detention or retention basin) structure used to detain sediment laden water, diminish turbulent flow, and allow sediment to settle. Retains sediment on construction site to prevent sedimentation in receiving waters.
- R. Skimmer (Skimmer Sediment Basin): An earthen embankment with a trapezoidal spillway lined with impermeable geotextile or laminated plastic membrane and equipped with a floating skimmer for dewatering. Skimmer basins are designed to provide an area for runoff to pool and settle
- S. Sodding: Establishing permanent cover by laying a continuous layer of grass sod.
- T. Subgrade: Uppermost surface of an excavation or the top surface of a fill or backfill immediately below subbase, drainage fill, drainage course, or topsoil materials.
- U. Subbase Course: Aggregate layer placed between the subgrade and base course for hot-mix asphalt pavement, or aggregate layer placed between the subgrade and a cement concrete pavement or a cement concrete or hot-mix asphalt walk
- V. Surface Roughening: Roughening the soil surface on a slope with horizontal grooves cross-slope, stair stepping or tracking with construction equipment.
- W. Temporary Diversions: A temporary ridge or excavated channel, or both, constructed across sloping land on a pre-determined grade. Temporary Diversions must extend to sediment control structures.
- X. Temporary Gravel Construction Entrance/Exit: A graveled pad located at points where vehicles and equipment leave the construction site.
- Y. Temporary Seeding: Planting rapid-growing annual grasses, small grains, or legumes to provide initial, temporary cover for erosion control on disturbed areas.
- Z. Temporary Slope Drain: Flexible pipe extending from the top to the bottom of a cut or fill slope used to transport sediment laden water from a temporary diversion into a sediment control structure.
- AA. Temporary Sediment Trap: A small, temporary ponding basin, without a pipe outlet structure, formed by an embankment or excavation to capture sediment. Structure detains sediment laden runoff, reduces turbulent flow and allows sediment to drop out to protect receiving waters.
- BB. Temporary Sediment Basin: A larger temporary or part of a permanent system, including a controlled outlet structure, used to detain sediment laden water, diminish turbulent flow, and allow sediment to settle. Retains sediment on construction site to prevent sedimentation in receiving waters.
- CC. Top-soiling: Preserving and using topsoil to enhance final site stabilization with vegetation.
- DD. Tree Preservation: Practices used to preserve and protect trees from damage during construction.
- EE. Utilities: On-site underground pipes, conduits, ducts, and cables, as well as underground services within buildings

#### **1.05 SUBMITTALS**

- A. Qualification Data: For third party 'Qualified Inspector (Professional)' if not provided by the Owner.
- B. Off-site Soil Qualification: For each borrow or waste site for soil material proposed for fill and/or waste that is not permitted under the Project site NPDES coverage:
  1. Copy of the site's NPDES Notice of Coverage (or similar coverage/approval document)
  2. Copy of the erosion and sediment control plan including best management practices and stabilization schedules to be used to include the site under the current NPDES Permit coverage.

## **1.06 QUALITY ASSURANCE**

- A. Intent: The main concern associated with erosion and sedimentation on the site is movement of sediment to off-site and off-site receiving waters and its affect on water quality. The Owner's intent is that the Contractor install, inspect, maintain and modify sufficient erosion and sediment control practices to retain sediment within the boundaries of the site in addition to complying with all regulatory codes, laws, rules, and ordinances. All erosion and sediment control measures shall conform to the drawings and to the latest requirements imposed by federal, state and local authorities. The Contractor is responsible for any repair and damages and shall be financially responsible for any penalties imposed.
- B. Drawing Review: It is the Contractor's responsibility to review the erosion and sediment control drawings and the Storm Water Pollution Prevention Plan (SWPPP) prepared by the engineer prior to implementation. All measures shall be implemented in accordance with this specification, contract drawings and documents and all regulatory authorities having jurisdiction. Where conflicting requirements arise the more restrictive rules shall govern.
- C. Contractor Responsibility: Contractor is to provide all temporary and permanent non-structural and structural measures shown on the drawings, and as directed by the Owner or NPDES authority for the duration of the work. SWPPP and Erosion and Sediment Control drawings are guidelines, additional measures not specified may be necessary and shall be implemented to address conditions that may develop during the construction process. Additional measures needed but not specified in the SWPPP or on the drawings shall be at no additional cost to the Owner.
- D. Coordination: Temporary structural measures shall be coordinated with permanent measures to the extent practical to assure economical, effective and continuous erosion and sediment control throughout construction and a seamless transition between temporary and permanent post construction operation.
- E. Contractor Inspections: Contractor shall inspect all erosion and sediment control measures at least at the beginning and at the end of each day to ascertain all devices are functioning properly during construction. Contractor shall fully and completely inspect the entire site once every seven (7) calendar days and within 24 hours of 0.5 inches (12 mm) of rain or more per 24 hour period, or more often if required by the governing Construction General Permit; these inspection findings must be reported on Form C-1. Any measures found to be unsatisfactory during that inspection shall be corrected within 48 hours of the inspection. The Owner may suspend the performance of any or all other construction work until the unsatisfactory condition has been corrected. Such suspension shall not be the basis of any claim by the Contractor for additional compensation nor for an extension of time to complete the work. Any Notices of Violations (NOV), fines or other corrective actions requested by authorities having jurisdiction or by the Owner shall be the sole responsibility of the Contractor.
- F. Contractor Response to Notice of Violation: Should the Contractor receive an inspection report or Notice of Violation from the regulatory authority (NPDES authority, Natural Resources Conservation Service, or other county or city authority) the report or notice shall immediately be forwarded to the Owner's representative. The Contractor shall **not** respond to an inspection or Notice of Violation without first gaining approval for the response from the Owner.
- G. Protect Adjacent Properties: Contractor is to protect adjacent properties, watercourses, threatened, endangered and protected species and critical habitats, any identified cultural, archeological or historic resources, and receiving water resources from erosion and sediment damage throughout the time of construction.
- H. SWPPP Pre-construction Meeting: Prior to beginning work, a pre-construction SWPPP meeting shall be held by the Owner and the site engineer. The General Contractor and its site work subcontractor must be present at this meeting.

## **1.07 PROJECT CONDITIONS**

- A. Traffic: Minimize interference with adjoining roads, streets, walks, and other adjacent occupied or used facilities during earth moving operations.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction.
  - 2. Provide alternate routes around closed or obstructed traffic ways if required by Owner or authorities having jurisdiction.



- B. Improvements on Adjoining Property: Authority for performing earth moving indicated on property adjoining Owner's property will be obtained by Owner before award of Contract.
  - 1. Do not proceed with work on adjoining property until directed by Owner.
- C. Utility Locator Service: Notify utility locator service for area where Project is located before beginning earth moving operations.
- D. Do not commence earth moving operations until all Phase I temporary sediment control measures are in place.
- E. Do not commence earth moving operations until plant-protection measures specified in Division 01 Section "Temporary Tree and Plant Protection" are in place.
- F. The following practices are prohibited within protection zones:
  - 1. Storage of construction materials, debris, or excavated material.
  - 2. Parking vehicles or equipment.
  - 3. Foot traffic.
  - 4. Erection of sheds or structures.
  - 5. Impoundment of water.
  - 6. Excavation or other digging unless otherwise indicated.
  - 7. Attachment of signs to or wrapping materials around trees or plants unless otherwise indicated.
- G. Do not direct vehicle or equipment exhaust towards protection zones.
- H. Prohibit heat sources, flames, ignition sources, and smoking within or near protection zones.

## **PART 2 - PRODUCTS**

### **2.01 SOIL MATERIALS**

- A. General: Provide borrow soil materials when sufficient satisfactory soil materials are not available from excavations.
- B. Riprap: ASTM D 4992-94 evaluation; ASTM D 6092-97e1 standard practice for size specification.
- C. Sand: ASTM C 33; fine aggregate.

### **2.02 GEOTEXTILES**

- A. Subsurface Drainage Geotextile: Nonwoven needle-punched geotextile, manufactured for subsurface drainage applications, made from polyolefins or polyesters; with elongation greater than 50 percent; complying with AASHTO M 288 and the following, measured per test methods referenced:
  - 1. Survivability: Class 2; AASHTO M 288.
  - 2. Grab Tensile Strength: 157 lbf (700 N); ASTM D 4632.
  - 3. Sewn Seam Strength: 142 lbf (630 N); ASTM D 4632.
  - 4. Tear Strength: 56 lbf (250 N); ASTM D 4533.
  - 5. Puncture Strength: 56 lbf (250 N); ASTM D 4833.
  - 6. Apparent Opening Size: No. 70 (0.212-mm) sieve, maximum; ASTM D 4751.
  - 7. Permittivity: 0.1 per second, minimum; ASTM D 4491.
  - 8. UV Stability: 50 percent after 500 hours' exposure; ASTM D 4355.
- B. Separation Geotextile: Woven geotextile fabric, manufactured for separation applications, made from polyolefins or polyesters; with elongation less than 50 percent; complying with AASHTO M 288 and the following, measured per test methods referenced:
  - 1. Survivability: Class 2; AASHTO M 288.
  - 2. Grab Tensile Strength: 247 lbf (1100 N); ASTM D 4632.
  - 3. Sewn Seam Strength: 222 lbf (990 N); ASTM D 4632.
  - 4. Tear Strength: 90 lbf (400 N); ASTM D 4533.
  - 5. Puncture Strength: 90 lbf (400 N); ASTM D 4833.
  - 6. Apparent Opening Size: No. 60 (0.250-mm) sieve, maximum; ASTM D 4751.
  - 7. Permittivity: 0.02 per second, minimum; ASTM D 4491.
  - 8. UV Stability: 50 percent after 500 hours' exposure; ASTM D 4355.
- C. Sediment Fence: Fabric with slit tape yarns in one direction (warp or fill) only. Fabric must have strong rot-proof synthetic fibers formed into either a woven or non-woven fabric.
  - 1. Fabric may be manufactured with pockets for posts, hems with cord, or with posts pre-attached using staples or button head nails.

2. Fabric to have manufacturer's mark, either with an approved color mark yarn in the fabric or the manufacturer's name and product trade name labeled on the fabric at a minimum of 100 ft (30 m) intervals.
  3. Fabric has no treatment or coating that might significantly alter its physical properties after installation.
  4. Contains stabilizers and/or inhibitors to make the filaments resistant to deterioration from sun or heat exposure.
  5. Makes a pervious sheet of synthetic fibers oriented into a stable network so that the fibers retain relative position with respect to each other under normal handling, installation, and service conditions.
  6. Has finished fabric edges to prevent the outer yarn from pulling away from the fabric.
  7. Have no defects or flaws that would significantly affect physical and/or functional properties.
  8. Has the following physical and dimensional requirements and properties:
    - a. Minimum tensile strength in pounds (Newtons): Warp 260 (1155), Fill 180 (800) ASTM D 4632.
    - b. Elongation: 40%, ASTM D4632
    - c. Apparent opening size (max. sieve size): No. 30 (600 um), ASTM D 4751
    - d. Flow rate in gallons per minute per square foot (L/min./m<sup>2</sup>): 70 (2850)
    - e. Ultraviolet stability (percent of required initial minimum tensile strength): 80% ASTM D4632 and ASTM D4355
    - f. Permittivity: 0.1 per second, minimum; ASTM D 4491.
    - g. Bursting strength, psi (kPa): 175 (1200), ASTM D 3786
    - h. Minimum fabric width: 36" (900 mm)
- D. RECP: Rolled Erosion Control Products, woven geo-textile fabric, manufactured for the establishment of vegetation for erosion control including:
1. Mulch Control Netting: Planar woven natural fiber or extruded geo-synthetic mesh used as a temporary degradable RECP to anchor loose fiber mulches. Maximum gradient for slope applications 5:1 ASTM D6459, maximum permissible shear stress channel applications is 0.25 lbs per square foot ASTM D6460, minimum tensile strength 5 lbs/ft ASTM D5035.
  2. Open Weave Textile: Temporary degradable RECP composed of processed natural or polymer yarns woven into a matrix, used to provide erosion control and facilitate vegetation establishment. Maximum gradient for slope applications 3:1 ASTM D6459, maximum permissible shear stress channel applications is 1.50 lbs per square foot ASTM D6459, minimum tensile strength 50 lbs/ft ASTM D5035.
  3. Erosion Control Blanket: Temporary degradable RECP composed of processed natural or polymer fibers mechanically, structurally or chemically bound together to form a continuous matrix to provide erosion control and facilitate vegetation establishment. Maximum gradient for slope applications 2:1 ASTM D6459, maximum permissible shear stress channel applications is 1.75 lbs per square foot ASTM D6460, minimum tensile strength 75 lbs/ft ASTM D5035.
  4. Turf Reinforcement Mat: Long-term non-degradable RECP composed of UV stabilized, non-degradable, synthetic fibers, filaments, nettings, and/or wire mesh processed into three dimensional reinforcement matrices designed for permanent and critical hydraulic applications where design discharges exert velocities and shear stresses that exceed the limits of mature, natural vegetation. TRM provide sufficient thickness, strength and void space to permit soil filling and/or retention and the development of vegetation within the matrix. Maximum gradient for slope applications 1:1 ASTM D6459, maximum permissible shear stress channel applications is 8.0 lbs per square foot ASTM D6460, minimum tensile strength 150 lbs/ft ASTM D5035, minimum thickness 0.25 inches (6.35 mm) ASTM D6525.

## **2.03 SEDIMENT FABRIC FENCING**

- A. Woven wire fabric fencing to be used with sediment fabric:
1. Ensure wire fence fabric is at least 32 inches (810 mm) high with at least 6 horizontal wires.
  2. Ensure the vertical wires have maximum spacing of 6 inches (78 mm)
  3. Ensure the top and bottom wires are at least 10 gauge (2.49 mm) and all other wires are at least 14 gauge (3.48 mm).

- B. Posts: Use post sizes and types as determined by the type of fence being installed. Hardwood posts are limited to ash, hickory, or oak, or other approved hardwood or softwood.
  - 1. Wood Posts: At least 2" (50 mm) in diameter or 2" x 2" (50 x 50 mm) 5 feet (1.5 m) long, and straight enough to provide a fence without a noticeable misalignment. Wood shall be commercial quality lumber of size and shape indicated. Each stake shall be free from decay, splits or cracks longer than the thickness of the stake or other defects that would weaken the stakes and cause the stakes to be structurally unsuitable.
  - 2. Steel posts to be "U", "T", or "C" shaped with a minimum weight of 1.15 pounds per foot (1.7 kg/m), 5 feet (1.5m) long, and have projections for fastening the fence to the posts.
  - 3. Fasteners for Wood Posts: Wire staples that are at least 17 gauge (1.37 mm), legs at least ½ inch (13 mm) long, and a crown of at least ¾ inch (19 mm) wide.
  - 4. Nails for Wood Posts: Use nails that are at least 14 gauge (2.03 mm), 1 inch (25 mm) long, with button heads of at least ¾ inch (19 mm).

## **2.04 SKIMMER**

- A. Skimmer: The Skimmer is a dewatering device used to slowly dewater sediment basins from the top of the water column. Manufactured by J.W. Faircloth & Son, Post Office Box 757, Hillsborough, NC, 27278. Telephone (919) 732-1244, or approved equal.

## **PART 3 - EXECUTION**

### **3.01 GENERAL REQUIREMENTS**

- A. The Contractor shall comply with and fully implement the Stormwater Pollution Prevention Plan (SWPPP) provided in the contract documents.
- B. Prior to beginning work, review erosion and sediment control drawings as they apply to the current site conditions. Any deviation from the drawings shall be submitted to the Owner and site engineer at least 72 hours prior to commencing that work.
- C. Hold a SWPPP pre-construction meeting prior to beginning work.
- D. Where required by the governing Construction General Permit, the General Contractor is to notify NPDES authority, in writing (or as required by local regulations) prior to initial land disturbance.

### **3.02 PREPARATION**

- A. Sequence of Construction: The approved construction sequence, as permitted and approved shall be adhered to during the execution of the work. All grading, drainage, best management practices (BMPs) for erosion and sediment control and all stabilization measures shall be constructed in the order presented in the Sequence of Construction. Modifications to the Sequence of Construction may occur only as approved by the Owner (and authority having jurisdiction when required).
  - 1. PHASE ONE Erosion and Sediment Control: All Phase One erosion and sediment control measures including but not limited to the required NPDES postings at the construction entrance/exit, construction of the temporary gravel construction entrance/exit, installation of perimeter sediment fence, temporary sediment basins and traps, and temporary diversion channels to sediment control structures shall be completed prior to any major land disturbing activity, including grubbing. Land disturbing activity during Phase One will be limited to the areas necessary to install Phase One best management practices only.
  - 2. PHASE TWO Erosion and Sediment Control: Grading (and mass grading) activity shall commence in Phase Two and includes additional erosion and sediment control measures as indicated on the drawings Contractor is to provide inspection, maintenance and recordkeeping throughout Phase One until Final Stabilization.
  - 3. PHASE THREE Erosion and Sediment Control: When complexity of project requires additional phases, they shall commence and be adhered to in the order presented on the drawings and in the SWPPP unless modified and approved by the Owner (and authority having jurisdiction when required).
- B. Temporary Construction Entrance/Exit and Lay Down Area:
  - 1. Temporary construction entrance/exit shall be installed and maintained as shown on the drawings. In addition to the entrance/exit shown on the drawings, a temporary gravel construction entrance/exit shall be installed and maintained at any point where construction

vehicles enter a public right-of-way, street or parking area, or exit the site. The pad shall be used to reduce mud tracked from construction vehicles onto public streets. The entrance/exit pad shall be constructed as shown on the drawings. Any sediment tracked onto the public street shall be cleaned immediately.

2. A 30,000 square foot, 6" thick stone base lay down area shall be established at grade and as located on the drawings or as directed by the Owner. A 24 foot gravel drive shall connect the temporary gravel construction entrance/exit and the lay down area, and the lay down area and the building pad. When the job nears completion, this stone may be incorporated into the pavement section provided it is in place and any overlying contaminated material has been removed.

### **3.03 DRAWING INTENT**

- A. Implementation of the erosion and sediment control measures shown on the drawings include but may not be limited to the approved measures. Contractor is responsible for providing all measures necessary that may be additional to accomplish the intent of the drawings. The quantity of best management practices shown on the drawings may be affected by actual conditions that occur during construction of the project. Additional sediment fence, diversion channels, sediment traps, inlet protection, and any other measure shown on the drawing may be necessary to provide adequate sediment control.

### **3.04 DEWATERING**

- A. Discharge from dewatering operations for the excavated areas shall not be directed to surface waters without first properly removing the suspended sediment from the water. The Contractor shall obtain any required permits associated with dewatering activities.

### **3.05 STABILIZATION**

- A. Limit Disturbed Area: Contractor to limit disturbed earthwork operations to the area commensurate with the Contractor's capability in keeping finished grading, seeding, mulching, stone base, and other control measures current and in accordance with the Schedule of Construction Activity. Should seasonal limitations make such coordination unrealistic, as determined by the Owner, temporary erosion control measures (stabilization) shall be provided immediately by the Contractor at no expense to the Owner.
- B. Temporary Stabilization: The Contractor shall incorporate all permanent erosion control measures into the project at the earliest practical time to minimize the need for temporary stabilization. Temporary stabilization shall be used where stabilization is needed or required prior to installation of permanent measures due to seasonal concern or NPDES stabilization requirements.
- C. Ground Cover Sufficient to Restrain Erosion: Any disturbed area where grading activities have temporarily or permanently ceased for more than 14 days (or a shorter time required by the local NPDES authority) shall be seeded, mulched and watered. Permanent stabilization consists of permanent seeding and landscaping per specification or stone base for paving or building construction. Temporary stabilization may include temporary seeding, mulch, stone base, mulch fiber matrix, or other methods.
- D. Slopes: Slopes shall be permanently seeded and mulched as excavation or fill proceeds to the extent possible. Slopes shall be temporarily seeded and mulched as necessary. Any graded slopes steeper than 3:1 shall be protected with erosion control blanket (RECP) as indicated on the drawings.

### **3.06 OWNER INSPECTION**

- A. The Owner's representative shall inspect the site and recordkeeping materials at least once per month.
- B. If Owner determines that the site is out of compliance with the governing NPDES Permit, the Contractor will have 24 hours to initiate and 48 hours to complete corrective action.
- C. The Owner's NPDES Compliance Manager shall visit the site periodically.
- D. If the Owner's Compliance Manager determines the site is out of compliance, the Contractor shall make corrective actions within 48 hours and produce any follow-up information requested by the Compliance Manager within the number of days specified in the Compliance Manager's report.

### **3.07 STORAGE OF SOIL MATERIALS**

- A. Stockpile borrow soil materials and excavated satisfactory soil materials without intermixing. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
  - 1. Stockpile soil materials away from edge of excavations. Do not store within drip line of remaining trees.
  - 2. Provide temporary cover for soil stockpiles if not active for more than 14 days.
  - 3. Provide perimeter protection (sediment fence, wattle, or as shown on the drawings) around stockpile to prevent sediment from leaving the area.

### **3.08 STORM DRAINAGE**

- A. Inlets: All inlets are to be provided with inlet protection as indicated on the drawings immediately upon construction.
- B. Outlets: All storm drainage outlets must be stabilized (velocity dissipation) as shown on the drawings before discharge becomes operational.

**END OF SECTION 015713**

## **SECTION 01 71 23**

### **FIELD ENGINEERING**

#### **PART 1 - GENERAL**

##### **1.01 SUMMARY**

- A. The Contractor shall provide construction stakeout sufficient to construct the proposed improvement in accordance with the approved construction plans.
- B. All stakeout services shall be completed under the direct supervision of a Professional Land Surveyor licensed in the State where the project is located.
- C. The Owner shall provide the following prior to the commencement of any stake-out services:
  - 1. Construction site drawings and associated electronic files.
  - 2. Copies of the topographic survey that the approved site plans have been based on. The topographic survey shall include at least one benchmark, which shall be used for vertical control; and,
  - 3. Copies of the boundary survey that the approved site plans have been based on. The boundary survey shall be closed and monumented/ironed. These monuments/irons shall be used for horizontal control related to the site boundary and the dimensional control plan.
- D. Contractor shall verify existing grades prior to performing work under this section. If existing grades are at variance with the drawings, notify the Owner and receive instructions prior to proceeding. No additional compensation will be considered resulting from grade variances once site clearing has commenced.

#### **PART 2 - PRODUCTS**

##### **2.01 MATERIALS**

- A. The Contractor/Surveyor shall supply all stakeout materials.

##### **2.02 EQUIPMENT**

- A. The Contractor/Surveyor shall supply all equipment necessary to accomplish the work.

#### **PART 3 - EXECUTION**

##### **3.01 PERFORMANCE STANDARDS**

- A. Building Layout
  - 1. Set a minimum of 4 building corners (to be the outer most building limits or as requested by the Contractor) with 2 (10 foot minimum) offsets per corner. A benchmark or a finished floor benchmark will be set within close proximity to the proposed building.
- B. Building Pad/Limits Certification
  - 1. Grade elevations for the building limits (finished floor elevation) shall be provided at a 50 foot grid for subgrade acceptance, stone base acceptance, and prior to slab placement.
- C. Detention/Retention Ponds and Storm Drainage
  - 1. The Contractor shall provide an as-built survey of all constructed detention/retention ponds and associated drainage structures prior to final acceptance, including a written certification verifying the constructed pond volume and inverts of the proposed drainage structures.
- D. Curb Layout
  - 1. Stakes shall be located at a minimum of 25 feet and a maximum of 50 feet intervals and also at points of curvature, points of tangency, radius points, and transitions, high and low points, and deflections. Offsets will be at 4 feet from face of curb, elevations to top of curb, elevations of top of curb to be provided at this 4 foot offset.
- E. Storm and Sanitary Manholes
  - 15 feet and 25 feet offset stakes in the same direction will be set from the centerline opening of structure lath. One offset stake will have an elevation to top of rim and inverts. Intermediate grade stakes to pipe invert elevation will be provided if needed. (Note: These stakes are not to conflict with piping.)
- F. Catch Basins

1. Set a centerline of structure lath with 10 foot offset HUB along the face of curb on either side of the lath at face of curb. One offset stake will have an elevation to top of grate and inverts.  
(Note: These stakes are not to conflict with piping.)
- G. Utility Layout
  1. Water – Stakes shall be located at 50 foot intervals along centerline of pipe and at deflections with no offsets. One 10 foot offset stake to the center of hydrant with a grade ring elevation will be provided;
  2. Lighting – Centerline of lighting structure with a 5 foot offset will be staked. Offset stake elevation will be to finished grade; and,
  3. Centerline of pipes will be staked with no offset.
- H. Roadway Layout
  1. Grade stakes shall be located at centerline of roadway at 50 foot intervals, including point of curvature, point on curve, point of tangency, and points of vertical curves. Grades shall be at finished grade.
- I. Wall Layout
  1. Stakes with 10 feet offset shall be provided at 50 feet intervals, deflections, beginning and end of wall. Additional stakes may be required, depending on wall height and conditions.
- J. Limits of Disturbance
  1. Clearing limits shall be staked at 100 feet  $\pm$  intervals and at all critical areas.
- K. Grade Stakes
  1. Stakes will be provided at a 50 foot grid. Grade elevations shall be to finished grade.

### **3.02 CONTRACTOR VERIFICATION**

- A. Contractor will field verify the utility location, size and invert elevations at points of connection in area of conflict, prior to construction and protect them from damage.
  1. Finished subgrades shall be verified by the Contractor to ensure proper elevation and conditions for construction above subgrade;
  2. Protect subgrade from excessive construction traffic and wheel loading including concrete and dump trucks; and,
- B. Notify Owner if it is necessary to destroy or remove control points and/or benchmarks due to construction. Contractor shall be responsible for the protection of benchmarks, including the cost for relocation as required.
- C. Advise Owner of any discrepancies between plans and field layout.

### **3.03 QUALITY ASSURANCE**

- A. The survey crew shall discuss all layout procedures with the Contractor's supervisor prior to commencing work.
- B. A survey crew daily report detailing that day's work, shall be completed and signed by the Contractor's supervisor at the end of that day's layout.
- C. Copies of sketches, cut sheets, etc. shall be provided to the Contractor by the beginning of the next workday.
- D. All costs related to re-staking due to construction or Contractors' work resulting in destruction or movement of stakes, shall be paid for by the Contractor and at no additional expense to the Owner.
- E. Building dimensions shall be obtained only from the approved architectural/structural drawings. Dimensions are to be obtained only from the appropriate approved (engineering, architectural and structural) drawings. The surveyor shall report any conflicts to the Contractor and Owner.

**END OF SECTION 017123**

## SECTION 024116

### DEMOLITION

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Specification Sections 31 and 32, apply to this Section.

##### 1.02 SUMMARY

- A. This Section includes the following:
  - 1. Demolition and removal of buildings and site improvements.
  - 2. Abandoning in place or removing below-grade construction.
  - 3. Disconnecting, capping or sealing, and abandoning in-place or removing site utilities.
  - 4. Salvaging items for reuse by Owner.
- B. Related Sections include the following:
  - 1. Division 2 Section "Summary" for use of the premises and phasing requirements.
  - 2. Division 2 Section "Construction Progress Documentation" for preconstruction photographs taken before building demolition.
  - 3. Division 2 Section "Temporary Facilities and Controls" for temporary construction, protection facilities, and environmental-protection measures for building demolition operations.
  - 4. Division 2 Section "Construction Waste Management and Disposal" for recycling and disposal of nonhazardous demolition wastes and for removal and storage of refrigerant.
  - 5. Division 2 Sections for demolishing or relocating site plumbing items.
  - 6. Division 2 Sections for demolishing or relocating site electrical items.
  - 7. Division 2 Section "Site Clearing" for site clearing and removal of above- and below-grade site improvements not part of building demolition
  - 8. Division 2 Section "Erosion and Sediment Control" for stabilization and control of discharges from the site.

##### 1.03 DEFINITIONS

- A. Demolish: Completely remove and legally dispose of off-site.
- B. Recycle: Recovery of demolition waste for subsequent processing in preparation for reuse.
- C. Remove and Salvage: Carefully detach from existing construction, in a manner to prevent damage, and deliver to Owner. Include fasteners or brackets needed for reattachment elsewhere.
- D. Existing to Remain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed, removed and salvaged, or recycled.

##### 1.04 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.
  - 1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

##### 1.05 SUBMITTALS

- A. Qualification Data (when required by Owner or Authorities Having Jurisdiction):
  - 1. Demolition Firm
  - 2. Test Control Firm
  - 3. For Refrigerant Recovery Technician.
  - 4. Licensed Professional Providing Demolition Oversight.
- B. Proposed Protection Measures: Submit informational report, including drawings, that indicates the measures proposed for protecting individuals and property. The drawing shall outline proposed methods for dust control, noise control and maintaining the surrounding streets and



buildings in a clean condition for both demolition operations and during debris removal. Indicate proposed locations and construction of barriers.

1. Adjacent Buildings: Detail special measures proposed to protect adjacent buildings to remain.
- C. Schedule of Demolition Activities: Contractor to submit for review and approval a detailed schedule for all proposed work to the Owner with the bid package. Submission shall include:
  1. Detailed sequence of demolition work, with starting and ending dates for each activity.
  2. Step-by-step description of all aspects pertaining to the demolition and protection of existing structures, the surrounding community, labor forces, rubble material management and disposal
  3. Temporary interruption of utility services.
  4. Shutoff and capping or re-routing of utility services.
- D. Traffic Control Plan: Contractor shall submit Traffic Control Plan with bid package complying with Division 32 Section 321321 "Traffic Control"
- E. Utility Schedule:
  1. Contractor to submit to Owner and all affected utility/service companies a proposed schedule of coordination for all necessary utility/service shut-offs, capping and continuation of utility services as required in the contract bid package.
  2. Contractor to provide Owner with written confirmation for all utility or service companies serving the site that service has been terminated prior to capping, abandoning or removal of any utility and prior to commencement of building demolition.
  3. Contractor shall accurately locate and mark on the contract drawings the location of all underground utility and services that have been capped and those that are to remain within the contract area.
- F. Permits:
  1. Prior to submission of a bid package, the Contractor shall investigate all permit requirements and include any cost for these requirements in the bid. Prior to the commencement of work, the Contractor shall obtain all necessary permits and certificates associated with utility disconnections, storage tank removals and building demolition work from any and all Federal, State or regulatory authorities having jurisdiction. The Contractor shall incur all fees and other requirements associated with all permits and certificates. Copies of all permits and certificates obtained including drawing and permit preparation, procurements, revisions and filing fees shall be borne by the Contractor.
  2. All permits and certificates shall be obtained by the Contractor prior to applying for and obtaining general demolition permits. The following permits and certificates shall be obtained by the Contractor if applicable:
    - a. Plumbing permit for water shut-off
    - b. Water shut-off certificate (original)
    - c. Plumbing permit for sewer seal
    - d. Building and/or Fire Department permit for underground storage tank removal
    - e. Letters from Electric and Gas Utility companies and gas meter shut-offs
    - f. Letters from Cable TV companies for cable disconnections and removals
    - g. Certificate from Tax Office (taxes paid);
    - h. Letter to adjacent Owners of proposed demolition with proof of receipt
    - i. Exterminator Certificate
    - j. Board of Health approval
    - k. Soil Erosion and Sediment Control Permit
    - l. Asbestos Abatement Permit
    - m. Asbestos Abatement Completion
    - n. Demolition Contractor's License
    - o. Any other permit or certificate required to perform the demolition work
- G. Building Demolition Plans: Drawings indicating the following:
  1. Locations of temporary protection
- H. Inventory: Submit a list of items to be removed and salvaged and deliver to Owner prior to start of demolition.
- I. Pre-demolition Video: Show existing conditions of adjoining construction and site improvements, including finish surfaces that might be misconstrued as damage caused by building demolition

operations. Documentation to include condition of on-site and adjacent structures and features including but not limited to curbs, sidewalks, landscapes, pavements, utility structures at grade, light poles, telephone poles, fences, bollards, etc... Comply with Division 1 Section 013200 "Construction Progress Documentation" . Submit before the Work begins.

- J. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a landfill facility licensed to accept hazardous wastes. Contractor to provide written permission from property owner on whose property the demolition material is to be disposed. Copies of any agreements shall be furnished to the Owner prior to sending any materials from the demolition site.
- K. Hazardous Materials: Contractor to deliver manifest or disposal tickets to Owner and Owner's Engineer for each truck that exits and enters the project site. Manifests shall include:
  - 1. Date and time of departure from demolition site.
  - 2. Type of material removed from site and type of material brought to the site.
  - 3. Amount of material in tons.
  - 4. Truck ID number
  - 5. Final destination of excess material.
  - 6. Date and time of entry to the demolition material
  - 7. Date and time of entry to the demolition site.
  - 8. Amount of material
  - 9. Source of material brought on-site.
- L. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

#### **1.06 QUALITY ASSURANCE**

- A. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- B. Statement of Refrigerant Recovery: Statement shall be signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant present was recovered and recovery was performed according to EPA regulations. Include name, address and signature on statement along with the date refrigerant was recovered.
- C. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Standards: Comply with ANSI A10.6 and NFPA 241.
- E. Pre-demolition Conference: Conduct conference at Project site to comply with requirements in *Division 01 Section 013200 "Project Management and Coordination."* Review methods and procedures related to building demolition including, but not limited to, the following:
  - 1. Inspect and discuss condition of construction to be demolished.
  - 2. Review structural load limitations of existing structures.
  - 3. Review and finalize building demolition schedule and verify availability of demolition personnel, equipment, and facilities needed to make progress and avoid delays.
  - 4. Review and finalize protection requirements.
  - 5. Review procedures for noise control and dust control.
  - 6. Review procedures for protection of adjacent buildings.
  - 7. Review items to be salvaged and returned to Owner.
- F. Progress Meetings: Once demolition work has begun Contractor shall schedule, administer and attend regularly scheduled meetings. Contractor shall include selected subcontractors as necessary to attend Progress Meetings. Contractor to schedule time and frequency of meetings at Owner's request to maintain optimum degree of communication between all parties involved.

#### **1.07 PROJECT CONDITIONS**

- A. Buildings to be demolished will be vacated and their use discontinued before start of the Work.
- B. Buildings immediately adjacent to demolition area will be occupied. Conduct building demolition so operations of occupied buildings will not be disrupted.
  - 1. Provide not less than 72 hours' notice of activities that will affect operations of adjacent occupied buildings.
  - 2. Maintain access to existing walkways, exits, and other facilities used by occupants of adjacent buildings.

- a. Do not close or obstruct walkways, exits, or other facilities used by occupants of adjacent buildings without written permission from authorities having jurisdiction.
  - C. Owner assumes no responsibility for buildings and structures to be demolished.
    - 1. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
  - D. Removal and Relocation of Existing Utilities/Structures: The Contractor shall be responsible for removal and/or relocation of existing utilities/structures, whether shown or not shown on the drawings, at locations where conflicts occur with proposed improvements at no additional cost to the owner.
  - E. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work unless otherwise indicated in the contract documents.
    - 1. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Owner. Hazardous materials will be removed by Owner under a separate contract.
  - F. On-site storage or sale of removed items or materials is not permitted.
- 1.08 COORDINATION**
- A. Arrange demolition schedule so as not to interfere with Owner's on-site operations or operations of adjacent occupied buildings.

## **PART 2 - PRODUCTS**

- 2.01 The Contractor shall supply all materials as required for this work.

## **PART 3 - EXECUTION**

### **3.01 EXAMINATION**

- A. Review Project Record Documents of existing construction provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Inventory and record the condition of items to be removed and salvaged. Provide video of conditions that might be misconstrued as damage caused by salvage operations. Comply with *Division 01 Section 013200 "Construction Progress Documentation"*.
- C. Survey condition of existing building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during building demolition operations. Correlate existing conditions with requirements indicated on drawings to help determine extent of work.
- D. Verify that hazardous materials have been remediated before proceeding with building demolition operations.
- E. Verify that all asbestos containing materials have been removed before proceeding with building demolition operations.
- F. Verify all sediment control measures are in place per the Phase I Erosion and Sediment Control Plan and Division 31 Section 311100 "Erosion and Sediment Control" (*forthcoming Division 31 Section 311100*) and the Stormwater Pollution Prevention Plan.

### **3.02 PREPARATION**

- A. Refrigerant: Remove refrigerant from mechanical equipment according to 40 CFR 82 and regulations of authorities having jurisdiction before starting demolition.
- B. Existing Utilities: Locate, identify, disconnect, and seal or cap off indicated utilities serving buildings and structures to be demolished.
  - 1. Arrange to shut off indicated utilities with utility companies.
  - 2. If removal, relocation, or abandonment of utility services will affect adjacent occupied buildings, then provide temporary utilities that bypass buildings and structures to be demolished and that maintain continuity of service to other buildings and structures as acceptable to Owner and authorities having jurisdiction.
  - 3. Cut off pipe or conduit a minimum of **24 inches (610 mm)** below grade. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing according to requirements of authorities having jurisdiction.

- C. Existing Utilities: Refer to Divisions 22 and 26 Sections for shutting off, disconnecting, removing, and sealing or capping utilities. Do not start demolition work until utility disconnecting and sealing have been completed and verified in writing.
- D. Temporary Shoring: Provide and maintain interior and exterior shoring, bracing, or structural support to preserve stability and prevent unexpected movement or collapse of construction being demolished.
  - 1. Strengthen or add new supports when required during progress of demolition.
- E. Salvaged Items: Comply with the following:
  - 1. Clean salvaged items of dirt and demolition debris.
  - 2. Pack or crate items after cleaning. Identify contents of containers.
  - 3. When permitted by Owner items removed may be stored in protected storage location during demolition and returned in original locations after demolition operations are complete. Store items in a secure area until delivery to Owner.
  - 4. Transport items to storage area designated by Owner or as indicated on Drawings.
  - 5. Protect items from damage during transport and storage.

### **3.03 PROTECTION**

- A. Existing Facilities: Protect adjacent walkways, loading docks, building entries, and other building facilities during demolition operations. Maintain exits from existing buildings.
- B. Existing Utilities: Maintain utility services to remain and protect from damage during demolition operations.
  - 1. Do not interrupt existing utilities serving adjacent occupied or operating facilities unless authorized in writing by Owner and authorities having jurisdiction.
  - 2. Provide temporary services during interruptions to existing utilities, as acceptable to Owner and authorities having jurisdiction.
    - a. Provide at least 72 hours' notice to occupants of affected buildings if shutdown of service is required during changeover.
- C. Temporary Protection: Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction and as indicated. Comply with requirements in Division 01 Section 015000 "Temporary Facilities and Controls"
  - 1. Protect adjacent buildings and facilities from damage due to demolition activities.
  - 2. Protect existing site improvements, appurtenances, and landscaping to remain.
  - 3. Erect a plainly visible fence around drip line of individual trees or around perimeter drip line of groups of trees to remain.
  - 4. Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
  - 5. Provide protection to ensure safe passage of people around building demolition area and to and from occupied portions of adjacent buildings and structures.
  - 6. Protect walls, windows, roofs, and other adjacent exterior construction that are to remain and that are exposed to building demolition operations.
  - 7. Erect and maintain dustproof partitions and temporary enclosures to limit dust, noise, and dirt migration to occupied portions of adjacent buildings.
- D. Remove temporary barriers and protections where hazards no longer exist. Where open excavations or other hazardous conditions remain, leave temporary barriers and protections in place.

### **3.04 DEMOLITION, GENERAL**

- A. General: Demolish indicated existing buildings and site improvements completely as specifically identified on the construction drawings. Use methods required to complete the Work within limitations of governing regulations and as follows:
  - 1. Do not use cutting torches until work area is cleared of flammable materials. Maintain portable fire-suppression devices during flame-cutting operations.
  - 2. Maintain fire watch during and hours after flame cutting operations as required by authorities having jurisdiction.
  - 3. Maintain adequate ventilation when using cutting torches.

4. Locate building demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- B. Engineering Surveys: During demolition, perform surveys to detect hazards that may result from building demolition activities.
- C. Site Access and Temporary Controls: Conduct building demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
  1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
  2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

### **3.05 DEMOLITION BY MECHANICAL MEANS**

- A. Proceed with demolition of structural framing members systematically, from higher to lower level. Complete building demolition operations above each floor or tier before disturbing supporting members on the next lower level.
  - B. Remove debris from elevated portions of the building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
    1. Remove structural framing members and lower to ground by method suitable to minimize ground impact and dust generation.
  - C. Salvage: Items to be salvaged are indicated on Drawings.
  - D. Below-Grade Construction: Abandon foundation walls and other below-grade construction. Cut below-grade construction flush with grade.
  - E. Below-Grade Construction: Demolish foundation walls and other below-grade construction that are within footprint of new construction and extending **10 feet (3 m)** outside footprint indicated for new construction. Abandon below-grade construction outside this area.
    1. Remove below-grade construction, including basements, foundation walls, and footings, to at least 24 inches (600 mm) below grade or as indicated on drawings or as required to eliminate conflict with new construction.
  - F. Existing Utilities: Abandon existing utilities and below-grade utility structures. Cut utilities flush with grade.
  - G. Existing Utilities: Demolish existing utilities and below-grade utility structures that are within 10 feet (3 m) outside footprint indicated for new construction. Abandon utilities outside this area.
1. Fill abandoned utility structures with satisfactory soil materials or recycled pulverized concrete and as indicated on the drawings or directed by Owner and according to backfill requirements in Division 31 Section 312000 "Earth Moving"

### **3.06 DEMOLITION BY EXPLOSIVES**

- A. Explosives: Perform explosive demolition only as approved by Owner and according to governing regulations.

### **3.07 SITE RESTORATION**

- A. Below-Grade Areas: Rough grade below-grade areas ready for further excavation or new construction.
- B. Below-Grade Areas: Completely fill below-grade areas and voids resulting from building demolition operations with satisfactory soil materials according to backfill requirements in Division 31 Section 312000 "Earth Moving"
- C. Site Grading: Uniformly rough grade area of demolished construction to a smooth surface, free from irregular surface changes. Provide a smooth transition between adjacent existing grades and new grades.

### **3.08 REPAIRS**

- A. Promptly repair damage to adjacent buildings caused by demolition operations.

- B. Where repairs to existing surfaces are required, patch to produce surfaces suitable for new materials.
- C. Restore exposed finishes of patched areas and extend restoration into adjacent construction in a manner that eliminates evidence of patching and refinishing.

**3.09 DISPOSAL OF DEMOLISHED MATERIALS**

- A. Remove demolition waste materials from Project site and safely dispose of all items in accordance with applicable EPA, State and local authorities having jurisdiction and all codes and ordinances. *(See Division 01 Section "Construction Waste Management and Disposal" for recycling and disposal of demolition waste.)*
- B. All recycling must be conducted in accordance with all currently applicable EPA, State and Local authorities having jurisdiction waste flow regulations. All recycling of demolition debris must be approved by Owner.
  - 1. Do not allow demolished materials to accumulate on-site.
  - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- C. Do not burn demolished materials.

**3.10 CLEANING**

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by building demolition operations. Return adjacent areas to condition existing before building demolition operations began.

**END OF SECTION 024116**

## SECTION 31 10 00

### SITE CLEARING

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. Section Includes:
  - 1. Protecting existing vegetation to remain.
  - 2. Removing existing vegetation.
  - 3. Clearing and grubbing.
  - 4. Stripping and stockpiling topsoil.
  - 5. Removing above- and below-grade site improvements.
  - 6. Disconnecting, capping or sealing, and removing site utilities abandoning site utilities in place.
- B. Related Sections:
  - 1. Division 01 Section "Field Engineering" for temporary utility services, construction and support facilities, security and protection facilities
  - 2. Division 02 Section "Demolition" for demolition of buildings, structures, and site improvements.
  - 3. Division 01 Section "Erosion and Sediment Control".
  - 4. Division 31 Section "Earth Moving".

##### 1.03 DEFINITIONS

- A. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.
- B. Surface Soil: Soil that is present at the top layer of the existing soil profile at the Project site. In undisturbed areas, the surface soil is typically topsoil; but in disturbed areas such as urban environments, the surface soil can be subsoil.
- C. Topsoil: Top layer of the soil profile consisting of existing native surface topsoil or existing in-place surface soil and is the zone where plant roots grow. Its appearance is generally friable, pervious, and black or a darker shade of brown, gray, or red than underlying subsoil; reasonably free of subsoil, clay lumps, gravel, and other objects more than 2 inches (50 mm) in diameter; and free of subsoil and weeds, roots, toxic materials, or other nonsoil materials.
- D. Plant-Protection Zone: Area surrounding individual trees, groups of trees, shrubs, or other vegetation to be protected during construction, and indicated on Drawings.
- E. Vegetation: Trees, shrubs, groundcovers, grass, and other plants.

##### 1.04 MATERIAL OWNERSHIP

- A. Except for stripped topsoil and other materials indicated to be stockpiled or otherwise remain Owner's property, cleared materials shall become Contractor's property and shall be removed from Project site.

##### 1.05 SUBMITTALS

- A. Existing Conditions: Documentation of existing trees and plantings, adjoining construction, and site improvements that establishes preconstruction conditions that might be misconstrued as damage caused by site clearing.
  - 1. Use sufficiently detailed photographs or include plans and notations to indicate specific wounds and damage conditions of each tree or other plants designated to remain.
- B. Record Drawings: Identifying and accurately showing locations of capped utilities and other subsurface structural, electrical, and mechanical conditions.

## **1.06 QUALITY ASSURANCE**

- A. Pre-construction meeting: Discuss site clearing and vegetation protection at SWPPP Pre-construction meeting at project site or agreed-upon location prior to site clearing and grading.

## **1.07 PROJECT CONDITIONS**

- A. Traffic: Minimize interference with adjoining roads, streets, walks, and other adjacent occupied or used facilities during site-clearing operations.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction.
  - 2. Provide alternate routes around closed or obstructed traffic ways if required by Owner or authorities having jurisdiction.
- B. Improvements on Adjoining Property: Authority for performing site clearing indicated on property adjoining Owner's property will be obtained by Owner before award of Contract.
  - 1. Do not proceed with work on adjoining property until directed by Owner.
  - 2. All benchmarks and monuments shall be protected during construction. If disturbed or destroyed, they shall be replaced in original position by a licensed surveyor at the Contractor's expense.
  - 3. Protect areas outside limits of disturbance from encroachment by construction personnel or equipment, regardless of property ownership. Access shall be by specific written permission or easement only.
- C. Contractor shall verify existing grades prior to performing work under this section. If existing grades are at variance with the drawings, notify the Owner and receive instructions prior to proceeding. No additional compensation will be considered resulting from grade variances once site clearing has commenced.
- D. Salvable Improvements: Carefully remove items indicated to be salvaged and store on Owner's premises where indicated.
- E. Utility Locator Service: Notify utility locator service for area where Project is located before site clearing.
- F. Do not commence site clearing operations until temporary sediment control, runoff control and other best management practices including plant protection measures are in place as shown on the Drawings and indicated in the Sequence of Construction.
- G. The following practices are prohibited within protection zones:
  - 1. Storage of construction materials, debris, or excavated material.
  - 2. Parking vehicles or equipment.
  - 3. Foot traffic.
  - 4. Erection of sheds or structures.
  - 5. Impoundment of water.
  - 6. Excavation or other earthwork unless otherwise indicated.
  - 7. Attachment of signs to or wrapping materials around trees or plants unless otherwise indicated.
- H. Do not direct vehicle or equipment exhaust towards protection zones.
- I. Prohibit heat sources, flames, ignition sources, and smoking within or near protection zones.
- J. Soil Stripping, Handling, and Stockpiling: Perform only when the topsoil is dry or slightly moist.

## **PART 2 - PRODUCTS**

### **2.01 MATERIALS**

- A. Satisfactory Soil Material: Requirements for satisfactory soil material are specified in Division 31 Section "Earth Moving."
  - 1. Obtain approved borrow soil material off-site when satisfactory soil material is not available on-site. Borrow material must be obtained from a permitted site.

## **PART 3 - EXECUTION**

### **3.01 PREPARATION**

- A. Protect and maintain benchmarks and survey control points from disturbance during construction.



- B. Locate and clearly identify trees, shrubs, and other vegetation to remain or to be relocated. Flag each tree trunk at 54 inches (1372 mm) above the ground.
- C. Protect existing site improvements to remain from damage during construction.
  - 1. Restore damaged improvements to their original condition, as acceptable to Owner.

### **3.02 TEMPORARY EROSION AND SEDIMENTATION CONTROL**

- A. Provide erosion and sediment control measures to prevent soil erosion and discharge of sediment and other pollutants to surface waters or airborne dust to adjacent properties and walkways, according to erosion and sediment control Drawings and requirements of authorities having jurisdiction.
- B. Provide erosion and sediment control measures in accordance with Division 01 Section "Erosion and Sediment Control", prior to any construction activity (including demolition).
- C. At Final Stabilization, remove erosion and sedimentation controls and restore and stabilize areas disturbed during removal.

### **3.03 TREE AND PLANT PROTECTION**

- A. General: Protect existing trees and plants to remain or be relocated on-site according to work shown on the Construction Drawings. All trees and plants to remain shall be barricaded and protected during the construction process
  - 1. Tree Protection
    - a. Erect and maintain a temporary fence directly below the drip line of individual trees or directly below the perimeter drip line of groups of trees to remain. Remove fence when construction is complete.
    - b. Do not excavate, for any reason, within the area directly below the drip lines of trees, unless otherwise indicated.
    - c. Where excavation for new construction is required within the drip line of trees, hand clear and excavate to minimize damage to root systems. Use narrow-tine spading forks, comb soil to expose roots, and cleanly cut roots as close to excavation as possible.
    - d. Repair or replace trees and vegetation indicated to remain that are damaged by construction operations, in a manner approved by the Owner.
- B. Limit of clearing is to be staked in accordance with Division 01 Section "Field Engineering", and verified by Owner prior to removal of any trees.
- C. All trees and plants not designated to remain within the area to be graded, shall be cut and the removal of stumps shall comply with Article 3.5 of this Section. Burning on site is not permitted, unless otherwise approved by the Owner and authorities having jurisdiction.
- D. Repair or replace trees, shrubs, and other vegetation indicated to remain or be relocated that are damaged by construction operations, in a manner approved by Owner.

### **3.04 EXISTING UTILITIES**

- A. Locate, identify, disconnect, and seal or cap utilities indicated to be removed or abandoned in place.
  - 1. Arrange with utility companies to shut off indicated utilities.
- B. Locate, identify, and disconnect utilities indicated to be abandoned in place.
- C. Interrupting Existing Utilities: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary utility services according to requirements indicated:
  - 1. Notify Owner not less than seven calendar days in advance of proposed utility interruptions.
  - 2. Do not proceed with utility interruptions without Owner's written permission.
- D. Excavate for and remove underground utilities indicated to be removed.

### **3.05 CLEARING AND GRUBBING**

- A. Remove obstructions, trees, shrubs, and other vegetation to permit installation of new construction.
  - 1. Do not remove trees, shrubs, grass, and other vegetation indicated to remain or to be relocated.
  - 2. Removal includes digging or grinding down stumps and remove roots, obstructions, and debris to a depth of 18 inches (450 mm) below exposed subgrade.

3. In areas outside the building limits where the depth of fill exceeds 8 feet in height, unless otherwise directed by the Owner, sound trees shall be cut at a height of not more than 6 inches above natural ground.
  4. Use only hand methods for grubbing within protection zones.
  5. Chip removed tree branches and stockpile in areas shown on the Drawings and as approved by Owner. Re-use material as indicated on the Drawings otherwise dispose of off-site.
- B. Fill depressions caused by clearing and grubbing operations with satisfactory soil material unless further excavation or earthwork is indicated.
1. Place fill material in horizontal layers not exceeding a loose depth of **8 inches (200 mm)**, and compact each layer to a density equal to adjacent original ground, and in accordance with Division 31 Section "Earth Moving".

### **3.06 TOPSOIL STRIPPING**

- A. Remove sod and grass before stripping topsoil.
- B. Strip topsoil to the full depth encountered in areas indicated to be graded and in a manner to prevent intermingling with underlying subsoil or other waste materials.
1. Remove subsoil and nonsoil materials from topsoil, including clay lumps, gravel, and other objects more than 2 inches (50 mm) in diameter; trash, debris, weeds, roots, and other waste materials.
- C. Stockpile sufficient topsoil material to facilitate seeding and landscaping. Stockpile topsoil away from edge of excavations without intermixing with subsoil. Grade and shape stockpiles to drain away from stockpile. Refer to Division 01 Section "Erosion and Sediment Control" or cover to prevent windblown dust and erosion by water.
1. Limit height of topsoil stockpiles to 72 inches (1800 mm).
  2. Do not stockpile topsoil within tree protection zones.
  3. Dispose of surplus soil material, unsuitable or excess topsoil, obstructions, demolished materials, and waste materials, including trash and debris, and in compliance with all regulations. Surplus topsoil is that which exceeds quantity indicated to be stockpiled or reused.
  4. Stockpile surplus topsoil to allow for re-spreading deeper topsoil.

### **3.07 SITE IMPROVEMENTS**

- A. Remove existing above- and below-grade improvements as indicated and necessary to facilitate new construction.

### **3.08 DISPOSAL OF SURPLUS AND WASTE MATERIALS**

- A. Remove surplus soil material, unsuitable topsoil, obstructions, demolished materials, and waste materials including trash and debris, and legally dispose of them off Owner's property.
- B. If indicated on the Drawings and/or in the Stormwater Pollution Prevention Plan separate recyclable materials produced during site clearing from other nonrecyclable materials. Store or stockpile without intermixing with other materials and transport them to recycling facilities. Do not interfere with other Project work.

**END OF SECTION 311000**

## **SECTION 31 20 00**

### **EARTH MOVING**

#### **PART 1 - GENERAL**

##### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### **1.02 SUMMARY**

- A. Section Includes:
  - 1. Cutting, proofrolling, filling, grading and preparing subgrades, required lines, dimensions, contours and elevations for proposed improvements including slabs-on-grade, walks, pavements, turf and grasses, and plants as shown and implied on the drawings or required by these specifications.
  - 2. Scarifying, compaction, moisture content conditioning and control, and removal of unsuitable materials to ensure proper preparation of areas for the proposed improvements.
  - 3. Excavating and backfilling for buildings and structures.
  - 4. Special construction procedures for the site recommended in the geotechnical report for preparation of building and pavement areas.
  - 5. Drainage course for concrete slabs-on-grade.
  - 6. Subbase course for concrete walks and pavements.
  - 7. Subbase course and base course for asphalt paving.
  - 8. Subsurface drainage backfill for walls and trenches.
  - 9. Excavating and backfilling trenches for utilities and pits for buried utility structures.
- B. Related Sections:
  - 1. Division 01 Section "Field Engineering" for temporary controls, utilities, and support facilities; also for temporary site fencing if not in another Section.
  - 2. Division 31 Section "Earth Moving" for site stripping, grubbing, stripping and stockpiling topsoil, and removal of above- and below-grade improvements and utilities.
  - 3. Division 32 Section "Planting" for finish grading in turf and grass areas, including preparing and placing planting soil for turf areas.
  - 4. Division 32 Section "Planting" for finish grading in planting areas and tree and shrub pit excavation and planting.

##### **1.03 UNIT PRICES**

- A. Work of this Section is affected by unit prices for earth moving specified in Division 01 Section "Unit Prices."
- B.
- C. Rock Measurement: Volume of rock actually removed, measured in original position, but not to exceed the following. Unit prices for rock excavation include replacement with approved materials.
  - 1. 24 inches (600 mm) outside of concrete forms other than at footings.
  - 2. 12 inches (300 mm) outside of concrete forms at footings. Additional depth may be required due to local codes or based on the geotechnical engineering study.
  - 3. Neat outside of minimum required dimensions of concrete cast against grade.
  - 4. Outside dimensions of concrete walls indicated to be cast against rock without forms or exterior waterproofing treatments.
  - 5. 6 inches (150 mm) beneath bottom of concrete slabs-on-grade.
  - 6. 12 inches (300 mm) beneath pipe invert elevation in trenches, and 12 inches (300 mm) wider than outside surface of either side of pipe or conduit. Removal of rock for trench excavation will be paid as part of the corresponding utility items unless stated elsewhere in the contract documents.

#### 1.04 DEFINITIONS

- A. Backfill: Soil material or controlled low-strength material used to fill an excavation.
  - 1. Initial Backfill: Backfill or bedding material backfill placed beside and over pipe in a trench, including haunches to support sides of pipe.
  - 2. Final Backfill: Backfill placed over initial backfill to fill a trench.
- B. Base Course: Aggregate layer placed between the subbase course and hot-mix asphalt paving.
- C. Bedding Course: Aggregate layer placed over the excavated subgrade in a trench before laying pipe.
- D. Borrow Soil: Satisfactory soil imported from off-site for use as fill or backfill.
- E. Drainage Course: Aggregate layer supporting the slab-on-grade that also minimizes upward capillary flow of pore water.
- F. Excavation: Removal of material encountered above subgrade elevations and to lines and dimensions indicated.
  - 1. Classified Excavation: Classified excavation shall be defined as the excavation necessary to subgrade lines and grades as shown on the contract drawings, which shall be a lump sum bid. Any and all unsuitable material, undercut excavation, mass rock excavation, trench rock excavation, mechanical rock excavation and soil stabilization shall be paid in addition to the classified excavation lump sum bid, by unit prices measured in-place. In the event the Owner elects to change the lines and grades as shown on the contract drawings, unit process shall be used to increase or decrease the contract amount in accordance with the change.
  - 2. Unclassified Excavation: Unclassified excavation shall be defined as all material excavated to and below the lines and grades as shown on the contract drawings to provide a firm and unyielding subgrade, regardless of its nature or composition, which includes any and all on-site cut or fill, off-site import or export, topsoil removal, subgrade preparation, unsuitable material, undercut excavation, mass rock excavation, trench rock excavation, mechanical rock excavation, utility and storm drainage trench excavation, and soil stabilization. Unclassified excavation shall be a lump sum bid with a unit price per cubic yard for unclassified excavation. In the event the Owner elects to change the lines and grades as shown on the contract drawings, the unclassified excavation unit price shall be used to increase or decrease the contract amount in accordance with the change.
  - 3. Authorized Additional Excavation: Excavation below subgrade elevations or beyond indicated lines and dimensions as directed by Owner. Authorized additional excavation and replacement material will be paid for according to Contract provisions for unit prices.
  - 4. Bulk Excavation: Excavation more than **10 feet (3 m)** in width and more than **30 feet (9 m)** in length.
  - 5. Unauthorized Excavation: Excavation below subgrade elevations or beyond indicated lines and dimensions without direction by Owner. Unauthorized excavation, as well as remedial work directed by Owner, shall be without additional compensation.
- G. Fill: Soil materials used to raise existing grades.
  - 1. If necessary, off-site fill (borrow) shall be obtained and provided by the Contractor. The Contractor is responsible for all permits and regulatory requirements associated with offsite borrow sources.
- H. Geogrid: A biaxial polymeric grid formed by a regular network of integrally connected tensile elements with apertures of sufficient size to allow interlocking with surrounding soil, rock, or earth to function primarily as a reinforcement.
- I. Minimum Average Roll Value (MARV): A value based on testing and determined in accordance with ASTM D4759-92.
- J. Rock: Rock material in beds, ledges, unstratified masses, conglomerate deposits, and boulders of rock material that exceed 1 cu. yd. (0.76 cu. m) for bulk excavation or 3/4 cu. yd. (0.57 cu. m) for footing, trench, and pit excavation that cannot be removed by rock excavating equipment

equivalent to the following in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted:

1. Excavation of Footings, Trenches, and Pits: Late-model, track-mounted hydraulic excavator; equipped with a 42-inch- (1065-mm-) wide, maximum, short-tip-radius rock bucket; rated at not less than 138-hp (103-kW) flywheel power with bucket-curling force of not less than 28,700 lbf (128 kN) and stick-crowd force of not less than 18,400 lbf (82 kN) with extra-long reach boom; measured according to SAE J-1179.
  2. Bulk Excavation: Late-model, track-mounted loader; rated at not less than 230-hp (172-kW) flywheel power and developing a minimum of 47,992-lbf (213.3-kN) breakout force with a general-purpose bare bucket; measured according to SAE J-732.
- K. Rock: Rock material in beds, ledges, un-stratified masses, conglomerate deposits, and boulders of rock material defined as:
1. General Excavation: Any material that cannot be excavated with a single-toothed ripper drawn by a crawler tractor having a minimum draw bar pull rated at not less than 71,000 lbs. (Caterpillar D9N or equivalent), and occupying an original volume of at least 2 cubic yards or more.
  2. Trench Excavation: Any material that cannot be excavated with a backhoe having a break out force rated at not less than 44,000 lbs (Caterpillar 235D or equivalent), and occupying an original volume of at least 2 cubic yards.
  3. Mechanical Excavation: Any material that must be excavated by a minimum 10,000 lb. mechanical hammer and occupying an original volume of at least 2 cubic yards.
- L. Structures: Buildings, footings, foundations, retaining walls, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.
- M. Subbase Course: Aggregate layer placed between the subgrade and base course for hot-mix asphalt pavement, or aggregate layer placed between the subgrade and a cement concrete pavement or a cement concrete or hot-mix asphalt walk.
- N. Subgrade: Uppermost surface of an excavation or the top surface of a fill or backfill immediately below subbase, drainage fill, drainage course, or topsoil materials.
- O. Utilities: On-site underground pipes, conduits, ducts, and cables, as well as underground services within buildings.

#### **1.05 SUBMITTALS**

- A. Product Data: For each type of the following manufactured products required:
1. Geotextiles.
  2. Controlled low-strength material, including design mixture.
  3. Geofoam.
  4. Warning tapes.
- B. Samples for Verification: For the following products, in sizes indicated below:
1. Geotextile and Geogrid: Submit product data sheet and certification from Manufacturer the product supplied meets the requirement of this section. Submit Manufacturer's installation instructions and general recommendations.
- C. Qualification Data: For qualified testing agency.
- D. Construction Sequence
1. Within 10 days after award of the contract, the Contractor shall submit to the Owner, with his bid package, a schedule detailing the sequence and time of completion of all phases of work under this section.
- E. Material Test Reports:
1. At least two (2) weeks in advance of importing material and for each borrow soil material proposed for fill and backfill, the Contractor shall notify the geotechnical engineer of the location of the borrow area. The geotechnical engineer shall furnish reports to the Owner and Contractor information as follows:
    - a. Moisture and Density Relationship: ASTM D1557 or D698 as required by the project geotechnical engineering study.
    - b. Mechanical Analysis: AASHTO T-88.
    - c. Plasticity Index: ASTM D4318.

- d. Classification according to ASTM D 2487.
  - e. 5 pound sample of each type of borrow material in an air tight container for the approval of the geotechnical engineer and Owner.
  - f. The name of each material supplier and specific type and source of each material. Any change in source or soil type throughout the project will require approval of the geotechnical engineer and Owner.
- 2. For Trench Excavation and Backfill: Contractor shall contact all utility companies and identify any requirements necessary for the construction of the Project. In addition provide:
  - a. Contractor to provide written confirmation on the status of all utility construction approvals and requirements to the Owner at the time of the pre-construction conference or no later than 30 days following the project possession date.
  - b. Submit a sample of each type of offsite fill and/or bedding material that is to be used in backfilling trenches.
- 3. For Aggregate Base Course: at least two weeks in advance of imported aggregate use, the Contractor shall submit the following laboratory test data, in conformance with the specified DOT aggregate materials:
  - a. Particle Size Analysis: AASHTO T-88; and,
  - b. Density: Modified Proctor Test (ASTM D1557)
  - c. Name of aggregate base course material supplier and specific type and source of each material, including relevant DOT compaction or specifications. Any change in source or aggregate base course type throughout the job requires approval of the Owner and the geotechnical engineer.
  - d. The geotechnical engineer shall prepare field reports that indicate compaction test location, elevation data, testing results and acceptability. The Owner and Contractor shall be provided with copies of reports within 24 hours of time test was performed.
- F. Blasting plan approved by authorities having jurisdiction is to be provided to the Owner at least 14 calendar days prior to commencement of blasting. Blasting plan to include all Federal, State and local permits applicable to the blasting operation. Blasting will be performed in accordance with all applicable laws, regulations, ordinances and industry standards. Plan shall coordinate with grading contractor to insure appropriate safety procedures are followed including signage and signaling devices.
- G. Blasting Contractor: All blasting to be performed by an insured, certified and licensed blasting Contractor. Proof of applicable insurance, license and certifications must be provided to the Owner at least 30 days prior to commencement of any blasting work. **Blasting Contractor shall carry the following insurance: Workers Compensation, Comprehensive General Liability, Broad Form Property Damage, Contractual Liability and Explosion, Collapse and Underground Hazard (naming the Owner as additionally insured).** Contractor must indemnify and hold harmless the Owner for all claims for damages arising from the blasting operation.
- H. The Blasting Contractor shall furnish a seismic survey report from seismic survey agency. The report will show the number of holes drilled, depth of holes, the burden and spacing, the amount of powder per hole, pound of powder per delay, the delay pattern, seismograph locations, and chronograph locations. The Seismic survey shall provide seismograph recordation of each blast at all adjacent structures. All reports shall be forwarded to the Owner.
- I. Contractor shall have the responsibility of furnishing a pre-blast survey of the surrounding area. Survey will include a one-quarter mile radius of the surrounding area.
- J. The Contractor shall provide and maintain a post-blast report including the amount of material displaced by each blast, the amount of explosive utilized in each blast, and the number of shots detonated. This report will be forwarded to the Owner.
- K. Pre-blast Photographs or Videotape: Show existing conditions of adjoining construction and site improvements, including finish surfaces, which might be misconstrued as damage caused by blasting operations. Submit before blasting begins.

#### 1.06 QUALITY ASSURANCE

- A. Blasting: Comply with applicable requirements in NFPA 495, "Explosive Materials Code," and prepare a blasting plan reporting the following:

1. Types of explosive and sizes of charge to be used in each area of rock removal, types of blasting mats, sequence of blasting operations, and procedures that will prevent damage to site improvements and structures on Project site and adjacent properties.
2. Seismographic monitoring during blasting operations.
- B. Blasting Requirements;
  1. Perform blasting only after receiving written approval from Owner and authorities having jurisdiction.
  2. Provide heavy mats as necessary to minimize concussion. Handle, store and use explosives in accordance with the Manual of Accident Prevention in Construction by the Associated General Contractor's of America, Inc., 1978 edition.
- C. Seismic Survey Agency: An independent testing agency, acceptable to authorities having jurisdiction, experienced in seismic surveys and blasting procedures to perform the following services:
  1. Report types of explosive and sizes of charge to be used in each area of rock removal, types of blasting mats, sequence of blasting operations, and procedures that will prevent damage to site improvements and structures on Project site and adjacent properties.
  2. Seismographic monitoring during blasting operations.
- D. Contractor Qualifications: The Contractor shall provide at least one supervisory person who shall be present at all times during execution of the work and who is thoroughly familiar with the type of work being performed and its best methods for completion. This person shall have the authority to act on behalf of the Contractor.
- E. Geotechnical Engineering Study (Soils Report)
  1. The Owner employed a geotechnical engineer to investigate sub-surface soil conditions and make recommendations regarding site work construction procedures. Perform all work in accordance with the recommendations and requirements therein. If conflicts exist between the geotechnical engineering study and the construction drawings and specifications, the more stringent requirements shall apply.
- F. Geotechnical Testing Agency Qualifications: A geotechnical engineer shall be familiar with the requirements of the geotechnical engineering study, selected and paid by the Owner, will be retained to perform construction inspection on site based on density testing, visual observation and judgment. These inspections shall not relieve the Contractor from his responsibility to complete the work in accordance with the drawings and specifications.
  1. Qualified according to ASTM E 329 and ASTM D 3740 for testing indicated.
  2. Provide one compaction test per Table 3.16C for each lift within the pavement area.
  3. Provide construction inspection and testing on trench backfilling operations.
  4. Provide visual field confirmation and density testing of subgrade preparation and fill placement procedures as part of the construction testing requirements. The Contractor shall be informed as soon as possible of test results.
  5. Geotechnical engineer shall prepare field reports that indicate compaction test location, elevation data, testing results and acceptability. The Owner and Contractor shall be provided with written copies of the results within 24 hours of time test was performed.
  6. All costs associated with required re-inspection due to failures shall be paid for by the Contractor at no additional expense to the Owner. The Owner reserves the right to direct any inspection that they deem necessary. Contractor shall provide free access to the site for inspection activities.
- G. Pre-excavation Conference: Conduct conference at Project site.
- H. Geogrid Pre-construction Conference: Contractor to arrange site meeting with material supplier, installer, Owner and Engineer prior to installation of geogrid. Owner and Engineer shall be notified at least seven (7) days prior to the meeting.
- I. Project Record Documents: Contractor to accurately record actual locations of all subsurface utilities, structures and obstructions encountered. Accurately record any as-built variation from the construction drawings and specifications. The Contractor shall provide as-built drawings within 30 days of project completion.

## **1.07 PROJECT CONDITIONS**

- A. General: The Contractor shall be responsible for removal and/or relocation of existing utilities at locations where conflicts occur with proposed utility improvements whether shown or not shown on the drawings. Removal and/or relocation shall be at no additional cost to the Owner.
- B. Traffic: Minimize interference with adjoining roads, streets, walks, and other adjacent occupied or used facilities during earth moving operations.
  - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction.
  - 2. Provide alternate routes around closed or obstructed traffic ways if required by Owner or authorities having jurisdiction.
- C. Improvements on Adjoining Property: Authority for performing earth moving indicated on property adjoining Owner's property will be obtained by Owner before award of Contract.
  - 1. Do not proceed with work on adjoining property until directed by Owner.
- D. Utility Locator Service: Notify utility locator service for area where Project is located before beginning earth moving operations.
- E. Do not commence earth moving operations until temporary erosion- and sedimentation-control measures, specified in Division 2 Section "Temporary Facilities and Controls," Division 2 Section "Erosion and Sediment Control" and Division 2 Section "Site Clearing," are in place.
- F. Do not commence earth moving operations until plant-protection measures specified in Division 2 Section "Temporary Tree and Plant Protection" are in place.
- G. The following practices are prohibited within plant-protection zones (if indicated on the Drawings):
  - 1. Storage of construction materials, debris, or excavated material.
  - 2. Parking vehicles or equipment.
  - 3. Erection of sheds or structures.
  - 4. Impoundment of water.
  - 5. Excavation or other digging unless otherwise indicated.
  - 6. Attachment of signs to or wrapping materials around trees or plants unless otherwise indicated.
- H. Do not direct vehicle or equipment exhaust towards protection zones.
- I. Prohibit heat sources, flames, ignition sources, and smoking within or near protection zones.

## **PART 2 - PRODUCTS**

### **2.01 SOIL MATERIALS**

- A. General: Obtain and provide borrow soil materials when sufficient satisfactory soil materials are not available from excavations.
- B. Satisfactory Soils: Soil Classification Groups consistent with geotechnical report and according to ASTM D 2487; free of rock or gravel larger than 2 inches (50 mm) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter.
  - 1. Soil materials used for fill shall be clean, well graded granular soil which is non-expansive and non-collapsible and shall have less than 20% by weight passing the #200 sieve. The portion passing the #200 sieve shall be non-plastic. Fill with fewer fines (less than #200) must be approved by the geotechnical engineer. Fill with more than 20% fines may be acceptable only if so indicated in the geotechnical engineering study.
  - 2. Prior to placement material used for fill shall not contain:
    - a. Debris (other than crushed concrete and brick meeting the requirements in 2.1.B.3);
    - b. Timber or railroad ties;
    - c. Deleterious materials such as steel rails;
    - d. Trash or hazardous materials.
    - e. Hazardous materials, unsuitable and deleterious materials and debris shall be disposed of off-site in accordance with all applicable regulations.
  - 3. On-site Soils:
    - a. On-site materials for use as fill shall consist of excavated soil from other portions of the site.



- b. Contractor to use on-site soil judiciously to facilitate construction schedule including the use of the most readily compactable soil for fill in building areas and fill within 2 feet of pavement sub-grade.
  - c. Topsoil shall not be utilized as engineered fill.
  - d. Excavated material containing rock, stone or masonry debris smaller than 2 feet in its largest dimension may be mixed with suitable material and utilized inside the building limits up to 6 feet below proposed subgrade and up to 3 feet below proposed subgrade outside building limits.
  - e. Excavated material containing rock, stone or masonry debris smaller than 6 inches in the largest dimension may be mixed with suitable material and utilized inside the building limits up to 3 feet below proposed subgrade and up to 18 inches below proposed subgrade outside the building limits.
  - f. No material greater than 2 inches in its largest dimension may be utilized inside the building limits within 3 feet of the proposed subgrade or within 18 inches of proposed subgrade for all other areas.
  - g. No material greater than 1-1/2 inches in its largest dimension may be utilized as backfill for storm drainage or utility trenches.
- 4. Imported Borrow:
  - a. Imported fill (borrow) shall meet the requirements of on-site soils and shall be free from all hazardous substances. Certification of compliance, and if requested, test results certifying compliance shall be furnished by the geotechnical engineer.
  - b. The Owner reserves the right to test off-site borrow material for conformance with these specifications.
- C. Unsatisfactory Soils: Soil identified by the geotechnical engineer according to ASTM D 2487.
  - 1. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction.
- D. Subbase Material: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 12 percent passing a No. 200 (0.075-mm) sieve.
- E. Base Course: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 95 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 8 percent passing a No. 200 (0.075-mm) sieve. All aggregate shall meet the state department of transportation specifications for the state in which the project is located for gradation and other specified material requirements.
- F. Recycled Concrete Aggregate Base Course: Recycled concrete aggregate may be approved by the Owner for use in lieu of aggregate base course specified under the following conditions:
  - 1. The gradation, plasticity, soundness, and abrasion requirements of the material shall meet the governing department of transportation specifications for recycled concrete aggregate or aggregate base course.
  - 2. The Contractor shall be required to submit a sieve analysis to the Owner for review and approval
  - 3. The recycled concrete aggregate shall not contain foreign materials, which includes reinforcing steel, wood, and other friable material.
  - 4. The Contractor shall obtain all required permits and report recycled materials usage as required by the regulatory authorities having jurisdiction.
  - 5. The Owner reserves the right to not approve use of the recycled concrete aggregate, for both pavement base structure and building pad construction. Approval of the use of recycled concrete aggregate shall only be authorized in writing by the Owner.
- G. Recycled Bituminous Concrete Base Course: Bituminous concrete on the site shall be milled or removed prior to placing any fill. Bituminous concrete may be reused under and immediately below the pavement stone base course if so indicated and approved by the geotechnical engineer and Owner.
- H. Engineered Fill: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 12 percent passing a No. 200 (0.075-mm) sieve.

- I. Bedding Materials: As shown on the drawings and specified on the trenching and bedding details and approved by the Owner and/or the geotechnical engineer.
  - 1. Bedding Course: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; except with 100 percent passing a 1-inch (25-mm) sieve and not more than 8 percent passing a No. 200 (0.075-mm) sieve.
  - 2. Bedding Material: As specified on the trenching and bedding details and/or conforming to local codes. Where conflict exists, the more stringent code or specification shall apply.
- J. Drainage Course: Narrowly graded mixture of washed crushed stone, or crushed or uncrushed gravel; ASTM D 448; coarse-aggregate grading Size 57; with 100 percent passing a 1-1/2-inch (37.5-mm) sieve and 0 to 5 percent passing a No. 8 (2.36-mm) sieve.
- K. Filter Material: Narrowly graded mixture of natural or crushed gravel, or crushed stone and natural sand; ASTM D 448; coarse-aggregate grading Size 67; with 100 percent passing a 1-inch (25-mm) sieve and 0 to 5 percent passing a No. 4 (4.75-mm) sieve.
- L. Sand: ASTM C 33; fine aggregate.
- M. Impervious Fill: Clayey gravel and sand mixture capable of compacting to a dense state.

## 2.02 EQUIPMENT

- A. Compactor for mass earthwork shall be minimum 5 ton static drum weight vibratory roller or 5 ton static drum weight sheep's footed compactor as appropriate for the type of soil material at the site or other compactor approved by the geotechnical engineer.
- B. Compactor for trenches and where access or maneuverability is of limited use, a double drum walk behind roller or "jumping jack" tamper may be used.

## 2.03 GEOTEXTILES

- A. Subsurface Drainage Geotextile: Nonwoven needle-punched geotextile, manufactured for subsurface drainage applications, made from polyolefins or polyesters; with elongation greater than 50 percent; complying with AASHTO M 288 and the following, measured per test methods referenced:
  - 1. Grab Tensile Strength: 157 lbf (700 N); ASTM D 4632.
  - 2. Sewn Seam Strength: 142 lbf (630 N); ASTM D 4632.
  - 3. Tear Strength: 56 lbf (250 N); ASTM D 4533.
  - 4. Puncture Strength: 56 lbf (250 N); ASTM D 4833.
  - 5. Apparent Opening Size: No. 60 (0.250-mm) sieve, maximum; ASTM D 4751.
  - 6. Permittivity: 0.2 per second, minimum; ASTM D 4491.
  - 7. UV Stability: 50 percent after 500 hours' exposure; ASTM D 4355.
- B. Separation Geotextile: Woven geotextile fabric, manufactured for separation applications, made from polyolefins or polyesters; with elongation less than 50 percent; complying with AASHTO M 288 and the geotechnical report.
- C. Structural Soil Reinforcement Geogrid: Shall be integrally formed and deployed as a single layer having the following characteristics (all are MARV values unless otherwise noted)

| Property                                     | Type 1                   | Type 2                   | Type 3                   | Type 4                   |
|----------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Aperture Stability<br>Modulus at 20<br>cm-kg | 0.32 m-N/deg             | .065 m-N/deg             | .058 m-N/deg             | 0.75 m-N/deg             |
| Rib Shape                                    | Rectangular or<br>Square | Rectangular or<br>Square | Rectangular or<br>Square | Rectangular or<br>Square |
| Rib Thickness                                | .030 in (0.76<br>mm)     | .045 in (1.14 mm)        | .050 in (1.27<br>mm)     | .070 in (1.78<br>mm)     |

|                                     |              |              |              |              |
|-------------------------------------|--------------|--------------|--------------|--------------|
| Nominal Aperture Size               | 1 inch       | 1 inch       | 2 inches     | 1.25 inches  |
| Junction efficiency                 | 93%          | 93%          | 93%          | 93%          |
| Flexural Rigidity                   | 250k mg-cm   | 750k mg-cm   | 450k mg-cm   | 2000k mg-cm  |
| Minimum True Initial Modulus in Use | 17,140 lb/ft | 27,240 lb/ft | 24,000 lb/ft | 34,270 lb/ft |
| MD                                  |              |              |              |              |
| CMD                                 | 27,240 lb/ft | 44,550 lb/ft | 34,270 lb/ft | 42,840 lb/ft |

## 2.04 CONTROLLED LOW-STRENGTH MATERIAL

- A. Controlled Low-Strength Material: Self-compacting, flowable concrete material produced from the following:
  1. Portland Cement: ASTM C 150, Type per geotechnical report.
  2. Fly Ash: ASTM C 618, Class C or F.
  3. Normal-Weight Aggregate: ASTM C 33, 3/4-inch (19-mm) nominal maximum aggregate size.
  4. Foaming Agent: ASTM C 869.
  5. Water: ASTM C 94/C 94M.
  6. Air-Entraining Admixture: ASTM C 260.
- B. Produce conventional-weight, controlled low-strength material with **80-psi (550-kPa)** compressive strength when tested according to ASTM C 495.

## 2.05 ACCESSORIES

- A. Detectable Warning Tape: Acid- and alkali-resistant, polyethylene film warning tape manufactured for marking and identifying underground utilities, a minimum of 6 inches (150 mm) wide and 4 mils (0.1 mm) thick, continuously inscribed with a description of the utility, with metallic core encased in a protective jacket for corrosion protection, detectable by metal detector when tape is buried up to 30 inches (750 mm) deep; colored as follows:
  1. Red: Electric.
  2. Yellow: Gas, oil, steam, and dangerous materials.
  3. Orange: Telephone and other communications.
  4. Blue: Water systems.
  5. Green: Sewer systems.

## PART 3 - EXECUTION

### 3.01 PREPARATION

- A. Prior to bidding work within this Section, the Contractor shall become thoroughly familiar with the geotechnical engineering study, existing site conditions, and all portions of the work within this Section.
- B. Do not perform any work required by this section prior to completion of all required inspections, tests and approvals.
- C. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by earth moving operations.
- D. Protect and maintain benchmarks, property corners, monuments and other reference points from damage or displacement. If a marker must be removed or relocated it shall be performed by a licensed professional land surveyor at no additional cost to the Owner.

- E. Notify utility companies to allow removal and/or relocation of any utilities that are in conflict with the proposed improvements. Locate, identify, protect and maintain in operating condition, existing utilities encountered during utility installation. Repair any damage to surface or subsurface improvements encountered or shown on the Drawings.
- F. Set all lines, elevations, and grades for utility and drainage system work and maintain for the duration of the work.
- G. Verify location, size, elevation, and other pertinent data required to make connections between existing utilities, drainage systems, and proposed construction indicated on the Drawings. Coordinate all building utility connection locations and elevations with architectural drawings.
- H. When performing grading operations during periods of prolonged wet or dry conditions, provide adequate measures for surface drainage or ground water and moisture control of the soils (i.e. wetting or drying, scarify and disk) so as to place and compact the soil within the moisture content range of a few percentage points of its optimum water content. Any disturbed areas should be proof rolled at the end of each day.
- I. Sloping, shoring, bracing, and fencing shall be installed in accordance with Federal OSHA requirements as well as the requirements of all regulatory authorities having jurisdiction.
- J. Protect and maintain all erosion control, sediment control, and runoff control and materials management measures during earth moving operations. Refer to erosion and sediment control drawings for staging earthwork operations and for measures that must be implemented prior to the commencement of earthwork.
- K. Protect subgrades and foundation soils from freezing temperatures and frost. Remove temporary protection before placing subsequent materials.
- L. Remove from the site any material encountered during grading operation that in the opinion of the Owner or geotechnical engineer is unsuitable or undesirable for backfilling in pavement or building areas. Do not allow debris and unsuitable material to accumulate on-site. Dispose of excess materials from the site.
- M. Any material exported or imported from or to the Project site shall be hauled from or to a site that has coverage under NPDES or a State Construction General Permit (or Individual Permit). Coverage may either be under a separate Notice, or included in coverage under the Project Notice. If the borrow or waste site has NPDES or State Construction General Permit coverage a copy of the Notice of Intent and Notice of Coverage (or equal) shall be placed in the SWPPP Ledger.

### **3.02 DEWATERING**

- A. Prevent surface water and ground water from entering excavations, from ponding on prepared subgrades, and from flooding Project site and surrounding area.
- B. Install dewatering systems that will be required to construct the Project. Water pumped out of excavations shall be disposed of onsite, and will not be discharged to the municipal storm drainage system or to surface waters unless approval to do so has been documented in writing by the Contractor.
- C. Protect subgrades from softening, undermining, washout, and damage by rain or water accumulation.
  - 1. Reroute surface water runoff away from excavated areas. Do not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches.

### **3.03 EXPLOSIVES**

- A. Explosives: Obtain written permission from authorities having jurisdiction before bringing explosives to Project site. Perform blasting by using explosives on Project site only after receiving written approval from the Owner.
  - 1. Perform blasting without damaging adjacent structures, property, or site improvements.
  - 2. Perform blasting without weakening the bearing capacity of rock subgrade and with the least-practicable disturbance to rock to remain.
  - 3. Handle, store and use explosives in accordance with the Manual of Accident Prevention in Construction by the Associated General Contractors of America, Inc., 1978 edition.
  - 4. Obtain all required Federal, State and Local permits applicable to the blasting operations.

5. Coordinate with grading Contractor to insure appropriate safety procedures are followed including signage and signaling devices.
6. Drill and blast such that rock will be suitable for use on the site as fill per this specification.

### **3.04 EXCAVATION, GENERAL**

#### **A. General**

1. The building limits shall be as identified on the construction drawings. The building subgrade shall be constructed to include a minimum of 10 feet beyond the building limits, or as directed by the Owner;
2. Structures include buildings, footings, foundations, retaining walls, embankment berms for storm water detention basins, slabs, tanks, curbs, mechanical and electrical appurtenances or other man-made stationary features constructed above or below the ground surface;
3. The building pad subgrade shall be prepared in strict accordance with the geotechnical engineering study and these specifications, whichever is more stringent; and,
4. The Contractor shall cut or fill to the proposed subgrade elevations based on finished grades and the pavement thicknesses as shown on the drawings. Subgrade elevations shall be constructed to within 0 to minus ½ inch of the proposed grades specified.

#### **B. Unclassified Excavation:** Excavate to subgrade elevations regardless of the character of surface and subsurface conditions encountered. Unclassified excavated materials may include rock, soil materials, and obstructions. No changes in the Contract Sum or the Contract Time will be authorized for rock excavation or removal of obstructions.

1. If excavated materials intended for fill and backfill include unsatisfactory soil materials and rock, replace with satisfactory soil materials.
2. Remove rock to lines and grades indicated to permit installation of permanent construction without exceeding the following dimensions:
  - a. 24 inches (600 mm) outside of concrete forms other than at footings.
  - b. 12 inches (300 mm) outside of concrete forms at footings.
  - c. 6 inches (150 mm) outside of minimum required dimensions of concrete cast against grade.
  - d. Outside dimensions of concrete walls indicated to be cast against rock without forms or exterior waterproofing treatments.
  - e. 6 inches (150 mm) beneath bottom of concrete slabs-on-grade.
  - f. 12 inches (300 mm) beneath pipe invert elevation in trenches, and 12 inches (300 mm) wider than outside surface of any pipe or conduit.

#### **C. Classified Excavation:** Excavate to subgrade elevations. Material to be excavated will be classified as earth and rock. Do not excavate rock until it has been classified and cross sectioned by Owner. The Contract Sum will be adjusted for rock excavation according to unit prices included in the Contract Documents. Changes in the Contract Time may be authorized for rock excavation.

1. Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation.
  - a. Intermittent drilling; blasting, if permitted; ram hammering; or ripping of material not classified as rock excavation is earth excavation.
2. Rock excavation includes removal and disposal of rock. Remove rock to lines and subgrade elevations indicated to permit installation of permanent construction without exceeding the following dimensions:
  - a. 24 inches (600 mm) outside of concrete forms other than at footings.
  - b. 12 inches (300 mm) outside of concrete forms at footings.
  - c. 6 inches (150 mm) outside of minimum required dimensions of concrete cast against grade.
  - d. Outside dimensions of concrete walls indicated to be cast against rock without forms or exterior waterproofing treatments.
  - e. 6 inches (150 mm) beneath bottom of concrete slabs-on-grade.
  - f. 12 inches (300 mm) beneath pipe invert elevation in trenches, and 12 inches (300 mm) wider than outside surface of any conduit or pipe.

### **3.05 EXCAVATION FOR STRUCTURES**

- A. Where existing grades are above proposed subgrade elevation, excavate materials in the building areas to line and grade as shown in the drawings being careful not to over excavate beyond the elevations needed for building subgrades.
  - 1. Excavate organic soils from the building area. If approved by Owner, organic soil excavation material may be used in landscaped area.
  - 2. Excavated on-site soils which meet the requirements of the geotechnical engineer may be used as building area fill.
  - 3. Unsuitable material, such as wood or any other deleterious materials determined to be unsuitable by the geotechnical engineer for use as on-site fill shall be disposed of off-site in accordance with this specification.
- B. Excavate to indicated elevations and dimensions within a tolerance of plus 0 to minus 1/2 inch (12 mm). If applicable, extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, and for inspections.
  - 1. Excavations for Footings and Foundations: Do not disturb bottom of excavation. Excavate by hand to final grade just before placing concrete reinforcement. Trim bottoms to required lines and grades to leave solid base to receive other work.
  - 2. Pile Foundations: Per geotechnical engineer.
  - 3. Excavation for Underground Tanks, Basins, and Mechanical or Electrical Utility Structures: Excavate to elevations and dimensions indicated within a tolerance of plus or minus 1 inch (25 mm). Do not disturb bottom of excavations intended as bearing surfaces.
- C. Excavations at Edges of Tree- and Plant-Protection Zones:
  - 1. Excavate by hand to indicated lines, cross sections, elevations, and subgrades. Use narrow-tine spading forks to comb soil and expose roots. Do not break, tear, or chop exposed roots. Do not use mechanical equipment that rips, tears, or pulls roots.
  - 2. Cut and protect roots according to requirements in Division 01 Section "Temporary Tree and Plant Protection."

### **3.06 EXCAVATION FOR WALKS AND PAVEMENTS**

- A. Excavate surfaces under walks and pavements to indicated lines, cross sections, elevations, and subgrades.

### **3.07 EXCAVATION FOR UTILITY TRENCHES**

- A. Contact authorities having jurisdictions and utility companies before excavation begins.
- B. Utility alignments are designed to avoid obstructions whenever possible. The Contractor shall immediately notify Owner if unanticipated significant obstructions are encountered during utility installation work.
- C. Cut trench banks for safety and remove stones as necessary to avoid point-bearing. All trench excavation side walls shall be sloped, shored, sheeted, braced or otherwise supported by means of sufficient strength to protect the workers within in accordance with the applicable rules and regulations established by the Department of Labor, Occupational Safety and Health Administration (OSHA), and by local codes and regulations. Moveable trench boxes shall not be allowed for HDPE, CMP or spiral ribbed pipes larger than 18" when installed in a trench condition in accordance with current OSHA requirements.
- D. Excavate trenches at proper width and depth for laying pipe, conduit or cable and in accordance with utility company and/or manufacturer requirements.
  - 1. Beyond building perimeter, excavate trenches to allow installation of top of pipe at line, grade and elevation as shown on the Drawings, or at minimum 12 inches below frost line.
- E. All trench width requirements for pipe, conduit, or cable shall be the minimum practical width that will allow for proper compaction of backfill, comply with trench and bedding details, and satisfy all safety, municipal and utility company regulations. Excavate trenches to uniform widths to provide the necessary clearance on each side of pipe or conduit.
- F. Trench Bottoms: Excavate and shape trench bottoms to provide uniform bearing and support of pipes and conduit. Shape subgrade to provide uniform bearing and support for each section of pipe at every point along the entire length except where necessary to excavate for bells, joints, and barrels of pipes and for joints, fittings, and bodies of conduits. Dig bell holes and depressions

for joints after trench bottom has been graded. Dig no deeper, longer, or wider than needed to make the joint connection properly. Remove projecting stones and sharp objects along trench subgrade.

1. Where foundation material is found to be of poor supporting value or of rock, the Owner's engineer may make minor adjustments in the location of the pipe to provide a more suitable foundation. Where this is not practical, the existing unsuitable material will be removed by undercutting to a depth directed by the geotechnical engineer and backfilling with suitable conditioning material consisting of crushed stone, gravel, or a combination of sand and crushed gravel as approved by the geotechnical engineer. Final selection of suitable conditioning material will be made by the geotechnical engineer.
2. Where foundation material is unacceptable and trench is over-excavated a suitable conditioning material or pipe bedding material will be used as specified by the geotechnical engineer. Bedding material is to be compacted at a minimum of 92% dry density as determined by ASTM D1557, Modified Proctor Test. Place bedding material as specified by geotechnical engineer and as shown on the trenching and bedding details on the Drawings.
- G. **Blasting:** Contractor shall drill and blast so that the rock will be suitable for use on the site as fill. Rock size should not exceed 24 inches and have enough smaller size pieces to create fold free matrix when placed and compacted. Particle velocity from blasting shall not exceed 2 inches per second as measured by a chronograph.
- H. **Excavated Material:** Stockpile excavated material suitable for backfilling in an orderly manner far enough from the trench to avoid overloading the excavation side wall. Remove unsuitable excavated materials from the site. Any abandoned structures, utilities, or debris discovered during construction shall be removed and disposed of, or capped.
- I. **Utility Installation Depths:** Utility installation shall meet the following minimum pipe installation depths, or applicable codes and ordinances, measured from finished grade to the top of the pipe barrel:
  1. Water Mains: 42 inches or 12 inches below the frost line whichever is deeper, or as specified on the plans.
  2. Sanitary Sewer: As indicated on the drawings, or (36 inches to top of pipe barrel minimum).
  3. Storm Drainage (Sewer): Elevations and grades as shown on the drawings, (24 inches minimum)
  4. Electrical Conduits: 24 inches, or as required by NEC 300-5, NEC 710-36 codes, or the regulatory authority standard, or utility company standards whichever is deeper.
  5. Telephone Conduits: 24 inches, or the regulatory authority standard, or utility company standards whichever is deeper.
6. **Landscape Irrigation Piping:** See Section 328400 .
- J. **Laterals:** All utilities intended to connect to services within the building shall be extended from the building a distance of five feet in the direction of the utility service and at elevations to connect at those locations shown on the Drawings. All utility ends will be plugged and marked by a 2 inch by 4 inch piece of wood extending from the utility invert to 4 feet above final grade.
- K. **Trenches in Tree- and Plant-Protection Zones:**
  1. Hand-excavate to indicated lines cross sections, elevations, and subgrades. Use narrow-tine spading forks to comb soil and expose roots. Do not break, tear, or chop exposed roots. Do not use mechanical equipment that rips, tears, or pulls roots.
  2. Do not cut main lateral roots or taproots; cut only smaller roots that interfere with installation of utilities.

### **3.08 UNDERCUT EXCAVATION**

- A. When approved by the Owner and recommended by the geotechnical engineer, the Contractor will be required to remove natural soil materials in areas where fills are to be placed where soil materials are determined to be undesirable. The Contractor shall be required to remove the undesirable material and backfill with approved material. The backfill material shall be compacted per Table 3.16.C.
- B. At locations where undesirable material is shown on the drawings or identified in the geotechnical engineering study removal and replacement shall be per the drawings or as directed by the geotechnical engineer or Owner.

- C. At locations where soil is wet the Contractor shall provide a “good faith” effort in drying and disking these areas prior to requesting approval for undercut excavation.
- D. Where undercut excavation is required adjacent or beneath the location of a proposed drainage structure, undercut excavation and backfill shall extend a sufficient distance adjacent to the installation to prevent future operations from disturbing the completed drainage structure.
- E. All material removed in the work of undercut excavation will be classified by the geotechnical engineer and Owner as either suitable for other use without excessive manipulation and utilized by the Contractor elsewhere in the work, or unsuitable for future use and disposed of by the Contractor as directed by the geotechnical engineer in accordance with 3.10.M of this specification.
- F. The Contractor shall conduct undercut operations in such a way that the necessary measurements can be taken before any backfill is placed.
- G. Backfill in undercut areas shall be placed as a continuous operation along with undercutting operation, or as recommended by the geotechnical engineer. No backfill material shall be placed in water or in wet conditions unless otherwise recommended by the geotechnical engineer and approved by the Owner.

### **3.09 SUBGRADE INSPECTION**

- A. Notify Owner when excavations have reached required subgrade.
- B. If Owner determines that unsatisfactory soil is present, continue excavation and replace with compacted backfill or fill material as directed.
- C. Proof-roll subgrade below the building slabs and pavements with a pneumatic-tired and loaded 10-wheel, tandem-axle dump truck weighing not less than 15 tons (**13.6 tonnes**) to identify soft pockets and areas of excess yielding. Do not proof-roll wet or saturated subgrades.
  - 1. Completely proof-roll subgrade in one direction, repeating proof-rolling in direction perpendicular to first direction. Limit vehicle speed to 3 mph (5 km/h).
  - 2. Excavate soft spots, unsatisfactory soils, and areas of excessive pumping or rutting, as determined by Owner, and replace with compacted backfill or fill as directed.
- D. Authorized additional excavation and replacement material will be paid for according to Contract provisions.
- E. Reconstruct subgrades damaged by freezing temperatures, frost, rain, accumulated water, or construction activities, as directed by Owner, without additional compensation.

### **3.10 UNAUTHORIZED EXCAVATION**

- A. Fill unauthorized excavation under foundations or wall footings by extending bottom elevation of concrete foundation or footing to excavation bottom, without altering top elevation. Lean concrete fill, with 28-day compressive strength of 2500 psi (17.2 MPa), may be used when recommended by the geotechnical engineer and approved by Owner.
  - 1. Fill unauthorized excavations under other construction, pipe, or conduit as directed by geotechnical engineer and approved by Owner.

### **3.11 STORAGE OF SOIL MATERIALS**

- A. Stockpile borrow soil materials and excavated satisfactory soil materials without intermixing. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
  - 1. Stockpile soil materials away from edge of excavations. Do not store within drip line of remaining trees.
  - 2. Stockpiles shall be surrounded by perimeter sediment control measures and shall be covered with temporary measures to prevent erosion as soon as practical but no longer than 14 days after completion of the pile.

### **3.12 BACKFILL**

- A. Place and compact backfill in excavations promptly, but not before completing the following:
  - 1. Construction below finish grade including, where applicable, sub drainage, damp proofing, waterproofing, and perimeter insulation.
  - 2. Surveying locations of underground utilities for Record Documents.
  - 3. Testing and inspecting underground utilities.



4. Removing concrete formwork.
  5. Removing trash and debris.
  6. Removing temporary shoring and bracing, and sheeting.
  7. Installing permanent or temporary horizontal bracing on horizontally supported walls.
- B. Place backfill on subgrades free of mud, frost, snow, or ice.

### **3.13 UTILITY TRENCH BACKFILL**

- A. Place backfill on subgrades free of mud, frost, snow, or ice.
- B. Place and compact bedding course on trench bottoms and where indicated. Shape bedding course to provide continuous support for bells, joints, and barrels of pipes and for joints, fittings, and bodies of conduits.
- C. Trenches under Footings: Backfill trenches excavated under footings and within 18 inches (450 mm) of bottom of footings with satisfactory soil; fill with concrete to elevation of bottom of footings. Concrete is specified in Division 03 Section "Cast-in-Place Concrete"
- D. Trenches under Roadways: If shown on the Drawings or specified by the geotechnical engineer provide support for piping or conduit less than 30 inches (750 mm) below surface of roadways.
- E. Backfill voids with satisfactory soil while removing shoring and bracing.
- F. Do not backfill over porous, wet, frozen or spongy subgrade surfaces.
- G. Fill around pipes and conduit shall be placed and compacted in accordance with the trenching and bedding details shown on the Drawings. Place and compact initial backfill approved by the geotechnical engineer, to a height not to exceed 8 inches (200 mm) over the pipe or conduit.
  1. Select material shall be used as specified by trenching and bedding details and where required by the geotechnical engineer. Backfill is to be kept free of stones, frozen lumps, chunks of highly plastic clay or other objectionable material.
  2. Carefully compact initial backfill under pipe haunches and compact evenly up on both sides and along the full length of piping or conduit to avoid damage or displacement of piping or conduit. Coordinate backfilling with utilities testing.
  3. Grade and maintain backfill areas to minimize erosion or saturation will not damage pipe bed or backfill.
  4. Heavy equipment shall not be operated over any pipe until it has been properly backfilled with a minimum of 24 inches of cover. Where any part of the required cover is above the proposed finished grade, the Contractor shall place, maintain and finally remove such material at no cost to the Owner. Pipe which becomes misaligned, shows excessive settlement, or has been otherwise damaged by the Contractor's operations shall be removed and replaced by the Contractor at no cost to the Owner.
- H. Place and compact final backfill of satisfactory soil to final subgrade elevation.
- I. Install warning tape directly above utilities, 12 inches (300 mm) below finished grade, except 6 inches (150 mm) below subgrade under pavements and slabs.

### **3.14 SOIL FILL**

- A. Fill areas to contours and elevations shown on the Construction Drawings with materials deemed satisfactory, less the topsoil depth as specified in Section 329300.
- B. Existing grades below building areas shall be leveled prior to fill placement. Contractor shall remove any existing lawn and topsoil in these areas prior to placement of any fill.
- C. All existing grades below building areas shall be proofrolled and compacted per this specification.
- D. Plow, scarify, bench, or break up sloped surfaces steeper than 1 vertical to 4 horizontal so fill material will bond with existing material.
- E. Fill shall not be placed:
  1. In areas of standing water, frozen or thawing ground or in areas that have not been approved by the geotechnical engineer.
  2. During unfavorable weather conditions. When work is interrupted by heavy rains fill operations shall not be resumed until all saturated surface soils are returned to satisfactory moisture content as determined by the geotechnical engineer.
- F. Place and compact fill material in layers (lifts):
  1. Layers shall be made smooth and free from ruts or indentations at the end of any work day when precipitation is forecasted too prevent saturation of surface fill material. Fill surfaces

- shall be graded smooth to drain and sealed with a drum roller at the completion of each work day.
2. Layers (or lifts) shall not exceed 12 inches (300 mm) in depth and shall be compacted systematically to achieve at least 6 passes of the compactor. Larger layer thickness may be approved if broken rock is used and placed at least 6 feet (1.8 m) below grade.
  3. Each layer shall be compacted to minimum densities listed in Table 3.16.C and as specified by the geotechnical engineer.
- G. Layers (lifts) to required elevations as follows:
1. Under grass and planted areas, use satisfactory soil material.
  2. Under walks and pavements, use satisfactory soil material.
  3. Under steps and ramps, use engineered fill or fill material approved by geotechnical engineer.
  4. Under building slabs, use engineered fill or fill material approved by geotechnical engineer.
  5. Under footings and foundations, use engineered fill or fill material approved by geotechnical engineer.
- H. Place soilfill on subgrades free of mud, frost, snow, or ice. Wet or saturated material shall be air dried as necessary to achieve field densities specified in this Section. Removal and replacement shall not occur without prior approval of Owner. Removal and replacement shall be used if necessary to facilitate the construction schedule.
- I. Contractor shall adjust water content by aeration or adding water to achieve the required density. Assist drying by disking, harrowing or pulverizing until moisture content is reduced to achieve proper compaction and facilitate the construction schedule.
- J. Contractor to remove areas of finished subgrade found to have insufficient compaction density of depth necessary and replace with suitable compacted fill as approved by the Owner. Surface subgrade after compaction shall be hard, uniform, smooth, and stable and true to grade and cross-section.

### **3.15 SOIL MOISTURE CONTROL**

- A. Uniformly moisten or aerate subgrade and each subsequent fill or backfill soil layer before compaction to within 2 percent of optimum moisture content.
1. Do not place backfill or fill soil material on surfaces that are muddy, frozen, or contain frost or ice.
  2. Remove and replace, or scarify and air dry, otherwise satisfactory soil material that exceeds optimum moisture content by 2 percent and is too wet to compact to specified dry unit weight.

### **3.16 COMPACTION OF SOIL BACKFILLS AND FILLS**

- A. Place backfill and fill soil materials in layers not more than 12 inches (300 mm) in loose depth for material compacted by heavy compaction equipment, and not more than 4 inches (100 mm) in loose depth for material compacted by hand-operated tampers.
- B. Place backfill and fill soil materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure.
- C. Compact soil materials to not less than the following percentages of maximum dry unit weight according to **ASTM D 698** and **ASTM D 1557**. In areas to receive fill and at the final cut subgrade, proofroll and compact the exposed ground surface following clearing and grubbing and any required excavation with a minimum of 4 passes of an approved compactor and obtain at least the density required in the geotechnical engineering study and as indicated below:

TABLE 3.16.C

| Location or Area                                      | Standard Proctor<br>Density ASTM<br>D698<br>(AASHTO T 99) | Modified Proctor<br>Density ASTM<br>D1557<br>(AASHTO T 180) | Testing<br>Frequency 1 per<br>lift per |
|-------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------|----------------------------------------|
| Structures and Walkways                               | 95%                                                       | 92%                                                         | 20,000 sf                              |
| Retaining Walls                                       | 95%                                                       | 92%                                                         | 1,000 sf                               |
| Trenches                                              | 95%                                                       | 92%                                                         | 150 lf                                 |
| Landscape or Unimproved Areas                         | 92%                                                       | 90%                                                         | 20,000 sf                              |
| Building and Pavement Subgrades (Top 18 inches)       | 100%                                                      | 95%                                                         | 10,000 sf                              |
| Building and Pavement Subgrades (Below Top 18 inches) | 95%                                                       | 92%                                                         | 15,000 sf                              |
| Out-Parcels (Below Top 18 inches)                     | 95%                                                       | 92%                                                         | 20,000 sf                              |

1. In addition to the above referenced table, proofrolling shall be completed in accordance with Section 3.17 Proofrolling.
2. Any soft areas exhibiting excessive weaving or unsatisfactory material identified during excavation, fill placement, compaction and proof testing shall be removed, replaced with suitable fill, and compacted as specified in Table 3.16.C above.
3. Prior to preparing subgrade in low lying areas perform the following:
  - a. Drain standing water by gravity or with a pump. Water should not be discharged directly into a storm drain. Sediment laden water may only be discharged to an approved sediment control measure.
  - b. After drainage is complete, remove organic debris, mud, debris and other unsuitable material using equipment and methods that will minimize disturbance to the underlying soils.
  - c. Thoroughly compact subgrade as specified in Table 3.16.C.
  - d. If proposed for fill, all muck, mud and other materials removed from the low area shall be dried on-site by spreading in thin layers for observation by Owner and geotechnical engineer. If after observation by Owner or geotechnical engineer the material is found to be unsuitable, it shall be removed from the site.

### 3.17 PROOFROLLING

- A. The work covered by this subsection consists of furnishing and operating, proofrolling equipment at the direction of the Owner's representative and/or geotechnical engineer.
- B. Proofrolling shall be under the observation of the owner's representative and/or the geotechnical engineer as described herein and under the following schedule:
  1. Immediately following the completion of excavation to proposed subgrades in cut areas, proofrolling shall be performed as specified; and,
  2. Immediately **prior to and following** stone base course placement, in pavement and building pad areas for final floor slab preparation, all subgrade and stone base shall be proofrolled. Any areas which deflect, rut or pump under the loaded construction equipment shall be

- undercut and replaced with compacted fill material or stone base course as directed by the geotechnical engineer and approved by the Owner, at no additional cost to the Owner.
- C. Proofrolling shall be completed with pneumatic tired and loaded 10 wheel tandem-axle dump truck weighing not less than 25 tons (22.6 tonnes) to identify soft pockets and areas of yielding. Other equipment may be used if approved by the geotechnical engineer. Do not proofroll wet or saturated subgrades.
  - D. Construction methods shall be as follows:
    - 1. After the subgrade or stone base course has been completed the subgrade or stone base course shall then be proofrolled. The coverage areas and methods will be identified by the geotechnical engineer.
    - 2. Completely proofroll subgrade in one direction unless otherwise directed by the Owner or geotechnical engineer.
    - 3. The equipment speed shall be limited to 3 mph (5km/h) such that the geotechnical engineer can comfortably and slowly walk along side the equipment.
    - 4. If necessary to take corrective action, such as but not limited to under drain installation, undercut and backfill of unsuitable material, and/or aeration of excessively wet materials in areas that have been proofrolled, see Section 3.8. These areas shall be proofrolled again following the completion of the necessary corrections. If the corrections are necessary due to the negligence of the Contractor, the corrective work and additional proofrolling shall be performed by the contractor at on cost to the Owner.
    - 5. The contractor shall protect all structural facilities on the project including but not limited to box culverts, pipe culverts, and utilities from damage by the proofrolling equipment.

### **3.18 GRADING**

- A. General: Shape to conform to the grades shown on the drawings. Uniformly grade areas to a smooth surface, free of irregular surface changes. Comply with compaction requirements and grade to cross sections, lines, and elevations indicated.
  - 1. Provide a smooth transition between adjacent existing grades and new grades.
  - 2. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
- B. Site Rough Grading: Slope grades to direct water away from buildings and to prevent ponding. Finish subgrades to required elevations within the following tolerances:
  - 1. Turf or Unpaved Areas: Plus or minus 1 inch (25 mm).
  - 2. Walks: 0 to -1/2 inches (13 mm) of the proposed subgrade.
  - 3. Pavements: 0 to -1/2 inches (13 mm) of the proposed subgrade
- C. Grading inside Building Lines: 0 to -1/2 inches (13 mm) of the proposed subgrade when tested with a 50-foot (15-m) grid across the Lowe's building pad/limits.

### **3.19 BUILDING PAD LIMITS AND PAVED AREA CERTIFICATIONS FOR GEOTECHNICAL ENGINEER AND LAND SURVEYOR**

- A. The building pad/limits and pave area subgrades shall be satisfactorily proofrolled.
- B. The Developer and/or Contractor shall provide the Building Pad/Limits and Paved Area(s) Certification forms for subgrade and stone base. Forms shall be completed in full. Building pad limits and paved area subgrades shall be constructed in accordance with the Drawings and these Specifications. Construction staking methods shall be in accordance with these specifications.
- C. Prior to completion of the building pad acceptance report, the Contractor and/or developer shall be required to address all subsurface recommendations identified in the geotechnical engineering study or by the geotechnical engineer retained by the owner.
- D. The Owner will not take ownership of the building pad until the pad certification form is received and approved by the Owner. The Building Pad/Limits and Paved Area(s) Certification Forms are attached to this Section.

### **3.20 SUBSURFACE DRAINAGE**

- A. Subdrainage Pipe: Specified in Division 33 Section "Subdrainage."
- B. Subsurface Drain: Place subsurface drainage geotextile around perimeter of sub drainage trench. Place a 6-inch (150-mm) course of filter material on subsurface drainage geotextile to

support sub drainage pipe. Encase sub drainage pipe in a minimum of 12 inches (300 mm) of filter material, placed in compacted layers 6 inches (150 mm) thick, and wrap in subsurface drainage geotextile, overlapping sides and ends at least 6 inches (150 mm).

1. Compact each filter material layer to 85 percent of maximum dry unit weight according to ASTM D 698.
- C. Drainage Backfill: Place and compact filter material over subsurface drain, in width indicated, to within 12 inches (300 mm) of final subgrade, in compacted layers 6 inches (150 mm) thick. Overlay drainage backfill with one layer of subsurface drainage geotextile, overlapping sides and ends at least 6 inches (150 mm).
  1. Compact each filter material layer if used to 85 percent of maximum dry unit weight according to ASTM D 698.

### **3.21 SUBBASE AND BASE COURSES UNDER PAVEMENTS AND WALKS**

- A. Place subbase course and base course on subgrades free of mud, frost, snow, or ice.
- B. On prepared subgrade, place subbase course and base course under pavements and walks as follows:
  1. If shown on the Drawings install geogrid reinforcement of base/subbase and/or subgrade improvements according to manufacturer's written instructions, overlapping sides and ends. Geogrid is to be laid at proper elevation and alignment as shown on the drawings. Granular fill placement over geogrid to be in lifts and compacted as directed to minimize development of wrinkles or movement. At minimum a lift of 6 inches must be placed over geogrid prior to operation of tracked vehicles. Rubber-tired equipment may pass over geogrid reinforcement at slow speeds (less than 10 mph) when integrally-formed geogrids are used. When woven, multilayered or welded-strip geogrids are used, rubber-tired equipment shall not be allowed to pass directly on the geogrid until minimum 6 inch base lift has been installed.
  2. If shown on the Drawings install separation geotextile on prepared subgrade according to manufacturer's written instructions, overlapping sides and ends.
  3. If subbase course is shown on the Drawings, place base course material over subbase course under hot-mix asphalt pavement.
  4. Place in uniform loose depth and without segregation. All stone base delivered to the site shall be spread and rolled by the end of each day.
  5. Shape subbase course and base course to required crown elevations and cross-slope grades.
  6. Place subbase course and base course 8 inches (200 mm) or less in compacted thickness in a single layer.
  7. Place subbase course and base course that exceeds 8 inches (200 mm) in compacted thickness in layers of equal thickness, with no compacted layer more than 6 inches (150 mm) thick or less than 4 inches (100 mm) thick.
  8. Each layer of material shall have been sampled, tested, compacted, and approved prior to placing succeeding layers of subbase course, base course material or pavement.
  9. Contractor shall utilize methods of handling, hauling, and placing which will minimize segregation and contamination. Aggregate which is contaminated with foreign materials shall be rejected and removed and replaced by the Contractor at no additional cost to the Owner.
- C. Pavement Shoulders: Place shoulders along edges of subbase course and base course to prevent lateral movement. Construct shoulders, at least 12 inches (300 mm) wide, of satisfactory soil materials and compact simultaneously with each subbase and base layer to not less than 95 percent of maximum dry unit weight according to ASTM D 698.
- D. Compaction:
  1. Compact each layer of subbase course and/or base course at optimum moisture content to required grades, lines, cross sections, and thickness to not less than 98 percent of maximum dry unit weight according to Modified Proctor density ASTM D 1557.
  2. Subbase course and base course shall be compacted at the optimum moisture content as determined by the geotechnical engineer and approved by the Owner. The Contractor shall dry or add moisture to materials when required to provide a uniformly compacted and acceptable subbase or base.

3. Final layer of material shall be shaped to conform to the lines, grades and typical sections as shown on the drawings or as established by the engineer. When compacted, the base course shall be smooth, hard, dense, unyielding, and well bonded.
- E. Quality Control:
  1. Thickness of the base course shall be within a tolerance of plus or minus ½ inch of the required thickness as specified on the drawings for building pad and pavement areas.
  2. The elevation of the base course within the building limits shall be within a tolerance of 0 to ½ inch. All other areas shall be within a tolerance of plus or minus 0.10 feet.
  3. The Contractor shall be required to repair any areas which do not conform to this tolerance or specification. Any repairs required shall be at no cost to the Owner, and shall meet these specifications.
  4. The developer and/or Contractor shall provide Lowe's Building Pad/Limits and Paved Area(s) Certifications for stone base which are located at the end of this section.

### **3.22 DRAINAGE COURSE UNDER CONCRETE SLABS-ON-GRADE**

- A. Place drainage course on subgrades free of mud, frost, snow, or ice.
- B. On prepared subgrade, place and compact drainage course under cast-in-place concrete slabs-on-grade as follows:
  1. Install sub drainage geotextile on prepared subgrade according to manufacturer's written instructions, overlapping sides and ends.
  2. Place drainage course 6 inches (150 mm) or less in compacted thickness in a single layer.
  3. Place drainage course that exceeds 6 inches (150 mm) in compacted thickness in layers of equal thickness, with no compacted layer more than 6 inches (150 mm) thick or less than 3 inches (75 mm) thick.

### **3.23 FIELD QUALITY CONTROL**

- A. Special Inspections: Owner will engage a qualified geotechnical engineer to perform the following special inspections:
  1. Determine prior to placement of fill that site has been prepared in compliance with requirements.
  2. Determine that fill material and maximum lift thickness comply with requirements.
  3. Determine, at the required frequency, that in-place density of compacted fill complies with requirements.
- B. Testing Agency: Owner will engage a qualified geotechnical engineering testing agency to perform tests and inspections.
- C. Allow testing agency to inspect and test subgrades and each fill or backfill layer. Proceed with subsequent earth moving only after test results for previously completed work comply with requirements.
- D. Footing Subgrade: At footing subgrades, at least one test of each soil stratum will be performed to verify design bearing capacities. Subsequent verification and approval of other footing subgrades may be based on a visual comparison of subgrade with tested subgrade when approved by Owner.
- E. Testing agency will test compaction of soils in place according to ASTM D 1556, ASTM D 2167, ASTM D 2922, and ASTM D 2937, as applicable. Tests will be performed at the locations and frequencies shown in Table 3.16.C:
- F. When testing agency reports that subgrades, fills, or backfills have not achieved degree of compaction specified, scarify and moisten or aerate, or remove and replace soil materials to depth required; recompact and retest until specified compaction is obtained.

### **3.24 PROTECTION**

- A. Protecting Graded Areas: Protect newly graded areas from traffic, freezing, and erosion. Keep free of trash and debris.
- B. Repair and reestablish grades to specified tolerances where completed or partially completed surfaces become eroded, rutted, settled, or where they lose compaction due to subsequent construction operations or weather conditions.

1. Scarify or remove and replace soil material to depth as directed by Owner; reshape and recompact.
  - C. Where settling occurs before Project correction period elapses, remove finished surfacing, backfill with additional soil material, compact, and reconstruct surfacing.
    1. Restore appearance, quality, and condition of finished surfacing to match adjacent work, and eliminate evidence of restoration to greatest extent possible.
    2. Correction of subgrade after compaction shall be hard, uniform, smooth, and stable and true to grade and cross-section.
- 3.25 DISPOSAL OF SURPLUS AND WASTE MATERIALS**
- A. Remove surplus satisfactory soil and waste materials, including unsatisfactory soil, trash, and debris, and legally dispose of them off Owner's property.
  - B. Transport surplus satisfactory soil to designated storage areas on Owner's property. Stockpile or spread soil as directed by Owner.
    1. Remove waste materials, including unsatisfactory soil, trash, and debris, and legally dispose of them off Owner's property.

**END OF SECTION 312000**

### BUILDING PAD/LIMITS CERTIFICATION FORM

|                           |  |
|---------------------------|--|
| <b>Project</b>            |  |
| <b>Date</b>               |  |
| <b>Geotech. Engineer</b>  |  |
| <b>Surveyor</b>           |  |
| <b>Grading Contractor</b> |  |
| <b>Const. Mgr.</b>        |  |

☐ **SUBGRADE**

☐ **STONE BASE**

#### GEOTECHNICAL ENGINEERING CERTIFICATION

I certify that the building pad/limits for the above referenced project, has been constructed in accordance with the Geotechnical Investigation prepared by \_\_\_\_\_ dated, \_\_\_\_\_, and Project Specifications, dated \_\_\_\_\_.

All earth cut and fills have been installed competently, properly and have been compacted under the supervision of the below certifying Geotechnical Engineer. The building pad/limits has been acceptably prepared to support the proposed construction. A final report containing a description of the grading work, on-site recommendations and the results of testing and inspections has been prepared and is dated \_\_\_\_\_.

Geotechnical Engineer (signature) \_\_\_\_\_ Date \_\_\_\_\_

Registration No. \_\_\_\_\_ Expiration Date \_\_\_\_\_

Affix Seal Here (not valid unless sealed)

#### ELEVATION CERTIFICATION

I certify to the satisfactory completion of the grading for the building pad/limits in accordance with the approved drawings and specifications engineered by \_\_\_\_\_. All as-built subgrade elevations have been taken on a 50' grid across the Project building pad/limits and are within the tolerance of 0 to -1/2 inches of the proposed subgrade elevation as required by the Project Specifications.

Finished Floor Elevation \_\_\_\_\_ Date \_\_\_\_\_

Surveyor (signature) \_\_\_\_\_ Expiration Date \_\_\_\_\_

Registration No. \_\_\_\_\_ Affix Seal Here (not valid unless sealed)

#### GRADING CONTRACTOR VERIFICATION

I verify to the satisfactory completion of grading for the building pad/limits in accordance with the approved Grading Drawings and Project Specifications.

Contractor (signature) \_\_\_\_\_ Date \_\_\_\_\_



### PAVED AREA(S) CERTIFICATION FORM

|                           |  |
|---------------------------|--|
| <b>Project</b>            |  |
| <b>Date</b>               |  |
| <b>Geotech. Engineer</b>  |  |
| <b>Surveyor</b>           |  |
| <b>Grading Contractor</b> |  |
| <b>Const. Mgr.</b>        |  |

☐ **SUBGRADE**

☐ **STONE BASE**

#### GEOTECHNICAL ENGINEERING CERTIFICATION

I certify that the paved area, located at \_\_\_\_\_, for the above referenced project, has been constructed in accordance with the Geotechnical Investigation prepared by \_\_\_\_\_ dated, \_\_\_\_\_, and Project Specifications, dated \_\_\_\_\_.

All earth cut and fills have been installed competently, properly and have been compacted under the supervision of the below certifying Geotechnical Engineer. The paved area has been acceptably prepared to support the proposed construction. A final report containing a description of the grading work, on-site recommendations and the results of testing and inspections has been prepared and is dated \_\_\_\_\_.

Geotechnical Engineer (signature) \_\_\_\_\_ Date \_\_\_\_\_

Registration No. \_\_\_\_\_ Expiration Date \_\_\_\_\_

Affix Seal Here (not valid unless sealed)

#### ELEVATION CERTIFICATION

I certify to the satisfactory completion of the grading for the paved area in accordance with the approved drawings and specifications engineered by \_\_\_\_\_. All as-built subgrade elevations have been taken on a 50' grid across the paved areas and are within the tolerance of 0 to -1/2 inches of the proposed subgrade elevation as required by the Project Specifications.

Date \_\_\_\_\_

Surveyor (signature) \_\_\_\_\_ Expiration Date \_\_\_\_\_

Registration No. \_\_\_\_\_ Affix Seal Here (not valid unless sealed)

#### GRADING CONTRACTOR VERIFICATION

I verify to the satisfactory completion of grading for the paved areas in accordance with the approved Grading Drawings and Project Specifications.

Contractor (signature) \_\_\_\_\_ Date \_\_\_\_\_

## **SECTION 31 31 16**

### **TERMITE CONTROL**

#### **PART 1- GENERAL**

##### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### **1.02 SUMMARY**

- A. This Section includes the following for termite control:
  - 1. Soil treatment.

##### **1.03 DEFINITIONS**

- A. EPA: Environmental Protection Agency.
- B. PCO: Pest control operator.

##### **1.04 SUBMITTALS**

- A. The General Contractor and the Sub-contractor must execute the provided Conformance Submittal for each product specified.
- B. Soil Treatment Application Report: After application of termiticide is completed, submit report for Owner's record information, including the following as applicable:
  - 1. Date and time of application.
  - 2. Moisture content of soil before application.
  - 3. Brand name and manufacturer of termiticide.
  - 4. Quantity of undiluted termiticide used.
  - 5. Dilutions, methods, volumes, and rates of application used.
  - 6. Areas of application.
  - 7. Water source for application.
- C. Warranties: Warranties specified in this Section.

##### **1.05 QUALITY ASSURANCE**

- A. Applicator Qualifications: A PCO who is licensed according to regulations of authorities having jurisdiction to apply termite control treatment in jurisdiction where Project is located and who is experienced and has completed termite control treatment similar to that indicated for this Project and whose work has a record of successful in-service performance.
- B. Applicator Qualifications: A PCO who is licensed according to regulations of authorities having jurisdiction to apply termite control treatment in jurisdiction where Project is located and who is an experienced installer who employs workers trained and approved by bait station system manufacturer to install manufacturer's products.
- C. Regulatory Requirements: Formulate and apply termiticides, and label with a Federal registration number, to comply with EPA regulations and authorities having jurisdiction.

##### **1.06 PROJECT CONDITIONS**

- A. Environmental Limitations: To ensure penetration, do not treat soil that is water saturated or frozen. Do not treat soil while precipitation is occurring. Comply with EPA-Registered Label requirements and requirements of authorities having jurisdiction.

##### **1.07 COORDINATION**

- A. Coordinate soil treatment application with excavating, filling, and grading and concreting operations. Treat soil under footings, grade beams, and ground-supported slabs, before construction.

### **1.08 WARRANTY**

- A. General Warranty: The warranty specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.
- B. Warranty: Written warranty for five years from date of Substantial Completion, signed by applicator and Contractor certifying that termite control work, consisting of applied soil termiticide treatment, will prevent infestation of subterranean termites. If subterranean termite activity or damage is discovered during warranty period, re-treat soil and repair or replace damage caused by termite infestation.

### **1.09 MAINTENANCE SERVICE**

- A. Continuing Service: Provide a proposal for continuing service, including monitoring, inspection, and retreatment for occurrences of termite activity, from applicator to Owner, in the form of a standard yearly (or other period) continuing service agreement, starting on the date of Substantial Completion. State services, obligations, conditions, and terms for agreement period and for future renewal options.

## **PART 2- PRODUCTS**

### **2.01 SOIL TREATMENT**

- A. Termiticide: Provide an EPA-registered termiticide complying with requirements of authorities having jurisdiction, in a soluble or emulsible, concentrated formulation that dilutes with water or foaming agent, and formulated to prevent termite infestation. Use only soil treatment solutions that are not harmful to plants. Provide quantity required for application at the label volume and rate for the maximum termiticide concentration allowed for each specific use, according to the product's EPA-Registered Label.
- B. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- C. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
  - 1. BASF Corporation.
  - 2. Bayer Corporation.
  - 3. Dow AgroSciences.
  - 4. FMC Corporation.
  - 5. Syngenta.

## **PART 3- EXECUTION**

### **3.01 EXAMINATION**

- A. Examine substrates, areas, and conditions, with Applicator present, for compliance with requirements for moisture content of the soil, interfaces with earthwork, slab and foundation work, landscaping, and other conditions affecting performance of termite control. Proceed with application only after unsatisfactory conditions have been corrected.

### **3.02 PREPARATION**

- A. General: Comply with the most stringent requirements of authorities having jurisdiction and with manufacturer's written instructions for preparing substrate. Remove all extraneous sources of wood cellulose and other edible materials such as wood debris, tree stumps and roots, stakes, formwork, and construction waste wood from soil and around foundations.
- B. Soil Treatment Preparation: Remove foreign matter and impermeable soil materials that could decrease treatment effectiveness on areas to be treated. Loosen, rake, and level soil to be treated, except previously compacted areas under slabs and footings. Termiticides may be applied before placing compacted fill under slabs if recommended by termiticide manufacturer.
- C. Fit filling hose connected to water source at the site with a backflow preventer, complying with

requirements of authorities having jurisdiction.

### **3.03 APPLICATION, GENERAL**

- A. General: Comply with the most stringent requirements of authorities having jurisdiction and with manufacturer's EPA-Registered Label for products.

### **3.04 APPLYING SOIL TREATMENT**

- A. Application: Mix soil treatment termiticide solution to a uniform consistency. Provide quantity required for application at the label volume and rate for the maximum specified concentration of termiticide, according to manufacturer's EPA-Registered Label, to the following so that a continuous horizontal and vertical termiticidal barrier or treated zone is established around and under building construction. Distribute the treatment evenly.
  - 1. Slabs-on-Grade and Basement Slabs: Under ground-supported slab construction, including footings, building slabs, and attached slabs as an overall treatment. Treat soil materials before concrete footings and slabs are placed.
  - 2. Foundations: Adjacent soil including soil along entire inside perimeter of foundation walls, along both sides of interior partition walls, around plumbing pipes and electric conduit penetrating slab, and around interior column footers, piers, and along entire outside perimeter, from grade to bottom of footing. Avoid soil washout around footings.
  - 3. Penetrations: At expansion joints, control joints, and areas where slabs will be penetrated.
- B. Avoid disturbance of treated soil after application. Keep off treated areas until completely dry.
- C. Protect termiticide solution, dispersed in treated soils and fills, from being diluted until ground-supported slabs are installed. Use waterproof barrier according to EPA-Registered Label instructions.
- D. Post warning signs in areas of application.
- E. Reapply soil treatment solution to areas disturbed by subsequent excavation, grading, landscaping, or other construction activities following application.

**END OF SECTION 313116**

This Page Left Intentionally Blank

**CONFORMANCE SUBMITTAL**  
**Section 313116 – Termite Control**

Project Location \_\_\_\_\_  
(City, State)

General Contractor: \_\_\_\_\_  
(Company Name, Phone Number)

\_\_\_\_\_

Sub-Contractor: \_\_\_\_\_  
(Address)

\_\_\_\_\_

(Company Name, Phone Number)

\_\_\_\_\_

(Address)

The following product has been selected (check one box) for use in this project from the list of acceptable products specified:

- ☐ BASF Corporation.
- ☐ Bayer Corporation.
- ☐ Dow AgroSciences.
- ☐ FMC Corporation.
- ☐ Syngenta.

I represent to the owner that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the project specification. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by the owner, the work shall be completed without additional cost to the Owner and / or the contract.

General Contractor:

\_\_\_\_\_  
(Signature of the Authorized Agent of the General Contractor)

\_\_\_\_\_  
(Print Name of the Authorized Agent of the General Contractor)

I represent to the owner that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the project specification. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by the owner, the work shall be completed without additional cost to the Owner and / or the contract.

Sub-Contractor:

\_\_\_\_\_  
(Signature of the Authorized Agent of the Sub-Contractor)

\_\_\_\_\_  
(Print Name of the Authorized Agent of the Sub-Contractor)

This Page Left Intentionally Blank



## **SECTION 32 12 16**

### **ASPHALT PAVING**

#### **PART 1 - GENERAL**

##### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### **1.02 SUMMARY**

- A. Section Includes:
  - 1. Cold milling of existing hot-mix asphalt pavement.
  - 2. Hot-mix asphalt patching.
  - 3. Hot-mix asphalt paving.
  - 4. Hot-mix asphalt paving overlay.
  - 5. Asphalt surface treatments.
  - 6. Pavement-marking paint.
  - 7. Imprinted asphalt.
- B. Related Sections:
  - 1. Division 02 Section "Structure Demolition" for demolition, removal, and recycling of existing asphalt pavements, and for geotextiles that are not embedded within courses of asphalt paving.
  - 2. Division 31 Section "Earth Moving" for aggregate subbase and base courses and for aggregate pavement shoulders.
  - 3. Division 32 Sections for other paving installed as part of crosswalks in asphalt pavement areas.
  - 4. Division 32 Section "Concrete Paving Joint Sealants" for joint sealants and fillers at paving terminations.

##### **1.03 REFERENCE STANDARDS**

- A. American Association of State Highway and Transportation Officials (AASHTO)
  - 1. M140 - Standard Specification for Emulsified Asphalt Nineteenth Edition; Revised Per Interim Specifications - Specifications - 1999 R(1998)
  - 2. M226 -Standard Specification for Viscosity Graded Asphalt Cement Nineteenth Edition R(1996)
  - 3. T245 - Standard Method of Test for Resistance to Plastic Flow of Bituminous Mixtures Using Marshall Apparatus Nineteenth Edition; ASTM D1559-76
  - 4. PP46-01 – Recommended Practice for Geosynthetic Reinforcement of the Aggregate Base Course of Flexible Pavement Structures, April 2001 Interim Edition of the AASHTO Provisional Standards.
- B. American Society for Testing and Materials (ASTM)
  - 1. D1559 – Test Method for Resistance to Plastic Flow of Bituminous Mixtures Using Marshall Apparatus.
  - 2. D2041 - Standard Test Method for Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
  - 3. D2171 – Standard Test Method for Viscosity of Asphalts by Vacuum Capillary Viscometer (RAP Asphalt Mixes)
  - 4. D1388-96 – Standard Test Method for Stiffness of Fabrics, Option A
  - 5. D3786 – Standard Test method for Hydraulic Bursting Strength of Knitted Goods and Nonwoven Fabrics
  - 6. D4355 – Test Method for Deterioration of Geotextiles from Exposure to Ultraviolet Light and Water
  - 7. D4439 – Terminology for Geotextiles
  - 8. D4873 – Guide for Identification, Storage, and Handling of Geotextiles
  - 9. D6637-01 – Standard Test Method for Determining Tensile Properties of Geogrids by the Single or Multi-rib Tensile Method

10. D4354-96 – Practice for Sampling of Geosynthetics for Testing
  11. D4759-92 – Practice for Determining the Specification Conformance of Geosynthetics
  12. D5818-95 – Practice for Obtaining Samples of Geosynthetics from a Test Section for Assessment of Installation Damage
  13. ASTM D-140 Standard Practice for Sampling of Bituminous Materials
  14. ASTM D-449 Asphalt Used in Damp-proofing and Waterproofing, Type II and III
  15. ASTM D-2939 Standard Test Methods Emulsion Bitumen's Use as Protective Coatings
  16. ASTM D-3405 Joint Sealant Hot-Applied for Concrete and Asphalt Pavement
  17. ASTM D-3320 Emulsified Coal Tar Pitch (Mineral Colloid Type)
  18. ASTM D-3910 Design, Testing and Construction of Slurry Seal
- C. Asphalt Institute (AI)
1. MS-2 – Mix Design Method for Asphalt Concrete and Other Hot Mix Types
  2. MS-22 – Principles of Construction of Hot-Mix Asphalt Pavement, Addendum

#### **1.04 DEFINITIONS**

- A. Hot-Mix Asphalt Paving Terminology: Refer to ASTM D 8 for definitions of terms.
- B. Geosynthetics:
1. Geogrid: A biaxial polymeric grid formed by a regular network of integrally connected tensile elements with apertures of sufficient size to allow interlocking with the surrounding soil, rock, or earth to function primarily as reinforcement.
  2. Non-woven Geotextile: An interlayer (paving fabric) used above fatigued asphalt or binder layer and beneath asphalt pavement overlay to provide a permanent moisture barrier and to retard reflective cracking.
  3. Woven Geogrid: A geogrid product formed by weaving discrete strips of polymer into a network. These geogrids usually require a protective coating to protect the polymer from premature degradation.
  4. Welded Strip Geogrid: A geogrid product formed by heat bonding (welding) discrete strips of polymer into a network.
  5. Average Roll Value: Minimum Average Roll Value (MARV) is property value calculated as typical minus two standard deviations.

#### **1.05 SUBMITTALS**

- A. Product Data: Contractor to submit mix design using either of the two methods below for each pavement course and each type of product indicated. Mix design data submittal shall be submitted to the Owner for review and approval 45 days prior to schedule production and paving of the mix design.
1. "Marshal Stability": Marshal Stability design mix submittals shall include type and name of mix, gradation analysis, grade of asphalt cement, Marshall Stability in pounds flow, effective asphalt content in percent (%), and corresponding copies of covering State Department of Transportation material specifications or regulatory authorities having jurisdiction for each proposed material.
  2. "Superpave": Superpave design mix submittals may be submitted in lieu of a "Marshall Stability" design mix, meeting the specifications of the governing State Department of Transportation or regulatory authorities having jurisdiction.
- B. Material Certificates: Contractor shall submit product data statement (at end of this Section) stating that asphalt mix to be supplied complies with the specifications of the governing State Department of Transportation or regulatory authority having jurisdiction, as well as copies of the regulatory specifications corresponding to the asphalt mix formula and material. The Conformance Submittal shall be signed by the asphalt mix producer and the Contractor.
- C. Samples for Verification: For the following products (if used on the project), in manufacturer's standard sizes unless otherwise indicated:
1. Each paving fabric, 12 by 12 inches (300 by 300 mm) minimum.
  2. Each pattern and color of imprinted asphalt.
- D. Cutting and Patching Proposal: Where asphalt cutting and patching is necessary to complete the work, the Contractor shall submit a proposal describing procedures to be followed at least 10 days prior to the time cutting and patching will be performed. The Contractor shall not proceed

with cutting and patching work until authorized by the Owner to proceed. The Cutting and Patching Proposal will include:

1. Extent of cutting and patching including how it will be performed and why it can not be avoided.
  2. Changes to existing construction describing anticipated results including a description of any changes to structural elements, operating components, changes in building appearance and other significant visual elements.
  3. List of products to be used and firms or entities that will perform the work.
  4. Dates when cutting and patching will be performed.
  5. List of utilities that will or could be affected, list of utilities that will be relocated, and a list of utilities that will be temporarily out of service. If existing utilities will be out of service provide length of time service will be disrupted.
  6. Indicate if cutting and patching will involve adding reinforcement to structural elements and provide details necessary to integrate reinforcement with the original structure.
  7. Owner's approval must be received prior to proceeding with the work. Owner approval does not waive its right to later require removal and replacement of unsatisfactory work.
- E. Asphalt Seal Coat: Submit materials certificate to the Owner's engineer which is signed by the Contractor, certifying that materials comply with, or exceed the requirements herein.
- F. Geotextiles:
1. Submit product data sheet and certification from the Manufacturer that the geotextile or geogrid product supplied meets the requirements of this Section. Manufacturer's certificate to include statement that furnished geotextile meets MARV requirements of the specification.
  2. Manufacturing Quality Control test results shall be provided upon request.
  3. Submit Manufacturer's installation instructions and general recommendations
- G. Qualification Data: For qualified manufacturer and Installer.

#### **1.06 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: A paving-mix manufacturer registered with and approved by authorities having jurisdiction or the DOT of state in which Project is located.
- B. Installer Qualifications: Imprinted-asphalt manufacturer's authorized installer who is trained and approved for installation of imprinted asphalt if required for this Project.
- C. Comply with Asphalt Institute Manual MS-22, "Construction of Hot Mix Asphalt Pavements", unless more stringent requirements are indicated.
- D. Geosynthetics:
1. Pre-Construction Conference: Prior to installation of any pavement overlay geotextile system, the Contractor shall arrange a meeting at the site with the geotextile material supplier and, where applicable the geotextile installer. The Owner and the Engineer shall be notified at least three days in advance of the time of the meeting. A representative of the supplier shall be available on an "as-needed" basis during construction.
  2. Sampling and Testing: Sampling and testing to verify conformance with specification in accordance with ASTM D 4354.
  3. Acceptance: Shall be in accordance with ASTM D 4759 based on testing of either conformance submittal using Procedure A of ASTM D 4354 or based on manufacturer's certifications and testing of quality control samples obtained using Procedure B of ASTM D 4354.
  4. Sewn Seams (if required): Field sewn or factory sewn samples shall be submitted to Engineer for approval prior to installation. Submit 6 foot (2 meter) length of sewn seam for approval.
- E. Testing Agency Qualifications: Qualified according to ASTM D 3666 for testing indicated.
- F. Regulatory Requirements: Comply with materials, workmanship, and other applicable requirements of the regulatory authority having jurisdiction and State Department of Transportation for asphalt paving work.
- G. Cutting and Patching: The Contractor shall perform all cutting, fitting or patching that may be required to complete the work or to make its several parts fit together properly. The Contractor shall not damage or endanger any portion of the work or the work of the Owner or any separate contractors by cutting, patching or otherwise altering any work, or by excavation. The contractor shall not cut or otherwise alter the work of the Owner or any separate contractor except with the

written consent of the Owner and the separate contractor. The Contractor shall not unreasonably withhold from the Owner or any separate contractor his consent to cutting or other altering the work.

- H. Cutting and Patching: Cutting and patching activities shall not:
1. Change load carrying capacity or load-deflection ratio of structural elements
  2. Reduce the capacity of operational elements to perform as intended or increase required maintenance or decrease operational life or safety.
  3. Reduces the buildings aesthetic qualities (as determined by the Owner). Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
  4. If possible retain original installer or fabricator to cut and patch work described. If original installer or fabricator is not available, engage another recognized, experienced and specialized firm to do the work.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver pavement-marking materials to Project site in original packages with seals unbroken and bearing manufacturer's labels containing brand name and type of material, date of manufacture, and directions for storage.
- B. Store pavement-marking materials in a clean, dry, protected location within temperature range required by manufacturer. Protect stored materials from direct sunlight.
- C. Geotextiles:
1. Labeling, shipment and storage shall follow ASTM D 4873.
  2. Product labels shall clearly show the manufacturer or supplier name, style name and roll number.
  3. Each shipping document shall include a notation certifying that the material is in accordance with the manufacturer's certificate.
  4. Each geotextile roll shall be wrapped with a material that will protect the geotextile from damage to shipment, water, sunlight, and contaminates. Protective wrapping shall be maintained during shipment and storage. If wrapping is damaged prior to installation, outer wrap of geotextile shall be removed and discarded prior to installation.
  5. During storage rolls to be elevated above ground and adequately protected from construction damage, extended exposure to ultraviolet radiation, precipitation, chemicals, flames, sparks, temperatures below -20 deg C (-29 deg C) or in excess of 71 deg C (160 deg F) and any other environmental condition that might damage the product.

#### **1.08 PROJECT CONDITIONS**

- A. Environmental Limitations: Do not apply asphalt materials if sub-grade is wet or excessively damp, during rainy weather, if rain is imminent or expected before time required for adequate cure, if the sub-grade or base course is frozen or if the air temperature, measured in the shade away from artificial heat at the location of the paving operations does not meet:
1. Prime Coat: Minimum ambient temperature in the shade has been 40 degrees F for at least 12 hours immediately prior to application.
  2. Tack Coat: Minimum ambient temperature in the shade has been 40 degrees F for at least 12 hours immediately prior to application or minimum.
  3. Asphalt Base Course: Minimum surface temperature of 35 deg F and rising at time of placement.
  4. Asphalt Binder (Intermediate) Course: Minimum surface temperature of 40 deg F and rising at the time of placement.
  5. Asphalt Surface Course: Minimum surface temperature of 50 deg F (15.6 deg C) at time of placement.
- B. Pavement-Marking Paint: Proceed with pavement marking only on clean, dry surfaces and at a minimum ambient or surface temperature of 40 deg F (4.4 deg C) for oil-based materials, and 55 deg F (12.8 deg C) for water-based materials, and not exceeding 95 deg F (35 deg C).
- C. Imprinted Asphalt Paving (If Used on Project): Proceed with coating imprinted pavement only when air temperature is at least 50 deg F (10 deg C) and rising and will not drop below 50 deg F (10 deg C) within 8 hours of coating application. Proceed only if no precipitation is expected within two hours after applying the final layer of coating.

## **PART 2 - PRODUCTS**

### **2.01 AGGREGATES**

- A. General: Use materials and gradations that have performed satisfactorily in previous installations.
- B. Coarse Aggregate: ASTM D 692, sound; angular crushed stone, crushed gravel, or cured, crushed blast-furnace slag.
- C. Fine Aggregate: AASHTO M 29, sharp-edged natural sand or sand prepared from stone, gravel, or combinations thereof.

### **2.02 ASPHALT MATERIALS**

- A. Asphalt Binder: AASHTO M 320 or AASHTO MP 1a, performance grade as specified by local authorities having jurisdiction or state department of transportation.
- B. Asphalt Cement: Type and grade of asphalt cement for the paving mixture shall comply with the applicable requirements of AASHTO M 226, Table 2, and meeting governing DOT specifications.
- C. Prime Coat: Emulsified asphalt applications shall meet the requirements of AASHTO M 140 and the governing DOT specifications.
- D. Tack Coat: Emulsified asphalt applications shall meet the requirements of AASHTO M 140 and the governing DOT specifications.
- E. Hot Mix Asphalt: Unless otherwise noted on the drawings, the design mix shall have the minimum stability base in accordance with AASHTO T245 or ASTM D 1559 and as specified by the State Department of Transportation in which the Project is located.
- F. Reclaimed Asphalt Pavement (RAP): May be utilized as approved by the Owner. No more than 25% (total mixture) of RAP material shall be utilized in proposed mixes and shall meet the governing State Department of Transportation specifications. The origin of the RAP material shall be clearly identified to the owner prior to approval, including the RAP percentage identified in the pavement mix design submittal. RAP material shall be free of contamination, including dirt, debris, concrete, clean stone, and other pollutants.
- G. Water: Potable.
- H. Undersealing Asphalt: ASTM D 3141, pumping consistency.
- I. Asphalt Seal Coat Equipment:
  - 1. Self-propelled squeegee equipment shall have at least two squeegee or brush devices (one behind the other) to assure adequate distribution and penetration of sealer into the bituminous pavement. Equipment shall have continuous agitation or mixing capabilities to maintain homogenous consistency of pavement sealer mixture throughout the application process.
  - 2. Pressurized spray application equipment shall be capable of spraying pavement sealer with sand added. Equipment shall have continuous agitation or mixing capabilities to maintain homogenous consistency of pavement sealer mixture throughout the application process.
  - 3. Hand squeegee and brushes shall be acceptable only in areas where practicality prohibits the use of mechanized equipment.
- J. Asphalt Seal Coat: Shall be as per the requirement of the regulatory authority having jurisdiction or as approved by the Owner.
  - 1. SealMaster Polymer Modified Coal Tar Sealer (PMCTS) with the following specifications:
    - a. Material shall be homogeneous and show no separation or coagulation that cannot be overcome by moderate stirring.
    - b. Non Volates: 40%
    - c. Ash Non Volates: 35 - 40%
    - d. Solubility of non Volitates in CS<sub>2</sub>: 20 min.
    - e. Specific Gravity: 25C – 1.18 Min.
    - f. Drying Time: 8 hours max. (Typically less than 60 min.)
    - g. Adhesion and Resistance to Water: No penetration or loss of adhesion
    - h. Resistance to Heat: No blistering or sagging
    - i. Flexibility: No cracking or flaking
    - j. Resistance to Impact: No chipping, flaking or cracking
    - k. Resistance to Volatilization: 10% loss in weight maximum
    - l. Wet Film Continuity: Smooth non-granular free from coarse particles

2. Sealmaster Polymer Modified MasteSeal (PMM) to be used in AK, CA, AZ and NM only, with the following specifications:
  - a. Material shall be homogeneous and show no separation or coagulation that cannot be overcome by moderate stirring.
  - b. Non Volates: 43% - 47%
  - c. Ash Non Volates: 42% - 52%
  - d. Solubility of non Volitates in CS<sub>2</sub>: 20 min.
  - e. Specific Gravity: 25C – 1.15 – 1.25
  - f. Drying Time: 8 hours max.
  - g. Adhesion and Resistance to Water: No penetration or loss of adhesion
  - h. Resistance to Heat: No blistering or sagging
  - i. Flexibility: No cracking or flaking
  - j. Resistance to Impact: No chipping, flaking or cracking
  - k. Resistance to Volatilization: 10% loss in weight maximum
  - l. Wet Film Continuity: Smooth non-granular free from course particles
3. Oil Spot Treatment: SealMaster PetroSeal or prep seal oil sot primer as specified by the manufacturer for pavement sealer.
4. Aggregate or sand as required and specified by the manufacturer.
5. Silica Sand: 400 meeting 40 to 60 fineness rating (AFS) .Black Beauty Slag Sand (with comparable sieve rating) may be substituted when silica sand is not available.
6. Polymer Additive (optional).
7. Fortifier
  - a. Water based epoxy-latex additive, 3%, designed as a fortifier for refined coal tar emulsions to increase resistance to power steering marks, fuel and chemical effects and to assist in fast drying of the coating is acceptable.
  - b. Thickeners are not permitted.

## **2.03 AUXILIARY MATERIALS**

- A. Herbicide: Commercial chemical for weed control, registered by the EPA. Provide in granular, liquid, or wettable powder form.
- B. Sand: ASTM D 1073 or AASHTO M 29, Grade Nos. 2 or 3.
- C. Paving Geotextile: AASHTO M 288, nonwoven polypropylene; resistant to chemical attack, rot, and mildew; and specifically designed for paving applications.
  1. Minimum Average Roll Values:
    - a. Grab Tensile Strength: ASTM D 4632, Type I 90 lbs (400 N), Type II 120 lbs (530 N)
    - b. Grab Elongation: ASTM D 4632, Type I & II 50%
    - c. Mullen Burst: ASTM D 3786, Type I 180 psi (1240 kPa), Type II 230 psi (1580 kPa)
    - d. Mass Per Unit Area: ASTM D 5261, Type I 3.6 oz/syd (122 g/sm), Type II 4.6 oz/syd (156 g/sm)
    - e. Asphalt Retention: ASTM D 6140, Type I 0.20 gal/syd (.9 L/sqm), Type II 0.24 gal/syd (1.1 L/sqm)
    - f. Melting Point: ASTM D 276 Type I & II 320 deg F (160 deg C)
    - g. UV Resistance: ASTM D 4355, Type I & II 70% at 150 hours.
  2. Tack Coat: Sealant material used to impregnate and seal the geotextile as well as bond it to both the base pavement and overlay shall be a paving grade asphalt recommended by the geotextile manufacturer and approved by the Engineer. Emulsions that contain solvents shall not be used. The grade of asphalt cement specified for hot-mix design in each geographic location is generally the most acceptable material.
- D. Joint Sealant: ASTM D 6690 or AASHTO M 324, Type I, hot-applied, single-component, polymer-modified bituminous sealant.
- E. Pavement-Marking Paint: Alkyd-resin type, lead and chromate free, ready mixed, complying with AASHTO M 248.
  1. Color: White (on asphalt paving).
  2. Materials:

- a. **Sherwin Williams Setfast Non- leaded Chlorinated Rubber** - White on asphalt (TM5126), yellow on concrete (TM5127), or as indicated on the drawing(s) is preferred.
  - b. **Sherwin Williams "Setfast Acrylic Waterborne Traffic Marking Paint"** – White on asphalt (TM226, yellow on concrete (TM225), or as indicated on the drawing(s)
  - c. **Valspar Enterprise Latex Traffic Marking Paint** - White on asphalt (#2540), yellow on concrete (#2541), or as indicated on the drawing(s).
  - d. **PPG (Pittsburg Paints)"SEEDHIDE® Traffic and Zone Marking Flat Latex"** – White on asphalt (11-23), yellow on concrete, or as indicated on the drawing(s).
3. Execution
- a. Proceed with pavement marking only on clean, dry surfaces and at a minimum ambient or surface temperature of 50 degrees F not exceeding 90 degrees F and relative humidity at a maximum of 85%.
  - b. Surface shall be clean and free of dirt, grease, oil, or other contaminants which could interfere with adhesion.
  - c. Apply paint material at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils and dry film thickness of 10 mils per coat.
  - d. Paint to be applied in 2 coats using a template or striping machine. Stripes shall be a minimum width of 4 inches unless otherwise noted on the Drawings.
4. Temporary Pavement Markings
- a. Temporary paint shall be applied in accordance with permanent pavement marking specifications however only one (1) coat of paint shall be required. The contractor may use a temporary removable pavement marking tape only as approved in writing by the Owner. Tape that has become damaged and is no longer serviceable shall be replaced without additional compensation.
  - b. All temporary markings shall be removed when no longer required. Any pavement area that has been determined to be damaged as a result of the removal operation shall be repaired at no additional cost to the Owner.
5. Pavement Marking Removal
- a. A motorized abrasive device shall be utilized to remove existing markings. Existing pavement marking lines and symbols that are to be removed shall be accomplished such that material or structural damage to the surface or texture of the pavement is avoided. The Contractor shall repair any damage to the pavement at no expense to the Owner. After removal, the pavement shall be in a condition that will not mislead or misdirect customers or motorists. Pavement marking removal within public rights of way shall be completed in accordance with the regulatory authority having jurisdiction and the Drawings and Specifications.
- F. Wheel Stops: Precast, air-entrained concrete, 2500-psi (17.2-MPa) minimum compressive strength, 6 inches (150 mm) high by 6 inches (150 mm) wide by 72 inches (1800 mm) long. Provide chamfered corners, drainage slots on underside, and holes for anchoring to substrate.
- 1. Dowels: Galvanized steel, 3/4-inch (19-mm) diameter, 12-inch (300-mm) minimum length. Or #4 bars 12-inch (300 mm) minimum.

## **2.04 IMPRINTED ASPHALT MATERIALS (When Used on the Project)**

- A. Templates: Imprinted-asphalt manufacturer's standard flexible templates for imprinting pattern into hot asphalt paving.
  - 1. Pattern: As indicated on the Drawings.
- B. Coating System: Imprinted-asphalt manufacturer's standard system formulated for exterior application on asphalt paving surfaces.

## **2.05 MIXES**

- A. Hot-Mix Asphalt: Dense, hot-laid, hot-mix asphalt plant mixes as indicated on the Drawings and approved by authorities having jurisdiction and the State Department of Transportation where the project is located; designed according to procedures in AI MS-2, "Mix Design Methods for Asphalt Concrete and Other Hot-Mix Types"; and complying with the following requirements:
  - 1. Provide mixes with a history of satisfactory performance in geographical area where Project is located.

## **PART 3 - EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that subgrade is dry and in suitable condition to begin paving.
- B. Proof-roll subgrade below pavements with heavy pneumatic-tired equipment to identify soft pockets and areas of excess yielding. Do not proof-roll wet or saturated subgrades.
  - 1. Completely proof-roll subgrade in one direction, repeating proof-rolling in direction perpendicular to first direction. Limit vehicle speed to 3 mph (5 km/h).
  - 2. Proof roll with a loaded 10-wheel, tandem-axle dump truck weighing not less than 15 tons (13.6 tonnes).
  - 3. Excavate soft spots, unsatisfactory soils, and areas of excessive pumping or rutting, as determined by Architect, and replace with compacted backfill or fill as directed.
- C. Proceed with paving only after unsatisfactory conditions have been corrected.
- D. Verify that utilities, traffic loop detectors, and other items requiring a cut and installation beneath the asphalt surface have been completed and that asphalt surface has been repaired flush with adjacent asphalt prior to beginning installation of imprinted asphalt.
- E. Examine surfaces to be cut and patched and conditions under which cutting and patching are to be performed. Before patching, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers. Proceed with installation only after unsafe or unsatisfactory conditions have been corrected.

### **3.02 COLD MILLING**

- A. Clean existing pavement surface of loose and deleterious material immediately before cold milling. Remove existing asphalt pavement by cold milling to grades and cross sections indicated.
  - 1. Milling of existing asphalt pavement shall be at the depth and location as indicated on the Construction Drawings or as directed by the Owner.
  - 2. Mill to a uniform finished surface free of excessive gouges, grooves, and ridges. The milled pavement surface shall be thoroughly cleaned of all loose aggregate particles, dust, and other objectionable material by the use of power brooms, power blowers and power vacuums and other means.
  - 3. Control rate of milling to prevent tearing of existing asphalt course.
  - 4. Repair or replace curbs, manholes, and other construction damaged during cold milling. Contractor shall coordinate any adjustment of manholes, meter boxes, drainage inlets, valve boxes, and other utilities affected by the milling operations.
  - 5. Excavate and trim unbound-aggregate base course, if encountered, and keep material separate from milled hot-mix asphalt.
  - 6. All milled material shall become the property of the Contractor and shall be disposed of off-site or used in conformance with Section 312000) or for utilization as Reclaimed Asphalt Pavement in conformance with this specification and only as approved by the Owner.

### **3.03 CUTTING AND PATCHING**

- A. Preparation: Protect existing construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of the Project that might be exposed during cutting and patching operations.
- B. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at earliest feasible time, and complete without delay.
- C. Cutting: Cut existing construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to the original condition.
  - 1. Cut existing construction by sawing, drilling, breaking, chipping, grinding and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original installer and comply with original installer's written recommendations.
    - a. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots as small as possible, neatly to size



- required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
- b. Existing Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
- c. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
- d. Excavating and Backfilling: Comply with requirements in applicable Specification Sections where required by cutting and patching operations.
- e. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
- f. Proceed with patching after construction operations requiring cutting are complete.
- D. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of the other Work. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified below:
- E. Hot-Mix Asphalt Pavement: Saw cut perimeter of patch and excavate existing pavement section to sound base. Excavate rectangular or trapezoidal patches, extending 12 inches (300 mm) into adjacent sound pavement, unless otherwise indicated. Cut excavation faces vertically. Remove excavated material. Re-compact existing unbound-aggregate base course to form new sub-grade.
- F. Surface Preparation: Immediately before placing asphalt materials, remove loose and deleterious material from substrate surfaces. Ensure that prepare substrate surface is ready to receive paving. Sweep loose granular particles from surface of un-bound aggregate base course.
- G. Tack Coat: Apply uniformly to vertical surfaces abutting or projecting into new, hot-mix asphalt paving at a rate of 0.05 to 0.15 gal./sq. yd. (0.2 to 0.7 L/sq. m).
  - 1. Allow tack coat to cure undisturbed before applying hot-mix asphalt paving.
  - 2. Avoid smearing or staining adjoining surfaces, appurtenances, and surroundings. Remove spillages and clean affected surfaces.
- H. Patching: Partially fill excavated pavements with hot-mix asphalt base mix and, while still hot, compact. Cover asphalt base course with compacted, hot-mix surface layer finished flush with adjacent surfaces. Restore exposed finished of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.

### **3.04 REPAIRS**

- A. Leveling Course: Install and compact leveling course consisting of hot-mix asphalt surface course to level sags and fill depressions deeper than 1 inch (25 mm) in existing pavements.
  - 1. Install leveling wedges in compacted lifts not exceeding 3 inches (75 mm) thick.
- B. Crack and Joint Filling: Remove existing joint filler material from cracks or joints to a depth of 1/4 inch (6 mm).
  - 1. Clean cracks and joints in existing hot-mix asphalt pavement.
  - 2. Use emulsified-asphalt slurry to seal cracks and joints less than 1/4 inch (6 mm) wide. Fill flush with surface of existing pavement and remove excess.
  - 3. Use hot-applied joint sealant to seal cracks and joints more than 1/4 inch (6 mm) wide. Fill flush with surface of existing pavement and remove excess.

### **3.05 SURFACE PREPARATION**

- A. General: Immediately before placing asphalt materials, remove loose and deleterious material from substrate surfaces by use of power blower or mechanical sweeping equipment.. Ensure that prepared sub-grade is ready to receive paving.
  - 1. Surface hairline cracks up to ½ inch must be filled with crack filler; cracks larger than ½ inch must be cleaned and filled with elastomeric emulsion crack filler.
  - 2. When using a high performance crack sealant, please note on proposal.
  - 3. Potholes, alligator cracks, and similar surface defects must be cut out and repaired.
- B. Prime Coat: Apply uniformly over surface of compacted unbound-aggregate base course at a rate of **0.20 gal./sq. yd.** Apply enough material to penetrate and seal but not flood surface. Allow prime coat to cure.

1. If prime coat is not entirely absorbed within 24 hours after application, spread sand over surface to blot excess asphalt. Use enough sand to prevent pickup under traffic. Remove loose sand by sweeping before pavement is placed and after volatiles have evaporated.
2. Protect primed substrate from damage until ready to receive paving.
- C. Tack Coat: Apply uniformly to surfaces of existing pavement at a rate of 0.05 to 0.15 gal./sq. yd. (0.2 to 0.7 L/sq. m).
  1. Allow tack coat to cure undisturbed before applying hot-mix asphalt paving.
  2. Avoid smearing or staining adjoining surfaces, appurtenances, and surroundings. Remove spillages and clean affected surfaces.
  3. Adequate traffic control shall be provided to prohibit traffic from traversing applied area.

### **3.06 PAVING GEOTEXTILE INSTALLATION**

- A. Preparation:
  1. Washed concrete sand may be spread over an asphalt-saturated geotextile to facilitate movement of equipment during construction or to prevent tearing or delaminating of the geotextile. Hot-mix broadcast in front of construction vehicle tires may also serve this purpose. If sand is applied, excess quantities shall be removed from the geotextile prior to placing the surface course.
  2. Sand is not usually required. However, ambient temperatures are occasionally sufficiently height to cause bleed-through of the asphalt sealant resulting in undesirable geotextile adhesion to construction vehicle tires.
  3. Neither the asphalt sealant nor the geotextile shall be placed when weather conditions, in the opinion of the Owner or Engineer are not suitable. Air and pavement temperatures shall be sufficient to allow the asphalt sealant to hold the geotextile in place. For asphalt cements air temperature shall be at least 10 deg C (50 deg F) and rising. For asphalt emulsions air temperature shall be 15 deg C (60 deg F) and rising.
  4. The surface shall be free of dirt, water, vegetation or other debris.
- B. Installation of Tack Coat:
  1. Apply tack coat, asphalt binder, asphalt cement, as specified on the Drawings uniformly to existing pavement surfaces.
  2. Rate of asphalt sealant application must be sufficient to satisfy the asphalt retention properties of the geotextile and bond the geotextile and overlay the pavement.
  3. Application shall be by manufacturers recommendations. Minimum temperature shall be 150 deg C (300 deg F) and shall not exceed 160 deg C (320 deg F).
  4. Target width of asphalt sealant application shall be the geotextile width plus 6 inches (150 mm). The asphalt sealant shall not be applied any farther in advance of geotextile placement than the distance the contractor can maintain free of traffic.
- C. Installation of Geosynthetic (Paving Fabric):
  1. Geotextile to be placed onto the asphalt sealant (calendared or smooth side up) with minimum wrinkling prior to the time the asphalt has cooled and lost tackiness. Upon approval of Engineer wrinkles or folds in excess of 1 inch (25 mm) shall be slit and laid flat.
  2. Place paving geotextile promptly according to manufacturer's written instructions. Broom or roll geotextile smooth and free of wrinkles and folds.
  3. Overlap longitudinal joints 4 inches (100 mm) and transverse joints 6 inches (150 mm). Transverse joints shall be lapped in direction of paving to prevent edge pickup by the paver. A second application of asphalt sealant to the geotextile overlap will be required if needed to ensure proper bonding of the double geotextile layer as directed by the Engineer.
  4. Protect paving geotextile from traffic and other damage and place hot-mix asphalt paving overlay the same day.
  5. Removal and replacement of geotextile that is damaged will be
- D. Protection:
  1. Traffic on the geotextile will be permitted for emergency and construction vehicles only.
  2. Placement of the hot-mix overlay should closely follow geotextile installation.
  3. Prior to placing a seal coat (or thin overlay such as an open-graded friction course), lightly sand the geotextile and a spread rate of 0.15 to 0.20 lb per square foot and pneumatically roll the geotextile tightly into the sealant.

### **3.07 HOT-MIX ASPHALT PLACING**

- A. Machine place hot-mix asphalt on prepared surface, spread uniformly, and strike off. Place asphalt mix by hand to areas inaccessible to equipment in a manner that prevents segregation of mix. Place each course to required grade, cross section, and thickness when compacted.
  - 1. Place hot-mix asphalt base course in number of lifts and thicknesses indicated.
  - 2. Place hot-mix asphalt surface course in single lift.
  - 3. Spread mix at minimum temperature of 250 deg F (121 deg C) and at maximum temperature of 325 deg F.
  - 4. Begin applying mix along centerline of crown for crowned sections and on high side of one-way slopes unless otherwise indicated.
  - 5. Regulate paver machine speed to obtain smooth, continuous surface free of pulls and tears in asphalt-paving mat.
- B. Place paving in consecutive strips not less than 10 feet (3 m) wide unless infill edge strips of a lesser width are required.
  - 1. After first strip has been placed and rolled, place succeeding strips and extend rolling to overlap previous strips. Complete a section of asphalt base course before placing asphalt surface course.
- C. Promptly correct surface irregularities in paving course behind paver. Use suitable hand tools to remove excess material forming high spots. Fill depressions with hot-mix asphalt to prevent segregation of mix; use suitable hand tools to smooth surface.

### **3.08 JOINTS**

- A. Construct joints to ensure a continuous bond between adjoining paving sections. Construct joints free of depressions, with same texture and smoothness as other sections of hot-mix asphalt course. Construct joints parallel to traffic flow.
  - 1. Clean contact surfaces and apply tack coat to joints.
  - 2. Offset longitudinal joints, in successive courses, a minimum of 6 inches (150 mm).
  - 3. Offset transverse joints, in successive courses, a minimum of 24 inches (600 mm).
  - 4. Construct transverse joints at each point where paver ends a day's work and resumes work at a subsequent time. Construct these joints using either "bulkhead" or "papered" method according to AI MS-22, for both "Ending a Lane" and "Resumption of Paving Operations." Or as shown on Drawings.
  - 5. Compact joints as soon as hot-mix asphalt will bear roller weight without excessive displacement.
  - 6. Compact asphalt at joints to a density within 2 percent of specified course density.

### **3.09 COMPACTION**

- A. General: Begin compaction as soon as placed hot-mix paving will bear roller weight without excessive displacement. Compact hot-mix paving with hot, hand tampers or with vibratory-plate compactors in areas inaccessible to rollers.
  - 1. Complete compaction before mix temperature cools to 185 deg F (85 deg C).
- B. Breakdown Rolling: Complete breakdown or initial rolling immediately after rolling joints and outside edge. Examine surface immediately after breakdown rolling for indicated crown, grade, and smoothness. Correct laydown and rolling operations to comply with requirements.
- C. Intermediate Rolling: Begin intermediate rolling immediately after breakdown rolling while hot-mix asphalt is still hot enough to achieve specified density. Continue rolling until hot-mix asphalt course has been uniformly compacted to the following density:
  - 1. Density: Compare density of in-place material against laboratory specimen of same mixture. Average density shall meet specifications and requirements of the State Department of Transportation in which the Project is located.
    - a. Average Density: 95 percent of reference maximum theoretical density according to ASTM D 2041, for binder (intermediate) and surface courses.
    - b. Average Density: 92 percent of reference maximum theoretical density according to ASTM D 2041, for base courses.
- D. Finish Rolling: Finish roll paved surfaces to remove roller marks while hot-mix asphalt is still warm.

- E. Edge Shaping: While surface is being compacted and finished, trim edges of pavement to proper alignment. Bevel edges while asphalt is still hot; compact thoroughly.
- F. Repairs: Remove paved areas that are defective or contaminated with foreign materials and replace with fresh, hot-mix asphalt. Compact by rolling to specified density and surface smoothness.
- G. Protection: After final rolling, do not permit vehicular traffic on pavement until it has cooled and hardened.
- H. Erect barricades to protect paving from traffic until mixture has cooled enough not to become marked.

### **3.10 INSTALLATION TOLERANCES**

- A. Pavement Thickness: Compact each course to produce the thickness indicated within the following tolerances:
  - 1. Base Course: Plus or minus 1/4 inch (6 mm).
  - 2. Binder (Intermediate) Course: Plus or minus 1/4 inch (6 mm)
  - 3. Surface Course: Plus or minus 1/8 inch (3 mm).
- B. Pavement Surface Smoothness: Compact each course to produce a surface smoothness within the following tolerances as determined by using a 10-foot (3-m) straightedge applied transversely or longitudinally to paved areas:
  - 1. Base Course: 1/2 inch (12 mm).
  - 2. Binder (Intermediate) Course: 1/4 inch (6 mm)
  - 3. Surface Course: 1/8 inch (3 mm).
- C. Testing: Contractors duties relating to testing include:
  - 1. Notify Owner 72 hours prior to asphalt paving
  - 2. Notify laboratory of conditions requiring testing
  - 3. Coordinate with laboratory for field testing.

### **3.11 SURFACE TREATMENTS**

- A. Application: Apply pavement sealer with ambient temperature is at least 50 degrees F and rising for a period of at least 24 hours after application. And subject to the following limitations:
  - 1. Do not apply when temperatures are expected to drop below 50 degrees F in a 24-hour period or if rain is expected or imminent within 8 hours
  - 2. Do not apply pavement sealer when ambient temperature is 90 degrees and above without first cooling the surface with a fine mist of water (fogging). The fogging should only dampen the surface without causing water pockets to form.
  - 3. Do not apply between September 15 and May 1 unless the specifications and requirements of the State Department of Transportation WEATHER LIMITATIONS in which the project is located permit application between these dates.
- B. Surface Preparation:
  - 1. Surface must be free from dirt, dust and includes grass along the edges. Remove and dispose of any loose and unsuitable materials, dirt, and debris from pavement surface by power blower or mechanical sweeping equipment.
  - 2. Surface hairline cracks up to 1/2 inch must be filled with crack filler; cracks larger than 1/2 inch must be cleaned and filled with elastomeric emulsion crack filler.
  - 3. When using a high performance crack sealant, please note on your proposal.
  - 4. Potholes, alligator areas, and similar surface defects must be cut out and repairs made.
  - 5. Treat all grease, oil and gasoline spots with compatible primer of the manufactured coating. In hot weather, the surface should be fogged with water prior to sealing.
  - 6. Prior to spreading pavement sealer, paint all existing white paint stripes with black paint.
  - 7. Contractor to dispose of all cans bags and leftover materials off-site.
- C. Application:
  - 1. Mix pavement sealer in accordance with the manufacturer's procedure to a uniform consistency before using. For each coat, the sealant shall be diluted with clean potable water while agitating. The percent of water to be added will be as per the manufacturer specification based on the asphalt surface quality, and the type of traffic it will experience. When the rubberized mixture has thickened, add sand or aggregate slowly to the mixing tank. Mix thoroughly before and slowly during the application.

- a. First coat on all parking areas at a rate of .13 gallons per square yard/coat. At no time are total coats to exceed .051 gallons per square yard. The first coat may be applied by hand squeegee, self propelled squeegee equipment or pressurized spray equipment. Hand squeegee or self propelled squeegee equipment is preferred.
  - b. Second coat on all parking areas at a rate of .13 gallons per square yard/coat. At no time total coats are to exceed .051 gallons per square yard. The second coat must be applied with pressurized spray equipment.
2. Lines, stencils, and markings shall be repainted in original size & location, unless otherwise directed by the Owner, in accordance with this specification.
3. It is the Contractor's responsibility to check local zoning codes & regulations.
4. All seal coat and re-stripping projects must be performed during available time periods (usually at night) that DO NOT interfere with normal store operations. Applications must be staged to provide customers free access to Lowe's the following business day.

### **3.12 WHEEL STOPS**

- A. Install wheel stops in bed of adhesive as recommended by manufacturer.
- B. Securely attach wheel stops to pavement with not less than two galvanized-steel dowels embedded at one-quarter to one-third points. Securely install dowels into pavement and bond to wheel stop. Recess head of dowel beneath top of wheel stop.

### **3.13 IMPRINTING ASPHALT (when used on project)**

- A. General: Imprint asphalt according to manufacturer's written instructions, using manufacturer's recommended equipment.
- B. Freshly Laid Asphalt: Immediately after asphalt has been laid and compacted but still plastic, begin the surface imprinting process.
  1. Monitor asphalt surface temperature in compliance with manufacturer's written recommendations to ensure required temperature to perform surface imprinting.
  2. Reheat asphalt if surface temperature drops below that required.
- C. Reheating Asphalt: Soften asphalt pavement surface by heating to a depth of at least 1/2 inch (13 mm) without burning asphalt.
  1. Heat to a temperature of 300 to 325 deg F (149 to 163 deg C) immediately before applying templates.
  2. Regularly monitor the pavement temperature to prevent overheating.
  3. Direct flame heaters are not permitted.
  4. If pavement is overheated and begins to emit black smoke, remove damaged pavement by milling down 1 inch (25 mm) and replace removed pavement with new, compacted surface course prior to resuming imprinting work.
- D. Surface Imprinting: Apply and imprint templates to a minimum depth as indicated on the Drawings and as required to embed precut marking material flush or barely beneath pavement surface.
- E. Coating Application: After imprinted surface has cooled, apply according to Drawings and manufacturer's recommendations. Do not allow traffic until coating has completely dried and cured.
- F. Precut Marking Material Application: Position precut marking material aligned with imprinted pattern and slowly heat to a temperature no higher than 325 deg F (163 deg C) until marking material begins to liquefy and flow. Do not allow traffic until installed marking material has cooled to ambient temperature.

### **3.14 FIELD QUALITY CONTROL**

- A. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to perform tests, inspections and to prepare reports. Testing agency will be paid by Owner..
- B. Thickness: In-place compacted thickness of hot-mix asphalt courses will be determined according to ASTM D 3549.
- C. Surface Smoothness: Finished surface of each hot-mix asphalt course will be tested for compliance with smoothness tolerances.
- D. In-Place Density: Testing agency will take samples of un-compacted paving mixtures and compacted pavement according to ASTM D 979 or AASHTO T 168.

1. Reference maximum theoretical density will be determined by averaging results from four samples of hot-mix asphalt-paving mixture delivered daily to site, prepared according to ASTM D 2041, and compacted according to job-mix specifications.
  2. In-place density of compacted pavement will be determined by testing core samples according to ASTM D 1188 or ASTM D 2726.
    - a. Two 4 inch core sample will be taken for every 5000 sq. yd. (836 sq. m) or less of intermediate course, at locations chosen by the Owner.
    - b. The Owner shall provide random location field density testing of in-place compacted pavement determined by nuclear method according to ASTM D 2950 and correlated with ASTM D 1188 or ASTM D 2726.
- E. Contractor to replace and compact hot-mix asphalt where core tests were taken.
- F. The Owner reserves the right to take additional testing. Remove and replace or install additional hot-mix asphalt where test results or measurements indicate that it does not comply with specified requirements. All areas that do not comply with specified requirements shall be remedied by the Contractor as prescribed by the Owner.

### **3.15 DISPOSAL**

- A. Except for material indicated to be recycled, remove excavated materials from Project site and legally dispose of them in an EPA-approved landfill.
1. Do not allow milled materials to accumulate on-site. Perimeter protection shall be provided for milled material stockpiles temporarily stored on site where there is a potential for these materials to mix with stormwater and be discharged from the site.
  2. Cleaning asphalt paving equipment and tools is not permitted on site.

**END OF SECTION 321216**

# MARSHALL STABILITY MIX DESIGN SUBMITTAL FORM

Project Location: \_\_\_\_\_

Type/Name of Mix: \_\_\_\_\_

AC Grade: \_\_\_\_\_

Reclaimed Asphalt Pavement (RAP) Mix: ☐ Yes \_\_\_\_% RAP or ☐ No[illegible]

SUBMITTAL WILL BE REJECTED WITHOUT EACH OF THE FOLLOWING ATTACHED:

1. State Department of Transportation (DOT) or Authority Having Jurisdiction (AHJ) asphalt mix design specifications for each type of mix.
2. Material certificates stating the asphalt mix to be supplied complies with the specifications of the DOT or AHJ signed by the Asphalt Mix Producer and the Contractor.
3. Origin or RAP material if applicable.

# SUPERPAVE MIX DESIGN SUBMITTAL FORM

Project Location: \_\_\_\_\_

Type/Name of Mix: \_\_\_\_\_

Reclaimed Asphalt Pavement (RAP) Mix: ☐ Yes \_\_\_\_\_% Binder in RAP or ☐ No

Reclaimed Asphalt Shingle (RAS) Mix: ☐ Yes \_\_\_\_\_% Binder in RAS or ☐ No

| Gradation Limits                          |           |         |         |         |
|-------------------------------------------|-----------|---------|---------|---------|
| Mix Type (Nominal Maximum Aggregate Size) |           |         |         |         |
| 9.5 mm                                    | 12.5 mm   | 19.0 mm | 25.0 mm | 37.5 mm |
| Sieve Size                                | % Passing |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |
|                                           |           |         |         |         |

|                                             |  |
|---------------------------------------------|--|
| Binder PG Grade                             |  |
| No. Gyration $N_{ini}/N_{des}/N_{max}$      |  |
| Voids in Mineral Aggregate VMA (%)          |  |
| Voids in Total Mix VTM (%)                  |  |
| Voids Filled with Asphalt VFA (%)           |  |
| %Gmm @ $N_{ini}$                            |  |
| %Gmm @ $N_{max}$                            |  |
| Dust to Binder Ratio ( $P_{0.075}/P_{be}$ ) |  |
|                                             |  |
|                                             |  |
|                                             |  |

NOTE: Mix design must be performed in accordance with the Superpave mix design system as described in AASHTO PP 28.

SUBMITTAL WILL BE REJECTED WITHOUT EACH OF THE FOLLOWING ATTACHED:

1. State Department of Transportation (DOT) or Authority Having Jurisdiction (AHJ) asphalt mix design specifications for each type of mix.
2. Material certificates stating the asphalt mix to be supplied complies with the specifications of the DOT or AHJ signed by the Asphalt Mix Producer and the Contractor.
3. Origin or RAP/RAS material if applicable.



## SECTION 32 12 36.13

### ASPHALT SEAL AND FOG COAT

#### PART 1 - GENERAL

##### 1.01 SUMMARY

- A. Work under this section shall include cleaning and preparing the pavement surface, mixing the pavement sealer, and applying the asphalt pavement sealer over existing bituminous pavement surfaces.
- B. Restriping parking lot markings for an existing parking lot for maintenance and repair application. Areas to receive parking lot markings are all areas within the property boundary.

##### 1.02 REFERENCED SECTIONS

- A. Section 321216 - Asphalt Paving
- B. Section 321313- Concrete Pavement Curb and Sidewalk

##### 1.03 REFERENCE STANDARDS

- A. American Society of Testing and Materials
  - 1. ASTM D-140 Standard Practice for Sampling of Bituminous Materials
  - 2. ASTM D-449 Asphalt Used in Damp-proofing and Waterproofing, Type II and III
  - 3. ASTM D-2939 Standard Test Methods Emulsion Bitumen's Use as Protective Coatings
  - 4. ASTM D-3405 Joint Sealant Hot-Applied for Concrete and Asphalt Pavement
  - 5. ASTM D-3320 Emulsified Coal Tar Pitch (Mineral Colloid Type)
  - 6. ASTM D-3910 Design, Testing and Construction of Slurry Seal

##### 1.04 SUBMITTALS

- A. Material Certificates: Submit materials certificate to the Owner's engineer which is signed by the Contractor, certifying that materials comply with, or exceed, the requirements herein.
- B. Seal Coat design shall be as per the requirement of the regulatory authority having jurisdiction or as approved by the Owner.

#### PART 2 - PRODUCTS

##### 2.01 MATERIALS

- A. SealMaster Polymer Modified Coal Tar Sealer (PMCTS) at the following specifications:
  - 1. SealMaster Specification
    - a. Material – Material shall be homogenous and show no separation or coagulation that cannot be overcome by moderate stirring.
    - b. Non Volatiles – 40%
    - c. Ash Non Volatiles – 35 – 40%
    - d. Solubility of Non Volatiles in CS<sub>2</sub> – 20 min.
    - e. Specific Gravity 25C – 1.18 MIN.
    - f. Drying Time – 8 hr. MAX. (Typically less than 60 min.)
    - g. Adhesion & Resistance to Water – No Penetration or Loss of Adhesion
    - h. Resistance to Heat – No Blistering or Sagging
    - i. Flexibility – No Cracking or Flaking
    - j. Resistance to Impact – No Chipping, Flaking or Cracking
    - k. Resistance to Volatilization – 10% Loss in Weight Max.
    - l. Wet Film Continuity – Smooth, Nongranular Free from coarse particles
- B. SealMaster Polymer Modified MasterSeal (PMM) to be used in AK, CA, AZ and NM ONLY at the following specifications:
  - 1. SealMaster Specification
    - a. Material – Material shall be homogenous and show no separation or coagulation that cannot be overcome by moderate stirring.
    - b. Non-Volatile, 43 – 47%

- c. Ash of Non-Volatile, 42 – 52%
  - d. Specific Gravity 25oc 1.15 – 1.25
  - e. Drying Time – 8hrs. MAX.
  - f. Adhesion & Resistance to Water – No Penetration or Loss of Adhesion
  - g. Resistance to Heat – No Blistering or Sagging
  - h. Flexibility – No Cracking or Flaking
  - i. Resistance to Impact – No Chipping, Flaking or Cracking
- Note: Only materials meeting the above specifications will be accepted. Certificate of Compliance from the refined coal tar manufacturer is required prior to application.
- C. Oil Spot Treatment: SealMaster PetroSeal or prep seal oil spot primer as specified by the manufacturer for pavement sealer.
  - D. Water
  - E. Aggregate or sand as required and specified by the manufacturer
  - F. Polymer Additive (optional)
  - G. Fortifier
    - 1. Water based epoxy-latex additive, designed as a fortifier for refined coal tar emulsions to increase resistance to power steering marks, fuel and chemical effects to assist in fast drying of the coating is acceptable.
    - 2. Thickeners only are not permitted.

## **2.02 EQUIPMENT**

- A. Self-propelled squeegee equipment shall have a least 2 squeegee or brush devices (one behind the other) to assure adequate distribution and penetration of sealer into the bituminous pavement. Equipment shall have continuous agitation or mixing capabilities to maintain homogenous consistency of pavement sealer mixture throughout the application process.
- B. Pressurized spray application equipment shall be capable of spraying pavement sealer with sand added. Equipment shall have continuous agitation or mixing capabilities to maintain homogenous consistency of pavement sealer mixture throughout the application process.
- C. Hand squeegee and brushes shall be acceptable only in areas where practicality prohibits the use of mechanized equipment.

## **2.03 MIX DESIGNS**

- A. Sealer concentrate – 100 Gallon
- B. Silica Sand 400 Meeting 40 to 60 fineness rating (AFS).
  - 1. Black Beauty Slag Sand (w/ comparable sieve rating) may be substituted when silica sand is not available.
- C. Water – Specified material does not require onsite dilution
- D. Fortifier 3%
- E. Curing agents on high traffic areas (when applicable)

## **PART 3 - EXECUTION**

- 3.01 Apply pavement sealer when ambient temperature is 50° F and rising for a period of 24 hours after application. Do not apply when temperature is expected to drop below 50° F in a 24-hour period. Do not apply if rain is imminent within 8 hours.**
- 3.02 Do not apply pavement sealer when ambient temperature is 90° F and above without first cooling the surface with a fine mist of water (fogging). The fogging should only dampen the surface without causing puddling.**
- 3.03 Between September 15 and May 1, check the specifications and requirements of the State Department of Transportation WEATHER LIMITATIONS on the permitted dates of applying the seal coats.**
- 3.04 SURFACE PREPARATION**

- A. Surface must be free from dirt, dust and includes grass along the edges. Remove and dispose of any loose and unsuitable materials, dirt, and debris from pavement surface by power blower or mechanical sweeping equipment.
- B. Surface hairline cracks up to ½ inch must be filled with crack filler; cracks larger than ½ inch must be cleaned and filled with elastomeric emulsion crack filler.
- C. When using a high performance crack sealant, please note on your proposal.
- D. Potholes, alligator areas, and similar surface defects must be cut out and repairs made.
- E. Treat all grease, oil and gasoline spots with compatible primer of the manufactured coating. In hot weather, the surface should be fogged with water prior to sealing.
- F. Prior to spreading pavement sealer, paint all existing white paint stripes with black paint.
- G. Contractor to dispose of all cans, bags and leftover materials off-site.

### **3.05 APPLICATION**

- A. Mix pavement sealer in accordance with the manufacturer's procedure to a uniform consistency before using. For each coat, the sealant shall be diluted with clean potable water while agitating. The percent of water to be added will be as per the manufacturer specification based on the asphalt surface quality, and the type of traffic it will experience. When the rubberized mixture has thickened, add sand or aggregate slowly to the mixing tank. Mix thoroughly before and slowly during the application.
  - 1. First coat on all parking areas at a rate of .13 gallons per square yard/coat. At no time are total coats to exceed 0.51 gallons per square yard. The first coat may be applied by hand squeegee, self propelled squeegee equipment or pressurized spray equipment. Hand Squeegee or self propelled squeegee equipment is preferred.
  - 2. Second coat on all parking areas at a rate of .13 gallons per square yard/coat. At no time are total coats to exceed 0.51 gallons per square yard. The second coat must be applied with pressurized spray equipment.
- B. Allow a minimum of 24 hours of curing time before allowing traffic over treated surface or application of traffic marking paint. Use of solvent borne paint shall not be permitted.
- C. Lines, stencils, and markings shall be repainted in original size & location, unless otherwise directed by the Owner, in accordance with Section 02745 Pavement Markings and Removal.
- D. It is the Contractor's responsibility to check local zoning codes & regulations.
- E. All seal coat and re-striping projects must be performed during available time periods (usually at night) that DO NOT interfere with normal store operations. Applications must be staged to provide customers free access to the building the following business day.

**END OF SECTION 321236.13**

This Page Left Intentionally Blank

## SECTION 32 13 13

### CONCRETE PAVEMENT CURB AND SIDEWALK

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. This Section includes exterior cement concrete pavement for the following:
  - 1. Driveways and roadways.
  - 2. Parking lots.
  - 3. Curbs and gutters.
  - 4. Walkways.
  - 5. Unit paver base (if used).
- B. Related Sections include the following:
  - 1. Division 03 Section "Cast-in-Place Concrete" for general building applications of concrete.
  - 2. Division 31 Section "Earth Moving" for subgrade preparation, grading, and subbase course.
  - 3. Division 32 Section "Concrete Paving Joint Sealants" for joint sealants of joints in concrete pavement and at isolation joints of concrete pavement with adjacent construction (if used).

##### 1.03 REFERENCE STANDARDS

- A. American Society of Testing Materials (ASTM)
  - 1. A82 - Standard Specification for Steel Wire, Plain, for Concrete Reinforcement
  - 2. A185 - Standard Specification for Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
  - 3. A615/A615M - Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
  - 4. C33 - Standard Specification for Concrete Aggregates
  - 5. C94 - Standard Specification for Ready-Mixed Concrete
  - 6. C150 - Standard Specification for Portland Cement
  - 7. C171 - Standard Specification for Sheet Materials for Curing Concrete
  - 8. C260 - Standard Specification for Air-Entraining Admixtures for Concrete
  - 9. C309 - Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete
  - 10. C494/C494M - Standard Specification for Chemical Admixtures for Concrete
  - 11. C979 - Standard Specification for Pigments for Integrally Colored Concrete
  - 12. C1116 - Standard Specification for Fiber-Reinforced Concrete and Shotcrete
  - 13. D1751 - Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
  - 14. D1752 - Standard Specification for Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
  - 15. D3405 - Standard Specification for Joint Sealants, Hot-Applied, for Concrete and Asphalt Pavements
  - 16. D5249 - Standard Specification for Backer Material for Use with Cold- and Hot-Applied Joint Sealants in Portland-Cement Concrete and Asphalt Joints
  - 17. D5893 - Standard Specification for Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements
- B. American Concrete Institute (ACI)
  - 1. 301R-99 – Specifications for Structural Concrete
  - 2. 304R – Placing and Handling Concrete, etc.
  - 3. 309R-96 – Guide for Consolidating of Concrete
  - 4. 330.1 – Standard Specifications for Plain Concrete Parking Lots
  - 5. 330R-92 – Guide for Design & Construction of Concrete Parking Lots

6. 211.1R-91 – Standard Practice for Selecting Proportions for Normal, Heavyweight and Mass Concrete
- C. American Association of State Highway and Transportation Officials (AASHTO)
  1. M182 – Standard Specifications for Burlap Cloth made from Jute for Kenaf
  2. M153 – Standard Specifications for Preformed Sponge Rubber and Cork Expansion Joint Filler.

#### **1.04 SUBMITTALS**

- A. Product Data: For each type of manufactured material and product mix indicated.
- B. Design Mixtures: For each concrete pavement mixture (see attached form at the end of this section). Include alternate mixture designs when characteristics of materials, project conditions, weather, test results, or other circumstances warrant adjustments.
- C. General Contractor and Subcontractor shall execute the Conformance Submittal(s) at the end of this section.
- D. Minutes of pre-installation conference.

#### **1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Manufacturer of ready-mixed concrete products who complies with ASTM C 94/C 94M requirements for production facilities and equipment.
- B. ACI Publications: Comply with ACI 301, "Specification for Structural Concrete," unless modified by requirements in the Contract Documents.
- C. Concrete Testing Service: The Owner will engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.
  1. A slump test and an air entrainment test shall be performed for each load delivered.
  2. Four (4) standard test cylinders shall be taken for each 55 cubic yards of concrete or each days pour, whichever is more frequent. Two cylinders shall be broken at 7 days and two cylinders shall be broken at 28 days.
- D. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."
  1. Before submitting design mixtures, review concrete pavement mixture design and examine procedures for ensuring quality of concrete materials and concrete pavement construction practices. Require representatives, including the following, of each entity directly concerned with concrete pavement, to attend conference:
    - a. Contractor's superintendent.
    - b. Independent testing agency responsible for concrete design mixtures.
    - c. Ready-mix concrete producer.
    - d. Concrete pavement subcontractor.

#### **1.06 PROJECT CONDITIONS**

- A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities.

### **PART 2 - PRODUCTS**

#### **2.01 MANUFACTURERS**

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
  1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, products specified.
  2. Products: Subject to compliance with requirements, provide one of the products specified.
  3. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
  4. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

## 2.02 FORMS

- A. Form Materials: Plywood, metal, metal-framed plywood, or other approved panel-type materials to provide full-depth, continuous, straight, smooth exposed surfaces.
  - 1. Use flexible or curved forms for curves with a radius 100 feet (30.5 m) or less.
- B. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces.

## 2.03 STEEL REINFORCEMENT

- A. Plain-Steel Welded Wire Reinforcement: ASTM A 185, 6 inches x 6 inches #10 mesh fabricated from as-drawn steel wire into flat sheets.
- B. Reinforcing Bars: ASTM A 615/A 615M, Grade 40 deformed.
- C. Plain Steel Wire: ASTM A 82, as drawn.
- D. Deformed-Steel Wire: ASTM A 496.
- E. Diamond Dowel Bars: 1/4" x 4-1/2" Diamond Dowels by PNA.
- F. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars, welded wire reinforcement, and dowels in place. Manufacture bar supports according to CRSI's "Manual of Standard Practice" from steel wire, plastic, or precast concrete of greater compressive strength than concrete.

## 2.04 CONCRETE MATERIALS

- A. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source throughout the Project:
  - 1. Portland Cement: ASTM C 150, Type I, Type II or III.
  - 2. If indicated on the plan and only as approved by the Owner supplement with the following:
    - a. Fly Ash: ASTM C 618, Class F.
- B. Normal-Weight Aggregates: ASTM C 33, Combined aggregate gradation for concrete pavement and other designated concrete shall be 8% - 18% for large top size aggregates (1-1/2") or 8% - 22% for smaller top size aggregates (1" or 3/4") retained on each sieve below the top size above the no. 100 sieve. Select coarse-aggregate size from options in first subparagraph below; add gradation requirements if preferred. PCA recommends maximum aggregate size of 3/4 inch (19 mm) in base slab if seeded exposed aggregate is pavement finish.
  - 1. Maximum Coarse-Aggregate Size: 1-1/2 inches nominal.
- C. Water: ASTM C 94/C 94M.
- D. Air-Entraining Admixture: ASTM C 260.
- E. Calcium Chloride: The use of calcium chloride or admixtures containing more than 0.05% chloride ions is prohibited.
- F. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and to contain not more than 0.1 percent water-soluble chloride ions by mass of cementitious material.
  - 1. Air-Entraining Admixture: ASTM C 260.
  - 2. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
  - 3. Retarding Admixture: ASTM C 494/C 494M, Type B.
  - 4. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
  - 5. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
  - 6. Water-Reducing and Accelerating Admixture: ASTM C 494/C 494M, Type E.

## 2.05 CURING MATERIALS

- A. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. (305 g/sq. m) dry.
- B. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- C. Water: Potable.
- D. Evaporation Retarder: Waterborne, monomolecular film forming; manufactured for application to fresh concrete.
- E. Clear Solvent Borne Liquid Membrane Forming Curing Compound: ASTM C 309, Type 1, Class B.
- F. Clear Waterborne Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B.

- G. White Waterborne Membrane-Forming Curing Compound: ASTM C 309, Type 2, Class B.

## 2.06 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 175, asphalt-saturated cellulosic fiber or ASTM D 1752, cork or self-expanding cork.
- B. Coloring Agent: When required, add coloring agent to mix according to manufacturer's written instructions.
  - 1. Color Pigment: ASTM C 979, synthetic mineral-oxide pigments or colored water-reducing admixtures; color stable, free of carbon black, non-fading, and resistant to lime and other alkalis.
  - 2. Color: As indicated on Drawings and per manufacturer's designation.
- C. Slip-Resistive Aggregate Finish: Factory-graded, packaged, rustproof, nonglazing, abrasive aggregate of fused aluminum-oxide granules or crushed emery with emery aggregate containing not less than 50 percent aluminum oxide and not less than 20 percent ferric oxide; unaffected by freezing, moisture, and cleaning materials.
- D. Bonding Agent: ASTM C 1059, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- E. Epoxy Bonding Adhesive: ASTM C 881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade to requirements, and as follows:
- F. Chemical Surface Retarder: Water-soluble, liquid-set retarder with color dye, for horizontal concrete surface application, capable of temporarily delaying final hardening of concrete to a depth of 1/8 to 1/4 inch (3 to 6 mm).
- G. Pigmented Mineral Dry-Shake Hardener: Factory-packaged dry combination of portland cement, graded quartz aggregate, color pigments, and plasticizing admixture. Use color pigments that are finely ground, nonfading mineral oxides interground with cement.

## 2.07 PAVEMENT MARKINGS

- A. Pavement-Marking Paint: Lead and chromate free, ready mixed, complying with AASHTO M 248.
  - 1. Color: Yellow (on concrete).
- B. Materials:
  - 1. **Sherwin Williams Setfast Non- leaded Chlorinated Rubber** - White on asphalt (TM5126), yellow on concrete (TM5127), or as indicated on the drawing(s) is preferred.
  - 2. **Sherwin Williams "Setfast Acrylic Waterborne Traffic Marking Paint"** – White on asphalt (TM226, yellow on concrete (TM225), or as indicated on the drawing(s)
  - 3. **Valspar Enterprise Latex Traffic Marking Paint** - White on asphalt (#2540), yellow on concrete (#2541), or as indicated on the drawing(s).
  - 4. **PPG (Pittsburg Paints)"SEEDHIDE® Traffic and Zone Marking Flat Latex"** – White on asphalt (11-23), yellow on concrete, or as indicated on the drawing(s).
- C. Execution
  - 1. New concrete pavement shall age a minimum of 30 days before painting, unless otherwise approved by the Owner.
  - 2. Proceed with pavement marking only on clean, dry surfaces and at a minimum ambient or surface temperature of 50 degrees F not exceeding 90 degrees F and relative humidity at a maximum of 85%.
  - 3. Surface shall be clean and free of dirt, grease, oil, or other contaminants which could interfere with adhesion.
  - 4. Apply paint material at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils and dry film thickness of 10 mils per coat.
  - 5. Paint to be applied in 2 coats using a template or striping machine. Stripes shall be a minimum width of 4 inches unless otherwise noted on the Drawings.
- D. Temporary Pavement Markings
  - 1. Temporary paint shall be applied in accordance with permanent pavement marking specifications however only one (1) coat of paint shall be required. The contractor may use a temporary removable pavement marking tape only as approved in writing by the Owner. Tape that has become damaged and is no longer serviceable shall be replaced without additional compensation.



2. All temporary markings shall be removed when no longer required. Any pavement area that has been determined to be damaged as a result of the removal operation shall be repaired at no additional cost to the Owner.

E. Pavement Marking Removal

1. A motorized abrasive device shall be utilized to remove existing markings. Existing pavement marking lines and symbols that are to be removed shall be accomplished such that material or structural damage to the surface or texture of the pavement is avoided. The Contractor shall repair any damage to the pavement at no expense to the Owner. After removal, the pavement shall be in a condition that will not mislead or misdirect customers or motorists. Pavement marking removal within public rights of way shall be completed in accordance with the regulatory authority having jurisdiction and the Drawings and Specifications.

## 2.08 WHEEL STOPS

- A. Wheel Stops: Precast, air-entrained concrete, 2500-psi (17.2-MPa) minimum compressive strength, 6 inches (150 mm) high by 6 inches (150 mm) wide by 72 inches (1820 mm) long. Provide chamfered corners and drainage slots on underside and holes for anchoring to substrate.
1. Dowels: Galvanized steel, 3/4-inch (19-mm) diameter, 12-inch (300-mm) minimum length. Or #4 bars 12-inch (300 mm) minimum.

## 2.09 CONCRETE MIXTURES

- A. Prepare design mixtures, proportioned according to ACI 211.1R-91 and ACI 304 and ACI 301, for each type and strength of normal-weight concrete determined by either laboratory trial mixes or field experience.
1. Use a qualified independent testing agency for preparing and reporting proposed concrete mixture designs for the trial batch method.
- B. Proportion mixtures to provide normal-weight concrete with the following properties:
1. Compressive Strength (28 Days): 4000 psi (27.6 MPa).
  2. Slump Limit: Maximum 5 inches (125 mm) at time of placement for pavement, 2 inch (50 mm) for curb and sidewalk.
- C. Add air-entraining admixture at manufacturer's prescribed rate to result in normal-weight concrete at point of placement having an air content as follows:
1. Air Content: 5-% to 8% for pavement, curb and sidewalk.
- D. Limit water-soluble, chloride-ion content in hardened concrete to 0.15 percent by weight of cement.
- E. Chemical Admixtures: Use admixtures according to manufacturer's written instructions.
1. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
- F. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement according to ACI 301 requirements, only as authorized by the Owner in writing as follows:
1. Fly Ash or Pozzolan: 25 percent.
- G. Color Pigment: When indicated on the Drawings add color pigment to concrete mixture according to manufacturer's written instructions and to result in hardened concrete color consistent with approved mockup.

## 2.10 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, and mix concrete materials and concrete according to ASTM C 94/C 94M and ASTM C 1116. Furnish batch certificates for each batch discharged and used in the Work.
1. When air temperature is between 85 deg F (30 deg C) and 90 deg F (32 deg C), reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F (32 deg C), reduce mixing and delivery time to 60 minutes.
- B. Project-Site Mixing: On-site mixing must be approved by the Owner. Comply with requirements and measure, batch, and mix concrete materials and concrete according to ASTM C 94/C 94M. Mix concrete materials in appropriate drum-type batch machine mixer.

1. For concrete mixes of 1 cu. yd. (0.76 cu. m) or smaller, continue mixing at least 1-1/2 minutes, but not more than 5 minutes after ingredients are in mixer, before any part of batch is released.
2. For concrete mixes larger than 1 cu. yd. (0.76 cu. m), increase mixing time by 15 seconds for each additional 1 cu. yd. (0.76 cu. m).
3. Provide batch ticket for each batch discharged and used in the Work, indicating Project identification name and number, date, mixture type, mixing time, quantity, and amount of water added.

## **PART 3 - EXECUTION**

### **3.01 EXAMINATION**

- A. Examine exposed subgrades and subbase surfaces for compliance with requirements for dimensional, grading, and elevation tolerances.
- B. Proof-roll prepared sub-base surface below concrete pavements with heavy pneumatic-tired equipment to identify soft pockets and areas of excess yielding.
  1. Completely proof-roll subbase in one direction and repeat in perpendicular direction. Limit vehicle speed to 3 mph (5 km/h).
  2. Proof-roll with a loaded 10-wheel tandem-axle dump truck weighing not less than 15 tons (13.6 tonnes).
  3. Subbase with soft spots and areas of pumping or rutting exceeding depth of 1/2 inch (**13 mm**) require correction according to requirements in Division 31 Section "Earth Moving."
- C. Proceed with concrete pavement operations only after nonconforming conditions have been corrected and sub-grade is ready to receive pavement.

### **3.02 PREPARATION**

- A. Remove loose material from compacted sub-base surface immediately before placing concrete.

### **3.03 EDGE FORMS AND SCREED CONSTRUCTION**

- A. Set, brace, and secure edge forms, bulkheads, and intermediate screed guides for pavement to required lines, grades, and elevations. Install forms to allow continuous progress of work and so forms can remain in place at least 24 hours after concrete placement.
- B. Maintain sufficient quantity of forms to allow continuing work so that forms are in place a minimum of 24 hours after concrete placement.
- C. Clean forms after each use and coat with form-release agent to ensure separation from concrete without damage.
- D. Flexible or curved forms shall be used on curves. Forms shall be of full depth of the concrete and of strength when staked sufficient to resist the pressure of concrete and the loads resulting from the finishing operations without springing, settling or losing shape.

### **3.04 STEEL REINFORCEMENT**

- A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating, placing, and supporting reinforcement.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, or other bond-reducing materials.
- C. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position during concrete placement. Maintain minimum cover to reinforcement.
- D. Accurately position and support reinforcement and secure against displacement. Set wire ties with ends directly into concrete.
- E. Install welded wire reinforcement in lengths as long as practicable. Lap adjoining pieces at least one full mesh, and lace splices with wire. Offset laps of adjoining widths to prevent continuous laps in either direction. Support reinforcing steel on wire chairs to ensure wire stays mid-depth of sidewalk section during concrete pour.

### **3.05 JOINTS**

- A. General: Form pre-molded expansion and contraction joints, construction joints, control joints, thickened edge expansion joints, isolation joints, and tool edgings true to line with faces

perpendicular to surface plane of concrete. Construct transverse joints at right angles to centerline, unless otherwise indicated.

1. When joining existing pavement, place transverse joints to align with previously placed joints, unless otherwise indicated.
- B. Construction Joints: Set construction joints at side and end terminations of pavement and at locations where pavement operations are stopped for more than one-half hour unless pavement terminates at isolation joints.
  1. Diamond Dowels: Install  $\frac{1}{4}$ " x 4-1/2" Diamond Dowels by PNA at 24" on center or as shown on the drawings. Install per manufacturer's recommendations.
- C. Isolation Joints: Locate isolation joints as shown on the Drawings. Form isolation joints of preformed joint-filler strips abutting Provide catch basins, manholes, inlets, structures, walks, light pole bases and other fixed objects, and where indicated.
  1. Expansion: Provide joint filler for the entire depth of the slab section and not less than one (1) inch below finished surface so as to allow for joint sealer. Provide thickened edge expansion joint as indicated on the Drawings.
    - a. Provide  $\frac{1}{2}$ " expansion joints for curb and gutter and sidewalk at 100 feet on center.
    - b. Provide  $\frac{1}{2}$ " contraction joints for curb and gutter at 10 feet on center.
    - c. Extend joint fillers full width and depth of joint.
    - d. Terminate joint filler not less than 1/2 inch (13 mm) or more than 1 inch (25 mm) below finished surface if joint sealant is indicated.
    - e. Place top of joint filler flush with finished concrete surface if joint sealant is not indicated.
    - f. Furnish joint fillers in one-piece lengths. Where more than one length is required, lace or clip joint-filler sections together.
    - g. Protect top edge of joint filler during concrete placement with metal, plastic, or other temporary preformed cap. Remove protective cap after concrete has been placed on both sides of joint.
- D. Contraction ("control") Joints: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of the concrete thickness, or 1 inch, whichever is deeper. For sidewalks, control joint spacing shall be equal to the sidewalk width. For concrete pavement, control joint spacing shall be placed as shown on the drawings but no greater than 30 times the slab thickness on center both ways.
  1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint with grooving tool to a 3/8-inch (10-mm) radius. Repeat grooving of contraction joints after applying surface finishes. Eliminate groove marks on concrete surfaces.
  2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- (3-mm-) wide joints into concrete within 24 hours of concrete placement and as soon as the cutting action will not tear, abrade, or otherwise damage surface. If required re-saw joint immediately prior to installing sealant to achieve a  $\frac{1}{4}$  inch joint width - second saw joint to be  $\frac{1}{4}$ -inch (6 mm) if required. Power saws are to be equipped with a bag to collect concrete dust. Concrete dust shall be disposed of in accordance with the Stormwater Pollution Prevention Plan.
- E. Edging: Tool edges of pavement, gutters, curbs, and joints in concrete after initial floating with an edging tool to a 3/8-inch (10-mm) radius. Repeat tooling of edges after applying surface finishes. Eliminate tool marks on concrete surfaces.

### **3.06 CONCRETE PLACEMENT**

- A. General: All concrete walks and aprons shall be a minimum of 4 inches thick as shown on the Drawings, with a turned down edge as detailed. Comply with tolerances in ACI 330.1 Specification for Plain Concrete Parking Lots.
- B. Inspection: Before placing concrete, inspect and complete formwork installation, steel reinforcement, and items to be embedded or cast in. Notify other trades to permit installation of their work.
- C. Remove snow, ice, or frost from sub-base surface and reinforcement before placing concrete. Do not place concrete on frozen surfaces.
- D. Moisten sub-base to provide a uniform dampened condition at time concrete is placed. Do not place concrete around manholes or other structures until they are at required finish elevation and alignment.

- E. Comply with ACI 301 requirements for measuring, mixing, transporting, and placing concrete.
- F. Do not add water to fresh concrete after testing.
- G. Deposit and spread concrete in a continuous operation between transverse joints. Do not push or drag concrete into place or use vibrators to move concrete into place.
- H. Consolidate concrete according to ACI 301 by mechanical vibrating equipment supplemented by hand spading, rodding, or tamping.
  - 1. Consolidate concrete along face of forms and adjacent to transverse joints with an internal vibrator. Keep vibrator away from joint assemblies, reinforcement, or side forms. Use only square-faced shovels for hand spreading and consolidation. Consolidate with care to prevent dislocating reinforcement, dowels, and joint devices.
- I. Screed pavement surfaces with a straightedge and strike off.
- J. Commence initial floating using bull floats or darbies to impart an open textured and uniform surface plane before excess moisture or bleed water appears on the surface. Do not further disturb concrete surfaces before beginning finishing operations or spreading surface treatments.
- K. Curbs and Gutters: When automatic machine placement is used for curb and gutter placement, submit revised mix design and laboratory test results that meet or exceed requirements. Produce curbs and gutters to required cross section, lines, grades, finish, and jointing as specified for formed concrete. If results are not approved, remove and replace with formed concrete.
- L. Slip-Form Pavers: When automatic machine placement is used for pavement, submit revised mix design and laboratory test results that meet or exceed requirements. Produce pavement to required thickness, lines, grades, finish, and jointing as required for formed pavement.
  - 1. Compact subbase and prepare subgrade of sufficient width to prevent displacement of paver machine during operations.
- M. When adjoining pavement lanes are placed in separate pours, do not operate equipment on concrete until pavement has attained 85 percent of its 28-day compressive strength.
- N. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
  - 1. When air temperature has fallen to or is expected to fall below 40 deg F (4.4 deg C), uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 deg F (10 deg C) and not more than 80 deg F (27 deg C) at point of placement.
  - 2. Do not use frozen materials or materials containing ice or snow.
  - 3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mix designs.
- O. Hot-Weather Placement: Comply with ACI 301 and as follows when hot-weather conditions exist:
  - 1. Cool ingredients before mixing to maintain concrete temperature below 90 deg F (32 deg C) at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
  - 2. Cover steel reinforcement with water-soaked burlap so steel temperature will not exceed ambient air temperature immediately before embedding in concrete.
  - 3. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade moisture uniform without standing water, soft spots, or dry areas.

### **3.07 FLOAT FINISHING**

- A. General: Do not add water to concrete surfaces during finishing operations.
- B. Float Finish: Begin the second floating operation when bleed-water sheen has disappeared and concrete surface has stiffened sufficiently to permit operations. Float surface with power-driven floats, or by hand floating if area is small or inaccessible to power units. Finish surfaces to true planes. Cut down high spots and fill low spots. Refloat surface immediately to uniform granular texture.
  - 1. Medium Textured Broom Finish: Draw a medium bristle broom across float-finished concrete surface perpendicular to line of traffic to provide a uniform, medium (1/16 (1.6mm)) texture.

### **3.08 CONCRETE PROTECTION AND CURING**

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures.
- B. Comply with ACI 306.1 for cold-weather protection.
- C. Evaporation Retarder: Apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h (1 kg/sq. m x h) before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- D. Begin curing after finishing concrete but not before free water has disappeared from concrete surface.
- E. Curing Methods: Cure concrete by moisture curing, moisture-retaining-cover curing, curing compound, or a combination of these as follows:
  - 1. Moist Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
    - a. Water.
    - b. Continuous water-fog spray.
    - c. Absorptive cover, water saturated and kept continuously wet. Cover concrete surfaces and edges with 12-inch (300-mm) lap over adjacent absorptive covers.
  - 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches (300 mm), and sealed by waterproof tape or adhesive. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
  - 3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
  - 4. All exterior concrete surfaces shall receive one coat of exterior sealer.

### **3.09 PAVEMENT TOLERANCES**

- A. Comply with tolerances of ACI 117 (based on ACI 330.1) and as follows:
  - 1. Elevation: 1/4 inch (6 mm).
  - 2. Thickness: Plus 3/8 inch (10 mm), minus 1/4 inch (6 mm).
  - 3. Surface: Gap below 10-foot- (3-m-) long, unleveled straightedge not to exceed 1/4 inch (6 mm).
  - 4. Lateral Alignment and Spacing of Tie Bars and Dowels: 1 inch (25 mm).
  - 5. Vertical Alignment of Tie Bars and Dowels: 1/4 inch (6 mm).
  - 6. Alignment of Tie-Bar End Relative to Line Perpendicular to Pavement Edge: 1/2 inch (13 mm).
  - 7. Alignment of Dowel-Bar End Relative to Line Perpendicular to Pavement Edge: Length of dowel 1/4 inch per 12 inches (6 mm per 300 mm).
  - 8. Joint Spacing: 3 inches (75 mm).
  - 9. Contraction Joint Depth: Plus 1/4 inch (6 mm), no minus.
  - 10. Joint Width: Plus 1/8 inch (3 mm), no minus.

### **3.10 PAVEMENT MARKING**

- A. Do not apply pavement-marking paint until layout, colors, and placement have been verified with Owner.
- B. Allow concrete pavement to cure for 28 days and be dry before starting pavement marking.
- C. Sweep and clean surface to eliminate loose material and dust.
- D. Apply paint with mechanical equipment to produce pavement markings of dimensions indicated with uniform, straight edges. Apply at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils (0.4 mm).

### **3.11 WHEEL STOPS**

- A. Securely attach wheel stops into pavement with not less than two galvanized steel dowels embedded in holes drilled or cast into wheel stops at one-quarter to one-third points. Firmly bond

each dowel to wheel stop and to pavement. Securely install dowels into pavement and bond to wheel stop. Recess head of dowel beneath top of wheel stop.

### **3.12 FIELD QUALITY CONTROL**

- A. Testing Agency: Owner will engage and pay for a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Testing Services: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
  - 1. Slump and Air Content Testing Frequency: Obtain at least 1 composite sample for each load delivered.
    - a. Slump: ASTM C 143/C 143M; Perform additional tests when concrete consistency appears to change.
    - b. Air Content: ASTM C 231, pressure method.
    - c. Concrete Temperature: ASTM C 1064; one test hourly when air temperature is 40 deg F (4.4 deg C) and below and when 80 deg F (27 deg C) and above.
  - 2. Test Cylinder Frequency: Obtain four standard test cylinders for each 55 cubic yards of concrete or each day's pour, whichever is more frequent.
    - a. Compressive-Strength Tests: ASTM C 39/C 39M; test 2 specimen cylinders at 7 days and 2 specimen cylinders at 28 days.
- C. Strength of each concrete mix will be satisfactory if average of any 3 consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi (3.4 MPa).
- D. Test results shall be reported in writing to Owner, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
- E. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect.
- F. Remove and replace concrete pavement where test results indicate that it does not comply with specified requirements.
- G. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

### **3.13 REPAIRS AND PROTECTION**

- A. Remove and replace concrete pavement that is broken, damaged, or defective or that does not comply with requirements in this Section.
- B. Protect concrete from damage. Exclude traffic from pavement for at least 14 days after placement. When construction traffic is permitted, maintain pavement as clean as possible by removing surface stains and spillage of materials as they occur.
- C. Maintain concrete pavement free of stains, discoloration, dirt, and other foreign material. Sweep concrete pavement not more than two days before date scheduled for Substantial Completion inspections.

**END OF SECTION 321313**

|                                                                                                                                                                  |                         |                             |                         |                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------|-------------------------|---------------------------------|
| <b><u>DESIGN INFORMATION</u></b>                                                                                                                                 |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             | <i>Please check one</i> |                                 |
| Based on Standard Deviation Analysis                                                                                                                             |                         |                             |                         |                                 |
| Trial Mix Test Data                                                                                                                                              |                         |                             |                         |                                 |
| <b><u>DESIGN CHARACTERISTICS</u></b>                                                                                                                             |                         |                             |                         |                                 |
| Density                                                                                                                                                          |                         |                             | pcf                     |                                 |
| Strength                                                                                                                                                         |                         |                             | psi (28 day)            |                                 |
| Air                                                                                                                                                              |                         |                             | % specified             |                                 |
| If trial mixes are used the Mix Design is proportioned to achieve $f'_{cr} = f'_c + 1200 \text{ psi}$<br>(1400 psi for strength higher than 5000 psi at 28 days) |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| <b><u>MATERIALS</u></b>                                                                                                                                          | <b>Type/<br/>Source</b> | <b>Specific<br/>Gravity</b> | <b>Weight/lb.</b>       | <b>Absolute<br/>Vol. cu.ft.</b> |
| Cement                                                                                                                                                           |                         |                             |                         |                                 |
| Microsilica                                                                                                                                                      |                         |                             |                         |                                 |
| Coarse Aggregate                                                                                                                                                 |                         |                             |                         |                                 |
| Fine Aggregate                                                                                                                                                   |                         |                             |                         |                                 |
| Water                                                                                                                                                            |                         |                             |                         |                                 |
| Other                                                                                                                                                            |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         | <b>TOTAL</b>                |                         | 27.0 cu. ft.                    |
| * Water/Cement Ratio (lbs. water/lbs. cement) = _____ %                                                                                                          |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| <b><u>ADMIXTURES</u></b>                                                                                                                                         | <b>Manufacturer</b>     | <b>Dosage<br/>oz/cwt</b>    |                         |                                 |
| Water Reducer                                                                                                                                                    |                         |                             |                         |                                 |
| Air Entraining Agent                                                                                                                                             |                         |                             |                         |                                 |
| High Range Water Reducer                                                                                                                                         |                         |                             |                         |                                 |
| Non-Corrosive Accelerator                                                                                                                                        |                         |                             |                         |                                 |
| Other                                                                                                                                                            |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| Slump before HRWR                                                                                                                                                |                         | inches                      |                         |                                 |
| Slump after HRWR                                                                                                                                                 |                         | inches                      |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| <b>Standard Deviation Analysis (from experience records):</b>                                                                                                    |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| # of Test Cylinders Evaluated:                                                                                                                                   |                         |                             |                         |                                 |
| Standard Deviation:                                                                                                                                              |                         |                             |                         |                                 |
|                                                                                                                                                                  |                         |                             |                         |                                 |
| $f'_{cr} = f'_c + 1.34s$ or $f'_{cr} = f'_c + 2.33s - 500$                                                                                                       |                         |                             |                         |                                 |

|                                                                                         |                   |                |                     |               |
|-----------------------------------------------------------------------------------------|-------------------|----------------|---------------------|---------------|
| <b>Slump before HRWR</b>                                                                |                   | inches         |                     |               |
| <b>Slump after HRWR</b>                                                                 |                   | inches         |                     |               |
|                                                                                         |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| <b>Standard Deviation Analysis (from experience records):</b>                           |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| <b># of Test Cylinders Evaluated:</b>                                                   |                   |                |                     |               |
| <b>Standard Deviation:</b>                                                              |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| $f'_{cr} - f'_c + 1.34s$ or $f'_{cr} = f'_c + 2.33s - 500$                              |                   |                |                     |               |
| (Refer to ACI 301 for increased deviation factor when less than 30 tests are available) |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| <b><u>LABORATORY TEST DATA</u></b>                                                      |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| <b>Compressive Strength</b>                                                             | <b>Age (days)</b> | <b>Mix # 1</b> | <b>Mix #2</b>       | <b>Mix #3</b> |
|                                                                                         | 7                 | psi            | psi                 | psi           |
|                                                                                         | 7                 | psi            | psi                 | psi           |
|                                                                                         | 28                | psi            | psi                 | psi           |
|                                                                                         | 28                | psi            | psi                 | psi           |
|                                                                                         | <b>28 average</b> | psi            | psi                 | psi           |
|                                                                                         |                   |                |                     |               |
| <b><u>REQUIRED ATTACHMENTS</u></b>                                                      |                   |                |                     |               |
|                                                                                         |                   |                | <i>Please Check</i> |               |
| Coarse Aggregate Gradation Report                                                       |                   |                |                     |               |
| Fine Aggregate Gradation Report                                                         |                   |                |                     |               |
| Concrete Compressive Strength Data or Trial Mixture Test Data                           |                   |                |                     |               |
| Admixture Compatability certification letter                                            |                   |                |                     |               |
| <b><u>Submitted by:</u></b>                                                             |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| Name:                                                                                   |                   |                |                     |               |
| Address:                                                                                |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| Phone #:                                                                                |                   |                |                     |               |
| Main Plant Location:                                                                    |                   |                |                     |               |
| Miles from Project:                                                                     |                   |                |                     |               |
| Secondary Plant Location:                                                               |                   |                |                     |               |
| Miles from Project:                                                                     |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
| Date:                                                                                   |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |
|                                                                                         |                   |                |                     |               |



**CONFORMANCE SUBMITTAL**  
**SECTION 321313 – CONCRETE PAVEMENT CURB AND SIDEWALK**

Project Location \_\_\_\_\_  
(City, State)

General Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

Sub-Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

---

The following products have been selected (check one box) for use in this project from the list of acceptable products specified:

Exterior Concrete Sealant:

- ☐ Sonneborn "Kure-N-Seal 30" exterior acrylic sealer  
☐ Euclid "Super Rez-Seal"

Cold-Applied Joint Sealant ASTM D5893, self leveling silicone sealant:

- ☐ Crafcro Inc. "Roadwaver Silicone-SL"  
☐ Dow Corning 888  
☐ Dow Corning 890-SL  
☐ Sonneborn "Sonomeric 1 Sealant"  
☐ Tremco "Vulkem 45"

Hot-Applied Joint Sealant: ASTM D3405, Polymeric sealant.

- ☐ Crafcro Inc. "ROADSAVER 22"  
☐ W.R. Meadows, Inc. "SEALTIGHT HI-SPEC"

---

I represent to City/Owner/Engineer that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the contract documents. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by Owner the work shall be completed without additional cost to the Owner and / or the contract.

Sub-Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the Sub-Contractor) Date  
\_\_\_\_\_  
(Print Name of the Authorized Agent of the Sub-Contractor)

General Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the General Contractor) Date  
\_\_\_\_\_  
(Print Name of the Authorized Agent of the General Contractor)

## SECTION 32 13 73

### CONCRETE PAVING JOINT SEALANTS

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. Section Includes:
  - 1. Cold-applied joint sealants.
  - 2. Cold-applied, jet-fuel-resistant joint sealants.
  - 3. Hot-applied joint sealants.
  - 4. Hot-applied, jet-fuel-resistant joint sealants.
- B. Related Sections:
  - 1. Division 32 Section "Asphalt Paving" for constructing joints between concrete and asphalt pavement.
  - 2. Division 32 Section "Concrete Pavement Curb and Sidewalk" for constructing joints in concrete pavement.
  - 3. Testing will not be required if joint-sealant manufacturers submit joint-preparation data that are based on previous testing, not older than 24 months, of sealant products for compatibility with and adhesion to joint substrates and other materials matching those submitted.

##### 1.03 SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
- B. Product Certificates: For each type of joint sealant and accessory, from manufacturer.
- C. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for joint sealants.

##### 1.04 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of units required for this Project.
- B. Source Limitations: Obtain each type of joint sealant from single source from single manufacturer.

##### 1.05 PROJECT CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
  - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.
  - 2. When joint substrates are wet.
  - 3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
  - 4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

#### PART 2 - PRODUCTS

##### 2.01 MATERIALS

- A. Compatibility: Provide joint sealants, backing materials, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As indicated on the Drawings.

## **2.02 COLD-APPLIED JOINT SEALANTS**

- A. Single-Component, Self-Leveling, Silicone Joint Sealant for Concrete: ASTM D 5893, Type SL.
  - 1. Products: Subject to compliance with requirements, provide one of the following:
    - a. Crafcro Inc., an ERGON company; RoadSaver Silicone Sealant.
    - b. Dow Corning Corporation; 888.
    - c. Sonneborn "Sonometric 1 Sealant"
    - d. Tremco "Vulkem 45".

## **2.03 HOT-APPLIED JOINT SEALANTS**

- A. Hot-Applied, Single-Component Joint Sealant for Concrete and Asphalt: ASTM D 6690, Types I, II, and III.
  - 1. Products: Subject to compliance with requirements, provide one of the following:
    - a. Craftco Inc. "Roadsaver 222"
    - b. Meadows, W. R., Inc.; Sealtight Hi-Spec.

## **2.04 CONCRETE SEALANTS**

- A. Exterior Concrete Sealant: Sonneborn "kure-n-Seal 30" exterior acrylic sealer, or Euclid "Super Rez-Seal.

## **2.05 JOINT FILLERS**

- A. Joint Fillers: Resilient pre-molded bituminous impregnated fiberboard units complying with ASTM D 1751, asphalt-saturated cellulosic fiber, ASSHTO M 152, Type I: or ASTM D 1752, cork or self-expanding cork.

## **2.06 JOINT-SEALANT BACKER MATERIALS**

- A. General: Provide joint-sealant backer materials that are non-staining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by joint-sealant manufacturer based on field experience and laboratory testing.
- B. Round Backer Rods for Hot-Applied Joint Sealants: ASTM D 5249, Type 1, of diameter and density required to control sealant depth and prevent bottom-side adhesion of sealant.
- C. Round Backer Rods for Cold-Applied Joint Sealants: ASTM D 5249, Type 3, of diameter and density required to control joint-sealant depth and prevent bottom-side adhesion of sealant.
- D. Backer Strips for Cold- and Hot-Applied Joint Sealants: ASTM D 5249; Type 2; of thickness and width required to control joint-sealant depth, prevent bottom-side adhesion of sealant, and fill remainder of joint opening under sealant.

## **2.07 PRIMERS**

- A. Primers: Product recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

# **PART 3 - EXECUTION**

## **3.01 EXAMINATION**

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

## **3.02 PREPARATION**

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions.
- B. Joint Priming: Prime joint substrates where indicated or where recommended in writing by joint-sealant manufacturer, based on preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

### **3.03 INSTALLATION OF JOINT SEALANTS**

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated unless more stringent requirements apply.
- B. Joint-Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install joint-sealant backings of kind indicated to support joint sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
  - 1. Do not leave gaps between ends of joint-sealant backings.
  - 2. Do not stretch, twist, puncture, or tear joint-sealant backings.
  - 3. Remove absorbent joint-sealant backings that have become wet before sealant application and replace them with dry materials.
- D. Install joint sealants using proven techniques that comply with the following and at the same time backings are installed:
  - 1. Place joint sealants so they directly contact and fully wet joint substrates.
  - 2. Completely fill recesses in each joint configuration.
  - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Nonsag Joint Sealants: Immediately after joint-sealant application and before skinning or curing begins, tool sealants according to the following requirements to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint:
  - 1. Remove excess joint sealant from surfaces adjacent to joints.
  - 2. Use tooling agents that are approved in writing by joint-sealant manufacturer and that do not discolor sealants or adjacent surfaces.
- F. Provide joint configuration to comply with joint-sealant manufacturer's written instructions unless otherwise indicated.

### **3.04 CLEANING**

- A. Clean off excess joint sealant or sealant smears adjacent to joints as the Work progresses, by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

### **3.05 PROTECTION**

- A. Protect joint sealants, during and after curing period, from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately and replace with joint sealant so installations in repaired areas are indistinguishable from the original work.

### **3.06 PAVEMENT-JOINT-SEALANT SCHEDULE**

- A. Joint-Sealant Application: Joints within cement concrete pavement.
  - 1. Joint Location:
    - a. Expansion and isolation joints in cast-in-place concrete pavement.
    - b. Contraction joints in cast-in-place concrete pavement.
    - c. Construction joints in cast-in-place concrete pavement.
    - d. Saw joints in joints in cast-in-place concrete pavement
    - e. Other joints as indicated.
  - 2. Silicone Joint Sealant for Concrete:
    - a. Crafcro Inc., an ERGON company; RoadSaver Silicone.
    - b. Dow Corning Corporation; 888.
    - c. Sonneborn "Sonometric 1 Sealant"
    - d. Tremco "Vulkem 45".
  - 3. Hot-Applied Joint Sealant for Concrete:
    - a. Craftco Inc. "Roadsaver 22"

- b. Meadows, W. R., Inc.; Sealtight Hi-Spec.
- 4. Joint-Sealant Color: Unless otherwise indicated on Drawings: Gray.

**END OF SECTION 321373**

## SECTION 32 84 00

### PLANTING IRRIGATION

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. Section Includes:
  - 1. Piping.
  - 2. Encasement for piping.
  - 3. Manual valves.
  - 4. Pressure-reducing valves.
  - 5. Automatic control valves.
  - 6. Automatic drain valves.
  - 7. Transition fittings.
  - 8. Dielectric fittings.
  - 9. Miscellaneous piping specialties.
  - 10. Sprinklers.
  - 11. Quick couplers.
  - 12. Drip irrigation specialties.
  - 13. Controllers.
  - 14. Boxes for automatic control valves.
  - 15. Flow Sensors
  - 16. Master Valves

##### 1.03 DEFINITIONS

- A. Circuit or Lateral Piping: Downstream from control valve to sprinklers, drip emitters, drip tubing or drain valves. Piping is under pressure only during remote control valve operation and flow.
- B. Drain Piping: Downstream from circuit-piping drain valves. Piping is not under pressure.
- C. Main Piping: Downstream from point of connection to water distribution piping to, and including, control valves. Piping is under water-distribution-system pressure.
- D. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control, signaling power-limited circuits.

##### 1.04 PERFORMANCE REQUIREMENTS

- A. Irrigation zone control shall be automatic operation with controller and automatic control valves.
- B. Location of Sprinklers and Other Components. The location of backflow preventers, mainline piping, remote control valve piping, flow sensors and master valve is approximate and should adhere to the following conditions:
  - 1. Backflow preventer should be located directly in line with water meter and in accordance with local water district regulations for setback from sidewalk, street and/or curbs.
  - 2. Mainline piping shall be located a minimum of 12" behind curbs or sidewalks. Alignment of mainline piping shall be straight runs with 90 degree intersections. Where piping must follow curvilinear boundaries, the degree of deflection should not exceed 15 degrees in any direction. Mainline piping should not be located in parking lot islands where conflict with tree or shrub planting may occur.
  - 3. Sprinkler heads spacing and location are shown to provide 100% coverage within fixed or identified boundaries within the landscape. Sprinkler head spacing shall never be stretched beyond the rated radius of the sprinkler head being installed. Additional sprinkler heads or pipe size adjustments will not be permitted without prior written approval by the Owner.
  - 4. Drip emitters and drip tubing locations shall be adjusted to fall within the drip line of the tree or shrub that is to be irrigated. Drip tubing spacing shall be adjusted to be evenly spaced within the designated planter or plant bed. Do not reduce the number of drip tubing lines

without prior written permission by the owner. Obtaining permission from someone other than the Owner shall be at the risk of having to replace improperly installed work and shall be at the irrigation contractor's expense.

#### 1.05 SUBMITTALS

- A. Product Data: Irrigation product to be used shall be
  - 1. As an alternative Product Data may be submitted in a quantity of 3 copies in 8-1/2" x 11" three ring notebooks, labeled with the date, job name, location, contractor name and contact number. Submittal shall contain a table of contents conforming to each of the products to be used identified in Part 2. For each type of product indicated, include rated capacities, operating characteristics, electrical characteristics, and accessory data.
  - 2. The first submittal is expected to be complete with catalog cuts, circled model numbers, certificates of compliance for piping or PVC solvent, or other materials.
  - 3. No more than 2 submittals are necessary. Submittals exceeding two will be billed at an hourly rate of not less than \$100.00/hour for a minimum of 2 hours. Each time notebooks are submitted a new submittal date shall be shown below the original submittal date.
  - 4. Work may not be initiated without complete approval of the submitted information. Starting work without written consent by the Owner shall be at the contractor's risk.
- B. Wiring Diagrams: For power, signal, and control wiring if equipment includes wiring.
- C. Coordination Drawings: Irrigation systems, drawn to scale, on which components are shown and coordinated with each other, using input from Installers of the items involved. Also include adjustments necessary to avoid plantings and obstructions such as signs and light standards.
  - 1. Drawings to include irrigation system design or shop drawings including but not limited to piping, sprinkler heads, valves, wiring, and controls.
  - 2. Drawings shall include layout referenced to adjacent rights-of -ways if required to be irrigated.
  - 3. Drawings shall show:
    - a. Static pressure (psi) and gallons per minute (gpm) upon which the design is based;
    - b. Complete system layout indicating placement of piping, controls, control boxes, valves, required sleeves, etc...
    - c. All pipe sizes, materials and class ratings
    - d. All manufacturers and model numbers
    - e. Design calculations for each zone
    - f. Specifications for each type of sprinkler head showing nozzle, spray pattern, radius, gpm/head, operation psi, size, etc...
    - g. Detailed installation requirements must be provided for all irrigation system components
    - h. A comprehensive written specification must accompany the drawings; and,
    - i. All design, drawings, specifications and materials must be approved by the Owner prior to the start of any installation of the irrigation system.
    - j. Design intent, inclusive of maximum flow rate, delivery water pressure and the number of stations that can be operated at one time.
    - k. Drawing shall include a separate water meter dedicated for landscape irrigation.
    - l. Indicate location of irrigation controller with 120 volt power. Controller shall be located out of public view but in a location where a portion of the landscape can be viewed.
    - m. Indicate location and size of flow sensor and master valve if specified.
    - n. Indicate location of rain sensor transmitter in relationship to irrigation controller.
- D. Qualification Data: For qualified Installer, see Part 1.06.
- E. Irrigation Zone Charts. Two color copies of irrigation zone charts shall be submitted before final payment can be made. Both charts shall be laminated and one chart shall be located within each controller for future reference.
- F. Controller Timing Schedule: Complete the controller manufacturer's site profile worksheet and provide two laminated copies, one that is left behind in the controller with the irrigation zone charts.
- G. Operation and Maintenance Data: Contractor to furnish two (2) each for sprinklers, controllers and automatic control valves to include in operation and maintenance manuals. Manuals may be loose-leaf and shall contain complete exploded drawings of all equipment installed showing components and catalog numbers together with the manufacturer's name and address. Copies of

this information can be photo copies of the original manual or printed PDF files and submitted in 3-ring notebooks with table of contents for the materials submitted.

#### 1.06 QUALITY ASSURANCE

##### A. Installer Qualifications:

1. An employer of workers that include a Certified Irrigation Installer qualified by The Irrigation Association, and partner with the EPA WaterSense Program [www.epa.gov/watersense](http://www.epa.gov/watersense). Submit verification of certification per 1.05 prior to beginning work.
2. A valid Landscape Contractor's License (where required), and local business license.

##### B. Requirements of Regulatory Agencies:

1. All work and materials shall be in full accordance with the latest rules and regulations of safety order of Division of Industrial Safety; the Uniform Building Code and other applicable laws and regulations, including any regulatory authorities having jurisdiction, and Plumbing Codes; and,
2. Should the contract documents be at variance with the aforementioned rules and regulations, notify the Owner for instructions before proceeding with work affected.

##### C. Permits and Inspections:

1. Any permits for the installation or construction of any work included under this contract, which are required by any of the legally constituted authorities having jurisdiction, shall be obtained and paid for by the Contractor, each at the proper time; and,
2. The Contractor shall also arrange for and pay all costs in connection with any inspection and examination required by these authorities.

##### D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application. Equipment powered by 120 volt power to be UL approved. Certificates of compliance are to be submitted per Section 1.05.

##### E. Record Drawings: The Contractor shall maintain one record set of drawings of the irrigation system in good condition at the site and mark on them the exact 'record'. The Contractor shall make a daily record of all work installed during each day. Drawings shall indicate the exact location of check valves, gate valves, wire locations, head layout, automatic valves, quick couplers, all irrigation and drainage piping and other irrigation materials installed. Locations should be shown by a triangular system of measurement from easily identified permanent features such as buildings, curbs, and fences. Drawings shall show approved substitutions if approved, including manufacturer's name and catalogue number. Drawing shall be to scale and all information shall be recorder in a neat orderly way.

1. At the time of the irrigation mainline test, the Contractor shall provide a preliminary set of "Record" drawings to the Owner.
2. On or before the date of final inspection, the Contractor shall deliver 2 sets of as-Built drawings to the Owner. As-Built information furnished on a CD will take the place of one set of As-Built drawings. The delivery of this information shall not relieve the Contractor of the responsibility of furnishing required information that may have been omitted. Final payment may be withheld until as-built drawings have been received.

##### F. Substitutions

1. The Contractor shall submit reason for substitution request that supports design criteria. Submittal must be in written form. Reasoning shall support system improvements such as extended warranty, improvements to long-term system maintenance or usage. Long lead time, or cost savings shall not be acceptable reasons for substitutions. Any cost savings shall be provided back to the Owner via a change order. Proceeding with substitutions shall not commence until obtaining written approval from the Owner.
2. The Contractor shall use materials as specified on the drawings and within the specifications. Material other than that specified will be permitted only after written application by the Contractor and written approval by the Owner.
3. Substitutions will only be allowed when in the best interest of the Owner.
4. The installation of any approved substitution must be made to the satisfaction of the Owner and without additional cost.



- 1.07 DELIVERY, STORAGE, AND HANDLING
  - A. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.
  - B. Store plastic piping and fittings protected from direct sunlight by means of tarps, storage containers or other strategies to avoid long term exposure to UV rays. Support to prevent sagging and bending.
- 1.08 PROJECT CONDITIONS
  - A. Interruption of Existing Water Service: Do not interrupt water service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water service according to requirements indicated:
    - 1. Notify Owner's Construction Manager no fewer than two days in advance of proposed interruption of water service.
    - 2. Do not proceed with interruption of water service without Owner's written permission.
- 1.09 EXTRA MATERIALS
  - A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
    - 1. Gear Driven Sprinklers: Equal to 5 percent of amount installed for each type and size indicated, but no fewer than 2 units.
    - 2. Spray Sprinklers: Equal to 5 percent of amount installed for each type and size indicated, but no fewer than 5 units.
    - 3. Bubblers: Equal to 5 percent of amount installed for each type indicated, but no fewer than 5 units.
    - 4. Emitters: Equal to 5 percent of amount installed for each type indicated, but no fewer than 5 units.
    - 5. Drip-Tube System Tubing: Equal to 5 percent of total length installed for each type and size indicated, but not less than 100 feet.(30 m)
    - 6. Soaker Tubes: Equal to 5 percent of total length installed for each type and size indicated, but not less than 50 feet (15.2 m)
    - 7. Quick Coupler Keys: Three quick coupler keys and matching swivel hose cells.
    - 8. Valve Keys: Two valve keys for gate valves
    - 9. Ball Valves: Two extra ball valve handles.
    - 10. Controller Keys: Two keys for each controller
    - 11. Special Tools: Two sets of special tools required for removing, disassembling and adjusting each type of sprinkler and valve supplied on the project
    - 12. Valve Boxes: Two complete valve boxes with covers.
    - 13. Lifting Tools: Two cover lifting tools for valve boxes.
    - 14. Remote Control Valves: Two valve diaphragms and solenoids.

## PART 2 - PRODUCTS

- 2.01 PIPES, TUBES, AND FITTINGS
  - A. Comply with requirements in the piping schedule for applications of pipe, tube, and fitting materials, and for joining methods for specific services, service locations, and pipe sizes.
  - B. All piping shall be from virgin parent material. The pipe shall be homogeneous throughout and free from visible cracks, holes, foreign materials, blisters, deleterious wrinkles and dents. All pipe shall be National Sanitation Foundation (NSF) approved.
  - C. PVC Pipe: Non Pressure Rated shall be Class 200.
    - 1. PVC Socket Fittings: ASTM D 2466, Schedule 40.
  - D. PVC Pipe, Pressure Rated: ASTM D 2241, PVC 1120 compound, Schedule 40 or Class 315. Outside diameter of pipe shall be the same as iron pipe.
    - 1. Pipe shall be marked at intervals (not to exceed 5 feet) with the following: Manufacturer's name or trade mark, nominal pipe size, schedule, PVC type and grade, SDR rating class, working pressure at 73 degrees and NSF approval.
    - 2. When connection is plastic to metal, male adapters shall be hand tightened, plus one turn with a strap wrench.

3. PVC Socket Fittings: ASTM D 2467 and D-2467-73 NSF approved, Schedule 40.
  4. PVC Socket Unions: Construction similar to MSS SP-107, except both headpiece and tailpiece shall be PVC with socket or threaded ends, Schedule 40.
  5. Sleeves: Piping for sleeving shall be high impact type pipe PVC 2110, minimum Schedule 40.
    - a. Main and lateral line sleeves are to be at minimum 2 times the diameter of the largest pipe to be sleeved.
    - b. Control wire sleeves shall be sufficient to hold the quantity of control and common wires. Electrical wires are not to be placed in the same sleeve with water pipes.
- 2.02 PIPING JOINING MATERIALS
- A. Pipe-Flange Gasket Materials: AWWA C110, rubber, flat face, 1/8 inch (3.2 mm) thick unless otherwise indicated; full-face or ring type unless otherwise indicated.
  - B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated. Galvanized piping shall not be permitted; where a short length of ferrous piping is required, threaded brass piping shall be used.
  - C. Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.
  - D. Solder Filler Metals: ASTM B 32, lead-free alloys. Include water-flushable flux according to ASTM B 813.
  - E. Solvent Cements for Joining PVC Piping: ASTM D 2564. #705 Gray NSF approved. Include primer according to ASTM F 656.
  - F. Plastic, Pipe-Flange Gasket, Bolts, and Nuts: Type and material recommended by piping system manufacturer unless otherwise indicated.
- 2.03 ENCASEMENT FOR PIPING
- A. Standard: ASTM A 674 or AWWA C105.
- 2.04 MANUAL VALVES
- A. Curb Valves:
    1. Basis-of-Design Product: Subject to compliance with requirements, shall be manual angle valve, provide product indicated on Drawings.
    2. Description:
      - a. Standard: AWWA C800.
      - b. NPS 1 (DN 25) and Smaller Pressure Rating: 100 psig (690 kPa).
      - c. Body Material: Brass or bronze with ball or ground-key plug.
      - d. End Connections: Matching piping.
      - e. Stem: With wide-tee head.
  - B. Curb-Valve Casing:
    1. Standard: Similar to AWWA M44 for cast-iron valve casings.
    2. Top Section: Telescoping, of length required for depth of burial of curb valve.
    3. Barrel: Approximately 3-inch (75-mm) diameter.
    4. Plug: With lettering "WATER."
    5. Bottom Section: With base of size to fit over valve.
    6. Base Support: Concrete collar.
  - C. Shutoff Rods for Curb-Valve Casings: Furnish one steel, tee-handle shutoff rod(s) with one pointed end, stem of length to operate deepest buried valve, and slotted end matching curb valve for Project.
  - D. Bronze Ball Valves:
    1. Basis-of-Design Product: Use only full-port models to reduce friction loss. Provide product indicated on Drawings or comparable product by one of the following:
      - a. American Valve, Inc.
      - b. Conbraco Industries, Inc.; Apollo Valves.
      - c. Crane Co.; Crane Valve Group; Crane Valves.
      - d. Hammond Valve.
      - e. Lance Valves; a division of Advanced Thermal Systems, Inc.
      - f. Legend Valve.
      - g. Milwaukee Valve Company.

- h. NIBCO INC.
- i. Red-White Valve Corporation.
- j. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- 2. Description:
  - a. Standard: MSS SP-110.
  - b. SWP Rating: 150 psig (1035 kPa).
  - c. CWP Rating: 600 psig (4140 kPa).
  - d. Body Design: Two piece.
  - e. Body Material: Bronze.
  - f. Ends: Threaded or solder joint if indicated.
  - g. Seats: PTFE or TFE.
  - h. Stem: Bronze.
  - i. Ball: Chrome-plated brass.
  - j. Port: Full

## 2.05 PRESSURE-REDUCING VALVES

### A. Water Regulators:

- 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings or comparable product by one of the following:
  - a. Cash Acme; a division of The Reliance Worldwide Corporation.
  - b. Conbraco Industries, Inc.; Apollo Valves.
  - c. Honeywell International Inc.
  - d. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
  - e. Zurn Plumbing Products Group; Wilkins Water Control Products.
- 2. Description:
  - a. Standard: ASSE 1003.
  - b. Body Material: Bronze for NPS 2 (DN 50) and smaller; for NPS 2-1/2 and NPS 3 (DN 65 and DN 80).
  - c. Pressure Rating: Initial pressure of 150 psig (1035 kPa).
  - d. End Connections: Threaded for NPS 2-1/2 (DN 50) and smaller; flanged for NPS 3 (DN 65 and DN 80).
  - e. Pressure regulator shall exceed the measured incoming delivery pressure to be regulated.

### B. Plastic Pressure Regulating Valves for Drip Valve Assemblies:

- 1. Basis of Design Product: Subject to compliance with requirements, provide product indicated on drawings or comparable product by one of the following:
  - a. Senninger
  - b. Rainbird PRF series
- 2. Description:
  - a. Main Valve Body: high impact plastic, cyclac-plastic or glass-reinforced plastic.
  - b. Pattern: in-line.
  - c. Trip: high impact plastic
  - d. End Connections: female or male IPS threaded connections. Socket-type, solvent welded connections are not acceptable.

### C. Water Control Valves:

- 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings or comparable product by one of the following:
  - a. CLA-VAL Automatic Control Valves.
  - b. Flomatic Corporation.
  - c. OCV Control Valves.
  - d. Watts ACV; a division of Watts Water Technologies, Inc.
  - e. Zurn Plumbing Products Group; Wilkins Water Control Products.
- 2. Description: Pilot-operation, diaphragm-type, single-seated main water control valve. Include small pilot control valve, restrictor device, specialty fittings, and sensor piping.
  - a. Main Valve Body: Cast- or ductile-iron body with AWWA C550 or FDA-approved, interior epoxy coating; or stainless-steel body.
  - b. Pattern: Angle-valve design.

- c. Trim: Stainless steel.
  - d. Pressure Rating: Initial pressure of 150 psig (1035 kPa) minimum.
  - e. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.
- 2.06 AUTOMATIC CONTROL MASTER VALVES
  - A. Bronze, or Cast Iron Automatic Control Valves (Normally Closed and Open Models) for Master Valves):
    - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:  
Superior Model 3100 or 3300 series  
Bermad Model 100 Series w/ ASCO low current draw solenoid  
Griswold Model 2160  
Wilkins series
    - 2. Description: Cast-bronze body, normally closed, diaphragm type with manual-flow adjustment, and operated by 24-V ac solenoid.
- 2.07 AUTOMATIC CONTROL VALVES
  - A. Plastic, Automatic Control Valves (Normally Closed and Open Models):
    - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:
      - a. Irritrol 100 Series, 200B Series
      - b. Hunter Industries Incorporated ICV Valve
      - c. Rain Bird Corporation PEB or PESB Series
      - d. Toro Company (The); Irrigation Division 252 or P-220 Series
    - 2. Description: Molded-plastic body, normally closed, diaphragm type with manual-flow adjustment, and operated by 24-V ac solenoid.
  - B. Pressure Regulating Valves (Normally Closed Only –NOT Allowed for Drip Applications):
    - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:
      - a. Toro, P220 Series
      - b. Rainbird, PESB-R Series, EFB-CP Series
      - c. Hunter HBV Series, ICV Series
    - 2. Description:
      - a. Cast bronze bodies and bonnets or for plastic models, glass-enforced nylon material including valve bonnet. Pressure regulation device can be a permanent or after –sale accessory as needed. Pressure regulation range shall be from 15 to 220 PSI.
- 2.08 DRIP FILTERS
  - A. Drip Filters
    - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:
      - a. Toro, Plastic Y Filters
      - b. Rainbird, RBY Filters
    - 2. Description:
      - a. Case: High impact plastic or glass-reinforced nylon
      - b. Screen: Removable stainless steel or plastic mesh
      - c. Inlet: Male or female IPS threads.
- 2.09 WIRELESS RAIN SENSORS
  - A. Rain Sensors
    - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:
      - a. Toro, TWRS Wireless Rain/Freeze Series
      - b. Irritrol, RFS 1000 Wireless Rain/Freeze Series
      - c. Hunter, Wireless Rain-Clik

- 2.10 AUTOMATIC DRAIN VALVES
- A. Description: Spring-loaded-ball type of corrosion-resistant construction and designed to open for drainage if line pressure drops below 2-1/2 to 3 psig (17 to 20 kPa).
- 2.11 TRANSITION FITTINGS
- A. General Requirements: Same size as, and with pressure rating at least equal to and with ends compatible with, piping to be joined.
- B. Transition Couplings:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Cascade Waterworks Manufacturing.
    - b. Dresser, Inc.; DMD Division.
    - c. Ford Meter Box Company, Inc. (The).
    - d. JCM Industries.
    - e. Smith-Blair, Inc; a Sensus company.
    - f. Viking Johnson.
  2. Description: AWWA C219, metal sleeve-type coupling for underground pressure piping.
- C. Plastic-to-Metal Transition Fittings:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Harvel Plastics, Inc.
    - b. Spears Manufacturing Company.
  2. Description: PVC one-piece fitting with manufacturer's Schedule 80 equivalent dimensions; one end with threaded brass insert, and one solvent-cement-socket or threaded end.
- D. Plastic-to-Metal Transition Unions:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Colonial Engineering, Inc.
    - b. NIBCO INC.
    - c. Spears Manufacturing Company.
  2. Description: MSS SP-107, PVC four-part union. Include one brass **or** stainless-steel threaded end, one solvent-cement-joint **or** threaded plastic end, rubber O-ring, and union nut.
- 2.12 MISCELLANEOUS PIPING SPECIALTIES
- A. Water Hammer Arresters: ASSE 1010 or PDI WH 201, with bellows or piston-type pressurized cushioning chamber and in sizes complying with PDI WH 201, Sizes A to F.
- B. Pressure Gages: ASME B40.1. Include 4-1/2-inch- (115-mm-) diameter dial, dial range of two times system operating pressure, and bottom outlet.
- 2.13 SPRINKLERS
- A. General Requirements: Designed for uniform coverage over entire spray area indicated at available water pressure.
- B. Plastic, Pop-up, Gear-Drive Rotary Sprinklers:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    - a. Hunter Industries Incorporated. 760-591-7383.  
[http://www.hunterindustries.com/Corporate/contact\\_us.html](http://www.hunterindustries.com/Corporate/contact_us.html)
    - b. Rain Bird Corporation. (1-800-724-6247. <http://www.rainbird.com/contact.htm>
    - c. Toro Company (The); Irrigation Division. 888-384-9939.  
<http://www.toro.com/contact/index.html>
  2. Description:
    - a. Body Material: ABS.
    - b. Nozzle: Brass.
    - c. Retraction Spring: Stainless steel.
    - d. Internal Parts: Corrosion resistant.
    - e. Pressure regulating
- C. Plastic, Pop-up "Fixed" Spray Sprinklers (Pressure Compensating):

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    - a. Irritrol, [www.irritrol.com](http://www.irritrol.com) (1-800-883-1234)
    - b. Hunter Industries Incorporated. 760-591-7383.  
[http://www.hunterindustries.com/Corporate/contact\\_us.html](http://www.hunterindustries.com/Corporate/contact_us.html)
    - c. Rain Bird Corporation. (1-800-724-6247. <http://www.rainbird.com/contact.htm>)
    - d. Toro Company (The); Irrigation Division. 888-384-9939.  
<http://www.toro.com/contact/index.html>
  2. Description:
    - a. Body Material: ABS.
    - b. Nozzle: Brass.
    - c. Retraction Spring: Stainless steel.
    - d. Internal Parts: Corrosion resistant.
    - e. Pattern: Fixed, with flow adjustment.
    - f. Pressure regulating
  - D. Plastic Flood Bubblers (Pressure Compensating)
    1. Manufacturers: Subject to compliance with requirements, provide product indicated on the drawings or comparable product by one of the following:
      - a. Irritrol, 533 Bubbler Series
      - b. Toro, 571 Flood Bubbler Series
      - c. Rain Bird, 1400 Series
      - d. Hunter PCB or PCN Bubbler Series
    2. Description
      - a. Body Material: Corrosion-proof and rubber construction
      - b. Pattern: Full circle
      - c. Pressure: Pressure regulating
      - d. Threads: ½" internal, IPS female threads.
  - E. Plastic Shrub Sprinklers (only if used, see Lowe's Development Criteria):
    1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
      - a. Hunter Industries Incorporated. 760-591-7383.  
[http://www.hunterindustries.com/Corporate/contact\\_us.html](http://www.hunterindustries.com/Corporate/contact_us.html)
      - b. Rain Bird Corporation. (1-800-724-6247. <http://www.rainbird.com/contact.htm>)
      - c. Toro Company (The); Irrigation Division. 888-384-9939.  
<http://www.toro.com/contact/index.html>
    2. Description:
      - a. Body Material: ABS or other plastic.
      - b. Pattern: Fixed, with flow adjustment.
      - c. Pressure regulating
- 2.14 QUICK COUPLERS
- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    1. Buckner; a division of Storm Manufacturing Group Inc.
    2. Hunter Industries Incorporated.
    3. Rain Bird Corporation.
    4. Toro Company (The); Irrigation Division.
  - B. Description: Factory-fabricated, bronze or brass, two-piece assembly. Include coupler water-seal valve; removable upper body with spring-loaded or weighted, rubber-covered cap; hose swivel with ASME B1.20.7, 3/4-11.5NH threads for garden hose on outlet; and two operating keys.
    1. For sites that use recycled or reclaimed water, use Acme-style quick couplers with purple-coded covers.
- 2.15 DRIP EMITTER SPECIALTIES
- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Buckner; a division of Storm Manufacturing Group Inc.
  2. Rain Bird Corporation.
  3. Toro Company (The); Irrigation Division.
  - B. Freestanding Emitters: Device to deliver water at approximately 20 psig (138 kPa).
    1. Body Material: PE or vinyl, with flow control.
    2. Riser to Emitter: PE or PVC flexible tubing.
  - C. Manifold Emitter Systems: Manifold with tubing and emitters.
    1. Manifold: With multiple outlets to deliver water to emitters.
      - a. Body Material: Plastic.
      - b. Outlet Caps: Plastic, for outlets without installed tubing.
      - c. Operation: Automatic pressure compensating.
    2. Tubing: PE or PVC; 1/8-inch (3-mm) minimum ID.
    3. Emitter: Device to deliver water at approximately 20 psig (138 kPa).
      - a. Body Material: PE or vinyl, with flow control.
  - D. Multiple-Outlet Emitter Systems: Emitter with tubing and button-type outlets.
    1. Emitter: With multiple outlets to deliver water to remote outlets.
      - a. Body Material: Plastic, with flow control.
      - b. Outlet Caps: Plastic, for outlets without installed tubing.
      - c. Operation: Automatic pressure compensating.
      - d. Emitters: Devices to deliver water at approximately 20 psig (138 kPa).
    2. Tubing: PE or PVC; 1/8-inch (3-mm) minimum ID.
  - E. Drip Tubes with Direct-Attached Emitters:
    1. Tubing: Flexible PE or PVC with plugged end.
    2. Emitters: Devices to deliver water at approximately 20 psig (138 kPa).
    3. Drip tubing emitters shall be pressure compensating.
      - a. Body Material: PE or vinyl, with flow control.
      - b. Mounting: Inserted into tubing at set intervals.
  - F. Drip Tubes with Remote Discharge:
    1. Tubing: Flexible PE or PVC with plugged end.
    2. Emitters: Devices to deliver water at approximately 20 psig (138 kPa).
      - a. Body Material: PE or vinyl, with flow control.
      - b. Mounting: Inserted into tubing at set intervals.
  - G. Off-Ground Supports: Plastic stakes.
  - H. Application Pressure Regulators: Brass or plastic housing, NPS 3/4 (DN 20), with corrosion-resistant internal parts; capable of controlling outlet pressure to approximately 20 psig (138 kPa).
  - I. Filter Units: Brass or plastic housing, with corrosion-resistant internal parts; of size and capacity required for devices downstream from unit.
  - J. Air Relief Valves: Brass or plastic housing, with corrosion-resistant internal parts.
  - K. Vacuum Relief Valves: Brass or plastic housing, with corrosion-resistant internal parts.
- 2.16 CONTROLLERS
- A. A fully automatic controller manufactured by Toro, Rainbird or Hunter Industries (substitutions only as approved by the engineering manager):
    1. Automatic Controller must have the following features:
      - a. Master switch permitting shutdown with programming maintained
      - b. Independent station programming and timing
      - c. Manual operation option
      - d. Variable day cycle
      - e. Battery powered models will not be permitted.
  - B. Description:
    1. Station Count: As needed 12-48 stations in 6-station increments.
    2. Interior Control Enclosures: UL compliance NEMA 3R rated, drip-proof, with key-lock entry and two matching keys.
      - a. Body Material: Powder-coated cold-rolled steel.
      - b. Mounting: Surface type for wall.
    3. Control Transformer: 80-VA, 3.2 amp dual voltage (120 or 240 volts) with internal thermal fuse. Additional fuse protection shall be available on the power distribution PCB.

4. Timing Device: Adjustable, 24-hour, with automated programming functions available for each station independently. Controller shall be capable of watering on any one of seven day water modes
  - a. Non-volatile Memory: Real-time clock shall hold data for a period of 7-10 days, while all programming data shall be stored in non-volatile memory.
5. Sensor Compatibility: Controller shall be compatible with both a wired or wireless rain sensor and Data Industrial IR-220 Series flow sensor series from 1" up to 4" size as well as "Insert-Type" models.
6. Manual Watering: The controller shall have the ability to manually operate a single or all stations with user-defined run times from 1-99 minutes.
7. AC Compatibility: The controller shall be compatible with optional AC input surge protection devices where applicable.
8. Conduit: Underground plastic conduit for remote control wire to the controller or from the flow sensor to the controller shall be Schedule 80 Class III. FS W-C1094. Piping sweeps shall have a minimum radius of 12".
9. Wiring: UL 493, Type UF multiconductor, with solid-copper conductors; insulated cable; suitable for direct burial. For wire installed in conduit, use stranded THWN, 12 gauge wires per local and state electrical codes
  - a. Feeder-Circuit Cables: No. 12 AWG minimum, between building and controllers.
  - b. Remote Control Wire: No. 14 AWG minimum, between controllers and automatic control valves (#12 AWG minimum for runs over 2,500 LF); color-coded different from feeder-circuit-cable jacket color; with insulation of different colors for different areas of the property. Common ground wire shall be white only.
  - c. Wiring Splicing Materials: Manufacturer's packaged kit consisting of insulating, spring-type wire-nut or connector, epoxy resin moisture seal, plastic molded enclosure, suitable for direct burial applications.
    - 1) 3M Direct Bury (DBY) splice kits by 3M Corporation, Austin, TX (512) 984-5667, no other equal will be accepted.

## 2.17 BOXES FOR AUTOMATIC CONTROL VALVES/QUICK COUPLERS

- A. Polymer-Concrete Boxes:
  1. Location: Valve boxes shall be located in pervious landscape areas and shall not be subject to high traffic loading.
  2. Manufacturers: Valve boxes shall be constructed of polymer-concrete, injected-molded, or structural foam HDPE resin. Subject to compliance with requirements, provide products by one of the following:
    - a. Armorcast Products Company.
    - b. Carson Industries LLC.
    - c. CDR Systems Corporation.
    - d. Rain Bird VB-STD series.
  3. Description: Box and cover, with open bottom and openings for piping; designed for installing flush with grade.
    - a. Size: As required for valves and service.
    - b. Shape: Valve Box shall be Rectangular. Shut Off Valves and Quick Coupler Valves shall be Round.
    - c. Sidewall Material: Polymer concrete or injected molded structural foam HDPE resin with lateral and vertical sidewall design loading of **5000 lb (2268 kg)** minimum over 10 by 10 inches (254 by 254 mm) square.
    - d. Cover Material: Reinforced polymer concrete, or injected molded structural foam HDPE resin with cover design loading of 5000 lb (2268 kg) minimum over 10 by 10 inches (254 by 254 mm) square.
      - 1) Color: Box and Lid to be green. (Local ordinances may require lids or boxes or both to be purple when recycled or reclaimed water is used – box and lid color shall be per local ordinance when recycled or reclaimed water is used).
      - 2) Lettering: "VALVE BOX."
- B. Drainage Backfill: Cleaned gravel or crushed stone, graded from 3/4 inch (19 mm) minimum to 3 inches (75 mm) maximum.



## 2.18 FLOW SENSORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following;  
Data Industrial – IR-220 Series (Badger Meter). Only Data Industrial models have direct compatibility with the specified irrigation control product. Designed for below grade applications such as irrigation where flow rates are between 0.5-30 feet/second and water temperatures are below 180 degrees F. IR sensors are supplied with two single conductors, 18 AWG; solid copper wire leads 48" in length with UL style 116666 direct burial insulation. No other alternatives will be accepted.
- B. Description: The flow sensor shall be an in-line type with a non-magnetic, spinning impeller (paddle wheel) as the only moving part. The electronics housing shall be glass-filled PPS. The impeller shall be glass-filled nylon or Tefzel® with a UHMWPE or Tefzel® sleeve bearing. The shaft material shall be tungsten carbide. The electronics housing shall have two ethylene-propylene O-Rings and shall be easily removed from the meter body. The sensor electronics will be potted in an epoxy compound designed for prolonged immersion. Electrical connections shall be 2 single conductor 18 AWG leads 48 inches long. Insulation shall be direct burial "UF" type colored red for the positive lead and black for the negative lead. The sensor shall operate in line pressures up to 100 psi and liquid temperatures up to 140° F, and operate in flows of 1 foot per second to 20 feet per second with linearity of  $\pm 1\%$  and repeatability of  $\pm 1\%$ . The meter body shall be fabricated from Schedule 80 PVC Tees, available in 1 1/2", 2", 3, and 4" with socket end connections. This flow sensor shall be Data

## PART 3 - EXECUTION

### 3.01 GENERAL

- A. Schedule: The Irrigation Contractor shall carefully schedule the work with the Landscape Contractor in order to coordinate with other Site Contractors, Developers and Subcontractors. Schedule installation after completion of site grading. Irrigation system shall be installed and completely operational at minimum three days prior to the installation of any plant materials.
- B. Layout: It is the Contractor's responsibility to establish the location of all sprinkler heads in order to assure full and complete coverage (with 100% overlap) of all areas. Contractor shall make any necessary minor adjustments to layout as required to achieve full coverage at no additional cost to the owner. Where distance between sprinkler heads or between rows of sprinkler heads exceed the indicated radius on the plans, make field adjustments as noted to maintain 100% sprinkler head coverage.
1. Where possible, use same sprinkler with different nozzle that increases the radius to provide head-to-head coverage. Increase pipe sizing as needed to prevent hydraulically overloading the valve zone or causing unacceptable friction losses (higher than 5ft/sec in any pipe length). Increase valve size if the accumulated GPM demand exceeds a friction loss of 5 PSI or more through the previously specified valve size. Adjustments to pipe size or valve size shall only be as approved in writing by the Owner.
  2. For mainline pipe shown crossing parking lots, or parking lot islands, the mainline pipe shall be 6" inside the planting curbing. Avoid planting trees or shrubs directly above the mainline whenever possible.
  3. Do not install more than one remote control valve in a single rectangular valve box.
  4. Install quick couplers in 10" round valve boxes.
  5. If valve boxes are located in parking lot islands, install 6" from back of curb and away from corners where errant vehicular traffic may cause damage.
  6. Lay out work as accurately as possible to the submitted shop drawings.
  7. Sleeves are required wherever piping or electrical wires are placed under paved surfaces. Install sleeves prior to commencement of paving.
  8. Pipe sizes shall conform to those shown on the Drawings. Pipe size and valve size may not be changed unless approved in writing by the Owner.
  9. Where piping is shown on Drawings to be under paved areas but running parallel and adjacent to planted areas, **the intent is to install piping in planting (pervious) areas.**
- C. Design Changes: Monetary consideration will not be made for any design change without written request by the Contractor and written approval by the Owner prior to implementing the change in

the field. Monetary compensation for a design change approved in writing by the Owner after award of contract will be negotiated between the Contractor and the Owner.

### 3.02 EARTHWORK

- A. Excavating, trenching, and backfilling are specified in Division *Division 31 Section "Earth Moving"*
  - 1. Perform all excavation as required for installation of the work included under this Section including shoring of earth banks if necessary. Restore all surfaces, existing underground installations, or other improvements damaged or cut as the result of the excavations to their original conditions.
  - 2. Should utilities not shown on the drawings be found during excavations, Contractor shall promptly notify the Owner for instructions as to further action. Failure to do so will make the Contractor liable for any and all damage thereto arising from his operations subsequent to discovery of such utilities. Indicate such utility crossings on the record drawings.
  - 3. Trenches shall be open vertical sided construction wide enough to provide free working space around work installed and to provide ample space for backfilling and compacting.
  - 4. When 2 pipes are to be placed in the same trench, a 6 inch space is to be maintained between pipes. The Contractor shall not install 2 pipes with one directly above the other.
  - 5. Contractor shall cut trenches for pipe to required grade lines and compact trench bottom to provide accurate grade and uniform bearing for the full length of the line.
  - 6. All laterals and mainline trenches shall be sufficiently sloped to provide positive drainage through drain valves.
  - 7. Backfill into trenches once mainline piping, conduit or remote control wires have been installed shall be placed in 4" lifts and compacted to a minimum of 90%. Mechanical whackers or sheep foot shall be used to obtain this level of compaction. Using pneumatic tired vehicles for compaction is unacceptable. Contractor shall be responsible for restoring any finish grade, asphalt or any other flexible paving that fails due to improperly backfilled and compacted mainline or conduit trenches.
- B. Install warning tape directly above pressure piping, 12 inches (300 mm) below finished grades, except 6 inches (150 mm) below sub-grade under pavement and slabs.
- C. Provide minimum cover over top of underground piping according the Drawing or at minimum provide the following depths of cover:
  - 1. Irrigation Main Piping: Minimum depth of 24 inches (600 mm) below finished grade, or not less than 12 inches (300 mm) below average local frost depth, whichever is deeper.
  - 2. Circuit Piping: 18 inches (300 mm).
  - 3. Drain Piping: 12 inches (300 mm).
  - 4. Sleeves: 24 inches (600 mm).
  - 5. Control Wires: 18 inches (300 mm).

### 3.03 PREPARATION

- A. Set stakes to identify locations of proposed irrigation system. Obtain Architect's approval before excavation.

### 3.04 PIPING INSTALLATION

- A. Location and Arrangement: Drawings indicate location and arrangement of piping systems. Install piping as indicated unless deviations are approved on Coordination Drawings.
- B. General:
  - 1. All pipe, fittings and valves shall be carefully placed in the trench. Interior of pipes shall be kept free from dirt and debris and open ends shall be closed by approved means when installation is not in progress.
  - 2. All lateral connections and other connections shall be made to the side of the mainline pipe, no top of pipe connections will be allowed.
- C. Install piping at minimum uniform slope of 0.5 percent down toward drain valves.
- D. Install pipes in trench bedded at least 2 inches of finely divided material with no rocks or clods over 1 inch diameter to provide uniform bedding. Pipe shall be snaked from side to side of trench bottom to allow for expansion and contraction. One additional foot per 100 linear feet of pipe is required to allow for snaking.
- E. Does not lay PVC pipe when there is water in the trench.

- F. Cutting PVC pipe will be with pipe cutter or hacksaw to ensure a square and even cut. Burrs at the cut ends shall be removed prior to installation of the pipe.
- G. Install piping free of sags and bends.
- H. Install groups of pipes parallel to each other, spaced to permit valve servicing.
- I. Install fittings for changes in direction and branch connections.
- J. Install unions adjacent to valves and to final connections to other components with NPS 2 (DN 50) or smaller pipe connection.
- K. Install flanges adjacent to valves and to final connections to other components with NPS 2-1/2 (DN 65) or larger pipe connection.
- L. Install PVC piping in dry weather when temperature is above 40 deg F (5 deg C). Allow joints to cure at least 24 hours at temperatures above 40 deg F (5 deg C) before testing.
- M. Install piping in sleeves under parking lots, roadways, and sidewalks.
- N. Install sleeves made of PVC pipe and socket fittings, and solvent-cemented joints.
- O. Install transition fittings for plastic-to-metal pipe connections according to the following:
  - 1. Underground Piping:
    - a. NPS 1-1/2 (DN 40) and Smaller: Plastic-to-metal transition fittings.
    - b. NPS 2 (DN 50) and Larger: AWWA transition couplings.

### 3.05 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- C. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
  - 2. Plastic Sprinkler Heads and Remote Control Valves shall use Teflon tape only. Teflon paste or joint compound is strictly forbidden from use.
  - 3. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
  - 4. Use strap-type friction wrench to tighten.
  - 5. When connection is plastic to metal, male adapters shall be used. Male adapters shall be hand tightened plus one turn with the strap wrench.
- D. Flanged Joints: Select rubber gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.
- E. PVC Piping Solvent-Cemented Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:
  - 1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
  - 2. PVC Pressure Piping: Join schedule number, ASTM D 1785, PVC pipe and PVC socket fittings according to ASTM D 2672. Join other-than-schedule-number PVC pipe and socket fittings according to ASTM D 2855.
  - 3. PVC Nonpressure Piping: Join according to ASTM D 2855.
  - 4. Joints shall be allowed to cure a minimum of one hour before applying any external stress on the piping and at least 24 hours before placing the joint under water pressure unless otherwise specified by the manufacturer.

### 3.06 VALVE INSTALLATION

- A. Valve Boxes:
  - 1. Valve boxes shall be set 1" above finish grade in lawn landscape planting areas and 3" above finish grade in landscape planting beds where mulch will be applied.
- B. Shut-Off Valves: Shall be installed at the following locations (all in planted or lawn areas):
  - 1. After backflow preventer and prior to main supply loop.
  - 2. Between mainline and each remote control valve.
  - 3. All shut-off valves to be placed in valve boxes.
- C. Irrigation Control Valves/ Master Valves: Shall be installed as shown in details and in accordance with manufacturer's instructions and these specifications.

1. In valve boxes grouped together and no closer than 12 inches to walkway edges, buildings and walls.
  2. Pressure regulating valves shall be adjusted so the most remote sprinkler heads operate at pressure specified.
  3. For valve boxes that incorporate drip valve assemblies, oversized or elongated boxes shall be used. The placement of the remote control valve, pressure regulator and filter shall allow the filter to be serviced (removed and replaced) within the valve box.
  4. Remote control and master valves shall be set plumb and level (parallel to piping) unless otherwise noted.
  5. No more than one remote control valve per valve box shall be installed which shall be placed parallel to one another whenever possible.
- D. Quick Coupling Valves:
1. In valve boxes grouped together and no closer than 12 inches to walkway edges, buildings and walls.
  2. Installed on 3 elbow PVC Schedule 80 swing joint assembly.
- E. Underground Curb Valves: Install in curb-valve casings with tops flush with grade.
1. Install valves and PVC pipe with restrained, gasket joints.
- F. Pressure-Reducing Valves: Install in boxes for automatic control valves.
- G. Drain Valves: Install one (1) at mainline and one (1) per lateral line in underground piping in boxes for automatic control valves and at sufficient intervals to provide complete drainage of all piping
- 3.07 SPRINKLER INSTALLATION
- A. General: All sprinkler heads within a zone shall be of the same type and have matched precipitation rates and shall operate at the same pressure. All sprinkler heads shall be pop-up type; permanent shrub risers are not permitted.
- B. Layout: Shrub beds and lawn areas are to be on separate valves (zones).
1. Place part-circle pop-up sprinkler heads 6 inches from the edge of adjacent walks, curbs and mowing bands or paved areas.
  2. All sprinkler heads are to be adjusted for the proper radius and direction of spray pattern to prevent over spraying onto walks pavement or buildings.
  3. Heads are to be placed perpendicular to finished grade unless otherwise indicated on the Drawings.
  4. Sprinkler heads installed in lawn areas where turf has not been established shall be set 1 inch above the proposed finished grade. Heads installed in this manner will be lowered to grade when the turf is sufficiently established to allow walking on it without appreciable destruction. Such lowering of heads shall be done by the Contractor as part of the original contract with no additional cost to the Owner.
- C. Thoroughly flush out all water lines under a full head of water before installing heads, valves, and quick couplers. Maintain flushing for a minimum of three minutes at the valve located furthest from the water supply. Cap or plug all openings to prevent entrance of materials that would obstruct the pipe or clog the heads. Leave caps/plugs in place until removal is necessary for completion of installation. Install sprinklers after hydrostatic test is completed.
- D. Install sprinklers at manufacturer's recommended heights.
- E. Locate part-circle sprinklers to maintain a minimum distance of 4 inches (100 mm) from walls and 2 inches (50 mm) from other boundaries unless otherwise indicated.
- 3.08 DRIP IRRIGATION SPECIALTY INSTALLATION
- A. General: Type, arrangement, sizes, water flow data and mounting heights (when shown on the Drawings) as shown on Drawings and Details.
1. Install freestanding emitters on pipe riser to mounting height indicated.
  2. Install manifold emitter systems with tubing to emitters. Plug unused manifold outlets. Install emitters on off-ground supports at height indicated.
  3. Install multiple-outlet emitter systems with tubing to outlets. Plug unused emitter outlets. Install outlets on off-ground supports at height indicated.
  4. Install drip tubes with direct-attached emitters on ground.

5. Install drip tubes with remote-discharge on ground with outlets on off-ground supports at height indicated.
6. Install off-ground supports of length required for indicated mounted height of device.
7. Install application pressure regulators in piping near device being protected, and in control-valve boxes.
8. Install air relief valves and vacuum relief valves in piping, and in control-valve boxes.

### 3.09 AUTOMATIC IRRIGATION-CONTROL SYSTEM INSTALLATION

- A. Equipment Mounting: Install interior controllers on wall.
  1. Controller shall be wall mounted in a locking box as shown on the Irrigation Drawings.
  2. Suitable electrical supply to be supplied by the Electrical Subcontractor. Applicable electrical codes from the regulatory jurisdiction shall take precedence in connecting the 110 volt electrical service to the controller. All high voltage wire shall be installed in rigid or flexible conduit where it extends from the exterior of the building to the controller. The controller transformer is shipped in a position for transit that when lowered, will protrude through the bottom of the enclosure for direct connection to a weather-tight junction box. Conductor color coding shall match industry recognized standards for low voltage wiring. Conduit shall be fastened securely to vertical walls and supported 12" on center.
  3. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
  4. Install anchor bolts to elevations required for proper attachment to supported equipment.
  5. Install controller. Connect remote control valves to controller in sequence to correspond with station setting beginning with number 1, then number 3, then 3 etc...
- B. Install control cable in same trench as irrigation piping and at least **2 inches (51 mm)** beside piping. Provide conductors of size not smaller than recommended by controller manufacturer. Install cable in separate sleeve under paved areas. Where more than one wire is placed in a trench, the wiring shall be taped together at intervals of 10 feet.
- C. Provide expansion curl in control cable at intervals of 100 LF. Expansion curls are formed by wrapping at least 5 turns of wire around a one inch diameter pipe, then withdrawing the pipe.
- D. The main line shall have two spare wires installed its entire length and to the automatic controller. Label each end "Spare Wire". A spare wire shall be installed and terminated with a 3DBY connector at each valve manifold. These un-used wires shall be tie-wrapped in the controller and labeled as spares as needed for future use.

### 3.10 CONNECTIONS

- A. Comply with requirements for piping specified in [Division 22 Section "Facility Water Distribution Piping"](#) for water supply from exterior water service piping, water meters, protective enclosures, and backflow preventers. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment, valves, and devices to allow service and maintenance.
- C. Connect wiring between controllers and automatic control valves.

### 3.11 FLOW SENSORS

- A. Locate the flow sensor downstream of the master valve and upstream of the first remote control valve within a valve box.
- B. Flow meter size should be specified to operate within the irrigation system's hydraulic requirements. In some cases the flow meter size may be smaller than the specified mainline pipe.
- C. Install the flow sensor in a vertical orientation by using the solvent weld fittings to connect into the mainline pipe. Locate the molded arrow on top of the flow sensor insert and confirm this is pointing parallel to the direction of water flow. Confirm the mainline pipe has been flushed clean of any construction debris and has been de-pressurized for this installation.
- D. Follow recommended reduction in mainline pipe sizing upstream and downstream of the flow sensor avoiding any changes in pipe direction within 5 pipe diameters downstream of this installation.
- E. Use a twisted pair of solid copper wire suitable for direct burial to connect the flow sensor to the controller. Before making connection to the flow sensor, verify wire continuity with a multi-meter

via an Ohms check. Twist the field wires together at the flow sensor while keeping the connection dry and connect the multi-meter to the other end (before connecting to the controller) for continuity.

- F. Sensor wire shall be continuous without any wire splices unless absolutely necessary. If necessary, locate wire splice in a round valve box that is clearly marked on the "as-built" drawings as a flow sensor junction box.
- G. Make a water-tight connection between the flow sensor wire and the direct burial wire back to the controller with 3M DBY connectors or an approved equal.
- H. Maximum cable length for 14 AWG wire shall not exceed 2500 linear feet. Be sure to leave sufficient flexibility in the wire to allow for changes in direction or for future servicing.
- I. Use different colored wire to distinguish between the red wire (+) and black wire (-). Polarity must be maintained with terminating into the Flow sensor input in the irrigation controller.
- J. Do not place flow sensor wire in the same trench as any high voltage wires (120 volts and higher). If flow sensor wire must cross over high voltage wires, it shall be done perpendicular to the high voltage line and have at least 10" of vertical separation.
- K. Set the High Flow threshold value to be slightly higher than the station with the highest GPM demand. Set the High Flow delay period depending on the irrigation system's layout and mainline length.
- L. Set the No Flow threshold value slightly higher than the station with the lowest GPM. Again set the No Flow delay period depending on the irrigation system's layout and mainline length.
- M. Set the Leak Detection threshold value above the expected flow value for a single quick coupler or hose bib. Again set the Leak Detection delay period depending on the irrigation system's layout and mainline length.
- N. Conduct a test of each of these flow monitoring functions once the irrigation system is complete as part of the acceptance of this phase of installation.

### 3.12 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification.
- B. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplates and signs on each automatic controller.
  - 1. Text: Affix controller name (e.g. "Controller A") on inside of controller cabinet door with letters minimum 1 inch high. Affix a non-fading copy of irrigation diagram to cabinet door below controller name. Irrigation diagram to be sealed between two sheets of 20 mil clear plastic. Irrigation diagram shall be a reduced copy of the as-built drawing and shall show clearly all valves operated by the Controller, showing station number, valve size and type of planting irrigated.
  - 2. Text: In addition to identifying each unit, distinguish between multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations.
- C. Warning Tapes: Arrange for installation of continuous, underground, detectable warning tapes over underground piping during backfilling of trenches. See Division 31 Section "Earth Moving" for warning tapes.

### 3.13 FIELD QUALITY CONTROL

- A. Tests and Inspections: All testing shall be completed under the supervision of the Owner or Owner's Representative. Submit written requests for inspections to the Owner at least 3 days prior to the anticipated inspection date. The Contractor is solely responsible for notifying the Owner where and when such work is ready for testing
- B. The Contractor shall maintain proper facilities and provide safe access for inspection to all parts of the work at all times. Any work covered (out of view) without approval of the Owner must be uncovered, if required for examination at the Contractor's expense.
- C. Irrigation inspections shall consist of:
  - 1. Mainline Pressure "Hydrostatic" Test
  - 2. Leak Test
  - 3. Coverage Test
  - 4. Operational Test
  - 5. Final Inspection

- D. Mainline Pressure "Hydrostatic" Test: Shall be an inspection of the completed mainline installation prior to backfilling trenches, after welded PVC joints have cured as per manufacturer's instructions. If mainline trenches are backfilled prior to completion of this test and inspection, it will be the Contractor's responsibility to expose all backfilled trenches at his expense without any delays to the construction schedule.
    - 1. Test to be completed after irrigation mainline, gate valves and quick couplers have been installed but prior to installing remote control valves.
    - 2. Open all isolation valves, fill all lines with water and shut off at meter. Pressurize the main with air to 100 psi and monitor gage for pressure loss for 4 hours. Leave fittings exposed throughout testing. Pressure mainline via a hand pump or air compressor slowly pressurizing the mainline to 100 psi.
    - 3. Leaks resulting from tests shall be repaired and tests repeated until system passes. Test all isolation valves for leakage. No additional work or payments will be allowed until all leaks are repaired and the pressure test requirements are met as noted above.
  - E. Leak Test: Shall be an inspection of the completed installation of non-pressurized laterals.
    - 1. Test piping after laterals and risers are installed and system is fully operational. Charge system and leave trenches open to detect possible leaks.
    - 2. Repair leaks and retest until no leaks exist.
  - F. Coverage Test: After installation of sprinkler heads, adjust sprinkler heads for proper radius and direction of spray pattern to prevent over spraying onto walks, pavement or building.
  - G. Operational Test: After electrical circuitry has been energized, operate controllers and automatic control valves to confirm proper system operation.
    - 1. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
    - 2. Any irrigation product will be considered defective if it does not pass tests and inspections.
  - H. Final Inspection: Conduct final inspection in conjunction with the final inspection of lawn, shrub and tree planting.
    - 1. Final Inspection will not occur without the Owner's possession of "As-Built" record drawings and without completing previously noted corrections, or without preparing the system for inspection
  - I. Prepare test and inspection reports.
- 3.14 STARTUP SERVICE
- A. Perform startup service.
    - 1. Complete installation and startup checks according to manufacturer's written instructions.
    - 2. Verify that controllers are installed and connected according to the Contract Documents.
    - 3. Verify that electrical wiring installation complies with manufacturer's submittal.
- 3.15 ADJUSTING
- A. Adjust settings of controllers.
  - B. Adjust automatic control valves to provide flow rate at rated operating pressure required for each sprinkler circuit.
  - C. Adjust sprinklers and devices, except those intended to be mounted aboveground, so they will be flush with turf areas and not more than 1/2 inch (13 mm) above, finish grade.
- 3.16 CLEANING
- A. Flush dirt and debris from piping before installing sprinklers and other devices.
- 3.17 DEMONSTRATION
- A. Train Owner's maintenance personnel to adjust, operate, and maintain automatic control valves and controllers.
- 3.18 PIPING SCHEDULE
- A. Install components having pressure rating equal to or greater than system operating pressure.
  - B. Piping in control-valve boxes and aboveground may be joined with flanges or unions instead of joints indicated.
  - C. Underground irrigation main piping, shall be the following:

1. SDR 21, PVC, pressure-rated pipe; Schedule 40, PVC socket fittings; and solvent-cemented joints.
  - D. Circuit piping, shall be the following:
    1. SDR 26, PVC, pressure-rated pipe; Schedule 40, PVC socket fittings; and solvent-cemented joints.
  - E. Underground Branches and Offsets at Sprinklers and Devices: Schedule 40, PVC pipe; threaded PVC fittings; and threaded joints.
    1. Option: Plastic swing-joint assemblies, with offsets for flexible joints, manufactured for this application.
  - F. Risers to Aboveground Sprinklers and Specialties: Schedule 40, PVC pipe and socket fittings; and solvent-cemented joints.
  - G. Drain piping shall be the following:
    1. Schedule 40, PVC pipe and socket fittings; and solvent-cemented joints.
- 3.19 VALVE SCHEDULE
- A. Underground, Shutoff-Duty Valves: Use the following:
    1. NPS 2 (DN 50) and Smaller: Curb valve, curb-valve casing, and shutoff rod.
    2. NPS 3 (DN 80) and Larger: Iron Gate valve, resilient seated; Iron Gate valve casing; and operating wrench (es).
  - B. Throttling-Duty Valves:
    1. NPS 2 (DN 50) and Smaller: Plastic automatic control valve.
    2. NPS 2-1/2 and NPS 3 (DN 65 and DN 80): Plastic automatic control valve.
  - C. Drain Valves:
    1. NPS 1/2 and NPS 3/4 (DN 15 and DN 20): Automatic drain valve.

END OF SECTION 328400



## SECTION 32 92 00

### TURF AND GRASSES

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. Section Includes:
  - 1. Seeding.
  - 2. Hydroseeding.
  - 3. Sodding.
  - 4. Plugging.
  - 5. Sprigging.
  - 6. Meadow grasses and wildflowers.
  - 7. Turf renovation.
  - 8. Erosion-control material(s).
  - 9. Grass paving.
- B. Related Sections:
  - 1. Division 31 Section "Site Clearing" for topsoil stripping and stockpiling.
  - 2. Division 31 Section "Earth Moving" for excavation, filling and backfilling, and rough grading.
  - 3. Division 32 Section "Planting Irrigation" for turf irrigation.
  - 4. Division 33 Section "Storm Utility Drainage Piping" for subsurface drainage.

##### 1.03 DEFINITIONS

- A. Duff Layer: The surface layer of native topsoil that is composed of mostly decayed leaves, twigs, and detritus.
- B. Finish Grade: Elevation of finished surface of planting soil.
- C. Manufactured Topsoil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- D. Pesticide: A substance or mixture intended for preventing, destroying, repelling, or mitigating a pest. This includes insecticides, miticides, herbicides, fungicides, rodenticides, and molluscicides. It also includes substances or mixtures intended for use as a plant regulator, defoliant, or desiccant.
- E. Pests: Living organisms that occur where they are not desired or that cause damage to plants, animals, or people. These include insects, mites, grubs, mollusks (snails and slugs), rodents (gophers, moles, and mice), unwanted plants (weeds), fungi, bacteria, and viruses.
- F. Planting Soil: Standardized topsoil; existing, native surface topsoil; existing, in-place surface soil; imported topsoil; or manufactured topsoil that is modified with soil amendments and perhaps fertilizers to produce a soil mixture best for plant growth.
- G. Subgrade: Surface or elevation of subsoil remaining after excavation is complete or top surface of a fill or backfill before planting soil is placed.
- H. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.
- I. Surface Soil: Soil that is present at the top layer of the existing soil profile at the Project site. In undisturbed areas, the surface soil is typically topsoil, but in disturbed areas such as urban environments, the surface soil can be subsoil.

##### 1.04 SUBMITTALS

- A. Product Data: For each type of product indicated.
  - 1. Pesticides and Herbicides: Include product label and manufacturer's application instructions specific to this Project.
- B. Certification of Grass Seed: From seed vendor for each grass-seed monostand or mixture stating the botanical and common name, percentage by weight of each species and variety, and

percentage of purity, germination, and weed seed. Include the year of production and date of packaging.

1. Certification of each seed mixture for turfgrass sod. Include identification of source and name and telephone number of supplier.
- C. Conformance Submittal: Submit Installer's Qualifications as indicated prior to beginning work for qualified landscape installer.
- D. Product Certificates: For soil amendments and fertilizers, from manufacturer.
- E. Material Test Reports: For standardized ASTM D 5268 topsoil and imported or manufactured topsoil.

#### **1.05 QUALITY ASSURANCE**

- A. Installer Qualifications: A qualified landscape Installer whose work has resulted in successful turf establishment.
  1. Professional Membership: Installer shall be a member in good standing of either the American Landscape Contractors Association or the American Nursery and Landscape Association.
  2. Registration. Installer shall be a Registered Landscape Contractor (where applicable).
  3. Experience: Five years' experience in turf installation in addition to requirements in **Division 2 Section "Quality Requirements."**
  4. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when work is in progress.
  5. Maintenance Proximity: Not more than two hours' normal travel time from Installer's place of business to Project site.
  6. Pesticide Applicator: State licensed, commercial.
- B. Soil-Testing Laboratory Qualifications: An independent laboratory or university laboratory, recognized by the State Department of Agriculture, with the experience and capability to conduct the testing indicated and that specializes in types of tests to be performed.
- C. Soil Analysis: For each unamended soil type, furnish soil analysis and a written report by a qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation exchange capacity; deleterious material; pH; and mineral and plant-nutrient content of the soil.
  1. Testing methods and written recommendations shall comply with USDA's Handbook No. 60.
  2. The soil-testing laboratory shall oversee soil sampling, with depth, location, and number of samples to be taken per instructions from Architect. A minimum of three representative samples shall be taken from varied locations for each soil to be used or amended for planting purposes.
  3. Report suitability of tested soil for turf growth.
    - a. Based on the test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 1000 sq. ft. (92.9 sq. m) or volume per cu. yd. (0.76 cu. m) for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.
    - b. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.

#### **1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Seed and Other Packaged Materials: Deliver packaged materials in original, unopened containers showing weight, certified analysis, name and address of manufacturer, and indication of conformance with state and federal laws, as applicable.
- B. Sod: Harvest, deliver, store, and handle sod according to requirements in "Specifications for Turfgrass Sod Materials" and "Specifications for Turfgrass Sod Transplanting and Installation" in TPI's "Guideline Specifications to Turfgrass Sodding." Deliver sod in time for planting within 24 hours of harvesting. Protect sod from breakage and drying.
- C. Fertilizer: Deliver to site in original unopened standard size bags showing weight, analysis and name of manufacturer. Store in weatherproof place and keep dry to maintain effectiveness. Store partially used bags in sealed containers.

- D. Bulk Materials:
1. Do not dump or store bulk materials near structures, utilities, walkways and pavements, or on existing turf areas or plants.
  2. Provide perimeter-control measures to prevent displacement of bulk materials, discharge of soil-bearing water runoff, and airborne dust reaching adjacent properties, water conveyance systems, or walkways.
  3. Accompany each delivery of bulk fertilizers and soil amendments with appropriate certificates.

#### **1.07 PROJECT CONDITIONS**

- A. Planting Restrictions: See drawings for planting periods and specific species for specific planting dates.
- B. Weather Limitations: Proceed with planting only when existing and forecasted weather conditions permit planting to be performed when beneficial and optimum results may be obtained. Apply products during favorable weather conditions according to manufacturer's written instructions.

#### **1.08 MAINTENANCE SERVICE**

- A. Initial Turf Maintenance Service: Provide full maintenance by skilled employees of landscape Installer. Maintain as required in Part 3. Begin maintenance immediately after each area is planted and continue until acceptable turf is established but for not less than the following periods:
1. Seeded Turf: 60 days from date of planting completion.
    - a. When initial maintenance period has not elapsed before end of planting season, or if turf is not fully established, continue maintenance during next planting season.
  2. Sodded Turf: 30 days from date of installation.
  3. Plugged and Sprigged Turf: 60 days from date of planting completion.
- B. Continuing Maintenance Proposal: From Installer to Owner, in the form of a standard yearly (or other period) maintenance agreement, starting on date initial maintenance service is concluded. State services, obligations, conditions, and terms for agreement period and for future renewal options. Include with Maintenance Service Proposal as defined in Division 21 Section 329300 Part 1.10.

### **PART 2 - PRODUCTS**

#### **2.01 SEED**

- A. Grass Seed: Fresh, clean, dry, new-crop seed complying with AOSA's "Journal of Seed Technology; Rules for Testing Seeds" for purity and germination tolerances.
- B. Seed Species: State-certified seed of grass species as indicated on the drawings, with not less than 95 percent germination, not less than 85 percent pure seed, and not more than 0.5 percent weed seed:
- C. Grass Seed Mix: Proprietary seed mix as indicated on the drawings.

#### **2.02 TURFGRASS SOD**

- A. Turfgrass Sod: Certified, complying with "Specifications for Turfgrass Sod Materials" in TPI's "Guideline Specifications to Turfgrass Sodding." Furnish viable sod of uniform density, color, and texture, strongly rooted, and capable of vigorous growth and development when planted.
- B. Turfgrass Species: Shall be as indicated on the drawings or as approved by the Owner.
- C. Turfgrass Species: Sod of grass species (from seed at sod farm) as follows, with not less than 95 percent germination, not less than 85 percent pure seed, and not more than 0.5 percent weed seed:

#### **2.03 PLUGS**

- A. Plugs: Turfgrass sod, certified, complying with "Specifications for Turfgrass Sod Materials" in TPI's "Guideline Specifications to Turfgrass Sodding." Furnish viable sod of uniform density, color, and texture, cut into square or round plugs, strongly rooted, and capable of vigorous growth and development when planted; of the following turfgrass species and plug size:

1. Turfgrass Species: Shall be as indicated on the drawings.
2. Plug Size: Shall be as indicated on the drawings.

#### **2.04 SPRIGS**

- A. Sod Sprigs: Healthy living stems, rhizomes, or stolons with a minimum of two nodes and attached roots free of soil, of the following turfgrass species:
  1. Turfgrass Species: Shall be as indicated on the drawings.
  2. Turfgrass Species: Shall be as indicated on the drawings.

#### **2.05 MEADOW GRASSES AND WILDFLOWERS**

- A. Wildflower Seed: Fresh, clean, and dry new seed, of mixed species as follows:
  1. Species as identified on drawings.
- B. Native Grass Seed: Fresh, clean, and dry new seed, of mixed species as follows:
  1. Species as identified on drawings.
- C. Wildflower and Native Grass Seed: Fresh, clean, and dry new seed, of mixed species as follows:
  1. Species as identified on drawings.
- D. Seed Carrier: Inert material, sharp clean sand or perlite, mixed with seed at a ratio of not less than two parts seed carrier to one part seed.

#### **2.06 INORGANIC SOIL AMENDMENTS**

- A. Lime: ASTM C 602, agricultural liming material containing a minimum of 80 percent calcium carbonate equivalent and as follows:
  1. Class: T, with a minimum of 99 percent passing through No. 8 (2.36-mm) sieve and a minimum of 75 percent passing through No. 60 (0.25-mm) sieve.
  2. Class: O, (only in high wind areas) with a minimum of 95 percent passing through No. 8 (2.36-mm) sieve and a minimum of 55 percent passing through No. 60 (0.25-mm) sieve.
  3. Provide lime in form of ground dolomitic limestone.
- B. Sulfur: Granular, biodegradable, containing a minimum of 90 percent sulfur, and with a minimum of 99 percent passing through No. 6 (3.35-mm) sieve and a maximum of 10 percent passing through No. 40 (0.425-mm) sieve.
- C. Iron Sulfate: Granulated ferrous sulfate containing a minimum of 20 percent iron and 10 percent sulfur.
- D. Aluminum Sulfate: Commercial grade, unadulterated.
- E. Perlite: Horticultural perlite, soil amendment grade.
- F. Agricultural Gypsum: Minimum 90 percent calcium sulfate, finely ground with 90 percent passing through No. 50 (0.30-mm) sieve.
- G. Sand: Clean, washed, natural or manufactured, and free of toxic materials.

#### **2.07 ORGANIC SOIL AMENDMENTS**

- A. Compost: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch (25-mm) sieve; soluble salt content of 2 to 5 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
  1. Organic Matter Content: 50 percent of dry weight.
- B. Sphagnum Peat: Partially decomposed sphagnum peat moss, finely divided or of granular texture, with a pH range of 3.4 to 4.8.
- C. Wood Derivatives: Decomposed, nitrogen-treated sawdust, ground bark, or wood waste; of uniform texture and free of chips, stones, sticks, soil, or toxic materials.
- D. Manure: Well-rotted, unleached, stable or cattle manure containing not more than 25 percent by volume of straw, sawdust, or other bedding materials; free of toxic substances, stones, sticks, soil, weed seed, and material harmful to plant growth.

#### **2.08 FERTILIZERS**

- A. Bonemeal: Commercial, raw or steamed, finely ground; a minimum of 1 percent nitrogen and 10 percent phosphoric acid.
- B. Superphosphate: Commercial, phosphate mixture, soluble; a minimum of 20 percent available phosphoric acid.

- C. Commercial Fertilizer: Commercial-grade complete fertilizer of neutral character, consisting of fast- and slow-release nitrogen, 50 percent derived from natural organic sources of urea formaldehyde, phosphorous, and potassium in the following composition:
  - 1. Composition: 1 lb/1000 sq. ft. (0.45 kg/92.9 sq. m) of actual nitrogen, 4 percent phosphorous, and 2 percent potassium, by weight unless recommended in soil reports from a qualified soil-testing laboratory or as specified on the drawings.
- D. Slow-Release Fertilizer: Granular or pelleted fertilizer consisting of 50 percent water-insoluble nitrogen, phosphorus, and potassium in the following composition:
  - 1. Composition: 20 percent nitrogen, 10 percent phosphorous, and 10 percent potassium, by weight, unless recommended in soil reports from a qualified soil-testing laboratory or as specified on the drawings.

## 2.09 PLANTING SOILS

- A. Planting Soil: ASTM D 5268 topsoil, with pH range of 5.5 to 7, a minimum of 6 percent organic material content; free of stones 1 inch (25 mm) or larger in any dimension and other extraneous materials harmful to plant growth. Mix ASTM D 5268 topsoil with the following soil amendments in the following quantities to produce planting soil:
  - 1. Ratio of Loose Compost to Topsoil by Volume: 1:4.
- B. Planting Soil: Existing, native surface topsoil formed under natural conditions with the duff layer retained during excavation process and stockpiled on-site. Verify suitability of native surface topsoil to produce viable planting soil. Clean soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.
  - 1. Supplement with native surface (topsoil) planting soil when quantities are insufficient.
  - 2. Mix existing, native surface topsoil with the following soil amendments in the following quantities to produce planting soil:
    - a. Ratio of Loose Compost to Topsoil by Volume: 1:4.
    - b. Ratio of Loose Sphagnum 1:4.
- C. Planting Soil: Existing, in-place surface soil. Verify suitability of existing surface soil to produce viable planting soil. Remove stones, roots, plants, sod, clods, clay lumps, pockets of coarse sand, concrete slurry, concrete layers or chunks, cement, plaster, building debris, and other extraneous materials harmful to plant growth. Mix surface soil with the following soil amendments in the following quantities to produce planting soil:
  - 1. Ratio of Loose Compost to Surface Soil by Volume: 1:3.
- D. Imported Planting Soil: Imported topsoil or manufactured topsoil from off-site sources. Obtain topsoil displaced from naturally well-drained construction or mining sites where topsoil occurs at least 4 inches (100 mm) deep; do not obtain from agricultural land, bogs or marshes.
  - 1. Additional Properties of Imported Topsoil or Manufactured Topsoil: Screened and free of stones 1 inch (25 mm) or larger in any dimension; free of roots, plants, sod, clods, clay lumps, pockets of coarse sand, paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, building debris, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, acid, and other extraneous materials harmful to plant growth; free of obnoxious weeds and invasive plants including quackgrass, Johnsongrass, poison ivy, nutsedge, nimblewill, Canada thistle, bindweed, bentgrass, wild garlic, ground ivy, perennial sorrel, and brome grass; not infested with nematodes, grubs, other pests, pest eggs, or other undesirable organisms and disease-causing plant pathogens; friable and with sufficient structure to give good tilth and aeration. Continuous, air-filled, pore-space content on a volume/volume basis shall be at least 15 percent when moisture is present at field capacity. Soil shall have a field capacity of at least 15 percent on a dry weight basis.
  - 2. Mix imported topsoil or manufactured topsoil with the following soil amendments in the following quantities to produce planting soil:
    - a. Ratio of Loose Compost to Topsoil by Volume: 1:4.

## 2.10 MULCHES

- A. Straw Mulch: Provide air-dry, clean, mildew- and seed-free, salt hay or threshed straw of wheat, rye, oats, or barley.

- B. Compost Mulch: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch (25-mm) sieve; soluble salt content of 2 to 5 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
  - 1. Organic Matter Content: 50 to 60 percent of dry weight.
- C. Fiber Mulch: Biodegradable, dyed-wood, cellulose-fiber mulch; nontoxic and free of plant-growth or germination inhibitors; with a maximum moisture content of 15 percent and a pH range of 4.5 to 6.5.
- D. Non-asphaltic Tackifier: Colloidal tackifier recommended by fiber-mulch manufacturer for slurry application; nontoxic and free of plant-growth or germination inhibitors.
- E. Asphalt Emulsion: NOT PERMITTED.

## **2.11 PESTICIDES**

- A. General: Pesticide, registered and approved by EPA, acceptable to authorities having jurisdiction, and of type recommended by manufacturer for each specific problem and as required for Project conditions and application. Do not use restricted pesticides unless authorized in writing by authorities having jurisdiction.
- B. Pre-Emergent Herbicide (Selective and Non-Selective): Effective for controlling the germination or growth of weeds within planted areas at the soil level directly below the mulch layer.
- C. Post-Emergent Herbicide (Selective and Non-Selective): Effective for controlling weed growth that has already germinated.

## **2.12 EROSION-CONTROL MATERIALS**

- A. Rolled Erosion-Control Blankets (RECP): Biodegradable wood excelsior, straw, or coconut-fiber mat enclosed in a photodegradable plastic mesh. Include manufacturer's recommended steel wire staples, 6 inches (150 mm) long.
- B. Erosion-Control Fiber Mesh: Biodegradable burlap or spun-coir mesh, a minimum of 0.92 lb/sq. yd. (0.5 kg/sq. m), with 50 to 65 percent open area. Include manufacturer's recommended steel wire staples, 6 inches (150 mm) long.
- C. Turf Reinforcement Mats (TRM): Cellular, non-biodegradable slope-stabilization mats designed to isolate and contain small areas of soil over steeply sloped surface, thickness as detailed on the drawings. Include manufacturer's recommended anchorage system for slope conditions.
  - 1. Products: See drawings and details,

## **2.13 GRASS-PAVING MATERIALS**

- A. Grass Paving: Cellular, non-biodegradable plastic mats, designed to contain small areas of soil and enhance the ability of turf to support vehicular and pedestrian traffic, see plan and details for mat thickness. Include manufacturer's recommended anchorage system for slope conditions.
  - 1. Products: See drawings and details.
- B. Base Course: Sound crushed stone or gravel complying with [ASTM D 448 for Size No. 8] Division 2 Section "Earthwork" for base-course material.
- C. Sand: Sound, sharp, washed natural sand or crushed stone complying with gradation requirements in ASTM C 33 for fine aggregate.
- D. Proprietary Growing Mix: As shown on the drawings or submitted and acceptable to Owner.
- E. Sandy Loam Soil Mix: Sound, sharp, washed, natural sand or crushed stone complying with gradation requirements in ASTM C 33 for fine aggregate blended with planting soil as specified. Use blend consisting of 1/2 sand and 1/2 planting soil.
- F. Soil for Paving Fill: Planting soil as specified on the drawings.

# **PART 3 - EXECUTION**

## **3.01 EXAMINATION**

- A. Examine areas to be planted for compliance with requirements and other conditions affecting performance.

1. Verify that no foreign or deleterious material or liquid such as paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, or acid has been deposited in soil within a planting area.
  2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
  3. Suspend soil spreading, grading, and tilling operations during periods of excessive soil moisture until the moisture content reaches acceptable levels to attain the required results.
  4. Uniformly moisten excessively dry soil that is not workable and which is too dusty.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. If contamination by foreign or deleterious material or liquid is present in soil within a planting area, remove the soil and contamination as directed by Owner and replace with new planting soil.

### **3.02 PREPARATION**

- A. Protect structures, utilities, sidewalks, pavements, and other facilities, trees, shrubs, and plantings from damage caused by planting operations.
1. Protect adjacent and adjoining areas from hydroseeding and hydromulching overspray.
  2. Protect grade stakes set by others until directed to remove them.
- B. Install erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.

### **3.03 TURF AREA PREPARATION**

- A. Limit turf subgrade preparation to areas to be planted.
- B. Newly Graded Subgrades: Loosen subgrade to a minimum depth of 6 inches (150 mm). Remove stones larger than 1 inch (25 mm) in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Owner's property.
1. Apply superphosphate fertilizer directly to subgrade before loosening.
  2. Spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly blend planting soil.
    - a. Delay mixing fertilizer with planting soil if planting will not proceed within a few days.
    - b. Mix lime with dry soil before mixing fertilizer.
  3. Spread planting soil to a depth of 6 inches (150 mm) but not less than required to meet finish grades after light rolling and natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
    - a. Spread approximately 1/2 the thickness of planting soil over loosened subgrade. Mix thoroughly into top 2 inches (50 mm) of subgrade. Spread remainder of planting soil.
    - b. Reduce elevation of planting soil to allow for soil thickness of sod where used.
- C. Unchanged Subgrades: If turf is to be planted in areas unaltered or undisturbed by excavating, grading, or surface-soil stripping operations, prepare surface soil as follows:
1. Remove existing grass, vegetation, and turf. Do not mix into surface soil.
  2. Loosen surface soil to a depth of at least 8 inches (200 mm). Apply soil amendments and fertilizers according to planting soil mix proportions and mix thoroughly into top 4 inches (100 mm) of soil. Till soil to a homogeneous mixture of fine texture.
    - a. Apply superphosphate fertilizer directly to surface soil before loosening.
  3. Remove stones larger than 1 inch (25 mm) in any dimension and sticks, roots, trash, and other extraneous matter.
  4. Legally dispose of waste material, including grass, vegetation, and turf, off Owner's property.
- D. Finish Grading: Grade planting areas to a smooth, uniform surface plane with loose, uniformly fine texture. Grade to within plus or minus 1/2 inch (13 mm) of finish elevation. Roll and rake, remove ridges, and fill depressions to meet finish grades. Limit finish grading to areas that can be planted in the immediate future. All turf areas shall slope to drain.
- E. Moisten prepared area before planting if soil is dry. Water thoroughly and allow surface to dry before planting. Do not create muddy soil.
- F. Before planting, obtain Architect's acceptance of finish grading; restore planting areas if eroded or otherwise disturbed after finish grading.

### **3.04 PREPARATION FOR EROSION-CONTROL MATERIALS**

- A. Prepare area as specified in "Turf Area Preparation" Article.

- B. For turf reinforcement mats (TRM), install planting soil in two lifts, with second lift equal to thickness of erosion-control mats. Install erosion-control mat and fasten as recommended by material manufacturer.
- C. Fill cells of turf reinforcement mat with planting soil and compact before planting.
- D. For rolled erosion-control blanket (RECP) or mesh, seed area, install RECP from top of slope, working downward, and as recommended by material manufacturer for site conditions and as shown on the details. Fasten as recommended by material manufacturer.
- E. Moisten prepared area before planting if surface is dry. Water thoroughly and allow surface to dry before planting. Do not create muddy soil.

### **3.05 PREPARATION FOR GRASS-PAVING MATERIALS**

- A. Reduce subgrade elevation soil to allow for thickness of grass-paving system. Grade planting areas to a smooth, uniform surface plane with loose, uniformly fine texture. Grade so that installed paving is within plus or minus 1/2 inch (13 mm) of finish elevation. Roll and rake, remove ridges, and fill depressions.
- B. Install base course (sand, soil mix, proprietary growing mix, or soil for paving fill) as shown on drawings) and as recommended by paving-material manufacturer for site conditions; comply with details shown on Drawings. Compact according to paving-material manufacturer's written instructions.
- C. Install paving mat and fasten according to paving-material manufacturer's written instructions.
- D. Before planting, fill cells of paving mat with planting soil mix as shown on the drawings and compact according to manufacturer's written instructions.
- E. Moisten prepared area before planting if surface is dry. Water thoroughly and allow surface to dry before planting. Do not create muddy soil.

### **3.06 SEEDING**

- A. Sow seed with spreader or seeding machine. Do not broadcast or drop seed when wind velocity exceeds 5 mph (8 km/h). Evenly distribute seed by sowing equal quantities in two directions at right angles to each other.
  - 1. Do not use wet seed or seed that is moldy or otherwise damaged.
  - 2. Do not seed against existing trees. Limit extent of seed to outside edge of planting saucer.
- B. Sow seed at a total rate as indicated on the drawings.
- C. Rake seed lightly into top 1/8 inch (3 mm) of soil, roll lightly, and water with fine spray.
- D. Protect seeded areas with slopes exceeding 3:1 with RECP installed and stapled according to manufacturer's written instructions.
- E. Protect seeded areas with turf reinforcement mats where shown on Drawings; install and anchor according to manufacturer's written instructions.
- F. Protect seeded areas with slopes not exceeding 3:1 and not indicated to receive RECP or TRM by spreading straw mulch. Spread uniformly at a minimum rate of 2 tons/acre (42 kg/92.9 sq. m) to form a continuous blanket in loose thickness over seeded areas. Spread by hand, blower, or other suitable equipment.
  - 1. Anchor straw mulch by crimping into soil with suitable mechanical equipment, or bond by spraying with approved tackifier at rate specified by manufacturer.
- G. Protect seeded areas from hot, dry weather or drying winds by applying specified mulch within 24 hours after completing seeding operations. Water and soak areas, scatter mulch uniformly and roll surface smooth.

### **3.07 HYDROSEEDING**

- A. Hydroseeding: Mix specified seed, fertilizer, and fiber mulch in water, using equipment specifically designed for hydroseed application. Continue mixing until uniformly blended into homogeneous slurry suitable for hydraulic application.
  - 1. Mix slurry with non-asphaltic fiber-mulch, or manufacturer's recommended tackifier.
  - 2. Apply slurry uniformly to all areas to be seeded in a two-step process. Apply first slurry coat at a rate so that mulch component is deposited at not less than 500-lb/acre (5.2-kg/92.9 sq. m) dry weight, and seed component is deposited at not less than the specified seed-sowing rate. Apply slurry cover coat of fiber mulch (hydromulching) as indicated on the drawings or at a rate of 1000 lb/acre (10.4 kg/92.9 sq. m).



### **3.08 SODDING**

- A. Area: Shall be as indicated on the drawings or at minimum a three (3) foot wide strip along walks, roadways and parking areas to reduce erosion.
- B. Lay sod within 24 hours of harvesting. Do not lay sod if dormant or if ground is frozen or muddy.
- C. Lay sod to form a solid mass with tightly fitted joints. Butt ends and sides of sod; do not stretch or overlap. Stagger sod strips or pads to offset joints in adjacent courses. Avoid damage to subgrade or sod during installation. Tamp and roll lightly to ensure contact with subgrade, eliminate air pockets, and form a smooth surface. Work sifted soil or fine sand into minor cracks between pieces of sod; remove excess to avoid smothering sod and adjacent grass.
  - 1. Lay sod across angle of slopes exceeding 4:1.
  - 2. Anchor sod on slopes exceeding 6:1 with steel staples spaced as recommended by sod manufacturer but not less than 2 anchors per sod strip to prevent slippage.
- D. Saturate sod with fine water spray within two hours of planting. During first week after planting, water daily or more frequently as necessary to maintain moist soil to a minimum depth of 1-1/2 inches (38 mm) below sod.

### **3.09 PLUGGING**

- A. Plant plugs in holes or furrows, spaced as indicated on the drawings. On slopes, contour furrows to near level.

### **3.10 SPRIGGING**

- A. Plant freshly shredded sod sprigs in furrows as indicated on drawings. Place individual sprigs with roots and portions of stem in moistened soil, as indicated, and fill furrows without covering growing tips. Lightly roll and firm soil around sprigs after planting.
- B. Broadcast Method: If broadcast method is indicated on drawings, spread sprigs uniformly over prepared surface at rate indicated and mechanically force sprigs into lightly moistened soil.
  - 1. Spread a 1/4-inch- (6-mm-) thick layer of planting soil on sprigs.
  - 2. Lightly roll and firm soil around sprigs after planting.
  - 3. Water sprigs immediately after planting and keep moist by frequent watering until well rooted.

### **3.11 TURF RENOVATION**

- A. Renovate existing turf.
- B. Renovate existing turf damaged by Contractor's operations, such as storage of materials or equipment and movement of vehicles.
  - 1. Reestablish turf where settlement or washouts occur or where minor regrading is required.
  - 2. Install new planting soil as required.
- C. Remove sod and vegetation from diseased or unsatisfactory turf areas; do not bury in soil.
- D. Remove topsoil containing foreign materials such as oil drippings, fuel spills, stones, gravel, and other construction materials resulting from Contractor's operations, and replace with new planting soil.
- E. Mow, dethatch, core aerate, and rake existing turf.
- F. Remove weeds before seeding. Where weeds are extensive, apply selective herbicides as required. Do not use pre-emergence herbicides.
- G. Remove waste and foreign materials, including weeds, soil cores, grass, vegetation, and turf, and legally dispose of them off Owner's property.
- H. Till stripped, bare, and compacted areas thoroughly to a soil depth of 6 inches (150 mm).
- I. Apply soil amendments and initial fertilizers required for establishing new turf and mix thoroughly into top 4 inches (100 mm) of existing soil. Install new planting soil to fill low spots and meet finish grades.
- J. Apply seed and protect with straw mulch, or sod as required for new turf.
- K. Water newly planted areas and keep moist until new turf is established.

### **3.12 TURF MAINTENANCE**

- A. Maintain and establish turf by watering, fertilizing, weeding, mowing, trimming, replanting, and performing other operations as required to establish healthy, viable turf. Roll, regrade, and replant bare or eroded areas and remulch to produce a uniformly smooth turf. Provide materials and installation the same as those used in the original installation.

1. Fill in as necessary soil subsidence that may occur because of settling or other processes. Replace materials and turf damaged or lost in areas of subsidence.
2. In areas where mulch has been disturbed by wind or maintenance operations, add new mulch and anchor as required to prevent displacement.
3. Apply treatments as required to keep turf and soil free of pests and pathogens or disease. Use integrated pest management practices whenever possible to minimize the use of pesticides and reduce hazards.
- B. Watering: Water to keep turf uniformly moist to a depth of 6 inches (150 mm).
  1. Watering shall be done in such a manner and as frequently as deemed necessary by the Owner to assure continued growth of healthy grass.
  2. Schedule watering to prevent wilting, puddling, erosion, and displacement of seed or mulch. Lay out temporary watering system to avoid walking over muddy or newly planted areas.
  3. Water turf with fine spray at a minimum rate of 1 inch (25 mm) per week unless rainfall precipitation is adequate.
  4. Owner will provide water, if available on-site, if not available on-site the Contractor shall provide all necessary water. The Contractor shall furnish all labor, fuel and equipment necessary and required to transport and apply water to the turf areas as required.
- C. Protection: Protect seeded or sod area from trespass during grass establishment. Furnish and install fences, signs, and barriers or any other necessary temporary protective devices. Damage resulting from trespass, erosion, settlement, or other causes shall be repaired at the Contractor's expense. All temporary measures must be removed prior to final acceptance.
- D. Mow turf as soon as top growth is tall enough to cut. Repeat mowing to maintain specified height without cutting more than 1/3 of grass height. Remove no more than 1/3 of grass-leaf growth in initial or subsequent mowing. Do not delay mowing until grass blades bend over and become matted. Do not mow when grass is wet. Schedule initial and subsequent mowing to maintain the following grass height:
  1. Bentgrass to a height of 1 inch (26 mm) or less.
  2. Bermuda grass to a height of 1 to 1-1/2 inch (26 to 40 mm).
  3. Centipedegrass, perennial ryegrass and zoysiagrass to a height of 1 to 2 inches (25 to 50 mm).
  4. Kentucky bluegrass, buffalograss and red fescue to a height of 1-1/2 to 2 inches (38 to 50 mm).
  5. Bahiagrass, turf-type tall fescue, and St Augustine grass to a height of 2 to 3 inches (50 to 75 mm).
- E. Turf Post fertilization: Apply fertilizer after initial mowing and when grass is dry.
  1. Use fertilizer that will provide actual nitrogen of at least 1 lb/1000 sq. ft. (0.45 kg/92.9 sq. m) to turf area.

### **3.13 SATISFACTORY TURF**

- A. Turf installations shall meet the following criteria as determined by Owner:
  1. Satisfactory Seeded Turf: At end of maintenance period, a healthy, uniform, close stand of grass has been established, free of weeds and surface irregularities, with uniform coverage exceeding 85 percent perennial vegetative cover.
  2. Satisfactory Sodded Turf: At end of maintenance period, a healthy, well-rooted, even-colored, viable turf has been established, free of weeds, open joints, bare areas, and surface irregularities.
  3. Satisfactory Plugged Turf: At end of maintenance period, the required number of plugs has been established as well-rooted, viable patches of grass, and areas between plugs are free of weeds and other undesirable vegetation.
  4. Satisfactory Sprigged Turf: At end of maintenance period, the required number of sprigs has been established as well-rooted, viable plants, and areas between sprigs are free of weeds and other undesirable vegetation.
- B. After grass growth has started all areas or parts of areas, which fail to show a uniform stand of grass for any reason whatsoever shall be re-seeded repeatedly until all areas are covered with a satisfactory growth of grass at no additional cost to the Owner.
- C. Use specified materials to reestablish turf that does not comply with requirements and continue maintenance until turf is satisfactory.

### **3.14 MEADOW GRASSES AND WILDFLOWERS**

- A. Sow seed with spreader or seeding machine. Do not broadcast or drop seed when wind velocity exceeds 5 mph (8 km/h). Evenly distribute seed by sowing equal quantities in two directions at right angles to each other.
  - 1. Do not use wet seed or seed that is moldy or otherwise damaged.
- B. Sow seed at a total rate as shown on the drawings.
- C. Brush seed into top 1/16 inch (1.6 mm) of soil, roll lightly, and water with fine spray.
- D. Protect seeded areas from hot, dry weather or drying winds by applying compost or straw mulch within 24 hours after completing seeding operations. Soak areas, scatter mulch uniformly to a thickness of 3/16 inch (4.8 mm), and roll surface smooth.
- E. Water newly planted areas and keep moist until meadow is established.

### **3.15 MEADOW GRASSES AND WILDFLOWER MAINTENANCE**

- A. Maintain and establish meadow by watering, weeding, mowing, trimming, replanting, and performing other operations as required to establish a healthy, viable meadow. Roll, regrade, and replant bare or eroded areas and remulch. Provide materials and installation the same as those used in the original installation.
  - 1. Fill in as necessary soil subsidence that may occur because of settling or other processes. Replace materials and meadow damaged or lost in areas of subsidence.
  - 2. In areas where mulch has been disturbed by wind or maintenance operations, add new mulch and anchor as required to prevent displacement.
  - 3. Apply treatments as required to keep meadow and soil free of pests and pathogens or disease. Use integrated pest management practices whenever possible to minimize the use of pesticides and reduce hazards.
- B. Watering: If indicated on the drawings, install and maintain temporary piping, hoses, and meadow-watering equipment to convey water from sources and to keep meadow uniformly moist.
  - 1. Schedule watering to prevent wilting, puddling, erosion, and displacement of seed or mulch. Lay out temporary watering system to avoid walking over muddy or newly planted areas.
  - 2. Water meadow with fine sprays at a minimum rate of 1/2 inch (13 mm) per week until final acceptance unless rainfall precipitation is adequate.

### **3.16 PESTICIDE APPLICATION**

- A. Apply pesticides and other chemical products and biological control agents in accordance with requirements of authorities having jurisdiction and manufacturer's written recommendations. Coordinate applications with Owner's operations and others in proximity to the Work. Notify Owner before each application is performed.
- B. Post-Emergent Herbicides (Selective and Non-Selective): Apply only as necessary to treat already-germinated weeds and in accordance with manufacturer's written recommendations.

### **3.17 CLEANUP AND PROTECTION**

- A. Promptly remove soil and debris created by turf work from paved areas. Clean wheels of vehicles before leaving site to avoid tracking soil onto roads, walks, or other paved areas.
- B. Erect temporary fencing or barricades and warning signs as required to protect newly planted areas from traffic. Maintain fencing and barricades throughout initial maintenance period and remove after plantings are established.
- C. Remove nondegradable erosion-control measures after grass establishment period.

**END OF SECTION 329200**

## SECTION 329300

### PLANTS

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 2 Specification Sections, apply to this Section.

##### 1.02 SUMMARY

- A. Section Includes:
  - 1. Plants.
  - 2. Planting soils.
  - 3. Tree stabilization.
  - 4. Landscape edgings.
  - 5. Tree grates.
- B. The Contractor shall furnish all materials and perform all work in accordance with these specifications, drawings, and instructions provided by the Owner, so that the intended vegetative cover, plants, trees, etc., flourish beyond the time limits set by their warrantee. The work shall include everything shown on the drawings and required by the specifications and everything to which in the judgment of the Owner is incidental to what is shown on the drawings or required by the specifications.
- C. Related Sections:
  - 1. Division 31 Section "Site Clearing" for protection of existing trees and plantings, topsoil stripping and stockpiling, and site clearing.
  - 2. Division 31 Section "Earth Moving" for excavation, filling, and rough grading and for subsurface aggregate drainage and drainage backfill materials.
  - 3. Division 32 Section "Turf and Grasses" for turf (lawn) and meadow planting, hydroseeding, and erosion-control materials.

##### 1.03 UNIT PRICES

- A. Work of this Section is affected by unit prices specified in Division 01 Section "Unit Prices."
  - 1. Unit prices apply to additions to and deletions from Work as authorized by Change Orders.

##### 1.04 DEFINITIONS

- A. Backfill: The earth used to replace or the act of replacing earth in an excavation.
- B. Balled and Burlapped Stock: Plants dug with firm, natural balls of earth in which they were grown, with ball size not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required; wrapped with burlap, tied, rigidly supported, and drum laced with twine with the root flare visible at the surface of the ball as recommended by ANSI Z60.1.
- C. Balled and Potted Stock: Plants dug with firm, natural balls of earth in which they are grown and placed, unbroken, in a container. Ball size is not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required.
- D. Bare-Root Stock: Plants with a well-branched, fibrous-root system developed by transplanting or root pruning, with soil or growing medium removed, and with not less than minimum root spread according to ANSI Z60.1 for type and size of plant required.
- E. Container-Grown Stock: Healthy, vigorous, well-rooted plants grown in a container, with a well-established root system reaching sides of container and maintaining a firm ball when removed from container. Container shall be rigid enough to hold ball shape and protect root mass during shipping and be sized according to ANSI Z60.1 for type and size of plant required.
- F. Duff Layer: The surface layer of native topsoil that is composed of mostly decayed leaves, twigs, and detritus.
- G. Fabric Bag-Grown Stock: Healthy, vigorous, well-rooted plants established and grown in-ground in a porous fabric bag with well-established root system reaching sides of fabric bag. Fabric bag size is not less than diameter, depth, and volume required by ANSI Z60.1 for type and size of plant.

- H. Finish Grade: Elevation of finished surface of planting soil.
- I. Manufactured Topsoil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- J. Pesticide: A substance or mixture intended for preventing, destroying, repelling, or mitigating a pest. This includes insecticides, matricides, herbicides, fungicides, rodenticides, and molluscicides. It also includes substances or mixtures intended for use as a plant regulator, defoliant, or desiccant.
- K. Pests: Living organisms that occur where they are not desired, or that cause damage to plants, animals, or people. These include insects, mites, grubs, mollusks (snails and slugs), rodents (gophers, moles, and mice), unwanted plants (weeds), fungi, bacteria, and viruses.
- L. Planting Area: Areas to be planted.
- M. Planting Soil: Standardized topsoil; existing, native surface topsoil; existing, in-place surface soil; imported topsoil; or manufactured topsoil that is modified with soil amendments and perhaps fertilizers to produce a soil mixture best for plant growth.
- N. Plant; Plants; Plant Material: These terms refer to vegetation in general, including trees, shrubs, vines, ground covers, ornamental grasses, bulbs, corms, tubers, or herbaceous vegetation.
- O. Root Flare: Also called "trunk flare." The area at the base of the plant's stem or trunk where the stem or trunk broadens to form roots; the area of transition between the root system and the stem or trunk.
- P. Stem Girdling Roots: Roots that encircle the stems (trunks) of trees below the soil surface.
- Q. Subgrade: Surface or elevation of subsoil remaining after excavation is complete, or the top surface of a fill or backfill before planting soil is placed.
- R. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.
- S. Surface Soil: Soil that is present at the top layer of the existing soil profile at the Project site. In undisturbed areas, the surface soil is typically topsoil; but in disturbed areas such as urban environments, the surface soil can be subsoil.

#### 1.05 SUBMITTALS

- A. Product Data: For each type of product indicated, including soils.
  - 1. Plant Materials: Include quantities, sizes, quality, and sources for plant materials.
  - 2. Pesticides and Herbicides: Include product label and manufacturer's application instructions specific to the Project.
  - 3. Plant Photographs: Include color photographs in digital format of each required species and size of plant material as it will be furnished to the Project. Take photographs from an angle depicting true size and condition of the typical plant to be furnished. Include a scale rod or other measuring device in each photograph. For species where more than 20 plants are required, include a minimum of three photographs showing the average plant, the best quality plant, and the worst quality plant to be furnished. Identify each photograph with the full scientific name of the plant, plant size, and name of the growing nursery.
- B. Samples for Verification: For each of the following:
  - 1. Trees and Shrubs: One sample of each variety and size shall be delivered to the site for review and approval by the Owner. Maintain approved samples on-site as a standard for comparison.
  - 2. Mulch: 1-quart (1-liter) or greater volume of each mulch required; in sealed plastic bags labeled with composition of materials by percentage of weight and source of mulch. Each Sample shall be typical of the lot of material to be furnished; provide an accurate representation of color, texture, and organic makeup.
  - 3. Mineral Mulch: **2 lb (1.0 kg)** of each mineral mulch required, in sealed plastic bags labeled with source of mulch. Sample shall be typical of the lot of material to be delivered and installed on the site; provide an accurate indication of color, texture, and makeup of the material.
  - 4. Weed Control Barrier: 12 by 12 inches (300 by 300 mm).
  - 5. Edging Materials and Accessories: Manufacturer's standard size, to verify color selected.
  - 6. Tree Grates Frames, and Accessories: Manufacturer's standard size delivered to the site for review, to verify design, finish and color selected.
  - 7. Root Barrier: Width of panel by 12 inches (300 mm).

- C. Qualification Data Submittal: For qualified landscape Installer. Include professional membership documentation and landscape contractor registration number (if applicable in state where project is located). Include list of similar projects completed by Installer demonstrating Installer's capabilities and experience. Include project names, addresses, and year completed, and include names and addresses of owners' contact persons.
- D. Product Certificates: For each type of manufactured product, from manufacturer, and complying with the following:
  - 1. Manufacturer's certified analysis of standard products.
  - 2. Analysis of other materials by a recognized laboratory made according to methods established by the Association of Official Analytical Chemists, where applicable.
- E. Material Test Reports: For standardized ASTM D 5268 topsoil, existing native surface topsoil, existing in-place surface soil, and imported or manufactured topsoil.
- F. Warranty: Sample of special warranty.

#### **1.06 QUALITY ASSURANCE**

- A. Installer Qualifications: A qualified landscape Installer whose work has resulted in successful establishment of plants.
  - 1. Professional Membership: Installer shall be a member in good standing of either the American Landscape Contractors Association or the American Nursery and Landscape Association.
  - 2. Registration: Installer shall be a Registered Landscape Contractor in the state where the project is located (if applicable in location where project is located).
  - 3. Experience: Five years' experience in landscape installation in addition to requirements in Division 2 Section "Quality Requirements."
  - 4. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when work is in progress.
  - 5. Maintenance Proximity: Not more than two hours' normal travel time from Installer's place of business to Project site.
  - 6. Pesticide Applicator: State licensed, commercial.
- B. Soil-Testing Laboratory Qualifications: An independent or university laboratory, recognized by the State Department of Agriculture, with the experience and capability to conduct the testing indicated and that specializes in types of tests to be performed.
- C. Soil Analysis: For each un-amended soil type, furnish soil analysis and a written report by a qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation exchange capacity; deleterious material; pH; and mineral and plant-nutrient content of the soil.
  - 1. Testing methods and written recommendations shall comply with USDA's Handbook No. 60.
  - 2. The soil-testing laboratory shall oversee soil sampling; with depth, location, and number of samples to be taken per instructions from Owner. A minimum of three representative samples shall be taken from varied locations for each soil to be used or amended for planting purposes.
  - 3. Report suitability of tested soil for plant growth.
    - a. Based upon the test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 1000 sq. ft. (92.9 sq. m) or volume per cu. yd. (0.76 cu. m) for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.
    - b. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.
- D. Provide quality, size, genus, species, and variety of plants indicated, complying with applicable requirements in ANSI Z60.1.
- E. Measurements: Measure according to ANSI Z60.1. Do not prune to obtain required sizes.
  - 1. Trees and Shrubs: Measure with branches and trunks or canes in their normal position. Take height measurements from or near the top of the root flare for field-grown stock and container grown stock. Measure main body of tree or shrub for height and spread; do not measure branches or roots tip to tip. Take caliper measurements 6 inches (150 mm) above

- the root flare for trees up to 4-inch (100-mm) caliper size, and 12 inches (300 mm) above the root flare for larger sizes.
2. Other Plants: Measure with stems, petioles, and foliage in their normal position.
- F. Plant Material Observation: Owner may observe plant material either at place of growth or at site before planting for compliance with requirements for genus, species, variety, cultivar, size, and quality. Owner retains right to observe trees and shrubs further for size and condition of balls and root systems, pests, disease symptoms, injuries, and latent defects and to reject unsatisfactory or defective material at any time during progress of work. Remove rejected trees or shrubs immediately from Project site.
1. Notify Owner of sources of planting materials seven days in advance of delivery to site.
- G. All work completed and materials furnished and installed shall be of the best quality and shall be in strict accordance with the intention of the drawings, specifications and samples. The Contractor shall cooperate with the Owner so that no error or discrepancy in the drawings or specifications shall cause defective or inappropriate materials to be used or poor workmanship to be allowed and so that the work may proceed in the most efficient and effective manner. If there is a discrepancy between the graphic count of plants and the drawing list count of plants on the landscape drawing, the graphic count shall govern.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Packaged Materials: Deliver packaged materials in original, unopened containers showing weight, certified analysis, name and address of manufacturer, and indication of conformance with state and federal laws if applicable.
- B. Bulk Materials:
1. Do not dump or store bulk materials near structures, utilities, walkways and pavements, or on existing turf areas or plants.
  2. Provide erosion-control measures to prevent erosion or displacement of bulk materials, discharge of soil-bearing water runoff, and airborne dust reaching adjacent properties, water conveyance systems, or walkways.
  3. Accompany each delivery of bulk fertilizers, lime, and soil amendments with appropriate certificates.
- C. Deliver bare-root stock plants freshly dug. Immediately after digging up bare-root stock, pack root system in wet straw, hay, or other suitable material to keep root system moist until planting.
- D. Do not prune trees and shrubs before delivery. Protect bark, branches, and root systems from sun scald, drying, wind burn, sweating, whipping, and other handling and tying damage. Do not bend or bind-tie trees or shrubs in such a manner as to destroy their natural shape. Provide protective covering of plants during shipping and delivery. Do not drop plants during delivery and handling.
- E. Handle planting stock by root ball. Lift from the bottom of the root balls or with belts or lifting harnesses of sufficient width not to damage root balls. Do not lift trees by the trunk.
- F. Store bulbs, corms, and tubers in a dry place at 60 to 65 deg F (16 to 18 deg C) until planting.
- G. Deliver plants after preparations for planting have been completed, and install immediately. If planting is delayed more than six hours after delivery, set plants and trees in their appropriate aspect (sun, filtered sun, or shade), protect from weather and mechanical damage, and keep roots moist.
1. Heel-in bare-root stock. Soak roots that are in dry condition in water for two hours. Reject dried-out plants.
  2. Set balled stock on ground and cover ball with soil, peat moss, sawdust, or other acceptable material.
  3. Do not remove container-grown stock from containers before time of planting.
  4. Water root systems of plants stored on-site deeply and thoroughly with a fine-mist spray. Water as often as necessary to maintain root systems in a moist, but not overly-wet condition.
  5. Protect plants at all times from the sun and from drying winds.

#### **1.08 PROJECT CONDITIONS**

- A. Field Measurements: Verify actual grade elevations, service and utility locations, irrigation system components, and dimensions of plantings and construction contiguous with new plantings by field measurements before proceeding with planting work.

- B. Interruption of Existing Services or Utilities: Do not interrupt services or utilities to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary services or utilities according to requirements indicated:
  - 1. Notify Owner seven (7) days in advance of proposed interruption of each service or utility.
  - 2. Do not proceed with interruption of services or utilities without Owner's written permission.
- C. Weather Limitations: Proceed with planting only when existing and forecasted weather conditions permit planting to be performed when beneficial and optimum results may be obtained. Apply products during favorable weather conditions according to manufacturer's written instructions and warranty requirements.
- D. Coordination with Turf Areas (Lawns): Plant trees, shrubs, and other plants after finish grades are established and before planting turf areas unless otherwise indicated.
  - 1. When planting trees, shrubs, and other plants after planting turf areas, protect turf areas, and promptly repair damage caused by planting operations.

#### **1.09 WARRANTY**

- A. Special Warranty: Installer agrees to repair or replace plantings and accessories that fail in materials, workmanship, or growth within specified warranty period.
  - 1. The Contractor shall provide the Owner a Warrantee for the work for a period of one year after final acceptance by the Owner.
  - 2. Failures include, but are not limited to, the following:
    - a. Death and unsatisfactory growth, except for defects resulting from abuse, lack of adequate maintenance, or neglect by Owner, or incidents that are beyond Contractor's control.
      - 1) Where Installer alleges defects resulting from abuse, lack of adequate maintenance or neglect by Owner, the Installer must officially provide written notification to the Owner within 30 days of the alleged abuse, lack of adequate maintenance or neglect.
    - b. Structural failures including plantings falling or blowing over.
    - c. Faulty performance of construction
    - d. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
  - 3. Warranty Periods from Date of Final Acceptance:
    - a. Trees, Shrubs, Vines, and Ornamental Grasses: 12 months.
    - b. Ground Covers, Biennials, Perennials, and Other Plants: 12 months.
    - c. Annuals: 12 months.
  - 4. Include the following remedial actions as a minimum:
    - a. Contractor to immediately remove dead plants and replace unless required to plant in the succeeding planting season.
    - b. Replace plants that are more than 25 percent dead or in an unhealthy condition at end of warranty period.
    - c. Provide extended warranty for period equal to original warranty period, for replaced plant material.
    - d. Contractor is responsible for any damage caused by its operations and shall dispose of all green waste, rubbish and excess soil as directed.

#### **1.10 MAINTENANCE SERVICE**

- A. Landscape Contractor shall provide the Owner with a written proposal due no later than the date of final acceptance or the established possession date for landscape maintenance by the Owner whichever is sooner. The written proposal shall be prepared by an ANA certified nursery business or Registered Landscape Contractor capable of performing the work. The proposal shall provide maintenance for a one year period and be renewable in one year increments. Maintenance shall begin at final acceptance of construction. The maintenance proposal is intended to run concurrently with the one year warrantee as part of this specification.
- B. Initial Maintenance Service for Trees and Shrubs: Provide maintenance by skilled employees of landscape Installer. Maintain as required in Part 3. Begin maintenance immediately after plants are installed and continue until plantings are acceptably healthy and well established but for not less than maintenance period below.
  - 1. Maintenance Period: 12 months from date of final acceptance.



- C. Initial Maintenance Service for Ground Cover and Other Plants: Provide maintenance by skilled employees of landscape Installer. Maintain as required in Part 3. Begin maintenance immediately after plants are installed and continue until plantings are acceptably healthy and well established but for not less than maintenance period below.
1. Maintenance Period 12 months from date of final acceptance.
- D. Initial Maintenance Work to Include: All necessary watering, cultivation, weeding, pruning, wound dressing, disease and insect pest control, protective spraying, straightening plants which lean or sag, adjustments of plants that settle, mowing of turf areas, replacement of mulch that has been displaced by erosion or other means, repairing and reshaping of water rings or saucers, top-dressing mulch areas at conclusion of first year, reseeding or replanting areas affected, removal of all rubbish, waste, provision of all tools and equipment used in the execution of the contract, and any procedure consistent with good horticultural practice necessary to insure normal, vigorous and healthy growth of all plant material
1. Watering:
- a. The irrigation system, if installed on the site, shall be used by the maintenance Contractor for the watering program, but any failure of the system does not eliminate the Contractor's responsibility of maintaining the desired level of moisture necessary to maintain vigorous, healthy growth.
  - b. The quantity of water applied at one time shall be sufficient to penetrate the soil to a depth necessary to sustain healthy plant growth.
  - c. On-site water shall be furnished by the Owner. The Contractor shall furnish hose and other watering equipment as needed.
2. Weeding:
- a. Maintenance Contractor shall keep all planting areas free from weeds and undesirable grasses by a method and materials approved by ANA.
3. Disease and Insect Pest Control
- a. Inspect all plant material at least once a month to locate any disease or insect pest infestations. Upon discovery of any disease or insect pest infestation, identify, or have identified, the nature or species of infestation. A method of control in accordance with ANA standards shall be immediately implemented. Application of disease or insect control shall be by licensed pesticide/insecticide applicator.
4. Fertilizing
- a. Maintenance Contractor is to fertilized plant material on a scheduled program to fit the requirements of soil conditions and plant materials to maintain healthy and vigorous plant growth.
5. Pruning and Repair
- a. The amount of pruning shall be limited to the minimum necessary to remove dead or injured twigs and branches and to compensate for the loss of roots as a result of transplanting operation and/or to maintain safety in vehicular use areas. Pruning shall be done in such a manner as to not change the natural habit or shape of the plant. All cuts shall be made flush, leaving no stubs or areas that will collect water.
6. Mowing
- a. Mow all grass areas at regular intervals to keep the grass height from exceeding 3 inches. Mow grass areas in such a manner as to prevent clippings from blowing on paved areas and sidewalks. Composting or mulching mowers are preferred. Cleanup from mowing shall include sweeping or blowing of paved areas and sidewalks to clear them from debris.
7. Clean Up
- a. During performance of maintenance work, excess waste and debris shall be continuously and promptly removed at the end of each work day.
8. Maintenance Report and Schedule of Activities
- a. Landscape Maintenance Contractor shall provide a schedule of work to be submitted to the Store Manager. The schedule is to provide a list of activities and times including anticipated hours and number of personnel needed. The schedule should expressly detail the planned activities including the work of any subcontractors.
9. Maintenance Contract

- a. These terms and conditions outlined shall be attached and made part of a maintenance contract with the Owner.
- 10. Termination of Maintenance Contract:
  - a. If the Owner fails to make payment for a period of 90 days without written clarification, the Maintenance Contractor may, upon 12 additional days written notice to the Owner, terminate the contract and recover from the owner, payment for all work executed and for any proven loss sustained upon any materials, equipment, or tools, including reasonable profit and damages applicable to the maintenance contract.
  - b. If the Maintenance Contractor defaults or persistently fails or neglects to carry out the work in accordance with the maintenance contract, the Owner, after 12 days written notice to the Maintenance Contractor, and without prejudice to any other remedy they may have, may make good such deficiencies and deduct the cost thereof, including compensation for additional services made necessary thereby, from the payment then or thereafter due the Contractor, or at their option, may terminate the contract.
- E. Insurance: Landscape Maintenance Contractor shall purchase and maintain Contractor's General Liability Insurance in the amounts of \$1,000,000. Certification of such insurance shall be filed with the Owner prior to commencement of the work.
- F. Plant Material Replacement shall comply with Part 1.9 of the Warrantee.
  - 1. During the first year of the maintenance contract, any replacement of plant material shall be the responsibility of the Contractor. Work shall be completed within 14 days during the planting season, or at the start of the next growing season if discovered outside the planting season.
- G. Continuing Maintenance Proposal: From Installer to Owner, in the form of a standard yearly (or other period) maintenance agreement, starting on date initial maintenance service is concluded. State services, obligations, conditions, and terms for agreement period and for future renewal options.

## PART 2 - PRODUCTS

### 2.01 PLANT MATERIAL

- A. General: Furnish nursery-grown plants true to genus, species, variety, cultivar, stem form, shearing, and other features indicated in Plant Schedule or Plant Legend shown on Drawings and complying with ANSI Z60.1; and with healthy root systems developed by transplanting or root pruning. Provide well-shaped, fully branched, healthy, vigorous stock, densely foliated when in leaf and free of disease, pests, eggs, larvae, and defects such as knots, sun scald, injuries, abrasions, and disfigurement.
  - 1. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed between two branches or between branch and trunk ("included bark"); crossing trunks; cut-off limbs more than 3/4 inch (19 mm) in diameter; or with stem girdling roots will be rejected.
  - 2. Collected Stock: Do not use plants harvested from the wild, from native stands, from an established landscape planting, or not grown in a nursery unless otherwise indicated.
- B. Quality: Unless specifically noted otherwise, all plants shall be of selected specimen quality, exceptionally heavy, symmetrical, tightly knit, so trained or favored in their development and appearance as to be superior in form, number of branches, compactness and symmetry. All plants shall have a normal habit or sound, healthy, vigorous plants with well-developed root systems.
  - 1. Trees, shrubs and other plants shall be nursery stock and shall be true to type and name in accordance with the current addition of **Standardized Plant Names** published by the **American Joint Committee on Horticultural Nomenclature**.
  - 2. Plants shall be free of disease, insect pests, eggs or larvae.
  - 3. Plants shall not be pruned before delivery to the site. Trees with abrasion of the bark, sunscalds, disfiguring knots or fresh cuts of limbs over 1 ¼ inches, which have not completely calloused, shall be rejected.
  - 4. All plants will have come from locations and grown under climatic conditions similar to those in the locality of the site of the project under construction or have been acclimated to such conditions for at least two (2) years. Unless otherwise approved, plants shall have been

- grown at latitude not more than 200 miles north or south of the latitude of the project unless the provenance of the plant can be documented to be compatible with the latitude and cold hardiness zone of the planting location.
5. Plants grown in containers shall be of appropriate sizes for the container as specified and be free of circling roots on the exterior and interior of the root ball. Container plants shall have been grown in the container long enough to have established roots throughout the growing medium. Single stemmed or thin rooted plants will not be accepted.
- C. Provide plants of sizes, grades, and ball or container sizes complying with ANSI Z60.1 for types and form of plants required. Plants of a larger size may be used if acceptable to Owner, with a proportionate increase in size of roots or balls.
    1. Plants shall meet the drawing planting list specification for spread, height or container size.
    2. If a range of size is given, no plant shall be less than the minimum size, and not less than 50% of the plants shall be as small as the lower half of the range specified.
    3. Measurements specified are the minimum size acceptable and, where pruning is required, are the measurements after pruning.
  - D. Root-Ball Depth: Furnish trees and shrubs with root balls measured from top of root ball, which shall begin at root flare according to ANSI Z60.1. Root flare shall be visible before planting.
    1. All B&B plants to be moved with the root systems as solid units with balls of earth firmly wrapped with burlap. Diameter and depth of the balls must be sufficient to encompass the fibrous root feeding systems necessary for healthy development of the plant. Plants where the ball of earth surrounding its roots has been badly cracked or broken will be accepted.
  - E. If formal arrangements or consecutive order of plants is shown on Drawings, select stock for uniform height and spread, and number the labels to assure symmetry in planting.
  - F. Annuals: Provide healthy, disease-free plants of species and variety shown or listed, with well-established root systems reaching to sides of the container to maintain a firm ball, but not with excessive root growth encircling the container. Provide only plants that are acclimated to outdoor conditions before delivery and that are in bud but not yet in bloom.

## **2.02 INORGANIC SOIL AMENDMENTS**

- A. Lime: ASTM C 602, agricultural liming material containing a minimum of 80 percent calcium carbonate equivalent and as follows:
  1. Class: T, with a minimum of 99 percent passing through No. 8 (2.36-mm) sieve and a minimum of 75 percent passing through No. 60 (0.25-mm) sieve.
  2. Provide lime in form of ground dolomitic limestone if magnesium is required.
- B. Sulfur: Granular, biodegradable, and containing a minimum of 90 percent sulfur, with a minimum of 99 percent passing through No. 6 (3.35-mm) sieve and a maximum of 10 percent passing through No. 40 (0.425-mm) sieve.
- C. Iron Sulfate: Granulated ferrous sulfate containing a minimum of 20 percent iron and 10 percent sulfur.
- D. Aluminum Sulfate: Commercial grade, unadulterated.
- E. Perlite: Horticultural perlite, soil amendment grade.
- F. Agricultural Gypsum: Minimum 90 percent calcium sulfate, finely ground with 90 percent passing through No. 50 (0.30-mm) sieve.
- G. Sand: Clean, washed, natural or manufactured, and free of toxic materials.

## **2.03 ORGANIC SOIL AMENDMENTS**

- A. Compost: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through **3/4-inch (19-mm)** sieve; soluble salt content of 10 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
  1. Organic Matter Content: 50 percent of dry weight.
  2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.
- B. Sphagnum Peat: Partially decomposed sphagnum peat moss, finely divided or granular texture, with a pH range of 3.4 to 4.8. Peat shall be used for planting soil mixture only.
- C. Wood Derivatives: Decomposed, nitrogen-treated sawdust, ground bark, or wood waste; of uniform texture and free of chips, stones, sticks, soil, or toxic materials.

- D. Pine Bark: Horticultural grade milled pine bark, with 80 percent material by volume between 10 and 15 mm. Pine bark shall be aged sufficiently to break down all woody material. pH shall range between 4 and 7.
- E. Manure: Well-rotted, unleached, stable or cattle manure containing not more than 25 percent by volume of straw, sawdust, or other bedding materials; free of toxic substances, stones, sticks, soil, weed seed, debris, and material harmful to plant growth.

#### **2.04 FERTILIZERS**

- A. Bonemeal: Commercial, raw or steamed, finely ground; a minimum of 1 percent nitrogen and 10 percent phosphoric acid.
- B. Superphosphate: Commercial, phosphate mixture, soluble; a minimum of 20 percent available phosphoric acid.
- C. Commercial Fertilizer: Commercial-grade complete fertilizer of neutral character, consisting of fast- and slow-release nitrogen, 50 percent derived from natural organic sources of urea formaldehyde, phosphorous, and potassium in the following composition:
  - 1. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing laboratory or as specified on the drawings.
  - 2. For the purpose of bidding, assume 10% nitrogen, 6% phosphorus and 4% potash by weight. At least 50% of the total nitrogen shall contain no less than 3% water-insoluble nitrogen. At least 60% of the nitrogen content shall be derived from super-phosphate containing not less than 18% phosphoric acid or bone meal containing 25% phosphoric acid and 2% nitrogen. Potash shall be derived from muriate of potash containing 55% potash.
- D. Slow-Release Fertilizer: Granular or pelleted fertilizer consisting of 50 percent water-insoluble nitrogen, phosphorus, and potassium in the following composition:
  - 1. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing laboratory or as specified on the drawings.
- E. Planting Tablets: Tightly compressed chip type, long-lasting, slow-release, commercial-grade planting fertilizer in tablet form. Tablets shall break down with soil bacteria, converting nutrients into a form that can be absorbed by plant roots.
  - 1. Size: 5-gram tablets.
  - 2. Nutrient Composition: 20 percent nitrogen, 10 percent phosphorous, and 5 percent potassium, by weight plus micronutrients.

#### **2.05 PLANTING SOILS**

- A. Planting Soil: ASTM D 5268 topsoil, with pH range of 5.5 to 7, a minimum of 6 percent to a maximum 20% organic material content; free of stones 1 inch (25 mm) or larger in any dimension and other extraneous materials harmful to plant growth. Mix ASTM D 5268 topsoil with the following soil amendments in the following quantities to produce planting soil:
  - 1. Ratio of Loose Compost to Topsoil by Volume: 1:4
- B. Planting Soil: Existing, native surface topsoil formed under natural conditions with the duff layer retained during excavation process and stockpiled on the site. Verify suitability of native surface topsoil to produce viable planting soil. Clean soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.
  - 1. If quantity of native surface topsoil is insufficient for project needs, supplement with planting soil.
  - 2. Mix existing, native surface topsoil with the following soil amendments in the following quantities to produce planting soil:
    - a. Ratio of Loose Compost to Topsoil by Volume: 1:4
- C. Planting Soil: Existing, in-place surface soil. Verify suitability of existing surface soil to produce viable planting soil. Remove stones, roots, plants, sod, clods, clay lumps, pockets of coarse sand, concrete slurry, concrete layers or chunks, cement, plaster, building debris, and other extraneous materials harmful to plant growth. Mix surface soil with the following soil amendments in the following quantities to produce planting soil:
  - 1. Ratio of Loose Compost to Surface Soil by Volume: 1:4.
- D. Planting Soil: Imported topsoil or manufactured topsoil from off-site sources. Obtain topsoil displaced from naturally well-drained construction or mining sites where topsoil occurs at least 4 inches (100 mm) deep; do not obtain from agricultural land, bogs, or marshes.

1. Additional Properties of Imported Topsoil or Manufactured Topsoil: Screened and free of stones 1 inch (25 mm) or larger in any dimension; free of roots, plants, sod, clods, clay lumps, pockets of coarse sand, paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, building debris, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, acid, and other extraneous materials harmful to plant growth; free of obnoxious weeds and invasive plants including quackgrass, Johnsongrass, poison ivy, nutsedge, nimblewill, Canada thistle, bindweed, bentgrass, wild garlic, ground ivy, perennial sorrel, and brome grass; not infested with nematodes; grubs; or other pests, pest eggs, or other undesirable organisms and disease-causing plant pathogens; friable and with sufficient structure to give good tilth and aeration. Continuous, air-filled pore space content on a volume/volume basis shall be at least 15 percent when moisture is present at field capacity. Soil shall have a field capacity of at least 15 percent on a dry weight basis.
2. Mix imported topsoil or manufactured topsoil with the following soil amendments in the following quantities to produce planting soil:
  - a. Ratio of Loose Compost to Topsoil by Volume: 1:4.

## **2.06 MULCHES**

- A. Organic Mulch: Free from deleterious materials and suitable as a top dressing of trees and shrubs, consisting of one of the following:
  1. Type: Shredded hardwood or shredded pine bark mulch
  2. Size Range: 3 inch after settlement, top dressing in all plant beds and around trees planted by the Contractor. Single trees or shrubs shall be mulched to the outside edge of the saucer. Mulch shall be of sufficient character as not to be easily displaced by wind or water runoff.
  3. Color: Natural.
- B. Compost Mulch: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch (25-mm) sieve; soluble salt content of 2 to 5 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
  1. Organic Matter Content: 50 percent of dry weight.
- C. Mineral Mulch: Hard, durable stone, washed free of loam, sand, clay, and other foreign substances, of following type, size range, and color:
  1. Type: Rounded riverbed gravel or granite chips or as per specified on the drawings..
  2. Size Range: Rounded Riverbed Gravel 1-1/2 inches (38 mm) maximum, 3/4 inch (19 mm) minimum, Granite Chips 3/4 inch (19 mm) maximum, 1/4 inch (6.4 mm) minimum
  3. Stone mulch shall be placed to a depth of 3 inches. Adjust grades allowing for thickness of mulch by cutting or filling. Assure 2% pitch away from building. Rake smooth and even and roll or tamp so that the subgrade is uniformly firm..
  4. Color: As specified on the plans

## **2.07 WEED-CONTROL BARRIERS**

- A. Nonwoven Geotextile Filter Fabric: "Easy Gardner Weed Block", "Dewitt Weed Barrier", "FibarFelt" or approved equivalent by the Owner. Material to be polypropylene or polyester fabric, 3.5 oz./sq. yd. (101g/sq. m) minimum, composed of fibers formed into a stable network so that fibers retain their relative position. Fabric shall be inert to biological degradation and resist naturally-encountered chemicals, alkalis, and acids.
- B. Paper Mulch Mat: Material only as approved by the Lowe's Engineering Manager. Material to be recycled content, organic, 100% compostable, and 100% bio-degradable paper mulch mat, composed of paper fibers formed into a continuous laminate sheet.

## **2.08 PESTICIDES**

- A. General: Pesticide registered and approved by EPA, acceptable to authorities having jurisdiction, and of type recommended by manufacturer for each specific problem and as required for Project conditions and application. Do not use restricted pesticides unless authorized in writing by authorities having jurisdiction.
- B. Pre-Emergent Herbicide (Selective and Non-Selective): Effective for controlling the germination or growth of weeds within planted areas at the soil level directly below the mulch layer.

- C. Post-Emergent Herbicide (Selective and Non-Selective): Effective for controlling weed growth that has already germinated.

## **2.09 TREE STABILIZATION MATERIALS**

- A. Stakes and Guys:
  - 1. Upright and Guy Stakes: Rough-sawn, sound, new pressure treated wood, free of knots, holes, cross grain, and other defects, 2-by-2-inch nominal (38-by-38-mm actual) by length indicated, pointed at one end.
  - 2. Wood Deadmen: Timbers measuring 8 inches (200 mm) in diameter and 48 inches (1200 mm) long, treated with specified wood pressure-preservative treatment.
  - 3. Flexible Ties: Wide rubber or elastic bands or straps of length required to reach stakes.
  - 4. Guys and Tie Wires: ASTM A 641/A 641M, Class 1, galvanized-steel wire, two-strand, twisted, 0.106 inch (2.7 mm) in diameter.
  - 5. Tree-Tie Webbing: UV-resistant polypropylene or nylon webbing with brass grommets.
  - 6. Guy Cables: Five-strand, 3/16-inch- (4.8-mm-) diameter, galvanized-steel cable, with zinc-coated turnbuckles or compression springs, a minimum of 3 inches (75 mm) long, with two 3/8-inch (10-mm) galvanized eyebolts.
  - 7. Flags: Standard surveyor's plastic flagging tape, white, 6 inches (150 mm) long.
  - 8. Proprietary Staking-and-Guying Devices: Proprietary stake and adjustable tie systems to secure each new planting by plant stem; sized as indicated and per manufacturer's written recommendations. See proprietary staking and guying devices if indicated on the drawings.
- B. Root-Ball Stabilization Materials:
  - 1. Upright Stakes and Horizontal Hold-Down: Rough-sawn, sound, new hardwood or softwood, free of knots, holes, cross grain, and other defects, 2-by-2-inch nominal (38-by-38-mm actual) by length indicated; stakes pointed at one end.
  - 2. Wood Screws: ASME B18.6.1.
- C. Palm Bracing: Battens or blocks, struts, straps, and protective padding as indicated.
  - 1. Battens or Blocks and Struts: Rough-sawn, sound, new hardwood or softwood, free of knots, holes, cross grain, and other defects, 2-by-4-inch nominal (38-by-89-mm actual) by lengths indicated.
  - 2. Straps: Adjustable steel or plastic package banding straps.
  - 3. Padding: Burlap.

## **2.10 LANDSCAPE EDGINGS**

- A. Wood Edging ("wood header boards"): Of sizes shown on Drawings, and wood stakes as follows:
  - 1. Species: Western red cedar, all heart.
  - 2. Stakes: Same species as edging, 1-by-2-inch nominal (19-by-38-mm actual) by 18 inches (450 mm) long, with galvanized nails for anchoring edging.
- B. Steel Edging: Standard commercial-steel edging, rolled edge, fabricated in sections of standard lengths, with loops stamped from or welded to face of sections to receive stakes.
  - 1. Manufacturers: Subject to compliance with requirements, provide product indicated on drawings or comparable product by one of the following:
    - a. Border Concepts, Inc.
    - b. Collier Metal Specialties, Inc.
    - c. Russell, J. D. Company (The).
    - d. Sure-Loc Edging Corporation.
  - 2. Edging Size: 3/16 inch (4.8 mm) wide by 4 inches (100 mm) deep or as indicated on the drawings.
  - 3. Stakes: Tapered steel, a minimum of 15 inches (380 mm).
  - 4. Accessories: Standard tapered ends, corners, and splicers.
  - 5. Finish: Standard paint, zinc or unfinished or as indicated on the drawings. Standard paint or as indicated on the drawings.
  - 6. Paint Color: As indicated on the drawings.
- C. Aluminum Edging: Standard-profile extruded-aluminum edging, ASTM B 221 (ASTM B 221M), Alloy 6063-T6, fabricated in standard lengths with interlocking sections with loops stamped from face of sections to receive stakes.

1. Manufacturers: Subject to compliance with requirements, provide product indicated on drawings or comparable product by one of the following:
  - a. Curv-Rite, Inc.
  - b. Permaloc Corporation.
  - c. Russell, J. D. Company (The).
  - d. Sure-Loc Edging Corporation.
2. Edging Size: 3/16 inch (4.8 mm) wide by 4 inches (100 mm) deep
3. Stakes: Aluminum, ASTM B 221 (ASTM B 221M), Alloy 6061-T6, approximately 1-1/2 inches (38 mm) wide by 12 inches (300 mm) long.
4. Finish: Manufacturer's standard paint, powder coat paint, natural aluminum or as indicated on the drawings.
5. Paint Color: As indicated on the drawings.

## **2.11 TREE GRATES**

- A. Tree Grates and Frames: ASTM A 48/A 48M, Class 35 (Class 250) or better, gray-iron castings of shape, pattern, and size indicated.
- B. Shape and Size: As indicated on the drawings.
- C. Finish: As indicated on the drawings/

## **2.12 MISCELLANEOUS PRODUCTS**

- A. Antidesiccant: Water-insoluble emulsion, permeable moisture retarder, film forming, for trees and shrubs. Deliver in original, sealed, and fully labeled containers and mix according to manufacturer's written instructions.
- B. Burlap: Non-synthetic, biodegradable.
- C. Rolled Erosion Control Blanket/Fabric Netting: Rolled erosion control blanket is to be applied on all slopes exceeding 3:1 and at other locations where indicated on the drawings. Blankets shall be "Curlex II" by American Excelsior Company, "SC150" by North American Green, or "Landlok CS2" by Synthetic Industries, and/or as specified on the plans. Area covered shall be properly prepared, fertilized, and seeded before blanket is applied, or per manufacturer specifications.
- D. Rolled Erosion Control Blanket or Turf Reinforcement Matting is to be applied in channels where indicated on the plans. Blanket or matting shall be applied in the direction of the flow of water per manufacturer specifications. RECP and/or TRM as specified on the plans.
- E. Tree Wrap: Tree wrap to be breathable synthetic fabric, white in color, delivered in 75 mm (3 inch) wide rolls. Specifically manufactured for tree wrapping. Provide product indicated on the drawings or comparable product such as "Breathable Fabric Tree Wrap" manufactured by Dewitt Company, Inc. Sikeston, MO or Owner approved equal. Tree wrap to be secured to the trunk using biodegradable tape suitable for nursery use and which is expected to degrade in sunlight in less than 2 years after installation.
- F. Planter Drainage Gravel: Washed, sound crushed stone or gravel complying with ASTM D 448 for Size No. 8.
- G. Planter Filter Fabric: Nonwoven geotextile manufactured for separation applications and made of polypropylene, polyolefin, or polyester fibers or combination of them.
- H. Mycorrhizal Fungi: Dry, granular inoculants containing at least 5300 spores per lb (0.45 kg) of vesicular-arbuscular mycorrhizal fungi and 95 million spores per lb (0.45 kg) of ectomycorrhizal fungi, 33 percent hydrogen, and a maximum of 5.5 percent inert material.

## **PART 3 - EXECUTION**

### **3.01 EXAMINATION**

- A. Examine areas to receive plants for compliance with requirements and conditions affecting installation and performance.
  1. Verify that no foreign or deleterious material or liquid such as paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, or acid has been deposited in soil within a planting area.
  2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
  3. Suspend soil spreading, grading, and tilling operations during periods of excessive soil moisture until the moisture content reaches acceptable levels to attain the required results.

4. Uniformly moisten excessively dry soil that is not workable and which is too dusty.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. If contamination by foreign or deleterious material or liquid is present in soil within a planting area, remove the soil and contamination as directed by Architect and replace with new planting soil.

### **3.02 PREPARATION**

- A. Protect structures, utilities, sidewalks, pavements, and other facilities and turf areas and existing plants from damage caused by planting operations.
  1. Before commencing work, all trees and shrubs which are to be saved must be protected from damage by the placement of fencing flagged for visibility or some other suitable protective procedure approved by the Owner. No work may begin until this requirement is fulfilled.
  2. In order to avoid damage to roots, bark or lower branches, no truck or other equipment shall be driven or parked within the drip line of any tree, unless the tree overspreads a paved driveway.
  3. The Contractor shall use any and all precautionary measures when performing work around trees, walks, pavements, utilities, and any other features either existing or previously installed under this contract.
  4. The Contractor shall adjust depth of earthwork and topsoil when working immediately adjacent to any of the aforementioned features in order to prevent disturbing tree roots, undermining walks and pavements, and damage in general to any existing or newly incorporated item.
- B. Where excavating, fill, or grading is required within the drip line of trees that are to remain, the work shall be performed as follows:
  1. Trenching: When trenching occurs around trees to remain, the tree roots shall not be cut, the trench shall be tunneled under or around the roots by careful hand digging and without injury to the roots.
  2. Raising Grades: When the existing grade at tree is below the new finished grade, and fill not exceeding 12 inches is required, clean, washed gravel graded from 1 to 2 inches in size shall be placed directly around the tree trunk. The gravel shall extend out from the trunk on all sides a minimum of 4 feet and finish approximately 2 inches above the finished grade at the tree. Install gravel before any earth fill is placed. New earth fill shall not be left in contact with the trunks of any trees requiring fill. Where fill exceeding 16 inches is required, a dry laid tree well shall be constructed around the trunk of the tree. The tree well shall extend out from the trunk on all sides a minimum of 3 feet and to 3 inches above finish grade at the tree. Clean grade rock shall be placed directly around the tree well extending to the drip line of the tree. Clean washed gravel graded from 1 to 2 inches in size shall be placed directly over the coarse rock to a depth of 3 inches. Approved backfill material shall be placed directly over the washed gravel to desired finished grade.
  3. Lowering Grades: Existing trees in areas where the new finished grade is to be lowered shall have re-grading work done by hand to elevation as indicated on the plans. Roots shall be preserved at the new grade to the extent possible and covered with topsoil.
- C. Install erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.
- D. Lay out individual tree and shrub locations and areas for multiple plantings. Stake locations, outline areas, adjust locations when requested, and obtain Owner's acceptance of layout before excavating or planting. Make minor adjustments as required.
- E. Wrap trees and shrubs with burlap fabric over trunks, branches, stems, twigs, and foliage to protect from wind and other damage during digging, handling, and transportation.

### **3.03 PLANTING AREA ESTABLISHMENT**

- A. Loosen subgrade of planting areas to a minimum depth of 6 inches (150 mm) for turf areas and 12 inches (300 mm) for shrub bed areas. Remove stones larger than 1 inch (25 mm) in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Owner's property.
  1. Spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly blend planting soil.
    - a. Delay mixing fertilizer with planting soil if planting will not proceed within a few days.



- b. Mix lime (if liming is required) with dry soil before mixing fertilizer. Ground limestone to be omitted for acid soil plants.
- 2. Spread planting soil to a depth of 6 inches (150 mm) for turf areas, and 12 inches (300 mm) for shrub beds, but not less than required to meet finish grades after natural settlement. Do not spread if planting soil or sub grade is frozen, muddy, or excessively wet.
  - a. Spread approximately one-half the thickness of planting soil over loosened subgrade. Mix thoroughly into top 2 inches (50 mm) of subgrade. Spread remainder of planting soil.
  - b. Planting soil which must be transported across finished walks shall be delivered in such a manner that no damage will be done to the walks. The Contractor shall be responsible for repair of such damage.
  - c. Placement shall be such that after final settlement there will be good drainage (and conforming to the elevations shown on drawings).
- B. Finish Grading: Grade planting areas to a smooth, uniform surface plane with loose, uniformly fine texture. Roll and rake, remove ridges, and fill depressions to meet finish grades.
- C. Before planting, obtain Owner's acceptance of finish grading; restore planting areas if eroded or otherwise disturbed after finish grading.
- D. Application of Mycorrhizal Fungi: If indicated on the drawings, and at time directed by Owner, broadcast dry product uniformly over prepared soil at application rate indicated on the drawings.

### **3.04 EXCAVATION FOR TREES AND SHRUBS**

- A. Planting Pits and Trenches: Excavate circular planting pits with sides sloping inward at a 45-degree angle. Excavations with vertical sides are not acceptable. Trim perimeter of bottom leaving center area of bottom raised slightly to support root ball and assist in drainage away from center. Do not further disturb base. Ensure that root ball will sit on undisturbed base soil to prevent settling. Scarify sides of planting pit smeared or smoothed during excavation.
  - 1. Excavate approximately three times as wide or at least 12 inches (300 mm) wider than ball diameter, whichever is greater, for balled and burlapped and container grown stock.
  - 2. Excavate only deep enough to accommodate vertical roots for bare-root stock.
  - 3. Do not excavate deeper than depth of the root ball, measured from the root flare to the bottom of the root ball.
  - 4. If area under the plant was initially dug too deep, add soil to raise it to the correct level and thoroughly tamp the added soil to prevent settling.
  - 5. Maintain required angles of repose of adjacent materials as shown on the Drawings. Do not excavate subgrades of adjacent paving, structures, hardscapes, or other new or existing improvements.
  - 6. Maintain supervision of excavations during working hours.
  - 7. Keep excavations covered or otherwise protected overnight, after working hours, or when unattended by Installer's personnel.
  - 8. If drain tile is shown on Drawings or required under planting areas, excavate to top of porous backfill over tile.
- B. Subsoil and topsoil removed from excavations may be used as planting soil if meeting ASTM D 5268 Topsoil and this specification.
- C. Obstructions: Notify Owner if unexpected rock or obstructions detrimental to trees or shrubs are encountered in excavations. Owner may require plant pits to be relocated, the pits enlarged or plants deleted from this contract.
  - 1. Hardpan Layer: Drill 6-inch- (150-mm-) diameter holes, 24 inches (600 mm) apart, into free-draining strata or to a depth of 10 feet (3 m), whichever is less, and backfill with free-draining material.
- D. Drainage: Notify Owner if subsoil conditions evidence unexpected excessive compaction or water seepage or retention in tree or shrub planting pits.
  - 1. Excessive Compaction: Where unsuitability within the planting area is deemed by the Owner to be due to excessive compaction caused by heavy equipment or by the presence of boards, mortar, concrete or other construction materials in the sub grade, and where the natural subsoil is deemed unsuitable, the Contractor shall loosen such areas with spikes, discs, or other means to render soil to a condition acceptable to the Owner. The Contractor shall also remove all debris and objectionable material. Soil to be loosened to a minimum depth of 12 inches (300 mm). Contractor may introduce additional planting soil or soil amendments as

- necessary to obtain adequate drainage. All such remedial measures shall be considered as incidental to the work and no extra payment shall be made for this part of the work.
2. Water Seepage or Retention: Where sub grade is deemed unsuitable by Owner due to excessive moisture (in excess of 30%), then such a condition shall be rendered suitable by installation of a sub drainage system or by other means described elsewhere in these specifications. Where such conditions have not been known or revealed prior to planting, and where they have not been recognized in the preparation of drawings and specifications, then the Owner shall issue a change order to install the proper remedial measures, all of which shall be in addition to the contract sum.
- E. Fill excavations with water and allow percolating away before positioning trees and shrubs.

### **3.05 TREE, SHRUB, AND VINE PLANTING**

- A. Before planting, verify that root flare is visible at top of root ball according to ANSI Z60.1. If root flare is not visible, remove soil in a level manner from the root ball to where the top-most root emerges from the trunk. After soil removal to expose the root flare, verify that root ball still meets size requirements.
- B. Remove stem girdling roots and kinked roots. Remove injured roots by cutting cleanly; do not break.
- C. Set balled and burlapped stock plumb and in center of planting pit or trench with root flare level with adjacent finish grades, or as indicated on the planting details.
  1. Use planting soil for backfill.
  2. After placing some backfill around root ball to stabilize plant, carefully cut and remove burlap, rope, and wire baskets from tops of root balls and from sides, but do not remove from under root balls. Remove pallets, if any, before setting. Do not use planting stock if root ball is cracked or broken before or during planting operation.
  3. Backfill around root ball in layers, tamping to settle soil and eliminate voids and air pockets. When planting pit is approximately one-half filled, water thoroughly before placing remainder of backfill. Repeat watering until no more water is absorbed.
  4. If shown on the drawings, place planting tablets in each planting pit when pit is approximately one-half filled; in amounts recommended in soil reports from soil-testing laboratory or as indicated on the drawings. Place tablets beside the root ball about **1 inch (25 mm)** from root tips; do not place tablets in bottom of the hole.
  5. Fertilize with commercial fertilizer at the rate of 3 pounds for trees up to 3 inches in caliper, 1 pound per 1 inch caliper trees, 8 ounces for large shrubs, 6 ounces for small shrubs.
  6. Continue backfilling process. Water again after placing and tamping final layer of soil.
- D. Set container grown stock plumb and in center of planting pit or trench with root flare level with finish grades, or as indicated on the planting drawings and details.
  1. Use planting soil for backfill.
  2. Carefully remove root ball from container without damaging root ball or plant.
  3. Backfill around root ball in layers, tamping to settle soil and eliminate voids and air pockets. When planting pit is approximately one-half filled, water thoroughly before placing remainder of backfill. Repeat watering until no more water is absorbed.
  4. If shown on the drawings place planting tablets in each planting pit when pit is approximately one-half filled; in amounts recommended in soil reports from soil-testing laboratory or as indicated on the drawings. Place tablets beside the root ball about **1 inch (25 mm)** from root tips; do not place tablets in bottom of the hole.
  5. Fertilize with commercial fertilizer at the rate of 3 pounds for trees up to 3 inches in caliper, 1 pound per 1 inch caliper trees, 8 ounces for large shrubs, 6 ounces for small shrubs.
  6. Continue backfilling process. Water again after placing and tamping final layer of soil.
- E. Set fabric bag-grown stock plumb and in center of planting pit or trench with root flare level with adjacent finish grades.
  1. Use planting soil for backfill.
  2. Carefully remove root ball from fabric bag without damaging root ball or plant. Do not use planting stock if root ball is cracked or broken before or during planting operation.
  3. Backfill around root ball in layers, tamping to settle soil and eliminate voids and air pockets. When planting pit is approximately one-half filled, water thoroughly before placing remainder of backfill. Repeat watering until no more water is absorbed.

4. Fertilize as indicated on the drawings.
5. Continue backfilling process. Water again after placing and tamping final layer of soil.
- F. Set and support bare-root stock in center of planting pit or trench with root flare level with adjacent finish grade.
  1. Use planting soil for backfill.
  2. Spread roots without tangling or turning toward surface, and carefully work backfill around roots by hand. Puddle with water until backfill layers are completely saturated. Plumb before backfilling, and maintain plumb while working backfill around roots and placing layers above roots.
  3. Fertilize as indicated on the drawings.
  4. Continue backfilling process. Water again after placing and tamping final layer of soil.
- G. When planting on slopes, set the plant so the root flare on the uphill side is flush with the surrounding soil on the slope; the edge of the root ball on the downhill side will be above the surrounding soil. Apply enough soil to cover the downhill side of the root ball.
- H. When indicated on the drawings or when necessary for the specific project conditions, wrap the trunk of newly planted trees. Wrapping may be required for thin-barked species, where reflective surfaces affect newly planted trees, or when orientation of the planted tree can not be matched with the orientation at the nursery.
  1. Wrapping material shall be applied from the base of the tree to the first branch.
  2. All wrapping material shall be removed no later than the end of the year after planting.

### **3.06 MECHANIZED TREE SPADE PLANTING**

- A. Trees may be planted with an approved mechanized tree spade at the designated locations. Do not use tree spade to move trees larger than the maximum size allowed for a similar field-grown, balled-and-burlapped root-ball diameter according to ANSI Z60.1, or larger than the manufacturer's maximum size recommendation for the tree spade being used, whichever is smaller.
- B. When extracting the tree, center the trunk within the tree spade and move tree with a solid ball of earth.
- C. Cut exposed roots cleanly during transplanting operations.
- D. Use the same tree spade to excavate the planting hole as was used to extract and transport the tree.
- E. Plant trees as shown on Drawings, following procedures in "Tree, Shrub, and Vine Planting" Article.
- F. Where possible, orient the tree in the same direction as in its original location.

### **3.07 TREE, SHRUB, AND VINE PRUNING**

- A. Remove only dead, dying, or broken branches. Do not prune for shape.
- B. Do not apply pruning paint to wounds.

### **3.08 TREE STABILIZATION**

- A. Install trunk stabilization only when necessary for specific conditions encountered and with approval of the Owner unless otherwise indicated on the drawings and details:
  1. Poor quality trees with cracked, wet, or loose root balls, poorly developed trunk-to-crown ratios, or undersized root balls shall be rejected if they require staking.
  2. Where required, stakes and guys will be installed immediately upon planting, and shall be removed at the end of the first growing season.
  3. Upright Staking and Tying: Stake trees of 2- through 5-inch (50- through 125-mm) caliper. Stake trees of less than 2-inch (50-mm) caliper only as required to prevent wind tip out, and only as directed by the Owner or shown on the drawings. Use a minimum of two stakes of length required to penetrate at least 18 inches (450 mm) below bottom of backfilled excavation and to extend to the dimension shown on the Drawings above grade. Set vertical stakes and space to avoid penetrating root balls or root masses.
  4. Support trees with bands of flexible ties at contact points with tree trunk. Allow enough slack to avoid rigid restraint of tree.

- B. Staking and Guying: Stake and guy trees more than 14 feet (4.2 m) in height and more than 3 inches (75 mm) in caliper unless otherwise indicated. Securely attach no fewer than three guys to stakes 30 inches (760 mm) long, driven to grade.
  - 1. Site-Fabricated Staking-and-Guying Method:
    - a. For trees more than 6 inches (150 mm) in caliper, anchor guys to wood deadmen buried at least 36 inches (900 mm) below grade. Provide turnbuckle for each guy wire and tighten securely.
    - b. Support trees with bands of flexible ties at contact points with tree trunk and reaching to turnbuckle. Allow enough slack to avoid rigid restraint of tree.
- C. Palm Bracing: Install bracing system at three or more places equally spaced around perimeter of trunk to secure each palm until established unless otherwise indicated.
  - 1. Site-Fabricated Palm-Bracing Method:
    - a. Place battens over padding and secure battens in place around trunk perimeter with at least two straps, tightened to prevent displacement. Ensure that straps do not contact trunk.

### **3.09 ROOT-BARRIER INSTALLATION**

- A. Install root barrier where shown on Drawings.
- B. Align root barrier with paving or hardscape element and run it linearly along and adjacent to the paving or other hardscape elements to be protected from invasive roots.

### **3.10 PLANTING IN PLANTERS**

- A. Place a layer of drainage gravel at least 4 inches (100 mm) thick in bottom of planter. Cover bottom with filter fabric and wrap filter fabric 4 – 6 inches (100 – 150 mm) up on all sides. Duct tape along the entire top edge of the filter fabric, to secure the filter fabric against the sides during the soil-filling process.
- B. Fill planter with planting soil per drawings. Place soil in lightly compacted layers to an elevation of 1-1/2 inches (38 mm) below top of planter, allowing natural settlement.

### **3.11 GROUND COVER AND PLANT PLANTING**

- A. Set out and space ground cover and plants other than trees, shrubs, and vines as indicated in the planting schedule or on the drawings in even rows with triangular spacing.
- B. Use planting soil for backfill.
- C. Dig holes large enough to allow spreading of roots.
- D. For rooted cutting plants supplied in flats, plant each in a manner that will minimally disturb the root system but to a depth not less than two nodes.
- E. Work soil around roots to eliminate air pockets and leave a slight saucer indentation around plants to hold water.
- F. Water thoroughly after planting, taking care not to cover plant crowns with wet soil.
- G. Protect plants from hot sun and wind; remove protection if plants show evidence of recovery from transplanting shock.

### **3.12 PLANTING AREA MULCHING**

- A. Install weed-control barriers (mat) under all areas to be covered with mulch before mulching according to manufacturer's written instructions. Completely cover area to be mulched, overlapping edges a minimum of 6 inches (150 mm) and secure seams with soil anchor or galvanized pins.
- B. Mulch shall be applied within 24 hours of planting.
- C. Mulch backfilled surfaces of planting areas and other areas indicated.
  - 1. Trees and Tree-like Shrubs in Turf Areas: Apply mulch ring of 3-inch (75-mm) average thickness, with 30-inch (750-mm) radius around trunks or stems. Do not place mulch within 3 inches (75 mm) of trunks or stems. Mulch application should be level (not shaped like a volcano).
  - 2. Organic Mulch in Planting Areas: Apply 3-inch (75-mm) average thickness of organic mulch extending 12 inches (300 mm) beyond edge of the plant bed and over the whole surface of the planting area, and finish level with adjacent finish grades. Do not place mulch within 3 inches (75 mm) of trunks or stems.

3. Mineral Mulch in Planting Areas: Apply 3-inch (75-mm) average thickness of mineral mulch extending 12 inches (300 mm) beyond edge of planting area, and finish level with adjacent finish grades. Do not place mulch within 3 inches (75 mm) of trunks or stems.

### **3.13 EDGING INSTALLATION**

- A. Wood Edging ("Wood Header Boards"): Install edging where indicated on drawings. Fasten each cut joint or connection with two galvanized nails. Anchor with wood stakes spaced up to 36 inches (900 mm) apart, driven at least 1 inch (25 mm) below top elevation of edging. Use two galvanized nails per stake to fasten edging, of length as needed to penetrate both edging and stake and provide 1/2-inch (13-mm) clinch at point. Pre-drill stakes if needed to avoid splitting. Replace stakes that crack or split during installation process.
- B. Steel Edging: Install steel edging where indicated according to manufacturer's written instructions. Anchor with steel stakes spaced approximately 30 inches (760 mm) apart, driven below top elevation of edging.
- C. Aluminum Edging: Install aluminum edging where indicated according to manufacturer's written instructions. Anchor with aluminum stakes spaced approximately 48 inches (1200 mm) apart, driven below top elevation of edging.
- D. Shovel-Cut Edging: Separate mulched areas from turf areas with a 45-degree, 4- to 6-inch- (100- to 150-mm-) deep, shovel-cut edge at locations as shown on the drawings.

### **3.14 TREE GRATE INSTALLATION**

- A. Tree Grates: Set grate segments flush with adjoining surfaces as shown on Drawings. Shim from supporting substrate with soil-resistant plastic. Maintain a ~~3-inch-~~ (75-mm-) minimum growth radius around base of tree; break away units of casting, if necessary, according to manufacturer's written instructions.

### **3.15 PLANT MAINTENANCE**

- A. Maintain plantings immediately after planting by pruning, cultivating, and watering, weeding, fertilizing, mulching, restoring planting saucers, adjusting and repairing tree-stabilization devices, resetting to proper grades or vertical position, and performing other operations as required to establish healthy, viable plantings. Spray or treat as required to keep trees and shrubs free of insects and disease until 45 days after final acceptance.
- B. Fill in as necessary soil subsidence that may occur because of settling or other processes. Replace mulch materials damaged or lost in areas of subsidence.
- C. Apply treatments as required to keep plant materials, planted areas, and soils free of pests and pathogens or disease. Use integrated pest management practices whenever possible to minimize the use of pesticides and reduce hazards. Treatments include physical controls such as hosing off foliage, mechanical controls such as traps, and biological control agents.
- D. Defective work shall be corrected as soon as possible after it becomes known and weather and season permits.
- E. If a substantial number of plants are weak, dead or otherwise un-acceptable to the Owner at the time of the inspection, acceptance shall not be granted and the Contractor's responsibility for maintenance of all plants shall continue until replacements are made and accepted.
  1. All replacements shall be of same kind, size and quality specified in the plant list. They shall be furnished and planted as specified during the next planting season at no cost to the Owner.

### **3.16 PESTICIDE APPLICATION**

- A. Apply pesticides and other chemical products and biological control agents in accordance with authorities having jurisdiction and manufacturer's written recommendations. Coordinate applications with Owner's operations and others in proximity to the Work. Notify Owner before each application is performed.
- B. Pre-Emergent Herbicides (Selective and Non-Selective): Apply to tree, shrub, and ground-cover areas in accordance with manufacturer's written recommendations. Do not apply to seeded areas.
- C. Post-Emergent Herbicides (Selective and Non-Selective): Apply only as necessary to treat already-germinated weeds and in accordance with manufacturer's written recommendations.

**3.17 CLEANUP AND PROTECTION**

- A. During planting, keep adjacent paving and construction clean and work area in an orderly condition.
- B. Protect plants from damage due to landscape operations and operations of other contractors and trades. Maintain protection during installation and maintenance periods. Treat, repair, or replace damaged plantings.
- C. After installation and before final acceptance, remove nursery tags, nursery stakes, tie tape, labels, wire, burlap, and other debris from plant material, planting areas, and Project site.

**3.18 DISPOSAL**

- A. Remove surplus soil and waste material including excess subsoil, unsuitable soil, trash, and debris and legally dispose of them off Owner's property.

END OF SECTION 329300

## SECTION 33 10 00

### FACILITY WATER DISTRIBUTION PIPING

#### PART 1 - GENERAL

##### 1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 31 Section 312000 "Earth Moving", apply to this Section.

##### 1.02 SUMMARY

- A. This Section includes water-distribution piping and related components outside the building from tapping the main to:
  - 1. Within 5 feet of outside the building limits for domestic and irrigation water service
  - 2. 1 foot above finished floor elevation for the fire service mains
  - 3. Supply and discharge piping including connections to fire protection water tank if shown on the plans..
- B. All work shall conform to the requirements of the local water authority, fire marshal, and other regulatory authorities having jurisdiction, or this specification, whichever is more stringent.
- C. Utility-furnished products include water meters that will be furnished to the site, ready for installation.

##### 1.03 DEFINITIONS

- A. EPDM: Ethylene propylene diene terpolymer rubber.
- B. LLDPE: Linear, low-density polyethylene plastic.
- C. PA: Polyamide (nylon) plastic.
- D. PE: Polyethylene plastic.
- E. PP: Polypropylene plastic.
- F. PVC: Polyvinyl chloride plastic.
- G. RTRF: Reinforced thermosetting resin (fiberglass) fittings.
- H. RTRP: Reinforced thermosetting resin (fiberglass) pipe.

##### 1.04 REFERENCE STANDARDS

- A. Factory Mutual (FM)
  - 1. Approval Guide
- B. Underwriters Laboratories (UL)
  - 1. Fire Protection Equipment Directory
  - 2. UL 1285 - Pipe and Couplings, Polyvinyl Chloride (PVC), for Underground Fire Service
  - 3. UL 262 - Gate Valves for Fire-Protection Service
  - 4. UL 246 - Hydrants for Fire-Protection Service
- C. National Sanitation Foundation (NSF)
  - 1. NSF 14 - Plastics Piping System Components and Related Materials
  - 2. NSF 61 - Drinking Water System Components - Health Effects
- D. National Fire Protection Association (NFPA)
  - 1. NFPA 70 - National Electrical Code
  - 2. NFPA 24 - Standard for the Installation of Private Fire Service Mains and their Appurtenances
  - 3. NFPA 1963 - Screw Threads and Gaskets for Fire Hose Connections (revision of ANSI/NFPA 1963-1993)
  - 4. NFPA 13 - Installation of Sprinkler Systems (latest edition)
- E. American Water Works Association (AWWA)
  - 1. C151 Ductile-Iron Pipe, Centrifugally Cast, for Water (revision of ANSI/AWWA C151/A21.51-91)
  - 2. C104 - Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for Water

3. C150 - Thickness Design of Ductile-Iron Pipe
  4. C110 - Ductile-Iron and Gray-Iron Fittings, 3 in through 48 in (75 mm through 1200 mm), for Water and Other Liquids
  5. C153 - Ductile-Iron Compact Fittings, 3 in. through 24 in. (76 mm Through 610 mm) and 54 in. through 64 in. (1,400 mm Through 1,600 mm), for Water Service
  6. C900 - Polyvinyl Chloride (PVC) Pressure Pipe, 4 Inch through 12 Inch for Water Distribution
  7. C500 - Gate Valves for Water and Sewage Systems
  8. C111 - Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
  9. C550 - Protective Epoxy Interior Coatings for Valves and Hydrants
  10. C509 - Resilient-Seated Gate Valves for Water Supply Service
  11. M44 - Distribution Valves: Selection, Installation, Field Testing, and Maintenance
  12. C800 - Underground Service Line Valves and Fittings
  13. C702 - Cold Water Meters - Compound Type
  14. C502 - Hydrants, Dry Barrel Fire
  15. M41 - Ductile Iron Pipe and Fittings
  16. C600 - Installation of Ductile-Iron Water Mains and Their Appurtenances
  17. C605 - Water Treatment - Underground Installation of Polyvinyl Chloride PVC Pressure Pipe and Fittings for Water
  18. M23 - PVC Pipe: Design and Installation
  19. M17 - Fire Hydrants: Installation, Field Testing, and Maintenance
  20. C651 - Disinfecting Water Mains
- F. American Society for Testing and Materials (ASTM)
1. B88 - Standard Specification for Seamless Copper Water Tube
  2. B813 - Standard Specification for Liquid and Paste Fluxes for Soldering Applications of Copper and Copper Alloy Tube
  3. B32 - Standard Specification for Solder Metal
  4. D2241 - Standard Specification for Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series)
  5. D3139 - Standard Specification for Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
  6. F645 - Standard Guide for Selection, Design, and Installation of Thermoplastic Water Pressure Piping Systems
- G. American Society of Mechanical Engineers (ASME)
1. B16.18 - Cast Copper Alloy Solder Joint Pressure Fittings R(1994)
  2. B16.22 - Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
- H. Manufacturer's Standardization Society (MSS)
1. SP-60 - Connecting Flange Joint Between Tapping Sleeves and Tapping Valves
- I. Copper Development Association (CDA)
1. Copper Tube Handbook

#### **1.05 SUBMITTALS**

- A. The General Contractor and Subcontractor(s) shall execute the Conformance Submittal(s) at the end of this section.

#### **1.06 QUALITY ASSURANCE**

- A. Regulatory Requirements:
1. Comply with requirements of regulatory authorities having jurisdiction or the utility company supplying water including tapping of water mains, backflow prevention installation, testing, and disinfection.
  2. Comply with standards of authorities having jurisdiction for potable-water-service piping, including materials, installation, testing, and disinfection.
  3. Comply with standards of authorities having jurisdiction for fire-suppression water-service piping, including materials, hose threads, installation, and testing.
- B. Piping materials shall bear label, stamp, or other markings of specified testing agency.



- C. Electrical Components, Devices, and Accessories: UL listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- D. Comply with ASTM F 645 for selection, design, and installation of thermoplastic water piping.
- E. Comply with FMG's "Approval Guide" or UL's "Fire Protection Equipment Directory" for fire-service-main products.
- F. NFPA Compliance: Comply with NFPA 13 and NFPA 24 for materials, installations, tests, flushing, and valve and hydrant supervision for fire-service-main piping for fire suppression.
- G. NSF Compliance:
  - 1. Comply with NSF 14 for plastic potable-water-service piping.
  - 2. Comply with NSF 61 for materials for water-service piping and specialties for domestic water.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Preparation for Transport: Prepare valves, including fire hydrants, according to the following:
  - 1. Ensure that valves are dry and internally protected against rust and corrosion.
  - 2. Protect valves against damage to threaded ends and flange faces.
  - 3. Set valves in best position for handling. Set valves closed to prevent rattling.
- B. During Storage: Use precautions for valves, including fire hydrants, according to the following:
  - 1. Do not remove end protectors unless necessary for inspection; then reinstall for storage.
  - 2. Protect from weather. Store indoors and maintain temperature higher than ambient dew-point temperature. Support off the ground or pavement in watertight enclosures when outdoor storage is necessary.
- C. Handling: Use sling to handle valves and fire hydrants if size requires handling by crane or lift. Rig valves to avoid damage to exposed parts. Do not use hand wheels or stems as lifting or rigging points.
- D. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.
- E. Protect stored piping from moisture and dirt. Elevate above grade. Do not exceed structural capacity of floor when storing inside.
- F. Protect flanges, fittings, and specialties from moisture and dirt.
- G. Store plastic piping protected from direct sunlight. Support to prevent sagging and bending.

#### **1.08 PROJECT CONDITIONS**

- A. Removal and Relocation of Existing Utilities: The contractor shall be responsible for removal and/or relocation of existing utilities, where conflicts occur but may or may not be shown on the Drawings, at no additional cost to the Owner.
- B. Interruption of Existing Water-Distribution Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water-distribution service according to requirements indicated:
  - 1. Notify Owner two (2) days in advance of proposed interruption of service.
  - 2. Do not proceed with interruption of water-distribution service without Owner's written permission.

#### **1.09 COORDINATION AND FEES**

- A. The Contractor shall be responsible for obtaining and payment of all tap and construction permit fees associated with this section.
- B. The Contractor shall provide and install domestic and irrigation water lines, meters, and appurtenances as shown on the drawings to within 5 feet of building limits, including, but not limited to, any taps, meters, vault, and backflow prevention. If Contractor's Work terminates at a connection point where work by others is complete, Contractor shall make the connection. If future connections will be required by others, Contractor shall install plugging and marking apparatus as necessary to protect the Work.
- C. The Contractor shall provide and install fire service water lines, meters, and appurtenances as shown on drawings to 1 foot above finished floor elevation, including, but not limited to any taps, meters, backflow prevention, hydrants, and free standing fire department connections. If Contractor's Work terminates at a connection point where work by others is complete, Contractor

shall make the connection. If future connections will be required by others, Contractor shall install plugging and marking apparatus as necessary to protect the Work.

## **PART 2 - PRODUCTS**

### **2.01 COPPER TUBE AND FITTINGS**

- A. Soft Copper Tube: NPS 3 inches or smaller; **ASTM B 88, Type K**, annealed temper.
  - 1. Copper, Solder-Joint Fittings: ASME B16.18, cast-copper-alloy or ASME B16.22, wrought-copper, solder-joint pressure type or ASME B 16.22 for wrought-copper and copper alloy, solder joint pressure fitting type. Furnish only wrought-copper fittings if indicated.
  - 2. Soldering flux shall be in accordance with ASTM B813, water-flushable type.
  - 3. Solder filler metal shall be in accordance with ASTM B 32, with 0.20 percent maximum lead content.
  - 4. Copper, Pressure-Seal Fittings:
    - a. **NPS 2 (DN 50)** and Smaller: Wrought-copper fitting with EPDM O-ring seal in each end.
    - b. NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Bronze fitting with stainless-steel grip ring and EPDM O-ring seal in each end.

### **2.02 DUCTILE-IRON PIPE AND FITTINGS**

- A. Mechanical-Joint, Ductile-Iron Pipe, NPS 3 inches or larger: AWWA C151 Class 350, and shall have a cement-mortar lining of standard thickness in accordance with AWWA C104; pipe thickness shall be in accordance with AWWA C150; pipe shall have push-on joints in accordance with AWWA C110, additional pipe:
  - 1. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
  - 2. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
    - a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
    - b. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

### **2.03 PVC PIPE AND FITTINGS**

- A. Polyvinyl Chloride (PVC) Pipe, NPS 4 inches to NPS 12 inches:
  - 1. PVC pipe shall conform to the requirements of AWWA C900, Class 150, DR 18. Pipe joints shall be elastomeric joints only. Sleeve couplings are not permitted except as necessary for repairs during testing, or connections to existing mains. Comply with UL 1285 for fire-service mains. Fittings shall be mechanical-joint ductile-iron compact fittings in accordance with AWWA C153 or standard size in accordance with AWWA C110.
- B. Polyvinyl Chloride (PVC) Pipe NPS 2 inch to NPS 3 inch:
  - 1. Pipe shall conform to the requirements of ASTM D2241, SDR 21, with elastomeric joints conforming to ASTM D3139. Pipe jointing shall be by elastomeric joints only. Sleeve couplings are not permitted except as necessary for repairs during testing, or connections to existing mains. Fittings shall be PVC fabricated fittings with elastomeric gaskets, or ductile iron compact fittings conforming to AWWA C153 with elastomeric gaskets.

### **2.04 GATE VALVES**

- A. AWWA, Cast-Iron Gate Valves:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide the product indicated on Drawings
  - 2. Nonrising-Stem, Metal-Seated Gate Valves:
    - a. Description: Gray- or ductile-iron body and bonnet; with cast-iron or bronze double-disc gate, bronze gate rings, bronze stem, and stem nut.
      - 1) Standard: AWWA C500, UL 262, FM-Approved.

- 2) Minimum Pressure Rating: 200 psig (1380 kPa).
- 3) End Connections: Mechanical joint per AWWA C111.
- 4) Interior Coating: Complying with AWWA C550.
- 5) Nut: 2 inches square, complying with AWWA C500.
3. Nonrising-Stem, Resilient-Seated Gate Valves:
  - a. Description: Gray- or ductile-iron body and bonnet; with bronze or gray- or ductile-iron gate, resilient seats, bronze stem, and stem nut.
    - 1) Standard: AWWA C509 UL 262 FM-Approved.
    - 2) Minimum Pressure Rating: 200 psig (1380 kPa).
    - 3) End Connections: Mechanical joint per ANSI A21.11 (AWWA C111).
    - 4) Interior Coating: Complying with AWWA C550.
    - 5) Nut: 2 inches square, complying with AWWA C500.

## **2.05 GATE VALVE ACCESSORIES AND SPECIALTIES**

- A. Tapping-Sleeve Assemblies:
  1. Basis-of-Design Product: Subject to compliance with requirements, provide the product indicated on Drawings.
  2. Description: Sleeve and valve compatible with drilling machine.
    - a. Standard: MSS SP-60.
    - b. Tapping Sleeve: Cast- or ductile-iron or stainless-steel, two-piece bolted sleeve with flanged outlet for new branch connection. Include sleeve matching size and type of pipe material being tapped and with recessed flange for branch valve.
    - c. Valve: AWWA, cast-iron, nonrising-stem, metal or resilient-seated gate valve with one raised face flange mating tapping-sleeve flange.
- B. Valve Boxes: Comply with AWWA M44 for cast-iron valve boxes. Include top section, adjustable extension of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over valve and with a barrel approximately 5 inches (125 mm) in diameter.
  1. Operating Wrenches: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and socket matching valve operating nut.
  2. Provide 24" x 24" x 6" thick concrete apron around all valve boxes in asphalt pavement areas.

## **2.06 CORPORATION VALVES AND CURB VALVES (STOPS)**

- A. Service-Saddle Assemblies: Comply with AWWA C800. Include saddle and valve compatible with tapping machine.
  1. Service Saddle: Copper alloy with seal and AWWA C800, threaded outlet for corporation valve.
  2. Corporation Valve: Bronze body and ground-key plug, with AWWA C800, threaded inlet and outlet matching service piping material.
- B. Curb Valves: Comply with AWWA C800. Include bronze body, ground-key plug or ball, and wide tee head, with inlet and outlet matching service piping material.
- C. Service Boxes for Curb Valves: Similar to AWWA M44 requirements for cast-iron valve boxes. Include cast-iron telescoping top section of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over curb valve and with a barrel approximately 3 inches (75 mm) in diameter.
  1. Shutoff Rods: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and slotted end matching curb valve.

## **2.07 WATER METERS**

- A. Manufacturers:
  1. Basis-of-Design Product: Subject to compliance with requirements, if utility company does not furnish water meter provide the product indicated on Drawings.
- B. 1-1/2 Inch Compound-Type Water Meters:
  1. Description:
    - a. Standard: AWWA C702.
    - b. Registration: Flow in gallons (liters).

- C. Fire Service Meters:
  - 1. Description: Use Fire Service Meter only when required by authorities having jurisdiction. Include meter modified with signal-transmitting assembly, low-voltage connecting wiring, and remote register assembly.
    - a. Standard: AWWA C703.
    - b. Registration: Flow in **gallons (liters)**.

## **2.08 BACKFLOW PREVENTERS**

- A. Comply with regulatory authorities having jurisdiction requirements.
  - 1. Maximum Pressure Loss (RPZ valve): 12 psig (83 kPa) at 2250 gpm maximum, through middle 1/3 of flow range.
  - 2. Maximum Pressure Loss (double detector check valve): 5 psig (83 35) at 2250 gpm maximum, through middle 1/3 of flow range.

## **2.09 WATER METER BOXES**

- A. Description: Cast-iron body and cover (H-20 rated) for disc-type water meter, with lettering "WATER METER" in cover; and with slotted, open-bottom base section of length to fit over service piping. Use only when required by the utility authority. Provide a 24" x 24" x 6" thick concrete apron in pavement areas.

## **2.10 FIRE HYDRANTS**

- A. Dry-Barrel Fire Hydrants:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide the product indicated on Drawings.
  - 2. Description: Freestanding, with one NPS 4-1/2 (DN 115) and two NPS 2-1/2 (DN 65) outlets, 5-1/4-inch (133-mm) main valve, drain valve, and NPS 6 (DN 150) mechanical-joint inlet. Include interior coating according to AWWA C550. Hydrant shall have cast-iron body, compression-type valve opening against pressure and closing with pressure.
    - a. Standard: AWWA C502 UL 246, FM-Approved.
    - b. Pressure Rating: **150 psig (1035 kPa)**.
    - c. Outlet Threads: NFPA 1963, with external hose thread used by local fire department. Include cast-iron caps with steel chains.
    - d. Operating and Cap Nuts: Pentagon, 1-1/2 inches (38 mm) point to flat.
    - e. Direction of Opening: Open hydrant valve by turning operating nut to left or counterclockwise. A clearly visible arrow and the word "OPEN" shall be cast in relief on the top of the hydrant to designate direction of opening.
    - f. Exterior Finish: Red alkyd-gloss enamel paint (two coats), unless otherwise indicated.

## **2.11 RESTRAINED JOINT SYSTEMS FOR FIRE LINE LEAD IN**

- A. The following section shall only apply to the portion of fire protection main extending from the 90 degree elbow below the sprinkler riser room floor to the flanged end of the pipe extending 1'-0" above the sprinkler riser room finished floor and the horizontal portion of pipe extending from the 90 degree elbow towards the building foundation.
- B. The fire protection main entering the sprinkler riser room through the floor shall be restrained from movement by the following:
  - 1. Pipe Clamps
    - a. Clamp dimensions shall be 5/8" x 2 1/2" for 10" pipe, 5/8" x 3" for 12" and larger pipe;
    - b. Clamp bolt dimensions shall be 3/4" for 10" pipe, 7/8" for 12" and larger pipe;
    - c. The diameter of the bolt hole shall be 1/16" larger than that of the corresponding bolt.
  - 2. Tie Rods: Threaded sections of rods shall not be formed or bent. Rods shall not be less than 5/8" in diameter and the minimum number of rods for each clamp shall be:
    - a. 10" Pipe: (4)-5/8" or (3)-3/4" or (2)-7/8" rods;
    - b. 12" Pipe: (6)-5/8" or (4)-3/4" or (3)-7/8" rods; and
    - c. 14" Pipe: (8)-5/8" or (5)-3/4" or (4)-7/8" rods
    - d. 16" Pipe: (10)-5/8" or (7)-3/4" or (5)-7/8" rods

3. Washers
  - a. Cast-iron washer dimensions shall be 5/8" x 3" for 10" pipe, 1/2" x 3 1/2" for 12" pipe and larger;
  - b. Steel washer dimensions shall be 1/2" x 3" for 10" pipe, 1/2" x 3 1/2" for 12" pipe and larger; and
  - c. The diameter of the hole in the washer shall be 1/8" larger than the rod.
4. Polyethylene Encasement: To prevent corrosion, a polyethylene tube/sheet shall be applied to the exterior piping, fittings, clamp and rods. The polyethylene casing shall be applied per the manufacturer's listing and shall extend 6" above finished floor elevation in the sprinkler room.

## **PART 3 - EXECUTION**

### **3.01 EARTHWORK**

- A. Refer to Division 31 Section 312000 "Earth Moving" for excavating, trenching, and backfilling.

### **3.02 PIPING APPLICATIONS**

- A. General: Use pipe, fittings, and joining methods for piping systems according to the following applications.
- B. Transition couplings and special fittings with pressure ratings at least equal to piping pressure rating may be used, unless otherwise indicated.
- C. Do not use flanges or unions for underground piping.
- D. Flanges, unions, grooved-end-pipe couplings, and special fittings may be used, instead of joints indicated, on aboveground piping and piping in vaults.
- E. Underground water-service piping shall be as shown on the plans

### **3.03 VALVE APPLICATIONS**

- A. General Application: Use mechanical-joint-end valves for NPS 2 (DN 50) and larger underground installation. Use threaded- or flanged-end valves for installation in vaults. Use UL/FMG, nonrising-stem gate valves for installation with indicator posts. Use corporation valves and curb valves with ends compatible with piping, for NPS 2 (DN 50) and smaller installation.
- B. Drawings indicate valve types to be used.
- C. Provide 24" x 24" x 6" thick concrete apron around all valve boxes in asphalt pavement areas.

### **3.04 PIPING SYSTEMS - COMMON REQUIREMENTS**

- A. See Division 22 Section "Common Work Results for Plumbing" for piping-system common requirements.

### **3.05 PIPING INSTALLATION**

- A. Water-Main Connection: Verify with regulatory authority having jurisdiction that size of tap and location shown on the drawings are acceptable. Tap water main according to requirements of water utility company and of size and in location indicated.
- B. Make connections NPS 2 (DN 50) and smaller with drilling machine according to the following:
  1. Install service-saddle assemblies and corporation valves in size, quantity, and arrangement required by utility company standards.
  2. Install service-saddle assemblies on water-service pipe to be tapped. Position outlets for corporation valves.
  3. Use drilling machine compatible with service-saddle assemblies and corporation valves. Drill hole in main. Remove drilling machine and connect water-service piping.
  4. Install corporation valves into service-saddle assemblies.
  5. Install manifold for multiple taps in water main.
  6. Install curb valve in water-service piping with head pointing up and with service box.
- C. Comply with NFPA 24 for fire-service-main piping materials and installation.
- D. Install ductile-iron, water-service piping according to AWWA C600 and AWWA M41.
- E. Install PVC, AWWA pipe according to ASTM F 645 and AWWA M23.

- F. Bury piping with depth of cover over top at least [42 inches (1061 mm), with top at least 12 inches (300 mm) below level of maximum frost penetration, or as required by regulatory authority having jurisdiction, whichever is deeper. If pipe is installed in an excavated "cut" section prior to completion of grading operations, pipe shall be installed so that minimum required cover will exist upon completion of grading operations.
- G. Install piping by tunneling or jacking, or combination of both, under streets and other obstructions that cannot be disturbed.
- H. Extend water-service piping and connect to water-supply source and building-water-piping systems five (5) feet outside face of building wall in locations and pipe sizes indicated.
  - 1. Terminate water-service piping five (5) feet outside building wall until building-water-piping systems are installed. Terminate piping with caps, plugs, or flanges as required for piping material. Make connections to building-water-piping systems when those systems are installed.
- I. Install underground piping with restrained joints at horizontal and vertical changes in direction. Use restrained-joint piping, thrust blocks, anchors, tie-rods and clamps, and other supports.
- J. Pipe Bedding: Pipe bedding material shall be as specified on trenching and bedding details as shown on drawings. No pipe shall be laid resting on a rock, blocking or unyielding objects.
- K. Location with Sewers: Separate trenches shall be provided for water lines and sewer lines, with lines separated by a minimum of 10 feet horizontally. Water mains that cross sewers shall have a minimum vertical separation of 18 inches.
- L. All piping shall be installed and verified to be level. This shall apply to piping in the horizontal and vertical positions.
- M. See Division 21 Section "Water-Based Fire-Suppression Systems" for fire-suppression-water piping inside the building.
- N. See Division 22 Section "Domestic Water Piping" for potable-water piping inside the building.

### **3.06 JOINT CONSTRUCTION**

- A. See Engineering Drawings for basic piping joint construction.
- B. Make pipe joints according to the following:
  - 1. Copper-Tubing, Pressure-Sealed Joints: Use proprietary crimping tool and procedure recommended by copper, pressure-seal-fitting manufacturer.
  - 2. Ductile-Iron Piping, Gasketed Joints for Water-Service Piping: AWWA C600 and AWWA M41.
  - 3. Ductile-Iron Piping, Gasketed Joints for Fire-Service-Main Piping: UL 194.
  - 4. PVC Piping Gasketed Joints: Use joining materials according to AWWA C900. Construct joints with elastomeric seals and lubricant according to ASTM D 2774 or ASTM D 3139 and pipe manufacturer's written instructions.
  - 5. Dissimilar Materials Piping Joints: Use adapters compatible with both piping materials, with OD, and with system working pressure. Refer to Division 22 Section "Common Work Results for Plumbing" for joining piping of dissimilar metals.

### **3.07 ANCHORAGE INSTALLATION**

- A. Install anchorages for tees, plugs and caps, bends, crosses, valves, and hydrant branches. Include anchorages for the following piping systems:
  - 1. Gasketed-Joint, Ductile-Iron, Water-Service Piping: According to AWWA C600.
  - 2. Gasketed-Joint, PVC Water-Service Piping: According to AWWA M23.
  - 3. Fire-Service-Main Piping: According to NFPA 24.
- B. Apply full coat of asphalt or other acceptable corrosion-resistant material to surfaces of installed ferrous anchorage devices.

### **3.08 VALVE INSTALLATION**

- A. AWWA Gate Valves: Comply with AWWA C600 and AWWA M44. Install each underground valve with stem pointing up and with valve box.
- B. AWWA Valves Other Than Gate Valves: Comply with AWWA C600 and AWWA M44.

- C. UL/FMG, Gate Valves: Comply with NFPA 24. Install each underground valve and valves in vaults with stem pointing up and with vertical cast-iron indicator post.
- D. UL/FMG, Valves Other Than Gate Valves: Comply with NFPA 24.
- E. MSS Valves: Install as component of connected piping system.
- F. Corporation Valves and Curb Valves: Install each underground curb valve with head pointed up and with service box.

### **3.09 WATER METER INSTALLATION**

- A. Install water meters, piping, and specialties according to utility company's written instructions.

### **3.10 ROUGHING-IN FOR WATER METERS**

- A. Rough-in piping and specialties for water meter installation according to utility company's written instructions.

### **3.11 BACKFLOW PREVENTER INSTALLATION**

- A. Install backflow preventers of type, size, and capacity indicated. Include valves and test cocks. Install according to requirements of plumbing and health department and authorities having jurisdiction.
- B. Do not install backflow preventers that have relief drain in vault or in other spaces subject to flooding.
- C. Do not install bypass piping around backflow preventers.

### **3.12 WATER METER BOX INSTALLATION**

- A. Install water meter boxes in paved areas flush with surface. Provide 24" x 24" x 6" thick concrete apron around all valve boxes in asphalt pavement areas.
- B. Install water meter boxes in grass or earth areas with top 2 inches (50 mm) above surface.

### **3.13 FIRE HYDRANT INSTALLATION**

- A. General: Install each fire hydrant with separate gate valve in supply pipe, anchor with restrained joints or thrust blocks, and support in upright position.
- B. AWWA Fire Hydrants: Comply with AWWA M17.
- C. UL/FMG Fire Hydrants: Comply with NFPA 24.

### **3.14 CONNECTIONS**

- A. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. See Engineering Plans for piping connections to valves and equipment.

### **3.15 FIELD QUALITY CONTROL**

- A. Piping Tests: Conduct piping tests before joints are covered and after concrete thrust blocks have hardened sufficiently. Fill pipeline 24 hours before testing and apply test pressure to stabilize system. Use only potable water.
- B. Hydrostatic Tests: Test at not less than one-and-one-half times working pressure for two hours.
  1. The Contractor shall test all pipe lines and appurtenances with water at test pressure of 200 psi or 50 psi in excess of the system working pressure, whichever is greater. Test pressure must be maintained for at least 2 hours. All leakage apparent after testing must be repaired immediately. The work will not be finally accepted until leakage shall be as follows:
    - a. The amount of leakage at the joints shall not exceed 2 quarts per hour per 100 gaskets or joints, irrespective of pipe diameter.
    - b. The amount of leakage specified above shall be permitted to be increased by 1 fluid ounce per inch valve diameter per hour for each metal seated valve isolating the test section.
    - c. If dry barrel hydrants are tested with the main valve open so the hydrants are under pressure, an additional 5 fluid ounces per minute shall be permitted for each hydrant.
    - d. The amount of leakage in buried piping shall be measured at the specified test pressure by pumping from a calibrated container.

2. Fire Water System tests shall be in full conformity with the requirements of all applicable codes, NFPA standards, and other authorities having jurisdiction.
  - a. All new underground mains and lead-ins shall be flushed thoroughly before connection is made to internal system piping. The site utility subcontractor shall be responsible for disposal of the test water drained from the test outlets.
  - b. The trench shall be backfilled between joints before testing to prevent movement of pipe.
  - c. Test shall be made by the site utility subcontractor in the presence of the regulatory authority having jurisdiction and/or the Owner's representative.
  - d. After the fire service underground main and lead-in have been installed by the site utility subcontractor and are ready for use, the site utility subcontractor shall furnish 2 completed copies of the "Contractor's Material and Test Certificate for Private Fire Service Mains" form to the General Contractor. Prior to attachment of any pipe or equipment to the lead-in located in the sprinkler room, the sprinkler subcontractor shall obtain a copy of the completed form from the General Contractor.
  - e. The site utility subcontractor shall prepare reports of testing activities and submit 2 copies to the General Contractor.
- C. Prepare reports of testing activities.

### 3.16 IDENTIFICATION

- 3.17 Install continuous underground detectable warning tape during backfilling of trench for underground water-distribution piping. Locate below finished grade, directly over piping. Underground warning tapes are specified in Division 31 Section 312000 "Earth Moving" .

### 3.18 CLEANING

- A. Clean and disinfect water-distribution piping as follows:
  1. Purge new water-distribution piping systems and parts of existing systems that have been altered, extended, or repaired before use.
  2. Use purging and disinfecting procedure prescribed by authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in NFPA 24 for flushing of piping. Flush piping system with clean, potable water until dirty water does not appear at points of outlet.
  3. Use purging and disinfecting procedure prescribed by authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in AWWA C651 or do as follows:
    - a. Fill system or part of system with water/chlorine solution containing at least 50 ppm of chlorine; isolate and allow to stand for 24 hours.
    - b. Drain system or part of system of previous solution and refill with water/chlorine solution containing at least 200 ppm of chlorine; isolate and allow to stand for 3 hours.
    - c. After standing time, flush system with clean, potable water until no chlorine remains in water coming from system.
    - d. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows evidence of contamination.
- B. The site utility subcontractor shall prepare reports of purging and disinfecting activities and submit two (2) copies to the General Contractor.
- C. All fire protection underground mains shall be flushed per the flow rates listed below:
 

| Fire Pump and/or Water Storage Tank Installed |           | No Fire Pump or Water Storage Tank |           |
|-----------------------------------------------|-----------|------------------------------------|-----------|
| 8" pipe                                       | 2,350 gpm | 8" pipe                            | 1,560 gpm |
| 10" pipe                                      | 3,670 gpm | 10" pipe                           | 2,440 gpm |
| 12" pipe                                      | 5,290 gpm | 12" pipe                           | 3,520 gpm |
| 14" pipe                                      | 7,188 gpm |                                    |           |
| 16" pipe                                      | 9,388 gpm |                                    |           |

Underground and lead-in fire protection mains shall be flushed through fire hydrants at dead ends of the underground piping system or through aboveground flushing outlets which are accessible will allow water to drain to a safe location and will provide the required flow listed above. Flush



underground mains until water is clear. Continue to flush for five minutes after water is clear. Utilize approved water flow measuring devices to verify that the required water flow is achieved.

**END OF SECTION 331000**

**CONFORMANCE SUBMITTAL**

**SECTION 331000 – Facility Water Distribution Piping**

Project Location \_\_\_\_\_

*(City, State)*

General Contractor: \_\_\_\_\_

*(Company Name, Phone Number)*

\_\_\_\_\_  
*(Address)*

Sub-Contractor: \_\_\_\_\_

*(Company Name, Phone Number)*

\_\_\_\_\_  
*(Address)*

The following products have been selected (check one box) for use in this project from the list of acceptable products specified:

Domestic and Fire Mains:

- ☐ Ductile-Iron Pipe, AWWA C151 Class 350, MJ DI Compact Fittings
- ☐ Polyvinyl Chloride (PVC) Pipe, AWWA C900, Class \_\_\_\_\_, MJ DI Compact Fittings
- ☐ Other per AHJ: \_\_\_\_\_

Domestic and Irrigation Supply Lines:

- ☐ Copper Tubing, ASTM B88, Type K, Annealed Temper, Copper Fittings
- ☐ Polyvinyl Chloride (PVC) Pipe, ASTM D2241, SDR 21
- ☐ Other per AHJ: \_\_\_\_\_

Fire Hydrants, BFP's, Valves, Meters, Fittings, Vaults, and all other Appurtenances:

☐ Conform to Project Specifications and All Authorities Having Jurisdiction

---

I represent to the City/Owner/Engineer that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the contract documents. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by Owner the work shall be completed without additional cost to the Owner and / or the contract.

Sub-Contractor: \_\_\_\_\_

*(Signature of the Authorized Agent of the Sub-Contractor)* Date

\_\_\_\_\_  
*(Print Name of the Authorized Agent of the Sub-Contractor)*

General Contractor: \_\_\_\_\_

*(Signature of the Authorized Agent of the General Contractor)* Date

\_\_\_\_\_  
*(Print Name of the Authorized Agent of the General Contractor)*

WATER DISTRIBUTION SYSTEM CERTIFICATION FORM

|                           |  |
|---------------------------|--|
| <b>Project</b>            |  |
| <b>Date</b>               |  |
| <b>Engineer</b>           |  |
| <b>General Contractor</b> |  |
| <b>Utility Contractor</b> |  |
| <b>Const. Mgr.</b>        |  |

**ENGINEER CERTIFICATION (If required)**

I certify that the water distribution system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

Engineer \_\_\_\_\_

Registration No. \_\_\_\_\_ Affix Seal Here (not valid unless sealed)

Date \_\_\_\_\_

**GENERAL CONTRACTOR CERTIFICATION (Required)**

I certify that the water distribution system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

General Contractor \_\_\_\_\_

License No. \_\_\_\_\_

Date \_\_\_\_\_

**UTILITY CONTRACTOR CERTIFICATION (Required)**

I certify that the water distribution system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

Utility Contractor \_\_\_\_\_

License No. \_\_\_\_\_

Date \_\_\_\_\_

\* Submit this certification form with test results, local certificates, etc.

# FIRE MAIN CERTIFICATION FORM

| <b>Contractor's Material and Test Certificate for Underground Piping</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------|
| <b>PROCEDURE</b><br>Upon completion of work, inspection and tests shall be made by the contractor's representative and witnessed by an owner's representative. All defects shall be corrected and system left in service before contractor's personnel finally leave the job.<br><br>A certificate shall be filled out and signed by both representatives. Copies shall be prepared for approving authorities, owners, and contractor. It is understood the owner's representative's signature in no way prejudices any claim against contractor for faulty material, poor workmanship, or failure to comply with approving authority's requirements or local ordinances. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                            |
| Property name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | Date                                                                                                                       |
| Property address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                            |
| <b>Plans</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Accepted by approving authorities (names)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |                                                                                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |                                                                                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Installation conforms to accepted plans                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Equipment used is approved<br>If no, state deviations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
| <b>Instructions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Has person in charge of fire equipment been instructed as to location of control valves and care and maintenance of this new equipment?<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Have copies of appropriate instructions and care and maintenance charts been left on premises?<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
| <b>Location</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Supplies buildings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |                                                                                                                            |
| <b>Underground pipes and joints</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Pipe types and class                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  | Type joint                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Pipe conforms to _____ standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Fittings conforms to _____ standard<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Joints needed anchorage clamped, strapped, or blocked in accordance with _____ standard<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
| <b>Test description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <u>Flushing:</u> Flow the required rate until water is clear as indicated by no collection of foreign material in burlap bags at outlets such as hydrants and blow-offs. Flush at flows not less than 390 gpm (1476 L/min) for 4-in. pipe, 880 gpm (3331 L/min) for 6-in. pipe, 1560 gpm (5905 L/min) for 8-in. pipe, 2440 gpm (9235 L/min) for 10-in. pipe, and 3520 gpm (13,323 L/min) for 12-in. pipe. When supply cannot produce stipulated flow rates, obtain maximum available.<br><u>Hydrostatic:</u> Hydrostatic tests shall be made at not less than 200 psi (13.8 bar) for 2 hours or 50 psi (3.4 bar) above static pressure in excess of 150 psi (10.3 bar) for 2 hours.<br><u>Leakage:</u> New pipe laid with rubber gasketed joints shall, if the workmanship is satisfactory, have little or no leakage at the joints. The amount of leakage at the joints shall not exceed 2 quarts per hour (1.89 L/hr) per 100 joints irrespective of pipe diameter. The leakage shall be distributed over all joints. If such leakage occurs at a few joints, the installation shall be considered unsatisfactory and necessary repairs made. The amount of allowable leakage specified above can be increased by 1 fluid ounce per inch valve diameter per hr. (30 mL/25 mm/hr) for each metal seated valve isolating the test section. If dry barrel hydrants are tested with the main valve open so the hydrants are under pressure, an additional 5 ounces per minute (150 mL/min) leakage is permitted for each hydrant. |  |                                                                                                                            |
| <b>Flushing tests</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | New underground piping flushed according to _____ standard by (company)<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | How flushing flow was obtained<br><input type="checkbox"/> Public water <input type="checkbox"/> Tank or reservoir <input type="checkbox"/> Fire pump                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | Through what type opening<br><input type="checkbox"/> Hydrant butt <input type="checkbox"/> Open pipe                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Lead-ins flushed according to _____ standard by (company)<br>If no, explain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  | <input type="checkbox"/> Yes <input type="checkbox"/> No                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | How flushing flow was obtained<br><input type="checkbox"/> Public water <input type="checkbox"/> Tank or reservoir <input type="checkbox"/> Fire pump                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | Through what type opening<br><input type="checkbox"/> Y connection to flange and spigot <input type="checkbox"/> Open pipe |

|                                  |                                                                                                                        |               |                                                                                        |                                                          |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------|----------------------------------------------------------|
| Hydrostatic test                 | All new underground piping hydrostatically tested at _____ psi for _____ hours                                         |               | Joints covered<br><input type="checkbox"/> Yes <input type="checkbox"/> No             |                                                          |
| Leakage test                     | Total amount of leakage measured<br>_____ gallons _____ hours                                                          |               |                                                                                        |                                                          |
|                                  | Allowable leakage<br>_____ gallons _____ hours                                                                         |               |                                                                                        |                                                          |
| Hydrants                         | Number installed                                                                                                       | Type and make | All operate satisfactorily<br><input type="checkbox"/> Yes <input type="checkbox"/> No |                                                          |
| Control valves                   | Water control valves left wide open<br>If no, state reason                                                             |               |                                                                                        | <input type="checkbox"/> Yes <input type="checkbox"/> No |
|                                  | Hose threads of fire department connections and hydrants interchangeable with those of fire department answering alarm |               |                                                                                        | <input type="checkbox"/> Yes <input type="checkbox"/> No |
| Remarks                          | Date left in service                                                                                                   |               |                                                                                        |                                                          |
|                                  |                                                                                                                        |               |                                                                                        |                                                          |
|                                  |                                                                                                                        |               |                                                                                        |                                                          |
| Signatures                       | Name of installing contractor                                                                                          |               |                                                                                        |                                                          |
|                                  | Tests witnessed by                                                                                                     |               |                                                                                        |                                                          |
|                                  | For property owner (signed)                                                                                            | Title         | Date                                                                                   |                                                          |
|                                  | For installing contractor (signed)                                                                                     | Title         | Date                                                                                   |                                                          |
| Additional explanation and notes |                                                                                                                        |               |                                                                                        |                                                          |

## **SECTION 333000**

### **SANITARY SEWER**

#### **PART 1 - GENERAL**

##### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### **1.02 SUMMARY**

- A. Section Includes:

1. This section includes sanitary sewer piping and related appurtenances from connection to main to within 5 feet of outside building limits.
2. Pipe and fittings.
3. Non-pressure and pressure couplings.
4. Expansion joints and deflection fittings.
5. Backwater valves.
6. Cleanouts.
7. Encasement for piping.
8. Manholes.

##### **1.03 REFERENCE STANDARDS**

- A. American Society for Testing and Materials (ASTM)
  1. A746 - Standard Specification for Ductile Iron Gravity Sewer Pipe
  2. D3034 – Standard Specification for Type PSM Poly Vinyl Chloride (PVC) Sewer Pipe and Fittings
  3. F477 - Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
  4. F696 - Standard Specification for Poly Vinyl Chloride (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings
  5. C476 - Standard Specification for Grout for Masonry
  6. C443 - Standard Specification for Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets
  7. C923 - Standard Specification for Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals
  8. D2321 - Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
  9. D478 - Standard Specifications for Precast Reinforced Concrete Manhole Sections
  10. C969 - Standard Practice for Infiltration and Exfiltration Acceptance Testing of Installed Precast Concrete Sewer Lines
- B. American Society of Sanitary Engineers (ASSE)
- C. American National Standards Institute (ANSI)
- D. American Concrete Institute (ACI)
  1. 318 - Code Requirements for Structural Plain Concrete
- E. National Sanitation Foundation (NSF)
- F. American Water Works Association (AWWA)
  1. C110 - Ductile-Iron and Gray-Iron Fittings, 3 in through 48 in (75 mm through 1200 mm), for Water and Other Liquids (revision of ANSI/AWWA C110/A21.10-93)
  2. C1111 - Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings C153 - Ductile-Iron Compact Fittings, 3 in. through 24 in. (76 mm Through 610 mm) and 54 in. through 64 in. (1,400 mm Through 1,600 mm), for Water Service (revision of ANSI/AWWA C153/A21.53-94).
  3. C600 - Installation of Ductile-Iron Water Mains and Their Appurtenances (revision of ANSI/AWWA C600-93)
  4. C150 - ANSI Standard for Thickness Design of Ductile Iron Pipe
  5. C151 – ANSI Standard for Ductile Iron Pipe



- 6. C153 – ANSI Standard for Ductile Iron Pipe Compact Fittings
- G. Federal Specifications
  - 1. SS-S-00210 - Sealing Compound Preformed Plastic for Pipe Joints
- H. Uni-Bell PVC Pipe Association
  - 1. UNI-B-6 - Low-Pressure Air Testing of Installed Sewer Pipe

#### **1.04 SUBMITTALS**

- A. Conformance Submittal: The General Contractor and the Subcontractor shall execute the Conformance Submittal(s) at the end of this Section.
- B. Field inspection, testing and quality-control reports.
- C. Sanitary Sewer Certification Form (signed by the Engineer, General Contractor and Utility Contractor) at the end of this Section.

#### **1.05 DELIVERY, STORAGE, AND HANDLING**

- A. Do not store pipe, and fittings in direct sunlight.
- B. Protect pipe, pipe fittings, and seals from dirt and damage.
- C. Handle manholes according to manufacturer's written rigging instructions.

#### **1.06 PROJECT CONDITIONS**

- A. Coordination and Fees:
  - 1. Contractor shall comply with requirements of the regulatory authorities having jurisdiction including tapping of sewer mains, installation and testing.
  - 2. Contractor shall be responsible for obtaining and payment of all tap and construction permit fees associated with this Section.
  - 3. Contractor to install all sanitary sewer lines and appurtenances as shown on the drawings to within 5 feet of building limits. If the Contractor's work terminates at a connection point where work by others is complete, the Contractor shall make the connection. If future connections are required by others, the Contractor shall install plugging and marking as necessary to identify and locate the work.
- B. Interruption of Existing Sanitary Sewerage Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary service according to requirements indicated:
  - 1. Notify Owner no fewer than two days in advance of proposed interruption of service.
  - 2. Do not proceed with interruption of service without Owner's written permission.

### **PART 2 - PRODUCTS**

#### **2.01 DUCTILE-IRON, GRAVITY SEWER PIPE AND FITTINGS**

- A. Pipe: ASTM A 746, for push-on joints.
- B. Standard Fittings: AWWA C110, ductile or gray iron, for push-on joints.
- C. Compact Fittings: AWWA C153, ductile iron, for push-on joints.
- D. Gaskets: AWWA C111, rubber.

#### **2.02 PVC PIPE AND FITTINGS**

- A. Performance Requirements:
  - 1. Gravity Flow Non-Pressure Piping Pressure Ratings: at least equal to system test pressure.
  - 2. Force-Main Pressure Ratings: at least equal to system operating pressure but not less than 150 psig.
- B. PVC Gravity Sewer Piping:
  - 1. 12 Inch and Smaller PVC Pipe and Fittings: ASTM D 3034, SDR, PVC gravity sewer pipe with bell-and-spigot ends and with integral ASTM F 477, elastomeric seals for gasketed joints.
  - 2. 15 Inch and Larger PVC Pipe and Fittings: ASTM F 679, SDR 35, Type T-1 wall thickness, PVC gravity sewer pipe with bell-and-spigot ends and with integral ASTM F 477, elastomeric seals for gasketed joints.

### **2.03 NONPRESSURE-TYPE TRANSITION COUPLINGS**

- A. Comply with ASTM C 1173, elastomeric, sleeve-type, reducing or transition coupling, for joining underground nonpressure piping. Include ends of same sizes as piping to be joined and corrosion-resistant-metal tension band and tightening mechanism on each end.
- B. Sleeve Materials:
  - 1. For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
  - 2. For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.
- C. Unshielded, Flexible Couplings:

### **2.04 CLEANOUTS**

- A. Cleanouts shall be provided on sanitary sewer service laterals at no more than 100' on center. Exterior cleanout plug shall be level with adjacent grade and provided with a 2' x 2' x 6" thick concrete apron as shown on the Drawings.
- B. Cast-Iron Cleanouts:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide US Foundry cover USF 7621 or equal product as indicated on Drawings.
  - 2. Description: ASME A112.36.2M, round, gray-iron housing with clamping device and round, secured, scoriated, gray-iron cover. Include gray-iron ferrule with inside calk or spigot connection and countersunk, tapered-thread, brass closure plug.
  - 3. Top-Loading Classification(s): Heavy Duty.
  - 4. Sewer Pipe Fitting and Riser to Cleanout: ASTM A 74, Service class, cast-iron soil pipe and fittings.
- C. PVC Cleanouts:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings.
  - 2. Description: PVC body with PVC threaded plug. Include PVC sewer pipe fitting and riser to cleanout of same material as sewer piping.

### **2.05 ENCASEMENT FOR PIPING**

- A. Standard: ASTM A 674 or AWWA C105.
- B. Material: high-density, cross-laminated polyethylene film of 0.004-inch (0.10-mm) minimum thickness.
- C. Form: Sheet.
- D. Color: Black.

### **2.06 MANHOLES**

- A. Standard Precast Concrete Manholes:
  - 1. Description: ASTM C 478 (ASTM C 478M), precast, reinforced concrete, of depth indicated, with provision for rubber gasketed joints and rubber pipe boots.
  - 2. Inside Diameter: 48 inches (1200 mm) minimum unless otherwise indicated.
  - 3. Ballast: Increase thickness of precast concrete sections or add concrete to base section, as required to prevent flotation.
  - 4. Base Section: 8-inch (175-mm) minimum thickness for floor slab and 5-inch (125-mm) minimum thickness for walls and base riser section; with separate base slab or base section with integral floor.
  - 5. Riser Sections: 5-inch (125-mm) minimum thickness, of length to provide depth indicated.
  - 6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated; with top of cone of size that matches grade rings.
  - 7. Gasket: ASTM C 443, rubber (when required by local authority having jurisdiction).
  - 8. Resilient Pipe Connectors: ASTM C 923 (ASTM C 923M), cast or fitted into manhole walls, for each pipe connection.
  - 9. Steps: Individual FRP steps wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).

10. Grade Rings (if required): Reinforced-concrete rings, 6- to 9-inch (150- to 225-mm) total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.
  11. Pipe Connectors: ASTM C 923, resilient, of size required for each pipe connecting to base section.
  12. Joints of the manhole sections shall be tongue and groove filled with approved preformed butyl rubber base sealing compound conforming to Federal Specifications SS-S210A, Type 1, and Rope Form.
- B. Designed Precast Concrete Manholes:
1. Description: ASTM C 913; designed according to ASTM C 890 for A-16 (ASSHTO HS20-44), heavy-traffic, structural loading; of depth, shape, and dimensions indicated, with provision for sealant joints.
  2. Ballast: Increase thickness of one or more precast concrete sections or add concrete to manhole as required preventing flotation.
  3. Joint Sealant: ASTM C 990 (ASTM 990M), bitumen or butyl rubber.
  4. Resilient Pipe Connectors: ASTM C 923 (ASTM C 923M), cast or fitted into manhole walls, for each pipe connection.
  5. Steps: Individual FRP steps or wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than **42 inches (1050 mm)**.
  6. Grade Rings: Reinforced-concrete rings, 6- to 9-inch (150- to 225-mm) total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.
- C. Manhole Frames and Covers:
1. Description: Ferrous; 24-inch (610-mm) ID by 7- to 9-inch (175- to 225-mm) riser, with 4-inch- (100-mm-) minimum-width flange and 26-inch- (660-mm-) diameter cover. Include indented top design with 2 inch high lettering cast into cover, with the words "SANITARY SEWER." Cover must be bolted (to prevent theft).
  2. Standard manhole frame and cover shall conform to the standard detail of the regulatory authorities having jurisdiction for the project. Otherwise manhole frames and covers shall be as detailed on the Drawings.

## 2.07 CONCRETE

- A. General: Cast-in-place concrete complying with ACI 318, ACI 350/350R (ACI 350M/350RM), and the following:
1. Cement: ASTM C 150, Type II.
  2. Fine Aggregate: ASTM C 33, sand.
  3. Coarse Aggregate: ASTM C 33, crushed gravel.
  4. Water: Potable.
- B. Portland Cement Design Mix: 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio.
1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
  2. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (420 MPa) deformed steel.
- C. Manhole Channels and Benches: Factory or field formed from concrete. Portland cement design mix, 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio. Include channels and benches in manholes.
1. Channels: Concrete invert, formed to same width as connected piping, with height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope.
    - a. Invert Slope: 2 percent through manhole.
  2. Benches: Concrete, sloped to drain into channel.
    - a. Slope: 4 percent.
- D. Ballast and Pipe Supports: Portland cement design mix, 3000 psi (20.7 MPa) minimum, with 0.58 maximum water/cementitious materials ratio.
1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
  2. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (420 MPa) deformed steel.

## **PART 3 - EXECUTION**

### **3.01 EARTHWORK**

- A. Excavating, trenching, and backfilling are specified in Division 31 Section "Earth Moving"

### **3.02 PIPING INSTALLATION**

- A. General Locations and Arrangements: Drawing plans and details indicate general location and arrangement of underground sanitary sewer piping. Location and arrangement of piping layout take into account design considerations. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.
- B. Install piping beginning at low point, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for using lubricants, cements, and other installation requirements.
- C. Clear interior of piping and structures of dirt and deleterious materials as work progresses. Place plug in end of incomplete piping at end of day and work stops for greater than 24 hours. Flush piping between manholes and other structures to remove collected debris when needed.
- D. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.
- E. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.
- F. Install gravity-flow piping to within 5 feet of the building limits of sizes and in locations shown on the Drawings. Terminate piping as specified.
- G. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of micro tunneling.
- H. Install gravity-flow, nonpressure, drainage piping according to the following:
  - 1. Install piping pitched down in direction of flow, at slope shown on the Drawings, and at a minimum slope of 1 percent for 6 inch diameter pipe and 0.5 percent for 8 diameter inch pipes unless otherwise indicated.
  - 2. Install piping with 36-inch (915-mm) minimum cover.
  - 3. Install ductile-iron, gravity sewer piping according to ASTM A 746.
  - 4. Install PVC gravity sewer piping according to ASTM D 2321 and ASTM F 1668.
- I. Install force-main, pressure piping according to the following:
  - 1. Install piping with restrained joints at tee fittings and at horizontal and vertical changes in direction. Use corrosion-resistant rods, pipe or fitting manufacturer's proprietary restraint system, or cast-in-place-concrete supports or anchors.
  - 2. Install piping with 36-inch (915-mm) minimum cover.
  - 3. Install ductile-iron special fittings according to AWWA C600.
  - 4. Install PVC pressure piping according to AWWA M23 or to ASTM D 2774 and ASTM F 1668.
- J. If indicated on Drawings install corrosion-protection piping encasement over the following underground metal piping according to ASTM A 674 or AWWA C105:
  - 1. Ductile-iron pipe and fittings.
  - 2. Expansion joints and deflection fittings.
- K. Clear interior of piping and manholes of dirt and superfluous material as work progresses. Maintain swab or drag in piping, and pull past each joint as it is completed. Place plug in end of incomplete piping at end of day and when work stops.

### **3.03 PIPE JOINT CONSTRUCTION**

- A. Join gravity-flow, nonpressure, drainage piping according to the following:
  - 1. Join ductile-iron, gravity sewer piping according to AWWA C600 for push-on joints.
  - 2. Join PVC gravity sewer piping according to ASTM D 2321 and ASTM D 3034 for elastomeric-seal joints or ASTM D 3034 for elastomeric-gasket joints.
  - 3. Join dissimilar pipe materials with nonpressure-type, flexible or rigid couplings.

- B. Join force-main, pressure piping according to the following:
  - 1. Join PVC pressure piping according to AWWA M23 for gasketed joints.
- C. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
  - 1. Use non-pressure flexible couplings where required to join gravity-flow, nonpressure sewer piping unless otherwise indicated.
    - a. Shielded flexible couplings for pipes of same or slightly different OD.
    - b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.
    - c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.
  - 2. Use pressure pipe couplings for force-main joints.

### **3.04 MANHOLE INSTALLATION**

- A. General: Install manholes complete with appurtenances and accessories indicated.
- B. Install precast concrete manhole sections with sealants according to ASTM C 891.
- C. Install FRP manholes according to manufacturer's written instructions.
- D. Form continuous concrete channels and benches between inlets and outlet.
- E. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops **3 inches (76 mm)** above finished surface elsewhere unless otherwise indicated.

### **3.05 CONCRETE PLACEMENT**

- A. Place cast-in-place concrete according to ACI 318.

### **3.06 BACKWATER VALVE INSTALLATION (If used)**

- A. Install horizontal-type backwater valves in piping manholes or pits.
- B. Install combination horizontal and manual gate valves in piping and in manholes.
- C. Install terminal-type backwater valves on end of piping and in manholes. Secure units to sidewalls.

### **3.07 CLEANOUT INSTALLATION**

- A. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Use cast-iron soil pipe fittings in sewer pipes at branches for cleanouts, and use cast-iron soil pipe for riser extensions to cleanouts. Install piping so cleanouts open in direction of flow in sewer pipe.
  - 1. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic and truck service areas.
- B. Set cleanout frames and covers in cast-in-place-concrete, 24 by 24 by 6 inches (600 by 600 by 150 mm) deep. Set with tops flush with surrounding grade.
- C. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

### **3.08 CONNECTIONS**

- A. Connect nonpressure, gravity-flow drainage piping to building's sanitary building drains specified in the engineering drawings.
- B. Connect force-main piping to building's sanitary force mains specified in Division 22 Section "Sanitary Waste and Vent Piping." Terminate piping where indicated.
- C. Make connections to existing piping and underground manholes.
  - 1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe, install wye fitting into existing piping, and encase entire wye fitting plus 6-inch (150-mm) overlap with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).
  - 2. Make branch connections from side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500). Remove section of existing pipe, install wye fitting into existing piping, and encase entire wye with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

3. Make branch connections from side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes by cutting opening into existing unit large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe or manhole wall, encase entering connection in 6 inches (150 mm) of concrete for minimum length of 12 inches (300 mm) to provide additional support of collar from connection to undisturbed ground.
  - a. Use concrete that will attain a minimum 28-day compressive strength of 3000 psi (20.7 MPa) unless otherwise indicated.
  - b. Use epoxy-bonding compound as interface between new and existing concrete and piping materials.
4. Protect existing piping and manholes to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.
- D. Connect to grease oil and sand interceptors specified in Division 2 Section "Sanitary Sewer."

### **3.09 CLOSING ABANDONED SANITARY SEWER SYSTEMS**

- A. The Contractor shall be responsible for removal and/or relocation of existing utilities as necessary, whether shown or not shown on the Drawings. At locations where conflicts occur with proposed sanitary sewer improvements, removal and relocation shall be at no additional cost to the Owner.
- B. Abandoned Piping: Close and grout fill open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed. Use either procedure below:
  1. Close open ends of piping with at least 8-inch- (203-mm-) thick, brick masonry bulkheads.
  2. Close open ends of piping with threaded metal caps, plastic plugs, or other acceptable methods suitable for size and type of material being closed. Do not use wood plugs.
- C. Abandoned Manholes: Excavate around manhole as required and use either procedure below:
  1. Remove manhole and close open ends of remaining piping.
  2. Remove top of manhole down to at least 36 inches (915 mm) below final grade. Fill to within 12 inches (300 mm) of top with gravel, or compacted dirt. Fill to top with concrete.
- D. Backfill to grade according to Division 31 Section "Earth Moving"

### **3.10 IDENTIFICATION**

- A. Materials and their installation are specified in Division 31 Section "Earth Moving." Arrange for installation of green warning tapes directly over piping and at outside edges of underground manholes.
  1. Use warning tape or detectable warning tape over ferrous piping.
  2. Use detectable warning tape over nonferrous piping and over edges of underground manholes.

### **3.11 FIELD QUALITY CONTROL**

- A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Inspect after approximately 24 inches (600 mm) of backfill is in place, and again at completion of Project.
  1. Submit separate report for each system inspection.
  2. Defects requiring correction include the following:
    - a. Alignment: Less than full diameter of inside of pipe is visible between structures.
    - b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 95 percent of piping diameter.
    - c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
    - d. Infiltration: Water leakage into piping.
    - e. Exfiltration: Water leakage from or around piping.
  3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
  4. Re-inspect and repeat procedure until results are satisfactory.
- B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.

1. Do not enclose, cover, or put into service before inspection and approval.
2. Test completed piping systems according to requirements of authorities having jurisdiction.
3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours' advance notice.
4. Submit separate report for each test to General Contractor within 2 days of test.
5. If authorities having jurisdiction do not have published procedures, perform tests as follows:
  - a. Hydrostatic Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction and the following:
    - 1) Fill sewer piping with water. Test with pressure of at least 10-foot (3-m) head of water, and maintain such pressure without leakage for at least 15 minutes.
    - 2) Close openings in system and fill with water.
    - 3) Purge air and refill with water.
    - 4) Disconnect water supply.
    - 5) Test and inspect joints for leaks.
    - 6) Allowable leakage is a maximum of 50 gal. Per inch of nominal pipe size per mile of pipe per day.
    - 7) Option: Test ductile iron piping according to AWWA C600, Section "Hydrostatic Testing". Use test pressure of at least 10 psig.
  6. Air Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction, UNI-B-6, and the following:
    - a. Option: Test plastic gravity sewer piping according to ASTM F 1417.
  7. Force Main: Perform hydrostatic test after thrust blocks, supports, and anchors have hardened. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psig (1035 kPa).
    - a. PVC Piping: Test according to AWWA M23, "Testing and Maintenance" Chapter.
  8. Manholes: Perform hydraulic test according to ASTM C 969 (ASTM C 969M).
- C. Leaks and loss in test pressure constitute defects that must be repaired.
- D. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

### **3.12 CLEANING**

- A. Clean dirt and superfluous material from interior of piping flush with potable water.

**END OF SECTION 333000**

**CONFORMANCE SUBMITTAL**  
**SECTION 333000 – SANITARY SEWER**

Project Location \_\_\_\_\_  
(City, State)

General Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

Sub-Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

---

The following products have been selected (check one box) for use in this project from the list of acceptable products specified:

Piping Materials:

- ☐ Ductile-Iron Pipe, ASTM A746  
☐ Polyvinyl Chloride (PVC) Pipe, ASTM D3034, SDR 35, Elastomeric Gasket Joints ASTM F477  
☐ Other per AHJ: \_\_\_\_\_

Manholes:

- ☐ Precast with Cored or Cast Holes with Properly Sized Boots  
☐ Other per AHJ: \_\_\_\_\_

---

I represent to City/Owner/Engineer that the products selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the contract documents. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by Owner the work shall be completed without additional cost to the Owner and / or the contract.

Sub-Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the Sub-Contractor)      Date

\_\_\_\_\_  
(Print Name of the Authorized Agent of the Sub-Contractor)

General Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the General Contractor)      Date

\_\_\_\_\_  
(Print Name of the Authorized Agent of the General Contractor)



# SANITARY SEWER CERTIFICATION FORM

|                           |  |
|---------------------------|--|
| <b>Project</b>            |  |
| <b>Date</b>               |  |
| <b>Engineer</b>           |  |
| <b>General Contractor</b> |  |
| <b>Utility Contractor</b> |  |
| <b>Const. Mgr.</b>        |  |

## ENGINEER CERTIFICATION (If required)

I certify that the sanitary sewer system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

Engineer \_\_\_\_\_

Registration No. \_\_\_\_\_

Date \_\_\_\_\_

Affix Seal Here (not valid unless sealed)

## GENERAL CONTRACTOR CERTIFICATION (Required)

I certify that the sanitary sewer system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

General Contractor \_\_\_\_\_

License No. \_\_\_\_\_

Date \_\_\_\_\_

## UTILITY CONTRACTOR CERTIFICATION (Required)

I certify that the sanitary sewer system for the above referenced project has been installed and tested in accordance with local code and Project Plans and Specifications dated \_\_\_\_\_.

Utility Contractor \_\_\_\_\_

License No. \_\_\_\_\_

Date \_\_\_\_\_

\* Submit this certification form with test results, local certificates, etc.

## **SECTION 33 41 00**

### **STORM UTILITY DRAINAGE PIPING**

#### **PART 1 - GENERAL**

##### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and all Specification Sections, apply to this Section.

##### **1.02 SUMMARY**

- A. Section Includes:
  - 1. Pipe and fittings.
  - 2. Nonpressure transition couplings.
  - 3. Pressure pipe couplings.
  - 4. Expansion joints and deflection fittings.
  - 5. Backwater valves.
  - 6. Cleanouts.
  - 7. Drains.
  - 8. Encasement for piping.
  - 9. Manholes.
  - 10. Channel drainage systems.
  - 11. Catch basins.
  - 12. Stormwater inlets.
  - 13. Stormwater detention structures.
  - 14. Pipe outlets.
  - 15. Dry wells.
  - 16. Stormwater disposal systems.

##### **1.03 STANDARDS**

- A. American Society For Testing and Materials (ASTM)
  - 1. A185 – Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
  - 2. A615 – Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
  - 3. A760 – Corrugated Steel Pipe, Metallic-Coated, for Sewers and Drains
  - 4. A798 – Installation of Corrugated-Steel Pipe for Sewers and Other Applications
  - 5. A929 – Metallic-Coated by the Hot-Dip Process for Corrugated Steel Pipe
  - 6. C76 – Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
  - 7. C443 – Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
  - 8. C478 – Precast Reinforced Concrete Manhole Sections
  - 9. C913 – Precast Concrete Water and Wastewater Structures
  - 10. C1479 – Installation of Reinforced Concrete Pipe
  - 11. C990-01A – Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants
  - 12. D1056 – Flexible Cellular Materials-Sponge or Expanded Rubber
  - 13. D2306 – Annular Corrugated Profile Wall Polyethylene pipe and Fittings for Gravity Flow Storm Sewer and Subsurface Drainage Applications
  - 14. D2321 – Installation of Thermoplastic Pipe for Sewer/Gravity-Flow Applications
  - 15. D3034 – Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
  - 16. D3212 – Joints for Drain and Sewer Plastic Pipes Using Elastomeric Seals
  - 17. F477 – Elastomeric Seals (Gaskets) for Joining Plastic Pipe
  - 18. F794 – Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter
  - 19. F949 – Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings
  - 20. F2418 – Polypropylene (PP) Corrugated Wall Stormwater Collection Chambers
  - 21. F2306 – Annular Corrugated Profile Wall Polyethylene (PE) Pipe and Fittings

- 22. F2562 – Steel Reinforced Thermoplastic Ribbed Pipe
- 23. C1504 - Precast Steel Reinforced Three Sided Concrete Structures
- B. American Association of State Highway and Transportation Officials (AASHTO)
  - 1. M36 – Corrugated Steel Pipe, Metallic-Coated, for Sewers and Drains
  - 2. M198 – Joints for Circular Concrete Sewer and Culvert Pipe Using Flexible Watertight Gaskets
  - 3. M252 – Corrugated Polyethylene Drainage Tubing
  - 4. M274 – Aluminum-Coated (Type 2), for Corrugated Steel Pipe
  - 5. M288 – Geotextile Specification for Highway Applications
  - 6. M294 – Corrugated Polyethylene Pipe.
  - 7. M36 – Metallic Coated Corrugated Steel Culverts and Underdrains
  - 8. M43 – Sizes of Aggregate for Road and Bridge Construction
  - 9. M190 – Bituminous Coated Corrugated Metal Culvert Pipe and Pipe Arches
  - 10. M199 – Standard Specification for Precast Reinforced Concrete Manhole Sections
  - 11. AASHTO LRFD Bridge Design Specifications Sections 3 & 12
- C. American Water Works Association (AWWA)
  - 1. C110 – Ductile-Iron and Gray-Iron Fittings, 3 in through 48 in (75 mm through 1200 mm), for Water and Other Liquids (revision of ANSI/AWWA C110/A21.10-93)
  - 2. C111 – Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
  - 3. C151 – Ductile-Iron Pipe, Centrifugally Cast, for Water
- D. American Concrete Institute (ACI)
  - 1. 301 – Structural Concrete for Buildings, Specifications for
  - 2. 318 – Building Code Requirements for Structural Plain Concrete

#### **1.04 SUBMITTALS**

- A. The General Contractor and the Subcontractor shall execute the Conformance Submittals at the end of this section:
  - 1. Storm Drainage Conformance Submittal
- B. Product Data: For each type of product indicated.
- C. Shop Drawings:
  - 1. Manholes: Include plans, elevations, sections, details, frames, and covers.
  - 2. Catch basins stormwater inlets and dry wells. Include plans, elevations, sections, details, frames, covers, and grates.
  - 3. Stormwater Detention Structures: Include plans, elevations, sections, details, frames, covers, and concrete design-mix reports.
- D. Product Certificates: For each type of cast-iron soil pipe and fitting, from manufacturer.
- E. Field quality-control reports.
- F. Project Record Drawings: Accurately record as-built locations of pipe runs, connections, catch basins, cleanouts, top elevations and invert elevations. Identify and describe unexpected variations of subsurface conditions and location of any utilities encountered.

#### **1.05 QUALITY ASSURANCE**

- A. All costs associated with re-inspection due to failures shall be paid for by the Contractor at no additional expense to the Owner. Owner reserves the right to direct any inspection that is deemed necessary. Contractor shall provide free access to site for inspection activities.

#### **1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Do not store plastic, pipe, and fittings in direct sunlight with the exception of Corrugated High Density Polyethylene Pipe and Fittings.
- B. All pipe shall be protected against impact, shock and free fall, and only equipment of sufficient capacity and proper design shall be used in the handling of the pipe. Pipes and chambers shall not be rolled or dragged over gravel or rock during handling. The Contractor shall take necessary precautions to ensure the method used in lifting or placing the pipe or chambers does not induce stress fatigue in the pipe or chamber and the lifting device used uniformly distributes the weight of the pipe or chamber along the axis or circumference. Storage of pipe on the job shall be in accordance with the pipe manufacturer's recommendations.

- C. Protect pipe, pipe fittings, and seals from dirt and damage.
- D. Damage to Pipe or Chambers:
  1. Each length of pipe or chamber shall be inspected for defects and cracks before carefully being lowered into the trench.
  2. Bituminous coated pipe shall be handled with special care and repair of damaged coating shall conform to AASHTO M190.
  3. Pipe or chambers which are defective from any cause, including damage caused by handling, storage or any other reason as determined by the Owner to be not repairable, shall be unacceptable for installation and shall be replaced at no cost to the Owner and as directed by the Owner.
  4. Pipe or chambers that are damaged or disturbed through any cause prior to acceptance of the work shall be repaired, realigned or replaced as directed by the Owner at no expense to the Owner.
- E. Handle manholes according to manufacturer's written rigging instructions.
- F. Handle catch basins and stormwater inlets according to manufacturer's written rigging instructions.

#### **1.07 PROJECT CONDITIONS**

- A. Removal/Relocation of Existing Utilities: The Contractor shall be responsible for removal and/or relocation of existing utilities, whether shown or not shown on the drawings, at locations where conflicts occur with proposed storm drainage improvements. Removal and relocation shall be at no additional cost to the Owner.
- B. Interruption of Existing Storm Drainage Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary service according to requirements indicated:
  1. Notify Owner no fewer than seven days in advance of proposed interruption of service.
  2. Do not proceed with interruption of service without Owner's written permission.

### **PART 2 - PRODUCTS**

#### **2.01 DUCTILE-IRON, CULVERT PIPE AND FITTINGS**

- A. Pipe: ASTM A 716, for push-on joints.
- B. Standard Fittings: AWWA C110, ductile or gray iron, for push-on joints.
- C. Compact Fittings: AWWA C153, for push-on joints.
- D. Gaskets: AWWA C111, rubber.

#### **2.02 ALUMINIZED PIPE AND FITTINGS**

- A. Aluminized Steel Type 2 Corrugated Steel Pipe 2 (CMP):
  1. Pipe shall meet requirements of ASTM A929 or AASHTO M 274 or ASTM A760
  2. Minimum gauge shall be 16 gauge for pipe diameters 10-24 inches, 14 gage for diameters 30-48 inches. Stormwater detention systems only: 12 gage for diameters 54-96 inches and 10 gauge for diameters 102 inches and larger, but not less than the diameter indicated on the drawings.
  3. Each pipe shall be clearly marked to show the class or gauge, date of manufacture and name or trademark of the manufacturer.
  4. Joints shall be fully corrugated 10" wide outside collars or coupling bands of aluminized steel angles riveted near the ends and bolted through angles to draw the bands tight for silt-tight designations. Additionally, a 7 "wide by 3/8" thick one piece continuous neoprene gasket per ASTM D1056 shall be provided at watertight designations.
  5. Maximum permitted diameter for CMP storm drainage piping is 48"
  6. CMP larger than 48"diameter is allowed for subsurface stormwater detention systems only.
- B. Aluminized Steel Type 2 Spiral Ribbed Pipe (Type IR)
  1. Pipe shall meet the requirements of ASTM A929 and AASHTO M274 or ASTM A760 with 3/4" x 3/4" x 7-1/2" continuous external ribs in accordance with the applicable requirements of AASHTO M-36 or ASTM A760 such as "Ultra-Flo" by Contech or approved equal.

2. Minimum gauge shall be 16 gauge for pipe diameters 10-24 inches and 14 gauge for diameters 30-48 inches, but not less than the diameter indicated on the drawings.
3. Each pipe shall be clearly marked to show the class or gauge, date of manufacture and name or trademark of the manufacturer.
4. Joints shall be fully corrugated 10" wide outside collars or coupling bands of aluminized steel angles riveted near the ends and bolted through angles to draw the bands tight for silt-tight designations. Additionally, a 7 " wide by 3/8" thick one piece continuous neoprene gasket per ASTM D1056 shall be provided at watertight designations
5. Pipe sizes, gages and corrugations shall be as shown on the project plans.
6. Maximum permitted diameter is 48"

## **2.03 HDPE PIPE AND FITTINGS**

- A. Steel Reinforced Thermoplastic Ribbed Smooth Interior Pipe
  1. Pipe lengths shall be joined on site using bell and spigots reinforced with steel that is fully encased in a pressure rated high density polyethylene and shall be watertight to an internal water pressure of 15 psi when tested in accordance with ASTM D3212.
  2. Gaskets shall meet the requirements of ASTM F477
  3. Maximum Diameter shall be 48"
- B. High Density Polyethylene Pipe (HDPE) Smooth Interior Pipe:
  1. Pipe and Fittings: Shall conform to AASHTO M252 and M294 and/or ASTM F2360 unless otherwise shown on the Drawings.
  2. Gaskets: Rubber gaskets shall meet requirements of ASTM F477 with joints conforming to AASHTO M294, watertight designations
  3. Maximum permitted diameter is 48".
  4. See drawings for bedding details.
  5. HDPE Pipe shall be NTPEP Certified.
  6. Approved Manufacturers:
    - a. Advance Drainage Systems, Inc., 3300 Riverside Drive, Columbus, Ohio 43221 (614) 457-3051
    - b. Hancor, Inc., 401 Olive Street, Findlay, Ohio 45840 (888) 367-7473
    - c. Lane Enterprises, Inc. (for Type S Lok-Tite Pipe) 3905 Hartzdale Drive, Suite 514, Camp Hill, PA 17011 (717) 761-8175
    - d. Quality Culvert, Inc., 25726 County Road 561, Astatula, FL 34750 (800) 881-1100

## **2.04 PVC PIPE AND FITTINGS**

- A. PVC Cellular-Core Piping:
  1. PVC Cellular-Core Pipe and Fittings: ASTM F 891, Sewer and Drain Series, PS 50 minimum stiffness, PVC cellular-core pipe with plain ends for solvent-cemented joints.
  2. Fittings: ASTM D 3034, SDR 35, PVC socket-type fittings.
- B. PVC Corrugated Sewer Piping:
  1. Pipe: ASTM F 949, and ASTM F 794 PVC, corrugated pipe with bell-and-spigot ends for gasketed joints.
  2. Fittings: ASTM F 949, PVC molded or fabricated, socket type.
  3. Gaskets: ASTM F 477, elastomeric seals with joints conforming to ASTM D3212
  4. Approved Manufacturers:
    - a. Contech "A2000", 1001 Grove Street, Middletown, OH 45044

## **2.05 CONCRETE PIPE AND FITTINGS**

- A. Reinforced-Concrete Pipe and Fittings: ASTM C 76 (ASTM C 76M).
  1. Bell-and-spigot or tongue-and-groove ends and gasketed joints with ASTM C 443 (ASTM C 443M), rubber gaskets or sealant joints with ASTM C 990 (ASTM C 990M), bitumen or butyl-rubber sealant for silt-tight designations.
  2. Class III, unless otherwise indicated on the Drawings.

## **2.06 NONPRESSURE TRANSITION COUPLINGS**

- A. Comply with ASTM C 1173, elastomeric, sleeve-type, reducing or transition coupling, for joining underground nonpressure piping. Include ends of same sizes as piping to be joined, and corrosion-resistant-metal tension band and tightening mechanism on each end.
- B. Sleeve Materials:
  - 1. For Concrete Pipes: ASTM C 443 (ASTM C 443M), rubber.
  - 2. For Cast-Iron Soil Pipes: ASTM C 564, rubber.
  - 3. For Fiberglass Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
  - 4. For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
  - 5. For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.
- C. Unshielded, Flexible Couplings:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on the Drawings.
- D. Shielded, Flexible Couplings:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings
- E. Ring-Type, Flexible Couplings:
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings

## **2.07 DRAINS**

- A. Sub Drains:
  - 1. Shall be perforated PVC or HDPE unless otherwise indicated on the Drawings. Installation shall be as shown on the drawings.

## **2.08 CLEANOUTS AND PLUGS**

- A. Installation shall be as shown on the details and at locations shown on the drawings.
- B. All cleanouts shall have a 2' x 2' x 6" thick concrete apron.

## **2.09 ENCASEMENT FOR PIPING**

- A. Standard: ASTM A 674 or AWWA C105.
- B. Material: Linear low-density polyethylene film of 0.008-inch (0.20-mm) minimum thickness.
- C. Form: Sheet or tube.
- D. Color: Black.

## **2.10 MANHOLES**

- A. Standard Precast Concrete Manholes:
  - 1. Description: ASTM C 478 (ASTM C 478M) and AASHTO M199, precast, reinforced concrete, of depth indicated, with provision for sealant joints. Heavy-duty traffic rated in accordance with Department of Transportation Standards in which project is located.
  - 2. Diameter: 48 inches (1200 mm) minimum unless otherwise indicated.
  - 3. Ballast: Increase thickness of precast concrete sections or add concrete to base section as required preventing flotation.
  - 4. Base Section: 6-inch (150-mm) minimum thickness for floor slab and 4-inch (102-mm) minimum thickness for walls and base riser section, and separate base slab or base section with integral floor.
  - 5. Riser Sections: 4-inch (102-mm) minimum thickness and lengths to provide depth indicated.
  - 6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated, and top of cone of size that matches grade rings.
  - 7. Joint Sealant: ASTM C 990 (ASTM C 990M), bitumen or butyl rubber.
  - 8. Resilient Pipe Connectors: ASTM C 923 (ASTM C 923M), cast or fitted into manhole walls, for each pipe connection.
  - 9. Steps: Individual FRP steps; FRP ladder; or ASTM A 615/A 615M, deformed, 1/2-inch (13-mm) steel reinforcing rods encased in ASTM D 4101, PP, wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor

- steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).
10. Grade Rings: Reinforced-concrete rings, 6- to 9-inch (150- to 225-mm) total thickness, to match diameter of manhole frame and cover, and height as required to adjust manhole frame and cover to indicated elevation and slope.
- B. Designed Precast Concrete Manholes:
1. Description: ASTM C 913; designed according to ASTM C 890 for A-16 (AASHTO HS20-44), heavy-traffic, structural loading; of depth, shape, and dimensions indicated, with provision for sealant joints.
  2. Ballast: Increase thickness of one or more precast concrete sections or add concrete to manhole as required preventing flotation.
  3. Joint Sealant: ASTM C 990 (ASTM C 990M), bitumen or butyl rubber.
  4. Resilient Pipe Connectors: ASTM C 923 (ASTM C 923M), cast or fitted into manhole walls, for each pipe connection.
  5. Steps: Individual FRP steps; FRP ladder; or ASTM A 615/A 615M, deformed, 1/2-inch (13-mm) steel reinforcing rods encased in ASTM D 4101, PP, wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).
  6. Grade Rings: Reinforced-concrete rings, 6- to 9-inch (150- to 225-mm) total thickness, to match diameter of manhole frame and cover, and of height required to adjust manhole frame and cover to indicated elevation and slope.
- C. Manhole Frames and Covers:
1. Description: As shown on the Drawings, otherwise provide ferrous; 24-inch (610-mm) ID by 7- to 9-inch (175- to 225-mm) riser with 4-inch- (102-mm-) minimum width flange and 26-inch- (660-mm-) diameter security bolted cover.
  2. Material: ASTM A 536, Grade 60-40-18 ductile iron unless otherwise indicated.

## **2.11 BEDDING AND BACKFILL MATERIAL**

- A. Bedding material shall be as specified by trenching and bedding details shown on the drawings.
- B. Where the foundation material is found to be of poor supporting value or of rock, the Owner may make minor adjustments in the location of the pipe to provide a more suitable foundation. Where this is not practical, the foundation shall be conditioned by removing the existing foundation material by undercutting to the depth as directed by the geotechnical engineer and backfilling with either a suitable local material secured from unclassified excavation or borrow excavation at the nearest accessible location along the project, or foundation conditioning material consisting of crushed stone or gravel or a combination of sand and crushed stone or gravel approved by geotechnical engineer as being suitable for the purpose intended. The selection of the type of backfill material to be used for foundation conditioning will be made by the geotechnical engineer.

## **2.12 CONCRETE**

- A. General: Cast-in-place concrete according to ACI 318, ACI 350/350R (ACI 350M/350RM), and the following:
  1. Cement: ASTM C 150, Type II.
  2. Fine Aggregate: ASTM C 33, sand.
  3. Coarse Aggregate: ASTM C 33, crushed gravel.
  4. Water: Potable.
- B. Portland Cement Design Mix: (28 day compressive strength) 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio.
  1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
  2. Reinforcing Bars: ASTM A 615/A 615M, Grade 40 or 60 (420 MPa) deformed steel.
- C. Manhole, Catch Basin and Storm Inlet Channels and Benches: Factory or field formed from concrete. Portland cement design mix, 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio. Include channels and benches in manholes.

1. Channels: Concrete invert, formed to same width as connected piping, with height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope.
  - a. Invert Slope: 1 percent through manhole unless otherwise detailed on the Drawings.
2. Benches: Concrete, sloped to drain into channel.
  - a. Slope: 4 percent unless otherwise detailed on the drawings..
- D. Ballast and Pipe Supports: Portland cement design mix, 3000 psi (20.7 MPa) minimum, with 0.58 maximum water/cementitious materials ratio.
  1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
  2. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (420 MPa) deformed steel.

## 2.13 CATCH BASINS

- A. Standard Precast Concrete Catch Basins:
  1. Description: ASTM C 478 (ASTM C 478M), precast, reinforced concrete, heavy duty (H20), of depth indicated, with provision for sealant joints.
  2. Base Section: 6-inch (150-mm) minimum thickness for floor slab and 6-inch (150-mm) minimum thickness for walls and base riser section, and separate base slab or base section with integral floor.
  3. Riser Sections: 6-inch (150-mm) minimum thickness, 48-inch (1200-mm) diameter, and lengths to provide depth indicated.
  4. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated. Top of cone of size that matches grade rings.
  5. Joint Sealant: ASTM C 990 (ASTM C 990M), bitumen or butyl rubber.
  6. Grade Rings: Include two or three reinforced-concrete rings, of 6- to 9-inch (150- to 225-mm) total thickness, that match 24-inch- (610-mm-) diameter frame and grate.
  7. Steps: Individual FRP steps; FRP ladder; or ASTM A 615/A 615M, deformed, 1/2-inch (13-mm) steel reinforcing rods encased in ASTM D 4101, PP, wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).
  8. Pipe Connectors: ASTM C 923 (ASTM C 923M), resilient, of size required, for each pipe connecting to base section.
- B. Designed Precast Concrete Catch Basins: ASTM C 913, precast, reinforced concrete; designed according to ASTM C 890 for A-16 (ASSHTO HS20-44), heavy-traffic, structural loading; of depth, shape, and dimensions indicated, with provision for joint sealants.
  1. Joint Sealants: ASTM C 990 (ASTM C 990M), bitumen or butyl rubber.
  2. Grade Rings: Include two or three reinforced-concrete rings, of 6- to 9-inch (150- to 225-mm) total thickness, that match 24-inch- (610-mm-) diameter frame and grate.
  3. Steps: Individual FRP steps; FRP ladder; or ASTM A 615/A 615M, deformed, 1/2-inch (13-mm) steel reinforcing rods encased in ASTM D 4101, PP, wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).
  4. Pipe Connectors: ASTM C 923 (ASTM C 923M), resilient, of size required, for each pipe connecting to base section.
- C. Grate and Frame: Per details shown on the drawings. Provide hood with stencil or casting "Dump No Waste – Drains to Waterways" or equal. Provide local casting if required. Provide 6 inch thick rectangular concrete apron, with 18 inch minimum width measured from the edge of structure frame to the end of the concrete apron, around all structure frames located in asphalt pavement areas. Provide saw cuts from each corner of the concrete apron to the frame of the structure as shown on the plan.
  1. Rectangular Frames and Grates: ASTM A 536, Grade 60-40-18, ductile iron designed for A-16, heavy duty (H20) structural loading. Include flat grate with small square or short-slotted drainage openings.
    - a. Size: 24 by 24 inches (610 by 610 mm) minimum unless otherwise indicated.
    - b. Grate Free Area: Approximately 50 percent unless otherwise indicated.



2. Round, Manhole Type Frames and Grates: ASTM A 536, Grade 60-40-18, ductile iron designed for A-16, heavy duty (H20) structural loading. Include 24-inch (610-mm) ID by 7- to 9-inch (175- to 225-mm) riser with 4-inch (102-mm) minimum width flange, and 26-inch- (660-mm-) diameter flat grate with small square or short-slotted drainage openings.
  - a. Grate Free Area: Approximately 50 percent unless otherwise indicated.

## **2.14 STORMWATER INLETS**

- A. Curb Inlets: Made with vertical curb opening of materials and dimensions according to the details shown on the Drawings.
- B. Gutter Inlets: Made with horizontal gutter opening of materials and dimensions according to the details shown on the Drawings. Include heavy-duty frames and grates.
- C. Combination Inlets: Made with vertical curb and horizontal gutter openings of materials and dimensions according to the details shown on the Drawings. Include heavy-duty frames and grates.
- D. Frames and Grates: Heavy duty and according to the details shown on the Drawings.

## **2.15 STORMWATER DETENTION STRUCTURES**

- A. Cast-in-Place Concrete, Stormwater Detention Structures: Constructed of reinforced-concrete bottom, walls, and top; designed according to ASTM C 890 for A-16 (AASHTO HS20-44), heavy-traffic, structural loading; of depth, shape, dimensions, and appurtenances indicated.
  1. Ballast: Increase thickness of concrete as required preventing flotation.
  2. Grade Rings: Include two or three reinforced-concrete rings, of 6- to 9-inch (150- to 229-mm) total thickness, that match 24-inch- (610-mm-) diameter frame and cover.
  3. Steps: Individual FRP steps; FRP ladder; or ASTM A 615/A 615M, deformed, 1/2-inch (13-mm) steel reinforcing rods encased in ASTM D 4101, PP, wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 16-inch (400-mm) intervals. Omit steps if total depth from floor of manhole to finished grade is less than 42 inches (1050 mm).
- B. Corrugated Aluminized Steel Detention Systems:
  1. Piping shall comply with AASHTO M36 for diameters 12"-144"
  2. The material shall be Aluminized Steel Type 2 conforming to AASHTO M274
  3. All fittings shall be reinforced per ASTM A998
- C. Precast Concrete Three Sided Detention Systems:
  1. Precast Concrete Detention Structures shall be manufactured per ASTM C1504
  2. Concrete shall be 4,000 psi mix and reinforcing steel shall have a minimum yield strength of 600 ksi
- D. Manhole Frames and Covers: ASTM A 536, Grade 60-40-18, ductile-iron castings designed for heavy-duty service. Include 24-inch (610-mm) ID by 7- to 9-inch (175- to 225-mm) riser with 4-inch (102-mm) minimum width flange, and 26-inch- (660-mm-) diameter cover. Include indented top design with lettering cast into cover, using wording equivalent to "STORM SEWER."

## **2.16 PIPE OUTLETS**

- A. Head Walls: Construction shall be according to details shown on the drawings. Headwalls shall be cast-in-place reinforced concrete, with apron and tapered sides unless otherwise indicated.
- B. Riprap Aprons: Broken, irregularly sized and shaped, graded stone according to Department of Transportation specifications for the state in which the project is located or by using NSSGA's "Quarried Stone for Erosion and Sediment Control". Unless otherwise shown on the drawings the median stone size used shall be 6 inches (150 mm). Riprap apron will be constructed of stone shaped according to the detail on the Drawings with an underlayment of medium weight non-woven geotextile fabric.
  1. Average Size: NSSGA No. R-6, screen opening 6 inches (150 mm).
- C. Concrete Lined Channels: Construction shall be in accordance with details shown on the drawings.
- D. Flared-End Sections: Shall meet Department of Transportation standards for the state in which the project is located unless otherwise indicated on the drawings.

## **2.17 DRY WELLS**

- A. Description: ASTM C 913, precast, reinforced, perforated concrete rings. Include the following:
  - 1. Floor: Cast-in-place concrete.
  - 2. Cover: Liftoff-type concrete cover with cast-in lift rings.
  - 3. Wall Thickness: 4 inches (102 mm) minimum with 1-inch (25-mm) diameter or 1-by-3-inch- (25-by-76-mm-) maximum slotted perforations arranged in rows parallel to axis of ring.
    - a. Total Free Area of Perforations: Approximately 15 percent of ring interior surface.
    - b. Ring Construction: Designed to be self-aligning.
  - 4. Filtering Material: ASTM D 448, Size No. 24, 3/4- to 2-1/2-inch (19- to 63-mm) washed, crushed stone or gravel.
- B. Description: Manufactured PE side panels and top cover that assemble into 50-gal. (190-L) storage capacity units.
  - 1. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings.
  - 2. Side Panels: With knockout ports for piping and seepage holes.
  - 3. Top Cover: With knockout port for drain.
  - 4. Filter Fabric: As recommended by unit manufacturer.
  - 5. Filtering Material: ASTM D 448, Size No. 24, 3/4- to 2-1/2-inch (19- to 63-mm) washed, crushed stone or gravel.
- C. Description: Constructed-in-place aggregate type. Include the following:
  - 1. Lining: Concrete blocks or precast concrete rings with notches or weep holes.
  - 2. Filtering Material: ASTM D 448, Size No. 24, 3/4- to 2-1/2-inch (19- to 63-mm) washed, crushed stone or gravel.
  - 3. Cover: Precast, reinforced-concrete slab designed for structural loading according to ASTM C 890 and made according to ASTM C 913. Include slab dimensions that will extend 12 inches (300 mm) minimum beyond edge of excavation, with bituminous coating over entire surface. Cast cover with opening for manhole in center.
  - 4. Manhole: 24-inch- (610-mm-) diameter, reinforced-concrete access lid with steel lift rings. Include bituminous coating over entire surface.

## **2.18 STORMWATER DISPOSAL SYSTEMS**

- A. Chamber Systems:
  - 1. Chambers shall meet the requirements of ASTM F2418 and meet the safety factors recommended by Section 12.12 of the AASHTO LRFD Bridge Design Specifications. Loads for design shall be calculated in accordance with Section 3 of the AASHTO LRFD Bridge Design Specifications.
  - 2. The chamber manufacturer shall provide design data in accordance with ASTM F2418. Installation shall be in accordance with the details shown on the Drawings.
  - 3. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings or comparable product by one of the following:
    - a. Advanced Drainage Systems. 4640 Trueman Blvd., Hilliard, Ohio 43026 (800) 433-7473
    - b. CULTEC, Inc. 878 Federal Road, PO Box 280, Brookfield, CT 06804 (800) 4-CULTEC.
    - c. Hancor Inc. 401 Olive Street, Findlay, OH 45840 (800) 848-3546.
    - d. StormTech LLC. 20 Beaver Road, Wethersfield, CT 06109 (888) 892-2694
  - 4. Storage and Leaching Chambers: Chamber rows shall provide continuous, unobstructed internal space with no internal support panels in order to provide ease of access for inspection and maintenance. Include number of chambers, distribution piping, end plates, and other standard components as required for system total capacity.
  - 5. Geotextile: Shall be enclosed in geotextile fabric for sediment capture and maintenance. Fabric shall be located per manufacturer's details.
    - a. Geotextile woven or spun filter fabric, in one or more layers, for minimum total unit weight of 4 oz./sq. yd. (135 g/sq. m).
    - b. Fabric between chamber bottom and the stone foundation shall be AASHTO M288 Class 1 woven for stabilization and filtration.
    - c. Fabric between the top of the chamber and the embedment stone shall be AASHTO M288 Class 2 non-woven for separation.

6. Filtering Material: ASTM D 448, Size No. 24, 3/4- to 2-1/2-inch (19- to 63-mm) washed, crushed stone or gravel.
- B. Pipe Systems:
  1. Perforated manifold, header, and lateral piping complying with AASHTO M 252M for NPS 10 (DN 250) and smaller, AASHTO M 294M for NPS 12 to NPS 60 (DN 300 to DN 1500). Include proprietary fittings, couplings, seals, and filter fabric.
  2. 360 Degree Perforated Aluminized Steel Type 2 Recharge/Detention System conforming to AASHTO M274. All fittings to be reinforced per ASTM A998
  3. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated on Drawings or comparable product by one of the following:
    - a. Advanced Drainage Systems. 4640 Trueman Blvd., Hilliard, Ohio 43026 (800) 433-7473
    - b. Hancor Inc. 401 Olive Street, Findlay, OH 45840 (800) 848-3546.
    - c. CONTECH Construction Products, Inc. 9025 Centre Pointe Drive, West Chester, Ohio 45069 (336) 854-2177

### **PART 3 - EXECUTION**

#### **3.01 EARTHWORK**

- A. Excavation, trenching, and backfilling are specified in Division 31 Section "Earth Moving."

#### **3.02 PIPING INSTALLATION**

- A. Locations and Arrangements: Contractor shall install all drainage structures, pipe and chambers in the locations shown on the drawings and/or as approved by the Owner. Pipe shall be of the type and sizes specified on the drawings and shall be laid accurately to line and grade. Structures shall be accurately located and properly oriented. Where specific installation is not indicated, follow piping manufacturer's written instructions.
- B. Install piping beginning at low point, on prepared foundation, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Lap joint pipes shall be laid with the inside circumferential laps pointing downstream and with the longitudinal laps at the side or quarter points.
- C. Install chambers in accordance with manufacturer's guidelines. Rows of chambers shall be laid out using spacers or appropriate measurements and markings to ensure proper spacing between rows for proper backfill and compaction as specified by the manufacturer.
- D. Manholes, catch basins and drain inlets shall be constructed as soon as the pipe laying reaches the location of the structures. If the Contractor continues pipe installation without making provisions for completion of the structures the Owner shall have the authority to stop the pipe installation until the structure is completed.
- E. Any structure which is miss-located or oriented improperly shall be removed and reconstructed at its proper location, alignment and orientation without cost to the Owner.
- F. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing storm drainage is indicated.
- G. Precast drainage structures shall be assembled in accordance with the manufacturer's instructions to form a sound structural unit.
- H. Cast-in-Place drainage structures shall be installed in accordance with the details or referenced specifications shown on the drawings. Concrete shall comply with the requirements of this section.
- I. Solid concrete brick masonry structures shall be installed in accordance with the details or referenced specifications shown on the drawings. Only solid masonry units may be used. Minimum wall thickness shall be 8 inches and minimum bottom slab thickness shall be 6 inches and extended a minimum of 6 inches outside the structure.
- J. Fittings and Connections: Pipe connections to drainage structures shall be made so that the pipe does not project beyond 3 inches inside the wall of the drainage structure and shall be grouted as necessary to make smooth and uniform surfaces on the inside of the structure. Connection

material shall not include large stone, broken block or other deleterious material. Bottom invert connections shall be constructed of concrete form smooth to provide a bench between pipe inverts unless otherwise detailed on the plans.

- K. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.
- L. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of micro-tunneling.
- M. Install gravity-flow, non-pressure drainage piping according to the following:
  - 1. Install piping pitched down in direction of flow.
  - 2. Install piping NPS 6 (DN 150) and larger with restrained joints at tee fittings and at changes in direction. Use corrosion-resistant rods, pipe or fitting manufacturer's proprietary restraint system, or cast-in-place concrete supports or anchors.
  - 3. Install piping with 24-inch (610-mm) minimum cover.
  - 4. Install hub-and-spigot, cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook."
  - 5. Install hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook."
  - 6. Install ductile-iron piping and special fittings according to AWWA C600 or AWWA M41.
  - 7. Install corrugated steel piping according to ASTM A798 and 798M.
  - 8. Install HDPE piping according to pipe manufacturer's installation guidelines for heavy duty drainage applications and ASTM D 2321.
  - 9. Install PVC profile gravity sewer piping according to ASTM D 2321 and ASTM F 1668.
  - 10. Install reinforced-concrete sewer piping according to ASTM C 1479 and ACPA's "Concrete Pipe Installation Manual."
- N. Install corrosion-protection piping encasement over the following underground metal piping according to ASTM A 674 or AWWA C105:
  - 1. Hub-and-spigot, cast-iron soil pipe and fittings.
  - 2. Hubless cast-iron soil pipe and fittings.
  - 3. Ductile-iron pipe and fittings.
  - 4. Expansion joints and deflection fittings.

### **3.03 PIPE JOINT CONSTRUCTION**

- A. Join gravity-flow, nonpressure drainage piping according to the following:
  - 1. Join hub-and-spigot, cast-iron soil piping with gasketed joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
  - 2. Join hub-and-spigot, cast-iron soil piping with calked joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
  - 3. Join hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-coupling joints.
  - 4. Join ductile-iron culvert piping according to AWWA C600 for push-on joints.
  - 5. Join ductile-iron piping and special fittings according to AWWA C600 or AWWA M41.
  - 6. Join corrugated steel sewer piping according to ASTM A 798/A 798M.
  - 7. Join HDPE pipe according to ASTM D 2321
  - 8. Join PVC cellular-core piping according to ASTM D 2321 and ASTM F 891 for solvent-cemented joints.
  - 9. Join PVC corrugated sewer piping according to ASTM D 2321 for elastomeric-seal joints.
  - 10. Join PVC sewer piping according to ASTM D 2321 and ASTM D 3034 for elastomeric-seal joints or ASTM D 3034 for elastomeric-gasketed joints.
  - 11. Join PVC profile gravity sewer piping according to ASTM D 2321 for elastomeric-seal joints or ASTM F 794 for gasketed joints.
  - 12. Join reinforced-concrete sewer piping according to ACPA's "Concrete Pipe Installation Manual" for rubber-gasketed joints.
  - 13. Join dissimilar pipe materials with nonpressure-type flexible couplings.

### **3.04 BACKWATER VALVE INSTALLATION**

- A. Install horizontal-type backwater valves in piping where indicated.

- B. Install combination horizontal and manual gate-valve type in piping and in manholes where indicated.
- C. Install terminal-type backwater valves on end of piping and in manholes where indicated.

### **3.05 CLEANOUT INSTALLATION**

- A. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Use cast-iron soil pipe fittings in sewer pipes at branches for cleanouts and cast-iron soil pipe for riser extensions to cleanouts. Install piping so cleanouts open in direction of flow in sewer pipe.
  - 1. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
- B. Set cleanout frames and covers in cast-in-place concrete, 24 by 24 by 6 inches (600 by 600 by 150 mm) deep. Set with tops flush with adjacent grade. At pavement areas and at roads set frames and covers with tops flush pavement surface.

### **3.06 DRAIN INSTALLATION**

- A. Install type of drains in locations indicated.
  - 1. Use Heavy-Duty, top-loading classification drains in vehicle service areas.
- B. Install drains according to details on the plans and manufacturer's installation requirements..
- C. Fasten grates to drains if indicated.
- D. Set drain frames and covers with tops flush with pavement surface.
- E. Assemble trench sections with flanged joints.

### **3.07 MANHOLE INSTALLATION**

- A. General: Install manholes, complete with appurtenances and accessories indicated.
- B. Install precast concrete manhole sections with sealants according to ASTM C 891.
- C. Where specific manhole construction is not indicated, follow manhole manufacturer's written instructions.
- D. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops 3 inches (76 mm) above finished surface elsewhere unless otherwise indicated.

### **3.08 CATCH BASIN INSTALLATION**

- A. Construct catch basins to sizes and shapes indicated.
- B. Frames, Grates and Hoods
  - 1. Set frames and grates to elevations indicated.
  - 2. Firmly embedded in mortar approximately 1 inch thick and aligned to fit the top section of the structure.
  - 3. Brick set in mortar used to adjust the frame to finished grade shall be limited to no more than four (4) courses for precast structures and have a minimum wall thickness of eight (8) inches.

### **3.09 STORMWATER INLET AND OUTLET INSTALLATION**

- A. Construct inlet head walls, aprons, and sides of reinforced concrete, as indicated.
- B. Construct riprap of broken stone, as indicated.
- C. Install outlets that spill onto grade, anchored with concrete, where indicated.
- D. Install outlets that spill onto grade, with flared end sections that match pipe, where indicated.
- E. Construct energy dissipaters at outlets, as indicated.

### **3.10 MODIFICATION OF EXISTING STRUCTURES**

- A. General: The Contractor shall alter, reconstruct and/or convert existing structures where and as shown on the drawings, and/or as approved by the Owner. Alterations shall be performed with the same type, grade and quality material as used in the original construction unless otherwise indicated on the drawings or approved by the Owner.
- B. Damage to Existing Structures: The Contractor shall exercise care during all alterations, reconstructions or conversions so as not to damage any portion of the existing structures or pipe to remain. Any damage caused by the Contractor shall be repaired by the Contractor at its own expense and to the satisfaction to the Owner.

### **3.11 ROOF DRAINS AND LEADERS**

- A. The site Contractor shall install roof downspout leaders as shown on the drawings to within five (5) feet of the building limits. If work by others is complete then the Contractor shall complete the connection. If future connections will be required by others, the Contractor shall install plugging and material apparatus as necessary to protect and mark the location of its work.
- B. All roof drain leader piping connections shall utilize watertight prefabricated fittings and drainage structures.

### **3.12 DRY WELL INSTALLATION**

- A. Excavate hole to diameter of at least 6 inches (150 mm) greater than outside of dry well. Do not extend excavation into ground-water table.
- B. Install precast, concrete-ring dry wells according to the following:
  - 1. Assemble rings to depth indicated.
  - 2. Extend rings to height where top of cover will be approximately 8 inches (203 mm) below finished grade.
  - 3. Backfill bottom of inside of rings with filtering material to level at least 12 inches (300 mm) above bottom.
  - 4. Extend effluent inlet pipe 12 inches (300 mm) into rings and terminate into side of tee fitting.
  - 5. Backfill around outside of rings with filtering material to top level of rings.
  - 6. Install cover over top of rings.
- C. Install manufactured, PE dry wells according to manufacturer's written instructions and the following:
  - 1. Assemble and install panels and cover.
  - 2. Backfill bottom of inside of unit with filtering material to level at least 12 inches (300 mm) above bottom.
  - 3. Extend effluent inlet pipe 12 inches (300 mm) into unit and terminate into side of tee fitting.
  - 4. Install filter fabric around outside of unit.
  - 5. Install filtering material around outside of unit.
- D. Install constructed-in-place dry wells according to the following:
  - 1. Install brick lining material dry and laid flat, with staggered joints for seepage. Build to diameter and depth indicated.
  - 2. Install block lining material dry, with staggered joints and 20 percent minimum of blocks on side for seepage. Install precast concrete rings with notches or weep holes for seepage. Build to diameter and depth indicated.
  - 3. Extend lining material to height where top of manhole will be approximately 8 inches (203 mm) below finished grade.
  - 4. Backfill bottom of inside of lining with filtering material to level at least 12 inches (300 mm) above bottom.
  - 5. Extend effluent inlet pipe 12 inches (300 mm) into lining and terminate into side of tee fitting.
  - 6. Backfill around outside of lining with filtering material to top level of lining.
  - 7. Install manhole over top of dry well. Support cover on undisturbed soil. Do not support cover on lining.

### **3.13 CONCRETE PLACEMENT**

- A. Place cast-in-place concrete according to ACI 318 and ACI 350R..
- B. No concrete or masonry shall be placed when the temperature is below 40 degrees Fahrenheit, or when indications are for lower temperatures within 24 hours, unless protection of concrete and masonry is approved by the Owner. Damage to the structure because of freezing shall be corrected by the Contractor at the Contractor's sole expense and to the satisfaction of the Owner.

### **3.14 STORMWATER DISPOSAL SYSTEM INSTALLATION**

- A. Chamber Systems: Excavate trenches of width and depth, and install system and backfill according to chamber manufacturer's written instructions. Include storage and leaching chambers, filtering material, and filter mat.
- B. Piping Systems: Excavate trenches of width and depth, and install piping system, filter fabric, and backfill, according to piping manufacturer's written instructions.

### 3.15 CONNECTIONS

- A. Connect nonpressure, gravity-flow drainage piping in building's storm building drains specified in Division 22 Section "Facility Storm Drainage Piping."
- B. Connect force-main piping to building's storm drainage force mains specified in Division 22 Section "Facility Storm Drainage Piping." Terminate piping where indicated.
- C. Compliance with Existing Facilities:
  - 1. Connections made into existing drainage facilities shall be performed in accordance with the requirements of the Owner of the facility. Construction within a public right-of-way will conform to all requirements of the regulatory authority having jurisdiction. The Contractor will be required to comply with all such requirements, including securing all required permits and paying all associated costs related to securing the permits. Costs associated with connections shall be included in the Contract Sum.
  - 2. The contractor shall make all required connections of the proposed drainage facilities into existing drainage facilities where a d as shown on the drawings and/or as approved by the Owner.
- D. Make connections to existing piping and underground manholes.
  - 1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe; install wye fitting into existing piping; and encase entire wye fitting, plus 6-inch (150-mm) overlap, with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).
  - 2. Make branch connections from side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500). Remove section of existing pipe, install wye fitting into existing piping, and encase entire wye with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).
  - 3. Make branch connections from side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes and structures by cutting into existing unit and creating an opening large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe, manhole, or structure wall, encase entering connection in 6 inches (150 mm) of concrete for minimum length of 12 inches (300 mm) to provide additional support of collar from connection to undisturbed ground.
    - a. Use concrete that will attain a minimum 28-day compressive strength of 3000 psi (20.7 MPa) unless otherwise indicated.
    - b. Use epoxy-bonding compound as interface between new and existing concrete and piping materials.
  - 4. Protect existing piping, manholes, and structures to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.
- E. Connect to sediment interceptors specified in Section "Sanitary Sewer."
- F. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
  - 1. Use nonpressure-type flexible couplings where required to join gravity-flow, nonpressure sewer piping unless otherwise indicated.
    - a. Shielded flexible couplings for same or minor difference OD pipes.
    - b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.
    - c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.
  - 2. Use pressure-type pipe couplings for force-main joints.

### 3.16 CLOSING ABANDONED STORM DRAINAGE SYSTEMS

- A. Abandoned Piping: Close open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed. Use either procedure below:
  - 1. Close open ends of piping with at least 8-inch- (203-mm-) thick, brick masonry bulkheads.

2. Close open ends of piping with threaded metal caps, plastic plugs, or other acceptable methods suitable for size and type of material being closed. Do not use wood plugs.
- B. Abandoned Manholes and Structures: Excavate around manholes and structures as required and use one procedure below:
  1. Remove manhole or structure and close open ends of remaining piping.
  2. Remove and backfill manhole locations as recommended in the geotechnical report and as indicated on the Drawings.
  3. If not indicated in the geotechnical report or on the Drawings, remove top of manhole or structure down to at least 36 inches (915 mm) below final grade. Fill to within 12 inches (300 mm) of top with stone, rubble, or gravel. Fill to top with concrete.
- C. Backfill to grade according to Division 31 Section "Earth Moving."

### **3.17 IDENTIFICATION**

- A. Materials and their installation are specified in Division 31 Section "Earth Moving." Arrange for installation of green warning tape directly over piping and at outside edge of underground structures.
  1. Use detectable warning tape over all storm drainage piping and over edges of underground structures.

### **3.18 PROTECTION AND CLEANING**

- A. The Contractor shall maintain all pipe and chamber installations and drainage structures in a condition such that they will function continuously and shall be kept clean of silt, debris and other deleterious substances until the project has achieved final acceptance.
- B. The Contractor shall use all erosion and sediment control measures necessary to assure construction sediments (or other pollutants) do not reach stormwater pipe and/or chamber installations.

### **3.19 FIELD QUALITY CONTROL**

- A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Inspect after approximately 24 inches (610 mm) of backfill is in place, and again at completion of Project (See 3.20 Post Installation Inspection).
  1. Submit separate reports for each system inspection.
  2. Defects requiring correction include the following:
    - a. Alignment: Less than full diameter of inside of pipe is visible between structures.
    - b. Deflection: Flexible piping with deflection exceeding 5%.
    - c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
    - d. Infiltration: Water leakage into piping.
    - e. Exfiltration: Water leakage from or around piping.
  3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
  4. Re-inspect and repeat procedure until results are satisfactory.
- B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.
  1. Do not enclose, cover, or put into service before inspection and approval.
  2. Test completed piping systems according to requirements in Section 3.20.
  3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours' advance notice.
  4. Submit separate report for each test.
  5. Gravity-Flow Storm Drainage Piping: Test according to requirements of authorities having jurisdiction, UNI-B-6, and the following:
    - a. Exception: Piping with soil tight joints unless required by authorities having jurisdiction.
    - b. Option: Test plastic piping according to ASTM F 1417.
    - c. Option: Test concrete piping according to ASTM C 924 (ASTM C 924M).
  6. Force-Main Storm Drainage Piping: Perform hydrostatic test after thrust blocks, supports, and anchors have hardened. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psig (1035 kPa).



- a. Ductile-Iron Piping: Test according to AWWA C600, "Hydraulic Testing" Section.
  - b. PVC Piping: Test according to AWWA M23, "Testing and Maintenance" Chapter.
- C. Leaks and loss in test pressure constitute defects that must be repaired.
- D. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

### **3.20 POST INSTALLATION INSPECTIONS**

- A. Upon completion of the work and before final acceptance by the Owner, the entire drainage system shall be subject to a final inspection in the presence of the Owner and/or the Project Engineer. The work shall not be considered complete until all requirements for line, grade, cleanliness, workmanship and final inspections have been completed. Final inspection of the completed pipe installations will be performed after the embankment and/or trench fill is in place and all non-asphalt bases and/or sub-grades have been completed for at least 30 days.
- B. Second Final Post Installation Inspection: (If required for the Project) The Owner shall require a second final post installation inspection.
  - 1. Final post installation inspections (if required) shall be conducted no sooner than 2 months before the end of the one year warranty.
  - 2. Final post installation inspections shall utilize a video camera and laser profiler/deflectometer or a video camera and go-no-go Mandrel. Lasers shall be calibrated to the pipe diameter as shown on the construction plans.
- C. Initial and final post installation inspections shall be performed and reported, at the Contractor's expense, by a National Association of Sewer Service Companies (NASSCO) Certified Pipe Inspector. Reports of storm pipe assessments shall be submitted to the Project Engineer for review and appraisal.
- D. The initial and post installation inspection report shall include: a copy of all video taken (if required), pipe location identification, equipment used for inspection, inspector name, deviation from design grade, deviation from line, deflection of pipe system, inspector notes, condition of joints, condition of pipe wall (e.g. Distress, cracking, wall damage dents, bulges, creases, tears, holes, etc...), ovality and flow capacity.
- E. For RCP: seal cracks having a width greater than .010 inches. Repair or replace pipes exhibiting spalls or de-lamination.
- F. For CMP and HDPE: initial and post installation inspection deflection shall not exceed 5%; final post installation (warranty) deflection shall not exceed 7%. Replace locations where deflections exceed these requirements; re-rounding of pipe is not allowed.

### **3.21 CLEANING**

- A. Clean interior of piping of dirt and superfluous materials. Flush with water.

**END OF SECTION 334100**

This Page Left Intentionally Blank

**CONFORMANCE SUBMITTAL**  
**SECTION 334100 – STORM UTILITY DRAINAGE PIPING**

Project Location \_\_\_\_\_  
(City, State)

General Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

Sub-Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

---

The following products have been selected (check one box) for use in this project from the list of acceptable products specified:

Concrete Pipe, ASTM C76, Butyl mastic joint sealant ASTM C990-01a for silt-tight designations or rubber gaskets meeting the material and joint configuration requirements of ASTM C443 for watertight designations:

- ☐ Tongue and Groove RCP, Class \_\_\_\_\_  
☐ Bell and Spigot RCP, Class \_\_\_\_\_

High Density Polyethylene (HDPE) Pipe, AASHTO M252, M294, Rubber Gasket Joints ASTM F477, silt-tight or watertight designations as specified:

- ☐ ADS Pipe  
☐ Hancor Pipe  
☐ Type S Lok-Tite Pipe  
☐ Quality Culvert Pipe  
☐ DuroMaxx  
☐ All underground connections will be made with pre-fabricated HDPE fittings

Polyvinyl Chloride (PVC) Pipe, Rubber Gasket Joints ASTM F477:

- ☐ PVC Pipe, ASTM D3034, SDR 35  
☐ Corrugated PVC Pipe, Contech "A2000"  
☐ All underground connections will be made with pre-fabricated PVC fittings

Aluminized Steel Type 2 Corrugated Steel Pipe (CMP), AASHTO M274 or ASTM A929, silt-tight or watertight designations as specified:

- ☐ Aluminized Steel Type 2 Corrugated Steel Pipe

Aluminized Steel Type 2 Spiral Ribbed Pipe (Type IR), AASHTO M274 or ASTM A929 and AASHTO M36 or ASTM A760, silt-tight or watertight designations as specified:

- ☐ Aluminized Steel Type 2 Spiral Ribbed Pipe (Type IR) such as "Ultra Flo" by Contech or approved equal

Ductile Iron Pipe (DIP), AWWA C151, Fittings AWWA C110, Gaskets AWWA C111:

- ☐ DIP

Stormwater Collection Chambers ASTM F2418

- ☐ StormTech  
☐ Hancor  
☐ CULTEC  
☐ StormTech by ADS

Stormwater Detention or Recharge System

- ☐ Aluminized Steel CMP Detention by CONTECH  
☐ 360 Degree Perforated CMP Detention/Recharge by CONTECH  
☐ Precast Concrete Detention System

Drainage Boxes (Must be pre-cast unless approved by Owner):

- ☐ Pre-cast Concrete, per specifications by: ☐ DOT # \_\_\_\_\_, ☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_  
☐ Cast-in-place Concrete, per specifications by: ☐ DOT # \_\_\_\_\_, ☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_  
☐ Solid Concrete Brick Masonry, per specifications by: ☐ DOT # \_\_\_\_\_,  
☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_

Cast Iron Frames, Grates, and Hoods:

- Manhole lids, per specifications by: ☐ DOT # \_\_\_\_\_, ☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_  
Curb Inlets, per specifications by: ☐ DOT # \_\_\_\_\_, ☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_  
Drop Inlets, per specifications by: ☐ DOT # \_\_\_\_\_, ☐ City # \_\_\_\_\_, ☐ Other \_\_\_\_\_

Detention Pond As-built Survey:

- ☐ I recognize that an as-built survey of all detention ponds and structures shall be completed prior to project acceptance in accordance with Section 017300 – Field Engineering and Surveying

---

I represent to Owner/City/Engineer that the products selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the contract documents. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and specifications. Immediately or as directed by Owner the work shall be completed without additional cost to the Owner and / or the contract.

Sub-Contractor:

\_\_\_\_\_  
(Signature of the Authorized Agent of the Sub-Contractor) Date  
\_\_\_\_\_  
(Print Name of the Authorized Agent of the Sub-Contractor)

General Contractor:

\_\_\_\_\_  
(Signature of the Authorized Agent of the General Contractor) Date  
\_\_\_\_\_  
(Print Name of the Authorized Agent of the General Contractor)

**TRENCH DRAIN CONFORMANCE SUBMITTAL**  
**SECTION 334100 – STORM UTILITY DRAINAGE PIPING**

Project Location \_\_\_\_\_  
(City, State)

General Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

Sub-Contractor: \_\_\_\_\_  
(Company Name, Phone Number)  
\_\_\_\_\_  
(Address)

---

**Product Verification:**

**The trench drains installed in this store will meet the product guidelines of Section 334100-2.13 “POLYMER-CONCRETE, CHANNEL DRAINAGE SYSTEMS”**

**Trench Drain Manufacturer & Model Number:** \_\_\_\_\_

**Grate Model Number:** \_\_\_\_\_

**Trench Drain Manufacturer & Model Number:** \_\_\_\_\_

**Grate Model Number:** \_\_\_\_\_

---

**General Contractor’s Affidavit:**

I represent to Owner that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the project specification. If noncompliance is discovered the General Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and Owner specifications. The work shall be completed immediately as directed by Owners without additional cost to Owner and/or the contract.

General Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the General Contractor) (Date)

\_\_\_\_\_  
(Print Name of the Authorized Agent of the General Contractor)

**Sub-Contractor’s Affidavit:**

I represent to Owner that the product selected will be installed in compliance with the applicable codes for the authorities having jurisdiction and in accordance with the project specification. If noncompliance is discovered the Sub-Contractor shall make or cause to be made all necessary corrections to meet the applicable codes and owners specifications. The work shall be completed immediately as directed by owner and/or the General Contractor without additional cost to owner and/or the contract.

Sub-Contractor: \_\_\_\_\_  
(Signature of the Authorized Agent of the Sub-Contractor) (Date)

\_\_\_\_\_  
(Print Name of the Authorized Agent of the Sub-Contractor)

## SECTION 21 01 00

### FIRE PROTECTION OPERATING AND MAINTENANCE MANUALS

#### PART 1 - GENERAL

##### 1.1 SECTION INCLUDES

- A. Compilation product data and related information appropriate for Owner's operation and maintenance of products furnished under Contract. Prepare operating and maintenance data as specified.
- B. Instruct Owner's personnel in operation and maintenance of equipment and systems.
- C. Submit three copies of complete manual in final form.

##### 1.2 SUBMITTALS

- A. Thirty (30) days after the Contractor has received the final scheduled identified submittals bearing the Architect / Engineer's stamp of acceptance (including resubmittals), submit for review one copy of the first draft of the Operating and Maintenance Manual. This copy shall contain as a minimum:
  - 1. Table of Contents for each element.
  - 2. Contractor information.
  - 3. All submittals, coordination drawings and product data, reviewed by the Architect / Engineer; bearing the Architect / Engineer's stamp of acceptance. (When submittals are returned from Engineer "Correct as Noted", corrected inserts shall be included.)
  - 4. All parts and maintenance manuals for items of equipment.
  - 5. Warranties (without starting dates).
  - 6. Certifications that have been completed. Submit forms and outlines of certifications that have not been completed.
  - 7. Operating and maintenance procedures.
  - 8. Form of Owner's Training Program Syllabus (including times and dates).
  - 9. Control operations/equipment wiring diagrams.
  - 10. Other required operating and maintenance information that are complete.
- B. Copy will be returned to the Contractor within 15 days with comments for corrections.
- C. Submit completed manuals in final electronic form to the Architect / Engineer one day after substantial completion, and prior to Owner's instructions. Include all specified data, test and balance reports, drawings, dated warranties, certificates, reports, along with other materials and information.
- D. The Architect / Engineer will review the manuals for completeness within fifteen (15) days.
- E. The Contractor shall be notified of any missing or omitted materials. The Manuals shall be reworked by the Contractor, as required, in the office of the Architect / Engineer. The manuals will not be retransmitted.
- F. Complete electronic manuals will be delivered to the Owner.

## PART 2 - PRODUCTS

### 2.1 BINDERS

- A. Commercial quality black three-ring binders with clear overlay plastic covers.
- B. Minimum ring size: 1"; Maximum ring size: 3".
- C. When multiple binders are used, correlate the data into related groupings.
- D. Label contents on spine and face of binder with full size insert. Label under plastic cover.

## PART 3 - EXECUTION

### 3.1 OPERATION AND MAINTENANCE MANUAL

- A. Form for Manuals:
  - 1. Prepare data in form of an instructional manual for use by Owner's personnel.
  - 2. Format:
    - a. Size: 8-1/2" x 11".
    - b. Text: Manufacturer's printed data or neatly typewritten.
  - 3. Drawings:
    - a. Provide reinforced punched binder tab and bind in text.
    - b. Fold larger drawings to size of text pages.
  - 4. Provide flyleaf indexed tabs for each separate product or each piece of operating equipment.
  - 5. Cover: Identify each volume with typed or printed title "Operating and Maintenance Instructions". List:
    - a. Title of Project.
    - b. Identity of separate structures as applicable.
    - c. Identity of general subject matter covered in the manual.
  - 6. Binder as specified.
- B. Content of Manual:
  - 1. Neatly typewritten Table of Contents for each volume arranged in systematic order as outlined in the specifications.
    - a. Contractor, name of responsible principal, address and telephone number.
    - b. A list of each product required to be included, indexed to content of the volume.
    - c. List with each product, name, address and telephone number of:
      - 1) Subcontractor or installer.
      - 2) Maintenance contractor as appropriate.
      - 3) Identify area of responsibility of each.
      - 4) Local source of supply for parts and replacement.
    - d. Identify each product by product name and other identifying symbols as set forth in Contract Documents.
  - 2. Product Data:
    - a. Include those sheets pertinent to the specific product
    - b. Annotate each sheet to:
      - 1) Identify specific product or part installed.
      - 2) Identify data applicable to installation.
      - 3) Delete references to inapplicable information. (All options not supplied with equipment shall be marked out indicated in some manner.
  - 3. Drawings:

- a. Supplement product data with drawings as necessary to illustrate:
      - 1) Relations of component parts of equipment and systems.
      - 2) Control and flow diagrams.
    - b. Coordinate drawings with information in Project Record Documents to assure correct illustration of completed installation.
    - c. Do not use Project Record Documents as maintenance drawings.
  - 4. Written text, as required to supplement product data for the particular installation:
    - a. Organize in consistent format under separate headings for different procedures.
    - b. Provide logical sequence of instructions for each procedure.
  - 5. Copy of each warranty, bond and service contract issued.
    - a. Provide information sheet for Owner's personnel, giving:
      - 1) Proper procedures in event of failure.
      - 2) Instances that might affect validity of warranties or bonds.
  - 6. Shop drawings, coordination drawings and product data as specified.
- C. Sections for Equipment and Systems.
  - 1. Content for each unit of equipment and system as appropriate:
    - a. Description of unit and component parts
      - 1) Function, normal operating characteristics, and limiting conditions.
      - 2) Performance curves, engineering data and tests.
      - 3) Complete nomenclature and commercial number of replaceable parts.
    - b. Operating procedures:
      - 1) Start up, break-in, routine and normal operating instructions.
      - 2) Regulation, control, stopping, shut down and emergency instructions.
      - 3) Summer and winter operating instructions.
      - 4) Special operating instructions.
    - c. Maintenance procedures:
      - 1) Routine operations
      - 2) Guide to trouble-shooting.
      - 3) Disassembly, repair and reassembly.
      - 4) Alignment, adjusting and checking.
      - 5) Routine service based on operating hours.
    - d. Servicing and lubrication schedule. List of lubricants required.
    - e. Manufacturer's printed operating and maintenance instructions.
    - f. Description of sequence of operation by control manufacturer.
    - g. Original manufacturer's parts list, illustrations, assembly drawings and diagrams required for maintenance.
      - 1) Predicted life of part subject to wear.
      - 2) Items recommended to be stocked as spare parts.
    - h. As installed control diagrams by controls manufacturer.
    - i. Complete equipment internal wiring diagrams.
    - j. Each Contractor's coordination drawings.
    - k. As installed color coded piping diagrams.
    - l. Charts of valve tag number, with location and function of each valve.
    - m. List of original manufacturer's spare parts and recommended quantities to be maintained in storage.
    - n. Other data as required under pertinent sections of the specifications.
  - 2. Prepare and include additional data when the need for such data becomes apparent during instruction of Owner's personnel.
  - 3. Additional requirements for operating and maintenance data as outlined in respective sections of specifications.
  - 4. Provide complete information for products specified in Division 21.



5. Provide certificates of compliance as specified in each related section.
6. Provide start up reports as specified in each related section.
7. Provide signed receipts for spare parts and material.
8. Provide training report and certificates.
9. Provide backflow preventer certified test reports.

END OF SECTION

## SECTION 21 05 00

### FIRE PROTECTION GENERAL PROVISIONS

#### PART 1 - GENERAL

##### 1.1 RELATED DOCUMENTS

- A. Except as modified in this Section, General Conditions and Supplementary Conditions, applicable provisions of the General Requirements, and other provisions and requirements of the contract documents apply to work of Division 21 Fire Sprinkler Systems.
- B. Applicable provisions of this section apply to all sections of Division 22, Plumbing.

##### 1.2 CODE REQUIREMENTS AND FEES

- A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.
- B. Plumbing work shall comply with applicable inspection services:
  - 1. Underwriters Laboratories.
  - 2. National Fire Protection Association.
  - 3. State Health Department.
  - 4. Local Municipal Building Inspection Department.
- C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.
- D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.
- E. Obtain all permits required.

##### 1.3 CONTRACTOR'S QUALIFICATIONS

- A. An approved contractor for the work under this division shall be:
  - 1. A licensed specialist in this field and have the personnel, experience, training, skill, and organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years.

##### 1.4 REFERENCE SPECIFICATIONS AND STANDARDS

- A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date bids are received. Requirements in reference specifications and standards are minimum for all equipment, material, and work. In instances where specified capacities, size, or other features of equipment, devices, or materials exceed these minimums, meet specified capacities.

## 1.5 CONTRACT DRAWINGS

- A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.

## 1.6 PROJECT RECORD DOCUMENTS

- A. Maintain at the job site a separate set of white prints (blue line or black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various lines, valves, ductwork, traps, equipment, and other pertinent items, as installed. Include flow-line elevation of sewer lines. Record existing and new underground and under slab piping with dimensioned locations and elevations of such piping.
- B. At the conclusion of project, obtain without cost to the Owner, PDF files of the original drawings and transfer as-built changes to these. Prior to transmittal of corrected drawings, obtain four sets of full-size prints of each drawing, regardless of whether corrections were necessary and include in the transmittal (two sets are for the Owner's use, one set is for the Architect, and one set for Engineer's records). Delivery of these as-built prints and reproducible drawings is a condition of final acceptance. Provide record drawings in a digital format transmitted to the Owner, the Architect, and the Engineer.
- C. As-Built drawings should indicate the following information as a minimum:
  - 1. Indicate all addendum changes to documents.
  - 2. Remove Engineer's seal, name, address and logo from drawings.
  - 3. Mark documents RECORD DRAWINGS.
  - 4. Clearly indicate: DOCUMENT PRODUCED BY.
  - 5. Indicate all changes to construction during construction. Indicate actual routing of all piping, etc. that were deviated from construction drawings.
  - 6. Correct schedules to reflect (actual) equipment furnished and manufacturer.
  - 7. During the execution of work, maintain a complete set of drawings and specifications upon which all locations of equipment, ductwork, piping, devices, and all deviations and changes from the construction documents in the work shall be recorded.
  - 8. Location and size of all ductwork and mechanical piping above ceiling including exact location of isolation of domestic and plumbing valves.
  - 9. Exact location of all electrical equipment in and outside of the building.
  - 10. Fire Protection System documents revised to indicate exact location of all sprinkler heads and zone valves.
  - 11. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
  - 12. Cloud all changes.

## 1.7 SPACE REQUIREMENTS

- A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

## 1.8 RELATION WITH OTHER TRADES

- A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements.

- B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.
- C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.
- D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.
- E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under that Division. Determine from the Contractor for the various trades, the Owner, and by direction from the Architect/Engineer, the exact location of all items.

#### 1.9 CONCEALED AND EXPOSED WORK

- A. When the word "concealed" is used in connection with insulating, painting, piping, ducts and the like, the work is understood to mean hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is understood to mean open to view.

#### 1.10 GUARANTEE

- A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. At the Owner's option, replacement of failed parts or equipment shall be provided.

#### 1.11 MATERIAL AND EQUIPMENT

- A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

#### 1.12 NOISE AND VIBRATION

- A. Select equipment to operate with minimum noise and vibration. If objectionable noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, rectify such conditions at no additional cost. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

#### 1.13 ACCEPTABLE MANUFACTURERS

- A. Manufacturers names and catalog number specified under sections of Division 21 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Equipment of similar design, equal to that specified, manufactured by a named manufacturer will be acceptable on approval. A request for prior approval of equipment not listed must be submitted ten (10) days before bid due date. Submit complete design and performance data to the Engineer.
- B. Where equipment or accessories are used which differ in arrangement, configuration, dimensions, ratings or engineering parameters from those indicated on the Contract Documents, the Contractor is responsible for all costs involved in integrating the equipment or accessories into the system and for obtaining the intended performance

from the system which these items are placed.

#### 1.14 OPERATING TESTS

- A. After all plumbing systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect/Engineer. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

#### 1.15 WARRANTIES

- A. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

#### 1.16 BUILDING CONSTRUCTION

- A. It shall be the responsibility of each sub-contractor to consult the Architectural and Engineering drawings, details, and specifications and thoroughly familiarize himself with the project and all job related requirements. Each sub-contractor shall cooperate with the General Contractor to verify that all piping and other items are placed in the walls, furred spaces, chases, etc., so there will be no delays in the job.

### PART 2 - PRODUCTS – NOT USED

### PART 3 - EXECUTION

#### 3.1 OPENINGS

- A. Framed, cast or masonry openings for ductwork, equipment or piping are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

#### 3.2 HOUSEKEEPING PADS

- A. Provide equipment housekeeping pads under all floor mounted and ground mounted plumbing equipment, and as shown on the drawings.
- B. Concrete work as specified in Division 3.
- C. Concrete pads:
  - 1. 4" high, rounded edges, minimum 2500 psi unless otherwise indicated on the drawings
  - 2. Chamfer strips at edges and corner of forms.
  - 3. Smooth steel trowel finish.
  - 4. Doweled to existing slab.
- D. Install concrete curbs around multiple pipe penetrations.

#### 3.3 VANDAL RESISTANT DEVICES

- A. Provide a handle for each loose keyed operated valve and hose bibb on the project.

- B. Where vandal resistant screws or bolts are employed on the project, deliver to the Owner 2 suitable tools for use with each type of fastener used.
- C. Proof of delivery of these items to the Owner shall be included in the Operating and Maintenance Manuals.

### 3.4 INSTRUCTION OF OWNER'S PERSONNEL

- A. Prior to final inspection, conduct an on-site training program to instruct the Owner's operating personnel in the operation and maintenance of the plumbing systems.
  - 1. Provide the training during the Owner's regular working day.
  - 2. The instructors shall each be experienced in their phase of operation and maintenance of building plumbing systems and with the project.
- B. Time to be allocated for instructions.
  - 1. Minimum of 4 hours dedicated instructor time.
  - 2. 2 hours on each of 2 days.
- C. Before proceeding with the on-site training program, submit the program syllabus; proposed time and dates; and other pertinent information for review and approval.
  - 1. One copy to the Owner.
  - 2. One copy to the Architect/Engineer.
- D. The Owner will provide a list of personnel to receive instructions and will coordinate their attendance at the agreed upon times.
- E. Use the operation and maintenance manuals as the basis of instruction. Review contents of manual with personnel in detail to explain all aspects of operation and maintenance.
- F. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shut down of each item of equipment.
- G. Demonstrate equipment functions (both individually and as part of the total integrated system).
- H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.
- I. Submit a report within one week after completion of the training program that instructions have been satisfactorily completed. Give time and date of each demonstration and hours devoted to the demonstration, with a list of people present.
- J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he/she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.
- K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

### 3.5 EQUIPMENT IDENTIFICATION

- A. Provide a laminated engraved plastic nameplate on each piece of equipment and starter.
  - 1. Designation approved by Architect/Engineer.
  - 2. Equipment includes, but is not limited to, water heaters, pumps, boilers and utility

- 3. controllers.  
3. Submit schedule of equipment to be included and designations.

B. Provide nameplates with 1/2" high letters and fastened with epoxy or screws.

### 3.6 OBSTRUCTIONS

- A. The drawings indicate certain information pertaining to surface and subsurface obstructions which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
  - 1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
  - 2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.
- B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

### 3.7 PROTECTION

- A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

END OF SECTION

## SECTION 21 05 10

### FIRE PROTECTION CONTRACT QUALITY CONTROL

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Contract quality control including workmanship, manufacturer's instructions and demonstrations.

##### 1.2 QUALITY CONTROL PROGRAM

- A. Maintain quality control over supervision, subcontractors, suppliers, manufacturers, products, services, site conditions and workmanship to produce work in accordance with contract documents.

##### 1.3 WORKMANSHIP

- A. Comply with industry standards except when more restrictive tolerances or specified requirements indicate more rigid standards or more precise workmanship.
- B. Perform work by persons qualified to produce workmanship of specified quality.
- C. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, and racking. Under no conditions shall material or equipment be suspended from structural bridging.
- D. Provide finishes to match approved samples. All exposed finishes shall be approved by the Architect. Submit color samples as required.

##### 1.4 MANUFACTURER'S INSTRUCTIONS

- A. Comply with instructions in full detail, including each step in sequence.
- B. Should instruction conflict with Contract Documents, request clarification from Architect / Engineer before proceeding.

##### 1.5 MANUFACTURER'S CERTIFICATES

- A. When required in individual Specification Sections, submit manufacturer's certificate in duplicate, certifying that products meet or exceed specified requirements.

##### 1.6 MANUFACTURER'S FIELD SERVICES

- A. When required in individual Specification Sections, manufacturer shall provide qualified personnel to observe:
  - 1. Field conditions.
  - 2. Condition of installation.
  - 3. Quality of workmanship.
  - 4. Start-up of equipment.
  - 5. Testing, adjusting, and balancing of equipment.
- B. Representative shall make written report of observations and recommendations to Architect / Engineer.



## PART 2 - PRODUCTS

### 2.1 REFERENCE APPLICABLE SPECIFICATION SECTIONS.

## PART 3 - EXECUTION

### 3.1 PROTECTION OF EQUIPMENT

- A. Do not deliver equipment to the project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather will be rejected, and the Contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.
- B. Adequately protect equipment from damage after delivery to the project. Cover with heavy tarpaulins, drop cloths or other protective coverings as required to protect from plaster, paint, mortar and/or dirt. Do not cover with plastic materials and trap condensate and cause corrosion.

END OF SECTION

## SECTION 21 05 12

### FIRE PROTECTION SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Prepare submittals as required by Division 1.
- B. The term submittal, as used herein, refers to all:
  - 1. Shop Drawings.
  - 2. Coordination Drawings.
  - 3. Product data.
- C. Submittals shall be prepared and produced for:
  - 1. Distribution as specified.
  - 2. Inclusion in the Operating and Maintenance Manual, as specified, in the related section.

##### 1.2 SHOP DRAWINGS

- A. Present drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.
- B. Show all dimensions of each item of equipment on a single composite Shop Drawing. Do not submit a series of drawings of components.
- C. Identify field dimensions; show relationship to adjacent features, critical features, work, or products.
- D. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.

##### 1.3 COORDINATION DRAWINGS

- A. Present in a clear and thorough manner. Title each drawing with project name. Identify each element of drawings by reference to sheet number and detail, or room number of contract documents. Minimum drawing scale:  $\frac{1}{4}" = 1'-0"$ .
- B. Prepare coordination drawings to coordinate installations for efficient use of available space, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
- C. For each mechanical room and for each outside equipment pad where equipment is located, submit plan and elevation drawings. Show:
  - 1. Actual mechanical equipment and components to be furnished.
  - 2. Service clearance.
  - 3. Relationship to other equipment and components.
  - 4. Roof drains and leader piping.
  - 5. Fire protection piping and equipment.
- D. Identify field dimensions. Show relation to adjacent or critical features of work or products.

- E. Related requirements:
  - 1. Ductwork shop drawings
  - 2. Coordination drawing specified in Division 26
- F. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.
- G. Gas piping sketch indicating proposed location of piping prior to proceeding with the installation.

#### 1.4 PRODUCT DATA AND INSTALLATION INSTRUCTION

- A. Submit only pages which are pertinent to the project. All options which are indicated on the product data shall become part of the contract and shall be required whether specified are not.
- B. Mark each copy of standard printed data to identify pertinent products, referenced to specification section and article number.
- C. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions and required clearances.
- D. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.
- E. Mark up a copy of the specifications for the product. Indicate in the margin of each paragraph the following: "Comply, "Do Not Comply", or "Not Applicable". Explain all "Do Not Comply" statements.
- F. Provide a separate transmittal for each submittal item. Transmittals shall indicate product by specification section name and number. Separate all submittals into appropriate specification section number. Do not combine specification sections.

#### 1.5 MANUFACTURERS INSTRUCTIONS

- A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

#### 1.6 CONTRACTOR RESPONSIBILITIES

- A. Review submittals prior to transmittal.
- B. Determine and verify:
  - 1. Field measurements.
  - 2. Field construction criteria.
  - 3. Manufacturer's catalog numbers.
  - 4. Conformance with requirements of Contract Documents.
- C. Coordinate submittals with requirements of the work and of the Contract Documents.
- D. Notify the Architect / Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.
- E. Do not fabricate products, or begin work for which submittals are specified, until such submittals have been produced and bear contractor's stamp. Do not fabricate products or

begin work scheduled to have submittals reviewed until return of reviewed submittals with Architect / Engineer's acceptance.

- F. Contractor's responsibility for errors and omissions in submittals is not relieved whether Architect / Engineer reviews submittals or not.
- G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect / Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations on reviewed documents.
- H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
  - 1. Proper sizes and capacities
  - 2. That the item will fit in the available space in a manner that will allow proper service.
  - 3. Construction methods, materials and finishes.
- I. Schedule submissions at least 15 days before date reviewed submittals will be needed.

#### 1.7 SUBMISSION REQUIREMENTS

- A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor.
- B. Number of submittals required:
  - 1. Shop Drawings and Coordination Drawings: Submit one reproducible transparency and three opaque reproductions.
  - 2. Product Data: Submit the number of copies which the contractor requires, plus those which will be retained by the Architect / Engineer.
- C. Accompany submittals with transmittal letter, in duplicate, containing:
  - 1. Date.
  - 2. Project title and number.
  - 3. Contractor's name and address.
  - 4. The number of each Shop Drawing, Project Datum and Sample submitted.
  - 5. Other pertinent data.
- D. Submittals shall include:
  - 1. The date of submission.
  - 2. The project title and number.
  - 3. Contract Identification.
  - 4. The names of:
    - a. Contractor.
    - b. Subcontractor.
    - c. Supplier.
    - d. Manufacturer.
  - 5. Identification of the product.
  - 6. Field dimensions, clearly identified as such.
  - 7. Relation to adjacent or critical features of the work or materials.
  - 8. Applicable standards, such as ASTM or federal specifications numbers.
  - 9. Identification of deviations from contract documents.
  - 10. Suitable blank space for General Contractor and Architect / Engineer stamps.
  - 11. Contractor's signed and dated Stamp of Approval.

- E. Coordinate submittals into logical groupings to facilitate interrelation of the several items:
  - 1. Finishes which involve Architect / Engineer selection of colors, textures or patterns.
  - 2. Associated items which require correlation for efficient function or for installation.

#### 1.8 SUBMITTAL SPECIFICATION INFORMATION

- A. Every submittal document shall bear the following information as used in the project manual:
  - 1. The related specification section number.
  - 2. The exact specification section title.
- B. Submittals delivered to the Architect / Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

#### 1.9 RESUBMISSION REQUIREMENTS

- A. Make re-submittals under procedures specified for initial submittals.
  - 1. Indicate that the document or sample is a re-submittal.
  - 2. Identify changes made since previous submittals.
- B. Indicate any changes which have been made, other than those requested by the Architect / Engineer.

#### 1.10 CONTRACTOR'S STAMP OF APPROVAL

- A. Contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
- B. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect / Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.
- C. Do not deliver any submittals to the Architect / Engineer that do not bear the Contractor's stamp of approval and signature.
- D. Submittals delivered to the Architect / Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

#### 1.11 ARCHITECT / ENGINEER REVIEW OF IDENTIFIED SUBMITTALS

- A. The Architect / Engineer will:
  - 1. Review identified submittals with reasonable promptness and in accordance with schedule.
  - 2. Affix stamp and initials or signature, and indicate requirements for re-submittal or approval of submittal.
  - 3. Return submittals to Contractor for distribution or for resubmission.

- B. Review and approval of submittals will not extend to design data reflected in submittals which is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.
- C. Architect / Engineer's review and approval is only for conformance with the design concept of the project and for compliance with the information given in the contract.
  - 1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
  - 2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes or coordination with the work of other trades.
- D. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.

#### 1.12 SUBSTITUTIONS

- A. Do not make requests for substitution employing the procedures of this Section.
- B. The procedure for making a formal request for substitution is specified in Div. 1.

PART 2 - PRODUCTS - NOT USED

PART 3 - EXECUTION - NOT USED

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 21 10 00

### FIRE SPRINKLER SYSTEMS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Design coordination of sprinkler work with the installations of other trades as shown on their drawings; all mechanical, electrical, plumbing and sprinkler work must fit the space requirements. The sprinkler work shall comply with other Sections of this specification; and fit the structure finishes. The Sprinkler Contractor will comply with all the codes and underwriter authorities, and the requirements for the installation of inside and outside piping; including sprinkler heads, valves, tamper switches, flow switches, hangers and supports, sleeves, fire department connections, inspector test connections, main drain and accessories, signs, and any other component parts reasonably incidental to providing a complete protection system. Provide 100 percent coverage for the entire building.
- B. A wet system shall be installed in heated areas and dry pipe systems in areas subject to freezing. When heated areas are not available and dry pipe system not used, provide heat tracing and / or insulation installed per NFPA and per local Fire Marshall Requirements, or as indicated on drawings.
- C. Furnish all articles of a completed sprinkler system including all materials, labor, tools, equipment, transportation services and supervision fees.
- D. The plans provide a riser assembly location at water entry into building for flow switch locations, valve locations (with tamper switches), fire department test assemblies and fire department Siamese connections. These are a guide for subsequent preparation of the Contractor's detailed installation drawings of the complete fire protection sprinkler system which shall be submitted to the Architect / Engineer for review. Submit only drawings and calculations bearing the approval of the authority having jurisdiction.
- E. Do not exceed 52,000 square feet of building for each individual sprinkler system.
- F. Install fire protective system identification signs in accordance with NFPA-13, NFPA-14, and NFPA-20
- G. It shall be the fire protection installer's responsibility to verify pressure at the project site by performing a flow test. Determine if the available static pressure, residual pressure, and flow rate will adequately provide the fire extinguishing system with the necessary operating requirements or if a fire pump, storage tank and necessary appurtenances are required. Notify Architect and Engineer if low water flow / pressure condition exist and inform them of all options prior to proceeding.
- H. The installation of the entire Sprinkler Systems shall comply with all rules and regulations of the National Board of Fire Underwriters, the Local Building Code, Local Fire Marshall, and Requirements of NFPA Pamphlet 13, and other local authorities exercising jurisdiction.
- I. Study the general, structural, electrical, and mechanical drawings and specifications, in order to become familiar with the building and details as they apply to the work of this Section. Cooperate with all Trades so that there will be no conflict of space. Plumbing flow lines, large ductwork HVAC piping and electrical service feeders shall take precedence over Fire Protection work, except where it is absolutely necessary to



maintain coverage protection.

- J. Provide a water curtain sprinkler system along glazing to create a 1-hour rating, as outlined in NFPA 13. Refer to Architecture plans for locations. Water demand for water curtain shall be added to the ceiling sprinkler water demand at the point of connection, per NFPA 13. Sprinkler heads shall be spaced at 6'-0" o.c., minimum 6 inches and maximum 12 inches from glazing.

## 1.2 BASIS OF DESIGN

- A. National Fire Protection Association (NFPA), latest edition of NFPA 13, Standard for the Installation of Sprinkler Systems.
- B. Vertical zone valves installed in horizontal position are not acceptable. All zone valves are to be located at water entry into building and mounted in the vertical riser.

## 1.3 QUALITY ASSURANCE

- A. Sprinkler equipment and installation to be in accordance with recommendations of and approved by local, state, and federal fire authorities.
- B. Equipment and installation to meet requirements of NFPA No. 13, 14, 20, 24, 25, 70 and 72.
- C. Use materials and equipment that are new and of unused, approved by NFPA and as listed in the UL list of "Inspected Fire Protection Equipment and Materials."

## 1.4 SHOP DRAWINGS

- A. Make complete shop drawings and working drawings of equipment furnished, including detailed drawings of piping and sprinkler head locations. Drawings shall show construction details and dimensions of each piece of equipment and work to be installed. The location of all heads shall be as approved. Where additional heads are required to meet NFPA 13, provide at no additional cost.
- B. Before the shop drawings are submitted to Architect / Engineer, submit drawings to the jurisdictions for approval. All approvals shall be noted on the drawings or by letter from the departments.
- C. The Architect's approval of shop drawings shall not relieve the responsibility of correctly figured dimensions or any errors that may be contained in these drawings. The omission of any material shown on the contract drawings, or specified from the shop drawings, even though approved, shall not relieve the responsibility to furnish and erect them.
- D. Provide ¼ scale drawings to show the location of the water entry into building with all zone valves, and shut-off valves, with alarms and drains at this location. Prepare the sprinkler drawings under the work of this Section.
- E. Submit samples of all sprinkler types for approval.

## PART 2 - PRODUCTS

### 2.1 ACCEPTABLE MANUFACTURERS

- A. Johnson Controls (Tyco Fire Products)
  - 1. Gem/Grinnell.

2. Central.
  3. Star Sprinkler.
- B. Automatic Sprinkler Company of America
  - C. Potter Roemer, Inc.
  - D. The Reliable Automatic Sprinkler Company.
  - E. Viking Corporation.
  - F. Victaulic Company of America.
  - G. Globe Fire Sprinkler Corporation.

## 2.2 PIPING AND FITTINGS

- A. Above Slab Inside Building
  1. Pipe 2" and Smaller: Schedule 40, black steel pipe conforming to ASTM A 795 or ASTM A135 joined with threaded fittings.
  2. Pipe 2-1/2" and larger, provide ASTM A795 or ASTM A135 UL and FM listed.
    - a. Light wall having a minimum corrosion resistance ratio (CRR) or 1.00 or greater.
    - a. Schedule 40 or Schedule 10, black steel pipe joined with rolled grooved fittings.
- B. Underground within five feet of building. Provide ductile iron pipe, Class 200 conforming to ASTM, and ring-tite fittings. Provide concrete thrust blocks at changes in direction, according to the pipe manufacturer's recommendations.
- C. Fittings used to join pipe shall be listed fabricated fittings or manufactured in accordance with the material and dimension standards listed in table 6.4.1 NFPA 13 and 2.2.1 NFPA 14.

## 2.3 SPRINKLER HEAD

- A. All sprinklers shall comply with the latest requirements of NFPA 13 with respect to orifice size.
- B. All heads shall be UL listed and/or FM approved and comply with the latest requirements of NFPA 13 with respect to orifice size unless otherwise noted. Sprinkler heads with "O" ring design shall not be acceptable.
- C. Exposed areas:
  1. Standard upright type with brass finish and escutcheon. Provide temperature rating per NFPA 13 and UL/FM approvals.
  2. Tyco Model B, FRB, Globe Model GL-QR, GL-SR, or approved equal.
- D. Sidewall applications:
  1. Horizontal sidewall type with brass finishes and chrome escutcheon.
  2. Unfinished areas and recessed with chrome plated escutcheon. Provide temperature rating per NFPA 13 and UL/FM approvals.
  3. Tyco Model B, FRB, Globe Model GL-QR/SW, GL-SR/SW, or approved equal.
- E. Suspended ceilings:
  1. Adjustable drop-down deflector type concealed heads with manufacturer painted

- white cover plate with glass bulb fusible link. Provide temperature rating per NFPA 13 and UL/FM approvals.
  - 2. Color of plate, selected by Architect
  - 3. Tyco Series RFII; Series ELOC, Globe Concealed Models GL-QR/INCH, GL-SW/INCH and GL-INCH/ECLH or approved equal.
- F. Sprinklers subject to mechanical injury shall be protected with fusible solder type sprinklers and listed heavy duty bolt on guards. Bulb type sprinklers will not be acceptable for these locations.
  - 1. Storage rooms with exposed structure.
  - 2. Gymnasiums.
  - 3. Mechanical and Electrical rooms.
  - 4. Below exposed stairs.
  - 5. Exposed structure areas.
- G. Systems serving walk-in freezers and coolers shall utilize Tyco Model DS-1 or DS-C dry pendent sprinklers. A Model DSB-1 dry sprinkler boot shall be utilized in conjunction with the dry sprinkler to eliminate the requirement for insulation and to stop potential air interchange. Length of dry pendent shall be determined by manufacturer's recommendation with respect to freezer ambient temperatures expected.

## 2.4 INSPECTOR'S TEST CONNECTION

- A. Provide inspector's test connection as required by NFPA 13.
  - 1. Ductile iron module housing with combination sight glass, orifice, and bonnet assembly.
  - 2. UL listed.
  - 3. Victaulic No. 718.
  - 4. Globe Model UTD.
  - 5. Tyco, or approved equal.

## 2.5 TAMPER SWITCH / SUPERVISORY SWITCH

- A. Tamper switch on each valve
  - 1. Controlling or shutting off sprinkler system or any portion thereof.
  - 2. Tamper switch with either one single pole, double throw switch or two single pole, double throw switches as required.
  - 3. Switch shall be compatible with installed valve for standard mounting.
  - 4. Potter-Roemer Fig. 6220, 6221, 6222, 6223 or approved equal.

## 2.6 FLOW SWITCH

- A. Vane type flow switch.
  - 1. Self-contained pneumatic, adjustable retard.
  - 2. Two, single pole, double throw switches.
  - 3. Red enamel tamper proof switch housing with flow paddle.
  - 4. Potter Roemer Model No. 6200 or approved equal.

## 2.7 FLOORS AND CEILING PLATES

- A. Provide chrome-plated floor and ceiling plates around pipes exposed to view when passing through walls, floors, partitions, or ceilings in finished areas; size plates to fit pipe or insulation and lock in place.

## 2.8 GASKETS

- A. Use 1/16-inch-thick preformed synthetic rubber bonded.

## 2.9 COUPLINGS

- A. Use listed rolled grooved mechanical couplings to engage and lock grooved, or shouldered pipe ends and to allow for some angular deflection, contraction, and expansion. Coupling consists of ductile iron housing, c-shaped composition sealing gasket and steel bolts. Gasket Material for dry pipe systems shall be silicone and listed for dry pipe service.

## 2.10 VALVES

- A. Use valves suitable for 175 psig WOG.
- B. Valves to be UL listed and FM approved.
- C. Valve Connections:
  - 1. Provide valves suitable to connect adjoining piping as specified for pipe joints. Use full line size valves unless noted otherwise.
  - 2. Screwed ends for pipe sizes 2 inches and smaller.
  - 3. Flanged ends for pipe sizes 2-1/2 inches and larger.
  - 4. Solder or screw to solder adapters for copper tubing.
  - 5. Use grooved body valves with mechanical grooved jointed piping.
- D. Gate Valves:
  - 1. Up to 2 inches, bronze, outside screw and yoke, rising stem, solid wedge, screwed ends, manufactured by: Mueller, or approved equal.
  - 2. Over 2 inches, iron body, bronze trim, outside screw and yoke, rising stem, solid wedge, flanged ends; manufactured by Mueller, or approved equal.
- E. Check Valves:
  - 1. Up to 2-inch, bronze, regrind bronze swing disk, solder, or screwed ends; 200 WOG, manufactured by Mueller, or approved equal.
  - 2. Over 2-inch, iron body bronze trim, swing disk, regrind – renew bronze disk and seat, flanged ends; 200 WOG, manufactured by Mueller, Globe Model RCV, or approved equal.
- F. Butterfly Valve: Lug body style, bubble-tight shutoff, cast iron body, ASTM B 148 bronze disk, with integral tamper switch, manufactured by Anvil Model No. 8000 FP, or approved equal.
- G. Backflow Preventer – Double Check valves:
  - 1. 2 1/2" inches and over: ASSE 1015, double check backflow preventer with 2 independent spring loaded check valves, 2 isolation ball, OS&Y or butterfly valves with normally open tamper switch with double wire leads, 4 valve test ports. Constructed of bronze or epoxy coated cast iron or stainless steel body with bronze and plastic internal parts, stainless steel springs, silicone rubber valve discs, bronze seats, rated for 175 PSIG.
- H. Freestanding Indicating Post: Install adjustable indicating post and valve outside building where shown on Civil drawings, consisting of UL/FM, non-rising stem gate valve and indicating post. Gate valve shall be iron body, non-rising stem, bronze mounted. Indicator flange, 175-psi non-shock rating, flanged end. Indicator shall be UL/FM approved cast iron body, Plexiglas window and 18-inch adjustment span with handle and tamper switch

wired to main fire alarm control panel, manufactured by Mueller, Valve No. A-2052, Indicating Post No. A20800, or approved equal.

#### 2.11 ELECTRIC ALARM BELL

- A. 10-inch round red enamel steel bell with electrically operated vibrating outdoor alarm bell, UL listed, red enamel steel, manufactured by Simplex, or approved equal.

#### 2.12 GAUGES

- A. Gauges shall be bourdon tube type with minimum 4-1/2-inch dial and die cast aluminum case with screwed ring and black enamel finish. The movement shall be all stainless steel with Grade A phosphor bronze bourdon tube, brazed at socket and tip. The accuracy of the gauge shall be within one-half of one percent of the scale range. The pointer shall be the micrometer adjustment type recalibrated from the front. Pressure and compound gauges shall have suitable scale ranges and graduations. Suitable for temperatures up to 120 degrees F.
- B. Gauges shall have ¼ inch connections and be mounted with combination stop / snubber needle valve with suitable pressure rating. Scale ranges: 0-200 psi.
- C. Gauge range shall be such that system normal operating pressure falls with 25 percent and 75 percent of the full-scale range.
- D. Pressure scale graduations shall read in psig. Figure intervals shall be in – 20 psig increments, with minor divisions in 2 psig increments.
- E. The accuracy of the gauge shall be at least 0.5 percent of the scale range. Gauge shall be made in accordance with ASME B40.1 accuracy grade 2A.
- F. Manufactured by:
  - 1. Trerice Model No. 4500 Series.
  - 2. Ashcroft.
  - 3. Marsh.
  - 4. Weksler.

#### 2.13 SPARE SPRINKLER HEAD BOX

- A. Provide baked enamel steel box to store 36 sprinkler heads (Minimum of 3 of each type used) for emergency replacement. Provide sprinkler wrench.

#### 2.14 ALARM CHECK VALVE

- A. Provide UL listed check valve.
  - 1. Variable for City Supplied systems pressure trim set.
  - 2. Constant for Fire Pump Systems pressure trim set.
  - 3. Tyco AV-1, Globe Model H, or approved equal.

#### 2.15 SIAMESE FIRE DEPARTMENT CONNECTION

- A. Siamese Wall mounted chrome-plated Siamese. Include caps, sillcock, chain, and a plate lettered AUTO-SPKR.
  - 1. Coordinate type and location with local fire department.

## PART 3 - EXECUTION

### 3.1 DESIGN

- A. Design, spacing of sprinkler heads and selection sizes shall conform to the requirements of NFPA 13 for the indicated occupancy.
- B. Uniform discharge density design shall be based on hydraulic calculations using the method outlined in NFPA 13. Density of discharge from sprinkler heads shall conform to NFPA 13.
- C. Friction losses in pipe will be based on a value of "C" = 120 in the Hazen and Williams formula.
- D. Design and install the system so that no part will interfere with doors, windows, heating, mechanical, lighting, or electrical equipment. Do not locate sprinkler heads closer than 3 feet to lighting fixtures or other obstructions.

### 3.2 LOCATION

- A. Heads shown, if indicated on reflected ceiling plans, are an integral part of the ceiling design. Where heads are not shown or indicated, locate them in the exact center of acoustical ceiling tile unless noted otherwise. In rooms with monolithic plaster or gypsum drywall ceilings, locate the sprinkler heads symmetrically arranged with respect to both axes of the room. Locate sprinkler heads in relation to specialty ceiling elements such as slats, ribs, panels, grids, etc., if not shown on the drawings. Generally, locate heads in the exact center of, or spaced between, such elements. Center heads in corridors.
- B. Locate heads as may be required for coordinated ceiling pattern, even though number of heads exceed minimum code requirements.
- C. Sprinkler heads located in utility or mechanical rooms, penthouses, service corridors, or other such spaces not subject to public view need not be centered in ceiling patterns and may use a straight drop from branch line.

### 3.3 PREPARATION

- A. Ream pipes and tubes, clean off scale, rust, oxide, and dirt, inside and outside, before assembly. Remove welding slag or other foreign material from piping.
- B. Pipe beveled each end, per approved procedures.
- C. Hammer clean and flush out piping after welding to remove scale, welding slag and other debris.

### 3.4 CONNECTION

- A. Make screwed joints with square, clean full cut standard taper pipe threads. Ream after cutting and threading. Red lead and linseed oil or other approved non-toxic joint compound applied to male threads only.
- B. Nipples: Shoulder type; extra heavy where less than 1-1/2 inch is unthreaded.

- C. Clamp cast iron water pipe at fittings with ¾ inch rods and properly anchor and support.
- D. Use grooved mechanical couplings and mechanical fasteners only in accessible locations.

### 3.5 COORDINATION

- A. Coordinate the installation schedule for this work with the construction schedule for the Work to ensure orderly progress with minimum delay.
- B. Coordinate interface of fire sprinkler system with the work of other trades to ensure proper and adequate provision for the installation and connection of this system.
- C. Coordinate location and quantity of Siamese connections required for fire department connection with Architect and local fire officials.

### 3.6 SURFACE CONDITIONS

- A. Before starting each stage of the fire sprinkler systems installation, inspect the installed work of other trades and determine that work is complete enough to allow installation to begin. Ensure that work of other trades has been installed in a manner to permit work of this Section in accordance with approved design.

### 3.7 INSTALLATION

- A. Run piping concealed above furred ceilings and in joists to minimize obstructions. Expose only heads.
- B. Protect sprinkler heads against mechanical injury with heavy duty bolt-on guards.
- C. Locate system drains and inspector's test connections in utility rooms, mechanical rooms or other readily accessible areas not requiring access through ceiling. Coordinate sprinkler system drain flow rates with plumbing system drainage capacities.
- D. Where low points or drains occur above ceilings or in otherwise finished spaces, furnish drain valve with brass cap and chain.
- E. Locate outside alarms on wall of building and coordinate with Architect.
- F. Fire pump and all accessories shall be tested in accordance with NFPA 20 and the local Fire Marshall and/or all other authorities having jurisdiction.
- G. Provide on interior wall near sprinkler valve, cabinet containing extra sprinkler heads of each type and wrench suitable for each head type.
- H. Provide a minimum 18-inch radius swing joint for each drop to sprinkler heads located in ceilings.
- I. Provide Easy-Flex or Flexhead Industries sprinkler hose fittings for each sprinkler head installation for hydraulically designed wet or dry pipe sprinkler connections per NFPA 13. Allow a 3" minimum bend radius per UL.
- J. Install pipe markers to identify fire protection.
- K. Provide shield or deflector for sprinklers or equipment where electrical switchgear, switchboards and motor control centers are in sprinkler protected spaces.

- L. Install fire 2-1/2-inch department valve, maximum 5 feet above floor, complying with NFPA 14.
- M. During construction, make one standpipe outlet available on each floor without delay, for fire department use.
- N. Provide 3-way standpipe outlets above roof.
- O. Provide pressure gauges at the top of each standpipe as detailed on the drawings.
- P. Provide drain for each standpipe.
- Q. Install valves with stems upright or horizontal, not inverted.
- R. Sprinkler heads shall be installed above and below ductwork over 48 inches wide, in exposed areas, per NFPA 13.
- S. Install the complete fire sprinkler system in accordance with the approved shop drawings.
- T. Perform piping installation in accordance with the provisions of the specifications, including furnishing of required sleeves for fire sprinkler system pipes passing through rated walls, floors, and other parts of the building. Provide scheduled 40 galvanized pipe sleeve for concrete or CMU penetrations. Furnish size required for fireproofing and or insulation. Furnish and install split wall plates and chrome plated escutcheons for exposed fire sprinkler system pipes. Where pipes pass through concrete floors, furnish, and install wrought iron or steel pipe sleeves made flush with the ceiling below and extending 2" above the finished floor.
- U. Do not cut or make holes in any part of the building except where shown on the approved shop drawings.
- V. Furnish and install, next to the sprinkler riser main, a print sheet protected by glass or a transparent plastic cover, giving brief instructions regarding control, emergency procedure, and other data required by NFPA #13. For hydraulically designed sprinkler systems, a placard is to be permanently attached to the riser indicating the location, and the basis of design (discharge density and system demand).
- W. Do not install exposed piping below structure in public area.
- X. Provide heat tracing and insulation on wet piping systems exposed to freezing when not installed in a heated space or installed by other acceptable methods of maintaining the piping from freezing. Installation of heat tracing and insulation shall be in accordance with the latest edition of NFPA 13 and the local code authorities. Coordinate electrical requirements with Division 26.

### 3.8 SECURING AND SUPPORTING

- A. Support piping to maintain line and grade, with provision for expansion and contraction. Use approved adjustable ring type or trapeze-type hangers connected to structural members of the building. Single pipe runs to be supported by approved adjustable ring type hangers. Multiple pipe runs to be supported by approved trapeze type hangers. Do not support piping from other piping or structural joist bridging.
- B. Provide supports both sides of elbows for pipe 6" and larger.



- C. Support vertical risers with steel strap pipe clamps of approved design and size, supported at each floor. Support piping assemblies in chases so they are rigid and self-supported before the chase is closed.
- D. Support spacing: As recommended by the project structural engineer and support manufacturer, but not more than listed below. Not to exceed spacing requirements of smallest pipe.

| Pipe Size       | Steel Max. Support Spacing, Feet | Minimum Rod Diameter, Inches |
|-----------------|----------------------------------|------------------------------|
| 1" & smaller    | 6                                | 3/8                          |
| 1-1/4" & 1-1/2" | 8                                | 3/8                          |
| 2"              | 10                               | 3/8                          |
| 3"              | 10                               | 1/2                          |
| 4" & 5"         | 10                               | 5/8                          |
| 6" and above    | 10                               | 3/4                          |

### 3.9 PIPE SUPPORTS

- A. Provide P1001 or P 5000 Unistrut metal framing members and appurtenances for pipe support. Hot-dip galvanize members and appurtenances when located outside. Sagging of pipes or supports is not acceptable.
- B. Adjustable ring type hangers shall be used for single pipe supports; Erico Model 115 NFPA UL/FM. When oversized clevis is used, a nipple shall be placed over the clevis bolt as a spacer to assure that the lower U-strap will not move in on the bolt. All parts shall be zinc plated carbon steel, or galvanized.

### 3.10 PIPE SLEEVES

- A. Sleeves through masonry and concrete construction:
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe.
  - 2. Size sleeve large enough to allow for movement due to expansion and to provide continuous insulation.
- B. Sleeves through gypsum wall construction.
  - 1. Fabricate sleeves of 16-gauge galvanized sheet metal.
- C. Sleeves through elevated slab construction.
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe with welded center flange in floor.
- D. Extend each sleeve through the floor or wall. Cut the sleeve flush with each wall surface. Sleeves through floors shall extend 2" above floor lines for waterproofing purposes. Slab on grade floors shall not be sleeved except where penetrating waterproofing membrane or insect control is required.
- E. Caulk sleeves water and airtight. Seal annular space between pipes and sleeves with mastic compound to make the space water and airtight.
- F. For sleeves below grades in outside walls, provide Thunderline Link-Seal or Advance Product and System Interlynx, with 316 stainless steel nuts and bolts, with cast iron pressure plate.
- G. Provide chrome plated escutcheon plates on pipes passing through walls, floors or

ceilings exposed to view. At exterior walls, stainless steel sheet metal is to be used.

- H. For sleeves through fire and smoke rated walls, seal with a UL through-penetration firestop, rated to maintain the integrity of the time rated construction. Install in accordance with the manufacturer's installation instructions. Comply with UL and NFPA standards for the installation of firestops. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

### 3.11 CLEANING OF PIPING SYSTEMS

- A. General cleaning of piping systems. Purge pipe of construction debris and contamination before placing the systems in service. Provide and install temporary connections as required to clean, purge, and circulate.

### 3.12 FLUSHING AND TESTING

- A. Testing and flushing of installation of sprinkler system shall be in accordance with NFPA 13, and NFPA 25.
- B. Flush sprinkler piping in accordance with NFPA 13. Additionally, flush all alarm valves, and all main piping up to valve.
- C. In addition to NFPA 13 required tests, provide flow switch test and tamper switch test for each device, and verify alarm valve operation.
- D. All tests shall be witnessed by Architect / Engineer. Contractor shall notify Architect / Engineer 7 working days in advance.

### 3.13 EXCAVATING, TRENCHING, AND BACKFILLING

- A. Perform excavation, trenching, and backfilling for this portion of the work in accordance with the specifications.

### 3.14 PIPE MARKERS

- A. Identify interior exposed piping and piping in accessible chases or plenums with Opti-Code Brady Pressure Sensitive Adhesive Pipe Markers, consisting of pipe marker and direction of flow arrow tape. Clean pipe prior to installation. Background colors of markers, arrows, and tape for each type of system shall be the same. Meet ANSI/OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- B. Identify exterior and mechanical room piping with Snap Around pipe markers through 4-inch pipe and Strap Around markers 5-inch pipe and larger. Pipe markers consisting of pipe marker and direction of flow arrow tape; background colors of markers, arrows, and type for each type of system shall be the same. Meet ANSI / OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- C. Install identification in the following locations:
  - 1. Both sides of penetrations through walls, floors, and ceilings.
  - 2. Close to valves or flanges.
  - 3. Intervals on straight pipe runs not to exceed 50 feet
  - 4. Apply marker where view is obstructed.
- D. Pipe markers shall meet or exceed the specifications of the ASME A13.1 "Scheme for

Identification of Piping Systems”.

3.15 TESTING AND ACCEPTANCE

- A. Prior to connecting to the overhead sprinkler piping, flush the underground main. Secure required approvals of the flushing operations.
- B. Upon completion of the fire sprinkler system installation, test and retest the complete installation and make corrections as necessary to obtain acceptance by the Fire Marshall and/or any other authority having jurisdiction. Furnish test equipment and personnel required.

3.16 TRAINING

- A. At a time mutually agreed upon, provide 4 hours of instruction to the Owner's designated personnel on the operation and maintenance of the automatic sprinkler system and associated equipment. Owner's Operation and Maintenance Manual prepared for this project shall be used during the instruction.

END OF SECTION

## SECTION 22 01 00

### PLUMBING OPERATING AND MAINTENANCE MANUALS

#### PART 1 - GENERAL

##### 1.1 SECTION INCLUDES

- A. Compilation product data and related information appropriate for Owner's operation and maintenance of products furnished under Contract. Prepare operating and maintenance data as specified.
- B. Instruct Owner's personnel in operation and maintenance of equipment and systems.
- C. Submit three copies of complete manual in final form.

##### 1.2 SUBMITTALS

- A. Thirty (30) days after the Contractor has received the final scheduled identified submittals bearing the Architect/Engineer's stamp of acceptance (including resubmittals), submit for review one copy of the first draft of the Operating and Maintenance Manual. This copy shall contain as a minimum:
  - 1. Table of Contents for each element.
  - 2. Contractor information.
  - 3. All submittals, coordination drawings and product data, reviewed by the Architect / Engineer; bearing the Architect / Engineer's stamp of acceptance. (When submittals are returned from Engineer "Correct as Noted", corrected inserts shall be included.)
  - 4. All parts and maintenance manuals for items of equipment.
  - 5. Warranties (without starting dates)
  - 6. Certifications that have been completed. Submit forms and outlines of certifications that have not been completed.
  - 7. Operating and maintenance procedures.
  - 8. Form of Owner's Training Program Syllabus (including times and dates).
  - 9. Control operations/equipment wiring diagrams.
  - 10. Other required operating and maintenance information that are complete.
- B. Copy will be returned to the Contractor within 15 days with comments for corrections.
- C. Submit completed manuals in final electronic form to the Architect / Engineer one day after substantial completion, and prior to Owner's instructions. Include all specified data, test and balance reports, drawings, dated warranties, certificates, reports, along with other materials and information.
- D. The Architect/Engineer will review the manuals for completeness within fifteen (15) days.
- E. The Contractor shall be notified of any missing or omitted materials. The Manuals shall be reworked by the Contractor, as required, in the office of the Architect / Engineer. The manuals will not be retransmitted.
- F. Complete electronic manuals will be delivered to the Owner.

#### PART 2 - PRODUCTS

##### 2.1 BINDERS

- A. Commercial quality black three-ring binders with clear overlay plastic covers.

- B. Minimum ring size: 1 inch; Maximum ring size: 3 inches.
- C. When multiple binders are used, correlate the data into related groupings.
- D. Label contents on spine and face of binder with full size insert. Label under plastic cover.

## PART 3 - EXECUTION

### 3.1 OPERATION AND MAINTENANCE MANUAL

- A. Form for Manuals:
  - 1. Prepare data in form of an instructional manual for use by Owner's personnel.
  - 2. Format:
    - a. Size: 8-1/2 inch x 11 inch.
    - b. Text: Manufacturer's printed data or neatly typewritten.
  - 3. Drawings:
    - a. Provide reinforced punched binder tab and bind in text.
    - b. Fold larger drawings to size of text pages.
  - 4. Provide flyleaf indexed tabs for each separate product or each piece of operating equipment.
  - 5. Cover: Identify each volume with typed or printed title "Operating and Maintenance Instructions". List:
    - a. Title of Project
    - b. Identity of separate structures as applicable.
    - c. Identity of general subject matter covered in the manual.
  - 6. Binder as specified.
- B. Content of Manual:
  - 1. Neatly typewritten Table of Contents for each volume arranged in systematic order as outlined in the specifications.
    - a. Contractor, name of responsible principal, address and telephone number.
    - b. A list of each product required to be included, indexed to content of the volume.
    - c. List with each product, name, address and telephone number of:
      - 1) Subcontractor or installer.
      - 2) Maintenance contractor as appropriate.
      - 3) Identify area of responsibility of each.
      - 4) Local source of supply for parts and replacement.
    - d. Identify each product by product name and other identifying symbols as set forth in Contract Documents.
  - 2. Product Data:
    - a. Include those sheets pertinent to the specific product.
    - b. Annotate each sheet to:
      - 1) Identify specific product or part installed.
      - 2) Identify data applicable to installation.
      - 3) Delete references to inapplicable information. (All options not supplied with equipment shall be marked out indicated in some manner.
  - 3. Drawings:
    - a. Supplement product data with drawings as necessary to illustrate:
      - 1) Relations of component parts of equipment and systems.
      - 2) Control and flow diagrams.
    - b. Coordinate drawings with information in Project Record Documents to assure correct illustration of completed installation.
    - c. Do not use Project Record Documents as maintenance drawings.

4. Written text, as required to supplement product data for the particular installation:
  - a. Organize in consistent format under separate headings for different procedures.
  - b. Provide logical sequence of instructions for each procedure.
5. Copy of each warranty, bond and service contract issued.
  - a. Provide information sheet for Owner's personnel, giving:
    - 1) Proper procedures in event of failure.
    - 2) Instances that might affect validity of warranties or bonds.
6. Shop drawings, coordination drawings and product data as specified.

C. Sections for Equipment and Systems.

1. Content for each unit of equipment and system as appropriate:
  - a. Description of unit and component parts.
    - 1) Function, normal operating characteristics, and limiting conditions.
    - 2) Performance curves, engineering data and tests.
    - 3) Complete nomenclature and commercial number of replaceable parts.
  - b. Operating procedures:
    - 1) Start up, break-in, routine and normal operating instructions.
    - 2) Regulation, control, stopping, shut down and emergency instructions.
    - 3) Summer and winter operating instructions.
    - 4) Special operating instructions.
  - c. Maintenance procedures:
    - 1) Routine operations
    - 2) Guide to trouble-shooting.
    - 3) Disassembly, repair and reassembly.
    - 4) Alignment, adjusting and checking.
    - 5) Routine service based on operating hours.
  - d. Servicing and lubrication schedule. List of lubricants required.
  - e. Manufacturer's printed operating and maintenance instructions.
  - f. Description of sequence of operation by control manufacturer.
  - g. Original manufacturer's parts list, illustrations, assembly drawings and diagrams required for maintenance.
    - 1) Predicted life of part subject to wear.
    - 2) Items recommended to be stocked as spare parts.
  - h. As installed control diagrams by controls manufacturer.
  - i. Complete equipment internal wiring diagrams.
  - j. Each Contractor's coordination drawings.
  - k. As installed color coded piping diagrams.
  - l. Charts of valve tag number, with location and function of each valve.
  - m. List of original manufacturer's spare parts and recommended quantities to be maintained in storage.
  - n. Other data as required under pertinent sections of the specifications.
2. Prepare and include additional data when the need for such data becomes apparent during instruction of Owner's personnel.
3. Additional requirements for operating and maintenance data as outlined in respective sections of specifications.
4. Provide complete information for products specified in Division 22.
5. Provide certificates of compliance as specified in each related section.
6. Provide start up reports as specified in each related section.
7. Provide signed receipts for spare parts and material.
8. Provide training report and certificates.
9. Provide backflow preventer certified test reports.
10. Provide gas piping pressure test reports.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 05 00

### PLUMBING GENERAL PROVISIONS

#### PART 1 - GENERAL

##### 1.1 RELATED DOCUMENTS

- A. Except as modified in this Section, General Conditions, Supplementary Conditions, applicable provisions of the General Requirements, and other provisions and requirements of the contract documents apply to work of Division 22 Plumbing.
- B. Applicable provisions of this section apply to all sections of Division 22, Plumbing.

##### 1.2 CODE REQUIREMENTS AND FEES

- A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.
- B. Plumbing work shall comply with applicable inspection services:
  - 1. Underwriters Laboratories.
  - 2. National Fire Protection Association.
  - 3. State Health Department.
  - 4. Local Municipal Building Inspection Department.
- C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.
- D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.
- E. Obtain all permits required.

##### 1.3 CONTRACTOR'S QUALIFICATIONS

- A. An approved contractor for the work under this division shall be:
  - 1. A licensed specialist in this field and have the personnel, experience, training, skill, and organization to provide a practical working system
  - 2. Able to furnish evidence of having contracted for and installed not less than three systems of comparable size and type that has served their Owners satisfactorily for not less than three years.

##### 1.4 REFERENCE SPECIFICATIONS AND STANDARDS

- A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date bids are received. Requirements in reference specifications and standards are minimum for all equipment, material, and work. In instances where specified capacities, size, or other features of equipment, devices, or materials exceed these minimums, meet specified capacities.

##### 1.5 CONTRACT DRAWINGS

- A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.



## 1.6 PROJECT RECORD DOCUMENTS

- A. Maintain at the job site a separate set of white prints (blue line or black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various lines, valves, ductwork, traps, equipment, and other pertinent items, as installed. Include flow-line elevation of sewer lines. Record existing and new underground and under slab piping with dimensioned locations and elevations of such piping.
- B. At the conclusion of project, obtain without cost to the Owner, PDF files of the original drawings and transfer as-built changes to these. Prior to transmittal of corrected drawings, obtain four sets of full size prints of each drawing, regardless of whether corrections were necessary and include in the transmittal (two sets are for the Owner's use and one set is for the Architect and one set for Engineer's records). Delivery of these as-built prints and reproducible drawings is a condition of final acceptance. Provide record drawings in a digital format transmitted to the Owner, the Architect, and the Engineer.
- C. As-Built drawings should indicate the following information as a minimum:
  - 1. Indicate all addendum changes to documents.
  - 2. Remove Engineer's seal, name, address and logo from drawings.
  - 3. Mark documents RECORD DRAWINGS.
  - 4. Clearly indicate: DOCUMENT PRODUCED BY
  - 5. Indicate all changes to construction during construction. Indicate actual routing of all piping, ductwork, etc. that were deviated from construction drawings.
  - 6. Indicate exact location of all underground plumbing and flow line elevation.
  - 7. Indicate exact location of all underground plumbing piping and elevation.
  - 8. Indicate exact location of all underground electrical raceways and elevations.
  - 9. Correct schedules to reflect (actual) equipment furnished and manufacturer.
  - 10. During the execution of work, maintain a complete set of drawings and specifications upon which all locations of equipment, ductwork, piping, devices, and all deviations and changes from the construction documents in the work shall be recorded.
  - 11. Location and size of all ductwork and mechanical piping above ceiling including exact location of isolation of domestic and plumbing valves.
  - 12. Exact location of all electrical equipment in and outside of the building.
  - 13. Fire Protection System documents revised to indicate exact location of all sprinkler heads and zone valves.
  - 14. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
  - 15. Cloud all changes.

## 1.7 SPACE REQUIREMENTS

- A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

## 1.8 RELATION WITH OTHER TRADES

- A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements.
- B. Because of the complicated relationship of this work to the total project, conscientiously

study the relation and cooperate as necessary to accomplish the full intent of the documents.

- C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.
- D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.
- E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under that Division. Determine from the Contractor for the various trades, the Owner, and by direction from the Architect / Engineer, the exact location of all items.

#### 1.9 CONCEALED AND EXPOSED WORK

- A. When the word "concealed" is used in connection with insulating, painting, piping, ducts and the like, the work is understood to mean hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is understood to mean open to view.

#### 1.10 GUARANTEE

- A. Guarantee work for one year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. At the Owner's option, replacement of failed parts or equipment shall be provided.

#### 1.11 MATERIAL AND EQUIPMENT

- A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

#### 1.12 NOISE AND VIBRATION

- A. Select equipment to operate with minimum noise and vibration. If objectionable noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, rectify such conditions at no additional cost. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

#### 1.13 ACCEPTABLE MANUFACTURERS

- A. Manufacturers names and catalog number specified under sections of Division 22 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Where equipment or accessories are used which differ in arrangement, configuration, dimensions, ratings, or engineering parameters from those indicated on the Contract Documents, the Contractor is responsible for all costs involved in integrating the equipment or accessories into the system and for obtaining the intended performance from the system into which these items are placed. Any redesign costs associated with the integration of substitute equipment into the existing Contract Documents, shall be billed by the Architect/Engineers, on an hourly basis, to the substituting contractor. Resulting change orders from the redesign are the sole responsibility of the substituting contractor.
- B. Written notification of intent to use manufacturers other than those specified is required ten days prior to bid. Submittals shall be reviewed only after bidding and may be rejected if any

aspect of the equivalent product is deemed lesser than that of the specified product by the specifier. The contractor shall be responsible for ensuring alternates are equivalent to those specified. Submit a marked-up set of the relevant specification section indicating all variances, a comparison to the specified product, and of construction and performance criteria, complete design and performance data for the specified product and the proposed substitution for comparison to the Engineer. The Architect issues approvals of acceptable manufacturers as addenda to the Construction Proposal Documents.

#### 1.14 OPERATING TESTS

- A. After all plumbing systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect / Engineer. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit three copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

#### 1.15 WARRANTIES

- A. Submit three copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

#### 1.16 BUILDING CONSTRUCTION

- A. It shall be the responsibility of each sub-contractor to consult the Architectural and Engineering drawings, details, and specifications and thoroughly familiarize himself with the project and all job related requirements. Each subcontractor shall cooperate with the General Contractor to verify that all piping and other items are placed in the walls, furred spaces, chases, etc., so there will be no delays in the job.

### PART 2 - PRODUCTS – NOT USED

### PART 3 - EXECUTION

#### 3.1 OPENINGS

- A. Framed, cast or masonry openings for ductwork, equipment or piping are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

#### 3.2 HOUSEKEEPING PADS

- A. Provide equipment housekeeping pads under all floor mounted and ground mounted plumbing equipment, and as shown on the drawings.
- B. Concrete work as specified in Division 3.
- C. Concrete pads:
  - 1. 4 inch high, rounded edges, minimum 2500 psi unless otherwise indicated on the drawings
  - 2. Chamfer strips at edges and corner of forms.
  - 3. Smooth steel trowel finish.
  - 4. Doweled to existing slab
- D. Install concrete curbs around multiple pipe penetrations.

### 3.3 VANDAL RESISTANT DEVICES

- A. Provide a handle for each loose keyed operated valve and hose bibb on the project.
- B. Where vandal resistant screws or bolts are employed on the project, deliver to the Owner two suitable tools for use with each type of fastener used.
- C. Proof of delivery of these items to the Owner shall be included in the Operating and Maintenance Manuals.

### 3.4 INSTRUCTION OF OWNER'S PERSONNEL

- A. Prior to final inspection, conduct an on-site training program to instruct the Owner's operating personnel in the operation and maintenance of the plumbing systems.
  - 1. Provide the training during the Owner's regular working day.
  - 2. The Instructors shall each be experienced in their phase of operation and maintenance of building plumbing systems and with the project.
- B. Time to be allocated for instructions.
  - 1. Minimum of 8 hours dedicated instructor time.
  - 2. 4 hours on each of 2 days.
- C. Before proceeding with the on-site training program, submit the program syllabus; proposed time and dates; and other pertinent information for review and approval.
  - 1. One copy to the Owner.
  - 2. One copy to the Architect / Engineer.
- D. The Owner will provide a list of personnel to receive instructions, and will coordinate their attendance at the agreed upon times.
- E. Use the operation and maintenance manuals as the basis of instruction. Review contents of manual with personnel in detail to explain all aspects of operation and maintenance.
- F. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shut down of each item of equipment.
- G. Demonstrate equipment functions (both individually and as part of the total integrated system).
- H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.
- I. Submit a report within one week after completion of the training program that instructions have been satisfactorily completed. Give time and date of each demonstration and hours devoted to the demonstration, with a list of people present.
- J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he/she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.
- K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

### 3.5 EQUIPMENT IDENTIFICATION

- A. Provide a laminated engraved plastic nameplate on each piece of equipment and starter.
  - 1. Designation approved by Architect / Engineer.
  - 2. Equipment includes, but is not limited to, water heaters, pumps, boilers and utility controllers.
  - 3. Submit schedule of equipment to be included and designations.
- B. Provide nameplates with ½ inch high letters and fastened with epoxy or screws.

### 3.6 OBSTRUCTIONS

- A. The drawings indicate certain information pertaining to surface and subsurface obstructions which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
  - 1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
  - 2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.
- B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

### 3.7 PROTECTION

- A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

END OF SECTION

## SECTION 22 05 10

### PLUMBING CONTRACT QUALITY CONTROL

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Contract quality control including workmanship, manufacturer's instructions and demonstrations.

##### 1.2 QUALITY CONTROL PROGRAM

- A. Maintain quality control over supervision, subcontractors, suppliers, manufacturers, products, services, site conditions and workmanship to produce work in accordance with contract documents.

##### 1.3 WORKMANSHIP

- A. Comply with industry standards except when more restrictive tolerances or specified requirements indicate more rigid standards or more precise workmanship.
- B. Perform work by persons qualified to produce workmanship of specified quality.
- C. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, and racking. Under no conditions shall material or equipment be suspended from structural bridging.
- D. Provide finishes to match approved samples. All exposed finishes shall be approved by the Architect. Submit color samples as required.

##### 1.4 MANUFACTURER'S INSTRUCTIONS

- A. Comply with instructions in full detail, including each step in sequence.
- B. Should instruction conflict with Contract Documents, request clarification from Architect / Engineer before proceeding.

##### 1.5 MANUFACTURER'S CERTIFICATES

- A. When required in individual Specification Sections, submit manufacturer's certificate in duplicate, certifying that products meet or exceed specified requirements.

##### 1.6 MANUFACTURER'S FIELD SERVICES

- A. When required in individual Specification Sections, manufacturer shall provide qualified personnel to observe:
  - 1. Field conditions.
  - 2. Condition of installation.
  - 3. Quality of workmanship.
  - 4. Start-up of equipment.
  - 5. Testing, adjusting, and balancing of equipment.
- B. Representative shall make written report of observations and recommendations to Architect / Engineer.

## PART 2 - PRODUCTS

### 2.1 REFERENCE APPLICABLE SPECIFICATION SECTIONS

## PART 3 - EXECUTION

### 3.1 PROTECTION OF EQUIPMENT

- A. Do not deliver equipment to the project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather will be rejected, and the Contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.
- B. Adequately protect equipment from damage after delivery to the project. Cover with heavy tarpaulins, drop cloths or other protective coverings as required to protect from plaster, paint, mortar and/or dirt. Do not cover with plastic materials and trap condensate and cause corrosion.

END OF SECTION

## SECTION 22 05 12

### PLUMBING SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Prepare submittals as required by Division 1.
- B. The term submittal, as used herein, refers to all:
  - 1. Shop Drawings.
  - 2. Coordination Drawings.
  - 3. Product data.
- C. Submittals shall be prepared and produced for:
  - 1. Distribution as specified.
  - 2. Inclusion in the Operating and Maintenance Manual, as specified, in the related section.

##### 1.2 SHOP DRAWINGS

- A. Present drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.
- B. Show all dimensions of each item of equipment on a single composite Shop Drawing. Do not submit a series of drawings of components.
- C. Identify field dimensions; show relationship to adjacent features, critical features, work, or products.
- D. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.

##### 1.3 COORDINATION DRAWINGS

- A. Present in a clear and thorough manner. Title each drawing with project name. Identify each element of drawings by reference to sheet number and detail, or room number of contract documents. Minimum drawing scale:  $\frac{1}{4}$  inch = 1 foot - 0 inch.
- B. Prepare coordination drawings to coordinate installations for efficient use of available space, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
- C. For each mechanical room and for each outside equipment pad where equipment is located, submit plan and elevation drawings. Show:
  - 1. Actual mechanical equipment and components to be furnished.
  - 2. Service clearance.
  - 3. Relationship to other equipment and components.
  - 4. Roof drains and leader piping.
  - 5. Fire protection piping and equipment.
- D. Identify field dimensions. Show relation to adjacent or critical features of work or products.
- E. Related requirements:
  - 1. Ductwork shop drawings.



2. Coordination drawing specified in Division 26.

- F. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.
- G. Gas piping sketch indicating proposed location of piping prior to proceeding with the installation.

#### 1.4 PRODUCT DATA AND INSTALLATION INSTRUCTION

- A. Submit only pages which are pertinent to the project. All options which are indicated on the product data shall become part of the contract and shall be required whether specified are not.
- B. Mark each copy of standard printed data to identify pertinent products, referenced to specification section and article number.
- C. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions and required clearances.
- D. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.
- E. Mark up a copy of the specifications for the product. Indicate in the margin of each paragraph the following: "Comply, "Do Not Comply", or "Not Applicable". Explain all "Do Not Comply" statements.
- F. Provide a separate transmittal for each submittal item. Transmittals shall indicate product by specification section name and number. Separate all submittals into appropriate specification section number. Do not combine specification sections.

#### 1.5 MANUFACTURERS INSTRUCTIONS

- A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

#### 1.6 CONTRACTOR RESPONSIBILITIES

- A. Review submittals prior to transmittal.
- B. Determine and verify:
  - 1. Field measurements.
  - 2. Field construction criteria.
  - 3. Manufacturer's catalog numbers.
  - 4. Conformance with requirements of Contract Documents.
- C. Coordinate submittals with requirements of the work and of the Contract Documents.
- D. Notify the Architect/Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.
- E. Do not fabricate products, or begin work for which submittals are specified, until such submittals have been produced and bear contractor's stamp. Do not fabricate products or begin work scheduled to have submittals reviewed until return of reviewed submittals with Architect/Engineer's acceptance.

- F. Contractor's responsibility for errors and omissions in submittals is not relieved whether Architect/Engineer reviews submittals or not.
- G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect/Engineer reviews submittals or not, unless Architect/engineer gives written acceptance of the specific deviations on reviewed documents.
- H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
  - 1. Proper sizes and capacities.
  - 2. That the item will fit in the available space in a manner that will allow proper service.
  - 3. Construction methods, materials and finishes.
- I. Schedule submissions at least 15 days before date reviewed submittals will be needed.

#### 1.7 SUBMISSION REQUIREMENTS

- A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor.
- B. Shop drawing submittals required:
  - 1. Shop drawing submittals shall be individually submitted by specification section number in PDF format. Combined submittals will be returned for contractor to divide.
  - 2. Product Data: Submit the number of copies which the contractor requires, plus those which will be retained by the Architect/Engineer.
- C. Accompany submittals with transmittal letter, containing:
  - 1. Date.
  - 2. Project title and number.
  - 3. Contractor's name and address.
  - 4. The number of each Shop Drawing, Project Datum and Sample submitted.
  - 5. Other pertinent data.
- D. Submittals shall include:
  - 1. The date of submission.
  - 2. The project title and number.
  - 3. Contract Identification.
  - 4. The names of:
    - a. Contractor.
    - b. Subcontractor.
    - c. Supplier.
    - d. Manufacturer.
  - 5. Identification of the product.
  - 6. Field dimensions, clearly identified as such.
  - 7. Relation to adjacent or critical features of the work or materials.
  - 8. Applicable standards, such as ASTM or federal specifications numbers.
  - 9. Identification of deviations from contract documents.
  - 10. Suitable blank space for General Contractor and Architect/Engineer stamps.
  - 11. Contractor's signed and dated Stamp of Approval.
- E. Coordinate submittals into logical groupings to facilitate interrelation of the several items:
  - 1. Finishes which involve Architect/Engineer selection of colors, textures or patterns
  - 2. Associated items which require correlation for efficient function or for installation

## 1.8 SUBMITTAL SPECIFICATION INFORMATION

- A. Every submittal document shall bear the following information as used in the project manual:
  - 1. The related specification section number.
  - 2. The exact specification section title.
- B. Submittals delivered to the Architect/Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

## 1.9 RESUBMISSION REQUIREMENTS

- A. Make re-submittals under procedures specified for initial submittals.
  - 1. Indicate that the document or sample is a re-submittal.
  - 2. Identify changes made since previous submittals.
- B. Indicate any changes which have been made, other than those requested by the Architect / Engineer.

## 1.10 CONTRACTOR'S STAMP OF APPROVAL

- A. Contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
- B. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect/Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.
- C. Do not deliver any submittals to the Architect/Engineer that do not bear the Contractor's stamp of approval and signature.
- D. Submittals delivered to the Architect/Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

## 1.11 ARCHITECT/ENGINEER REVIEW OF IDENTIFIED SUBMITTALS

- A. The Architect/Engineer will:
  - 1. Review identified submittals with reasonable promptness and in accordance with schedule.
  - 2. Affix stamp and initials or signature, and indicate requirements for re-submittal or approval of submittal.
  - 3. Return submittals to Contractor for distribution or for resubmission.
- B. Review and approval of submittals will not extend to design data reflected in submittals which is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.
- C. Architect/Engineer's review and approval is only for conformance with the design concept of the project and for compliance with the information given in the contract.
  - 1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.

- 2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes or coordination with the work of other trades.
- D. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.

#### 1.12 SUBSTITUTIONS

- A. Do not make requests for substitution employing the procedures of this Section.
- B. The procedure for making a formal request for substitution is specified in Div. 1.

PART 2 - PRODUCTS - NOT USED.

PART 3 - EXECUTION - NOT USED

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 05 15

### PLUMBING EARTHWORK

#### PART 1 - GENERAL

- A. Excavate and backfill for pipe trenches for underground piping, and excavate for structures installed as part of plumbing work.

#### PART 2 - PRODUCTS - NOT USED

#### PART 3 - EXECUTION

##### 3.1 EXCAVATION

- A. Excavate trenches for underground piping to the required depth to ensure 2 foot minimum coverage over piping.
- B. Cut the bottom of the trench or excavation to uniform grade.
- C. Should rock be encountered, excavate 6 inches below grade, fill with bedding material and tamp well.
- D. Lay out alignment of pipe trenches to avoid obstructions. Assure that proposed route of pipe will not interfere with building foundation before any cutting is begun. Should interference be found, contact the Architect/Engineer before proceeding.

##### 3.2 BACKFILL

- A. Backfill shall not be placed until the work has been inspected, tested and approved. Complete backfill to the surface of natural ground or to the lines and grades shown on drawings. Except where special materials are requested, use suitable friable soils from other excavation as backfill material. Do not use peat, silt, muck, debris or other organic materials. Deposit backfill in uniform layers and compact each layer as specified in Division 2.
- B. Compacting Backfill. Place material in uniform layers of prescribed maximum thickness and wet or dry the material to optimum moisture content. Compact with power-driven tampers to the prescribed density. Place regular backfill in 8 inch maximum layers, loose measure. Compact to not less than 95 percent of maximum soil density as determined by ASTM D-698 Standard Proctor.
- C. Restoration. Compact backfill, where trenching or excavation is required in improved areas such as pavements, walks, and similar areas, to a condition equal to the adjacent undisturbed earth, and restore surface of the area to the condition existing prior to trenching or excavating operation.
- D. Provide 6 inch stabilized sand bed with 4 inch stabilized sand cover around each pipe.

##### 3.3 DISPOSAL OF EXCESS MATERIAL

- A. Remove excess excavation material or material unsuitable for backfill. Excess material can be spread on grade, or shall be removed from site as directed by the Owner/Architect.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 05 17

### PLUMBING ACCESS DOORS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install access doors in wall or ceiling locations as required or shown for access to valves, controls, regulating devices, water arresters and other equipment requiring maintenance, adjustment or operation.

#### PART 2 - PRODUCTS

##### 2.1 NON-FIRE RATED ACCESS DOORS

- A. 16-Gauge frames.
- B. 14-gauge steel panels.
- C. Continuous fully concealed hinges.
- D. Cylinder lock with key.
- E. Prime coat finish.
- F. Brushed satin stainless steel finish for restroom, kitchen or cafeteria installation.
- G. Material suitable for wall and/or ceiling mounting.

##### 2.2 FIRE RATED ACCESS DOORS

- A. UL listed, 1-1/2 hour Label "B", access doors.
- B. 16-Gauge stainless steel.
- C. 20-Gauge insulated sandwich-type door panel.
- D. Two inch thick with fire rated insulation.
- E. Continuous fully concealed hinge.
- F. Automatic closing and latching mechanism.
- G. Knurled knob and recessed key operation for Owner selection.
- H. Interior latch release slide for opening from inside.
- I. Prime coat finish.
- J. Material suitable for wall and/or ceiling mounting.

##### 2.3 ACCEPTABLE MANUFACTURERS

- A. Milcor.
- B. MIFAB.



- C. Acudor.
- D. Elmdor.
- E. Or approved equal.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Access doors specified in Division 22 will be installed by other crafts. Not all required access doors are shown. Coordinate with the Contractor to locate access doors for ease of operation and maintenance of concealed equipment.
- B. Installation shall be in accordance with the manufacturer's printed instructions.
- C. Minimum size required:
  - 1. 24 inch x 24 inch for plumbing multiple isolation valves and electrical related items in ceilings.
  - 2. 12 inch x 12 inch for plumbing for single isolation valve, hub drain or shock arrestor.

END OF SECTION

## SECTION 22 05 19

### PRESSURE AND TEMPERATURE INSTRUMENTS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. This section specifies gauges, thermometers, wells and/or pressure and temperature test stations to be installed as specified.

##### 1.2 RELATED WORK

- A. Division 22, Plumbing
  - 1. Plumbing General Provisions.
  - 2. Pipe and Pipe Fittings, General.
  - 3. Valves, Strainers and Vents.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS - GAUGES AND THERMOMETERS

- A. Terice.
- B. Taylor.
- C. Marsh.
- D. Weksler.
- E. Weiss.
- F. or approved equal.

##### 2.2 PRESSURE GAUGES

- A. Case and Ring: 4 inch type 304 stainless steel; liquid filled case with stainless steel bayonet ring.
- B. Dial: White aluminum with black markings.
- C. Window: Clear acrylic.
- D. Tube: Phosphor bronze and forged brass socket.
- E. Gauge accuracy: +/- 1 percent over operating range.
- F. For pulsating service, provide impulse dampers.
- G. Without flange for pipe mounting.
- H. With flange for wall mounting.
- I. Weiss Model: Domestic Water 4CTS LF (Lead Free) 0-100 PSI.

##### 2.3 THERMOMETER WELLS

- A. Brass or type 300 stainless steel. Machined bar stock, 1-piece construction (Lead Free).
- B. Where installed in insulated piping or vessels, provide with extension neck to match insulation thickness.

- C. Provide metal-to-metal contact with bulb chamber for maximum sensitivity.
- D. Wells shall be sized to extend a minimum of 50 percent into pipe.

#### 2.4 THERMOMETERS IN PIPING SYSTEMS OR VESSELS

- A. Die cast aluminum case with baked epoxy finish.
- B. Adjustable angle 9 inch scale length.
- C. Clear acrylic window.
- D. Brass stem, length to match well.
- E. Red or blue reading organic spirit filled-in magnifying glass column.
- F. White background with black figures and markings.
- G. Brass stems and union connections (Lead Free).
- H. Accuracy: +/- 1 percent of scale range.
- I. Range:
  - 1. Hot water lines: 30 deg. F to 240 deg. F.

#### 2.5 PRESSURE AND TEMPERATURE TEST STATIONS

- A. "Test Station" fitting to receive either a temperature or pressure probe. Fitting shall be solid brass with two valve cores of Nordel (Lead Free).
  - 1. Fitted with a color coded cap strap with gasket.
  - 2. Acceptable Manufacturer: Peterson Equipment Company.
  - 3. Provide with extension neck to match insulation thickness.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. Install in accordance with drawing details and manufacturer's recommendations.
- B. Provide a ball valve at each gauge (Lead Free).
- C. Locate gauges and thermometers to be easily readable from the floor at a 5 foot-6 inch eye level. Use adjustable angle or rigid stem as required. Install gauges in upright position.
- D. Install pressure gauges in the following locations: across pumps, domestic water service entrance. Pressure scale range 0 to 160 PSI.
- E. Install thermometer in the following locations: At hot water supply at water heater, and hot water return line at circulation pump.
  - 1. Hot water lines: 30 deg. F to 240 deg. F.

END OF SECTION

## SECTION 22 05 23

### VALVES, STRAINERS AND VENTS

#### PART 1 - GENERAL

##### 1.1 SECTION INCLUDES

- A. Plumbing Valves
- B. Pipe strainer and suction diffusers.

#### PART 2 - PRODUCTS

##### 2.1 VALVES

- A. Pressure Ratings:
  - 1. Unless otherwise indicated, use valves suitable for 125 minimum psig working steam pressure (WSP) and 450 deg. F.
  - 2. The pressure temperature rating of valves shall be not less than the design criteria applicable to components of the system.
- B. Balancing Valves (Manual)
  - 1. Provide balancing valves with:
    - a. Corrosion resistant plug with resilient seal when required.
    - b. O-ring stem seal.
    - c. Permanently lubricated, corrosion resistant bearings.
  - 2. Connections
    - a. Through 2-inch pipe size use threaded connections.
    - b. For valves 2-1/2-inch pipe size and larger shall be provided with 150 psig flange connections.
  - 3. Provide each valve with:
    - a. Memory stop.
    - b. Plastic drip cap.
    - c. 1/8-inch gauge tap.
  - 4. All valves for domestic use must be lead free.
- C. Thermal Balancing Valves (adjustable Temperature)
  - 1. Adjustable thermal balancing valve used for automatic balancing of circulation circuits in domestic hot water systems. Modulates flow rate in each circuit so hot water temperature at fixtures remains constant.
  - 2. Standards:
    - a. NSF/ANSI/CAN 372 low-lead laws, as certified by ICC-ES.
    - b. NSF/ANSI/CAN 61, commercial hot water 180 deg. F. as certified by ICC-ES.
    - c. Meets codes IPC and UPC.
  - 3. Maximum Working Pressure: 230 psig.
  - 4. Body Material: DZR low-lead brass.
  - 5. Connections: NPT female threaded.
  - 6. Hydraulic Seals: Peroxide-cured EPDM.
  - 7. Adjustable Balancing Cartridge: Stainless steel and copper.
  - 8. ABS Adjustable Knob: Temperature adjustment scale for manual setting and tamper-proof adjustment locking screw.
  - 9. Factory Setting: 130 deg. F.
  - 10. Outlet Temperature gauge: 2-inch diameter with optional dual-scale outlet, 30 to 180 deg. F.

11. Check Valve.
12. Isolation Ball Valves: Inlet and outlet low-lead brass.
13. Manufacturers:
  - a. Caleffi.
  - b. Acorn.
  - c. Cimberio Valve.
  - d. Or approved equal.

D. Ball Valves

1. Provide ball valves with:
  - a. Blowout proof stem.
  - b. Full size port, 316 stainless steel ball and stem.
  - c. Cast bronze body.
  - d. Threaded ends.
2. Seat, seals, thrust washers and packing shall be suitable for the intended service.
3. Service rating:
  - a. 150 psi saturated steam.
  - b. 600 psi WOG.
4. Provide with memory stop for balancing valves.
5. Where Viega ProPress fittings are used, Viega ProPress ball valves may be used.
6. All valves for domestic use must be lead free.

E. Thermostatic Mixing Valves

1. Manufacturers:
  - a. Watts.
  - b. Caleffi.
  - c. Lawler.
  - d. Or approved equal.
2. Valve: Lead free brass body, stainless steel or copper alloy, integral temperature adjustment, check valves. At fixture ASSE 1070.

F. Valve Connections

1. Provide valves suitable to connect to adjoining piping as specified for pipe joints. Use pipe size valves. Sweated joints are not allowed.
2. Thread pipe sizes 2 inches and smaller.
3. Flange pipe sizes 2-1/2 inches and larger.
4. Use screw to solder adapters for copper tubing.
5. Use grooved body valves with mechanical grooved jointed piping.
6. Use press valves when using copper press systems.

G. Check Valves

1. Bronze body, 2 inches and smaller, bronze disc (Teflon disc for steam service), regrinding swing check, screw-in cap, threaded connection (Lead Free).
2. Iron body, 2-1/2 inches and larger, bronze trim, non-slam: stainless steel pins and springs, and bronze plate or bronze mounted, regrind-renew check, bronze seat ring and disc. Provide either wafer or threaded lug (Lead Free).
3. Acceptable Manufacturers (All listed must be lead free):
  - a. Apollo.
  - b. Milwaukee.
  - c. Nibco.
  - d. Or approved equal.

H. Backflow Preventer (All valves for domestic use must be lead free):

1. Intermediate Atmospheric Vented Backflow Preventers: Lead-free, ASSE 1012,

same size as pipe, with intermediate atmospheric vent between independent check valves, bronze body with union ends, stainless steel springs, rated for 175 psig and 210°F. Watts LF9D or equal.

2. Acceptable Manufacturers (All listed must be lead free):
  - a. Watts.
  - b. Wilkins.
  - c. Or approved equal.
- I. Provide valves of same manufacturer throughout where possible.
- J. Provide valves with manufacturer's name and manufacturing location, duty and pressure rating clearly marked on outside of body.
- K. Where valves are installed in insulated piping, provide with extended neck so valve operator and stop plate clears the full thickness insulation.
- L. Provide valve, seat and trim materials suitable for the intended service.
- M. Provide memory stops for all valves used for throttling service. Valves for throttling service shall be butterfly, plug, globe or ball type.

## 2.2 PIPE SYSTEMS STRAINERS

- A. Body:
  1. Bronze "Y" pattern or basket as shown on the drawings.
  2. Line size.
  3. Threaded strainer blow down port.
  4. ASTM A #126 Class B Cast Iron Body.
- B. Construction:
  1. 2 inch size and smaller with screw connections rated 400 psi WOG.
  2. Over 2 inch size with flanged connections, rated 125 psi WOG.
- C. Fabricate screens of Monel or type 304 stainless steel:
  1. With 20 mesh woven wire in piping systems through 2 inches.
  2. With 0.045 perforations in piping systems 2-1/2 inches and 3 inches.
  3. With 0.125 perforations in piping systems 4 inches and larger.
- D. Start-up:
  1. Provide an additional fine mesh disposable screen for use during start-up operations.
  2. Remove after 30 days.
  3. Attach to piping for Owner's review.
- E. Acceptable Manufacturers (All listed must be lead free):
  1. Apollo.
  2. Crane.
  3. Mueller.
  4. Nibco.
  5. Zurn.
  6. Or approved equal.

## 2.4 VALVE SCHEDULE

- A. Domestic Service
  - 1. Gas shut-off service: UL approved for natural gas service.
    - a. Nibco Ball Valve, full port through 1 inch: T-585-70-UL.
    - b. Nibco Ball Valve conventional port 1-1/4 inch through 3 inch: T-580-70-UL.  
Mueller 1-1/4 inch through 4 inch: Lub-O-seal.
    - c. Milwaukee Full Port 1/4 inch-2 inch.
    - d. Or approved equal.
  - 2. Cold and Hot water service (all listed must be Lead Free):
    - a. Nibco Ball Valve full port through 2 inch: T-585-66-LF.
    - b. Nibco Ball Valve 2-1/2 inch and 3 inch conventional port: T-580-66-LF.
    - c. Viega ProPress Bronze Ball Valves (where Viega ProPress fittings are used).
    - d. Milwaukee Full Port 1/4 inch-2 inch.
    - e. Milwaukee Standard Port 2-1/2 inch & 3 inch.
    - f. Apollo Press Bronze Ball valves – 77 WLF.
    - g. Or approved equal.
  - 3. Check Valve (All listed must be Lead Free):
    - a. Nibco Check Valve: T - 413 - Y -LF (Teflon Seats).
    - b. Milwaukee Valve – 509T.
    - c. Apollo Check Valve: 163TLF.
    - d. Apollo Press Check Valve: 163TPR-LF.
    - e. Apollo Check Valve 2 inch and larger 910WE-LF (Wafer).
    - f. Or approved equal.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install valves with stems upright or horizontal, not inverted.
- B. Install valves for shut-off and isolating service at each piece of equipment, at vertical risers, and where shown on the drawings.
- C. Use ball valves in domestic hot water and domestic cold water systems.
- D. Use ball valves in circulating water systems, for balancing duty.
- E. Provide drain valves at main shut-off valves and low points of piping and apparatus so the systems can be entirely drained.
  - 1. 1 inch valve for pipes 6 inch and larger.
  - 2. 3/4 inch valve for pipes smaller than 6 inch.
  - 3. Terminate with pipe plug.
  - 4. Drain valves shall be ball valves.
- F. Provide isolation valves in domestic water lines to isolate all equipment, restrooms, hose bibbs, and where shown on the drawings.
- G. Where valves are installed in insulated pipe, valve operator shall have an insert so the lever or handle will not damage the insulation. Install handles so the lever or handles will not damage the insulation.
- H. Provide clearance for installation of insulation and access to valves.

- I. Provide access where valves are not exposed.
- J. Install backflow preventers in accordance with Oklahoma requirements maintaining minimum clearance distances for servicing and testing. Provide indirect waste piping with air gap installation from relief opening to above hub drain or floor drain.

### 3.2 VALVE TAGS

- A. Furnish valves with 1-1/2 inch diameter brass valve tags with stamped, black or red-filled numbers. Service designations shall be 1/4 inch letters, and valve numbers shall be 2 inch letters. Engineer shall approve Service designations. Secure tags to valves by use of brass "S" hooks or brass chain. Secure chain to valve by use of copper or Monel meter seals. Valve tags are not required if the valve is located within 3 feet of the equipment being served and the service is obvious.
- B. Mount charts and drawings listing functions of each valve and its location in a metal and glass frame. Place charts and drawings as directed; in addition, on the record drawings mark the symbols and furnish a valve schedule properly identifying the valve number, service, exact location, the material being piped, and the room number of area that the valve services. This schedule shall be furnished on reproducible drafting paper or film suitable for reproduction on an Ozalid machine. The Owner shall approve the size of drafting paper. Provide a copy of the valve chart in the Operating and Maintenance Manuals.

### 3.3 PIPE SYSTEMS STRAINERS

- A. Provide strainers in supply piping to circulating pumps, thermostatic mixing valves, before solenoid valves and trap primer valves.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 22 07 19

### PLUMBING PIPING INSULATION

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install piping insulation, jackets, accessories and covering of specified materials. The insulation shall be used for high and low temperature piping applications including domestic hot and cold water, roof and overflow drain sump bodies and rain leaders, horizontal sanitary and drain piping which receives condensate.

##### 1.2 QUALITY ASSURANCE

- A. The intent of insulation specifications is to obtain superior quality workmanship resulting in an installation that is absolutely satisfactory in both function and appearance. Provide insulation in accordance with the specifications for each type of service and apply as recommended by the manufacturer and as specified.
- B. An approved contractor for this work under this Division shall be:
  - 1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that have served their owners satisfactorily for not less than 3 years.
- C. All piping insulation used on the project inside the building must have a flame spread rating not exceeding 25 and a smoke developed rating not exceeding 50, as determined by test procedures ASTM E 84, NFPA 255 and UL 723. These ratings must be as tested on the composite of insulation, jacket or facing, and adhesive. Components such as adhesives, mastics and cements must meet the same individual ratings as the minimum requirements and bear the UL label.
- D. Condensation on any insulated piping system is not acceptable.
- E. Replace insulation damaged by either moisture or other means. Insulation that has been wet, whether dried or not, is considered damaged. Make repairs where condensation is caused by improper installation of insulation. Also repair any damage caused by the condensation.

##### 1.3 APPROVALS

- A. Submit product data on each insulation type, adhesive, and finish to be used in the work. Make the submittal as specified in Division 1 General Requirements and obtain approval before beginning installation. Include product description, list of materials and thickness for each service and location and the manufacturer's installation instructions for each product.
- B. Make a field application of each type of insulation to display the material, quality and application method. Obtain approval of the sample application before proceeding with installation of the work.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Glass fiber pipe insulation:
  - 1. Johns-Manville Micro-Lok AP-T.

2. Owens-Corning ASJ/SSL.
  3. Knauf ASJ/SSL.
- B. Cellular Glass Insulation (Foamglass):
1. Pittsburg Corning.
  2. Cell-U-Foam.
- C. Aluminum Jacketing:
1. Childers.
  2. Pabco.
  3. RPR.
- D. Fiberglass reinforcing cloth mesh:
1. Perma Glass Mesh.
  2. Alpha Glass Mesh.
  3. Childers Chil-Glas.
  4. Vimasco.
- E. Mastics and Adhesives
1. Childers.
  2. Foster.
  3. Vimasco.
  4. Armstrong 520 Adhesive.
- F. Elastomeric Insulation
1. Armacell.

## 2.2 FIBERGLASS PIPE INSULATION

- A. Heavy density, dual temperature fiberglass insulation with factory applied, all service, reinforced vapor barrier jacket having integral laminated vapor barrier. Provide with a factory applied pressure sensitive tape closure system and matching butt strips. Supply in thickness as shown.
1. Thermal conductivity 0.23 @ 75°F mean (ASTM 335).

## 2.3 ELASTOMERIC INSULATION

- A. Insulation material shall be flexible, closed-cell elastomeric insulation in tubular or sheet form. Material shall have a flame spread rating of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E84, latest revision. Sheet material with a thickness greater than ¾" shall have a flame spread rating of 25 or less and a smoke developed rating of 100 or less when tested in accordance with ASTM E84, latest revision. In addition, the product, when tested, shall not melt or drip flaming particles, and the flame shall not be progressive. In addition, all materials shall pass simulated end-use fire test. Minimum ¾" thick.
1. Thermal conductivity 0.27 at 75°F mean (ASTM C177 or C518).

## 2.4 CELLULAR GLASS INSULATION

- A. ASTM C552:
1. "k" value of 0.35 @ 75°F ("ksi" value of 0.047 @ 24°C);
  2. 8.0 lb./cu.ft. (128 kg/cu.m.) density.

## 2.5 INSULATION/SHIELD AT HANGERS

- A. Field fabricated: Use 360° sections of rigid foamglass insulation that will support the bearing

area at hangers and supports. Further support insulation at hangers and supports with a shield of galvanized metal covering at least half of the pipe circumference, and conforming to the schedule. Insulation shall extend at least 1" beyond metal shield on each end. When pipe is guided at top and bottom, metal shields shall cover the whole pipe circumference. Adhere metal shield to insulation so that metal will not slide with respect to insulation with 1/2" aluminum bands (2) per shield.

1. Sections of foam glass insulation may be used of the same outside diameter of the adjoining pipe insulation.
  2. Minimum thickness of foam glass insulation shall not be less than 1" thick.
- B. Pipe saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter or more than 22". Provide 18 gauge through 4" pipe and 16-gauge 5" pipe and above.

## 2.6 SEALANT, ADHESIVE AND FINISH

- A. Lap Adhesive. Provide Childers CP-82 adhesive.
- B. Vapor Barrier Finish:
1. Indoors: Provide as insulation coating Childers CP-35, white.
  2. Outdoors: Provide as insulation coating Childers Encacel X.
  3. Underground: Provide Childers CP-22/24 for fittings and areas. Pittwrap cannot be used.
- C. Sealant. Provide Childers CP-76 vapor barrier sealant.
- D. Lagging Adhesive. Provide Childers CP-50.
- E. Other products of equal quality will be acceptable only upon approval.

## 2.7 GLASS FIBER BLANKET INSULATION

- A. Minimum density of 1.0 PCF, 2" thick, installed R value to be 6.0 or better at 75°F mean, facing of 0.35 mil foil reinforced with glass yarn mesh and laminated to 40 lbs fire resistant kraft.

## PART 3 - EXECUTION

### 3.1 INTERIOR PIPING

- A. Cover all piping with glass fiber, heavy density, dual temperature pipe insulation with a vapor barrier jacket. Apply insulation to clean, dry pipes. Longitudinal seams shall be joined firmly together and sealed with self-sealing lap joints. Butt insulation joints firmly together and seal with a 3" wide ASJ butt strip seal. Longitudinal seams and butt strip laps shall be coated and sealed with CP-35 vapor barrier coating for chilled water piping applications.
- B. Install hanger with protective shield, on the outside of all insulation.
- C. Where domestic water pipes (1/2" & 3/4" pipe sizes) are installed on trapeze type hangers, provide galvanized sheet metal protection shields at these locations. Place insulation jacket directly on hanger. Incompressible, load bearing insulation segments are not required.
- D. Pipe Saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter. Provide 18-gauge through 4" pipe and 16-gauge for 5" pipe and

above.

- E. Seal ends of pipe for drinking chilled water insulation with vapor barrier mastic at valves, flanges, fittings and every 21' on straight runs of piping. Mastic should extend on top of ASJ jacket, across the glass, down onto the pipe making a complete seal.
- F. Apply a smooth flood coat of white lagging Foster 8142W over all exposed insulation.
- G. Piping to be insulated as specified above:
  - 1. All hot and cold water.
  - 2. Make-up water
  - 3. Horizontal sanitary drain piping that receives condensate
  - 4. Exposed to view storm drainage system including roof and overflow drain bodies, vertical piping from drain body and all horizontal rain leaders to first elbow turning down

### 3.2 FLANGE, VALVE AND FITTING INSULATION

- A. Cover valves and flanges with fabricated segments, fittings with two-piece factory molded fittings, and both of matching pipe insulation type and thickness equal to that of the adjoining pipe. Fittings and fabricated segments shall be securely held in place.
  - 1. Apply a tack coat of insulating mastic to the insulated fitting to produce a smooth surface.
  - 2. After mastic is dry, apply a second coat of vapor barrier mastic. Neatly embed with 10 x 10 fiberglass cloth into the tack coat.
  - 3. Overlap mastic and fiberglass cloth by 2" on adjoining sections of pipe insulation.
  - 4. Apply a second coat of mastic over the fiberglass cloth to present a smooth surface.
  - 5. Apply mastic to a wet film thickness of 3/64".
  - 6. Fabric shall not be visible after completion.
  - 7. Vapor seal flanges, valves and fittings with Childers CP-35.
- B. PVC fitting covers are not acceptable.

### 3.3 CONCEALED STORM DRAIN PIPING

- A. Provide flexible glass fiber insulation with factory-applied, reinforced UL labeled Foil-Skrim-Kraft (FSK) facing. Install insulation on clean, dry piping.
- B. Insulation shall be wrapped tightly on the piping with all circumferential joints and longitudinal joints overlapped a minimum of 2" with facing to the outside to obtain specified R-value using a maximum of 25% compression.
- C. Provide vapor retarder at penetrations, joints, seams and damage to the facing with staples and FSK foil tape. The facing shall be taped with a minimum 3" wide strip of reinforced foil tape. Pressure-sensitive tape shall be a minimum 3" (76mm) wide and shall be applied with moving pressure using an appropriate sealing tool. Staples shall be outward cinch and placed 6" (152mm) on center.
- D. Mechanical / Electrical rooms and above ceilings are considered concealed spaces.

### 3.4 MISCELLANEOUS

- A. Install materials after piping has been tested and approved.
- B. Apply insulation on clean, dry surfaces only.

- C. Apply weather protective finish on elastomeric insulation installed in non-conditioned spaces.  
Provide a minimum of three coats.

3.5 INSULATION THICKNESS

| <u>INSULATED UNIT</u>                                      | <u>THICKNESS<br/>(Inches)</u> |
|------------------------------------------------------------|-------------------------------|
| Roof Drain Bodies and Horizontal Roof Drain Leaders        | 1                             |
| Roof Overflow Drain Bodies and Horizontal Drain Leaders    | 1                             |
| Domestic Cold Water.                                       | 1                             |
| Horizontal Sanitary Drain Piping Which Receives Condensate | 1                             |
| Domestic Hot Water Piping, 1-1/2" Pipe and Smaller         | 1                             |
| Domestic Hot Water Piping, 2" Pipe and Larger              | 1-1/2                         |

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 08 00

### PLUMBING COMMISSIONING COORDINATION

#### PART 1 - GENERAL

##### 1.1 SUMMARY

- A. Section outlines commissioning requirements and activities of Contractor, Owner, CxA and Design Professionals as related to the Division 22 Plumbing.
- B. Related Sections:
  - 1. Division 01 – General Requirements.
  - 2. Division 22 – Plumbing.
  - 3. Division 23 – Mechanical.
  - 4. Division 26 – Electrical .

##### 1.2 DEFINITIONS

- A. Refer to Division 01 – General Requirements.

##### 1.3 CONTACT INFORMATION

- A. The Owner will contract directly for commissioning services.
  - 1. Commissioning Agent fee will be paid for directly by the owner.
  - 2. Cost of contractor coordination with the CxA is specified in this section.

#### PART 2 - PRODUCTS

##### 2.1 TEST EQUIPMENT

- A. Contractor shall provide all standard and specialized testing equipment required to perform Start-up and Functional Performance Testing. Test equipment required for Functional Performance Testing is listed below. Data logging equipment and software required to test equipment shall be provided by the Contractor.
- B. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 1.0°F and a resolution of + or - 0.2°F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

##### 2.2 OTHER CONTRACTOR PROVIDED EQUIPMENT:

- A. Ladders and/or lifts and appropriate fall protection as required by Contractor site requirements.

#### PART 3 - EXECUTION

##### 3.1 COORDINATION - GENERAL

- A. Except for the activities to be performed by the CxA called for herein, all component and system installation work required by the Division 22, 23 and 26 specifications including



specific contractor furnished items indicated by this Section shall be provided by the Contractor.

### 3.2 SUBMITTALS

- A. Plumbing
  - 1. Plumbing Equipment.

### 3.3 EQUIPMENT START-UP

- A. Notification
  - 1. Contractor shall provide ten Owner business days' notice to CxA, Owner and Design Team of start-up dates.
- B. Prior to start-up, contractor shall:
  - 1. Verify that equipment and systems are complete, accessible, correctly connected to utilities and ready for operation. Perform all pre-start inspections and tests as called for in Division 22.
  - 2. Comply with pre-start requirements of manufacturer and complete applicable documentation.
  - 3. Complete applicable sections of Pre-functional Checklists.
  - 4. Coordinate start-up attendance by manufacturer or authorized representative as required by specifications or manufacturer.
- C. At start-up, contractor shall:
  - 1. Supervise the activities of the authorized start-up technician or manufacturer's representative.
  - 2. Verify proper voltage, phase, drive rotation and any other conditions that may cause damage if not correct.
  - 3. Execute start-up under supervision of qualified contractor and equipment manufacturer personnel and in accordance with the manufacturer's instruction.
  - 4. Complete manufacturer start-up requirements and documentation. Provide a copy of documentation to the CxA for inclusion in the Cx Manual.
  - 5. Complete PFC's and provide documentation to CxA.
  - 6. Provide documentation of any issues noted during start-up to CxA, Owner and Design Team. Outline recommendations for corrective action.

### 3.4 PRE-FUNCTIONAL CHECKLISTS

- A. Contractor shall forward completed copies of PFC's to the CxA for inclusion into the Cx documentation. PFC's will be provided by the CxA. As an alternate, contractor shall submit their versions of the PFC's to the CxA for review and comment.
- B. Contractor shall complete PFC for each of the following equipment:
  - 1. Plumbing:
    - a. Domestic Hot Water Heater/Converter.
    - b. Recirculation Pump.
    - c. Mixing Valve.

### 3.5 FUNCTIONAL TESTING

- A. General.
  - 1. Contractor shall organize and schedule Construction Team members to execute the functional testing, which will be directed by CxA.

- B. Recirculation Pump
  - 1. Graphics.
  - 2. Start/Stop/Schedule.
  - 3. Pump Operation (On/Off/Hand/Auto).
  - 4. Temperature Sensor Calibration.
- C. Domestic Water Heater
  - 1. Graphics.
  - 2. Start/Stop Schedule.
  - 3. Discharge Temperature.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 11 16

### DOMESTIC WATER PIPING AND APPURTENANCES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install domestic hot and cold water piping.

##### 1.2 RELATED WORK

- A. Division 22 Plumbing
  1. Valves, Strainers and Vents.
  2. Pipe and Pipe Fittings – General.
  3. Plumbing Piping Insulation.
  4. Plumbing Fixtures and Fixture Carriers.

#### PART 2 - PRODUCTS

##### 2.1 PIPING AND FITTINGS

- A. Below Slab on Grade Piping for Water Entries:
  1. 2-inch and smaller, provide ASTM B88 Type K (heavy wall) annealed tempered (soft) seamless copper water tube. No joints below slab entries.
  2. 2-1/2-inch and 3-inch, provide ASTM B88 Type K (heavy wall) annealed tempered (soft) seamless copper water tube, 20 ft. straight lengths. One joint allowed below slab entry using wrought copper, solder-joint pressure fittings: ASME B16.22 with an approved brazing filler metal or pipe can be shop bent for no joint installation by using a "bending" temper tubing.
  3. 4-inch and larger, provide ductile iron pipe with mechanical joints, ANSI A21.6.
  4. 3 inch and larger, provide one-piece stainless steel IBR (in building riser), Watts or Ames.
- B. Below Slab on Grade Piping. Furnish ASTM B 88 and ANSI/NSF Standard 61 annealed tempered (soft), Type K copper water tube. Run continuous with no joints under the floor slab. Provide copper pipe corrosion protection as specified in this Section.
- C. Below Slab on Grade Piping: PEX tubing. Refer to section 22 11 21.
- D. Above Slab Piping. Provide seamless ASTM B 88 and ANSI/NSF Standard 61 drawn tempered (hard) Type L copper water tube with wrought copper or bronze fittings with solder-joints, ANSI B16.22. Solder material shall be 95-5 (lead free) (Tin-Antimony-Grade 95TA) ASTM B 32.
- E. Above Slab Piping: PEX tubing. Refer to section 22 11 21.
- F. Unions. Provide 150 lb. standard unions with ground joint and bronze seat. Flange joints larger than 2 inches. Provide dielectric isolating unions at junctions or connection between metallic piping of dissimilar metal. Provide pipe threads with standard taper pipe threads ANSI B2.1.
- G. Alternate Method of Joining Copper Pipe and Tubing: Press Fittings: Copper press fitting shall conform to the material and sizing requirements of ASME B16.51. O-rings for copper press fittings shall be EPDM. VIEGA. The system intended for use shall be approved by submittal. Systems from various manufacturers may vary in technology. The field personnel

shall carry training credentials from the approved manufacturer for the project. Mixing of fittings from different manufacturers is strictly prohibited.

## 2.2 WATER HAMMER ARRESTORS

- A. Provide piston type hydraulic engineered/manufactured water hammer arrestors in cold and hot water supply lines in chases or walls to each fixture branch or battery of fixtures serving quick closing valves of electrical, pneumatic, spring loaded type, or quick hand closure valves on fixture trim. Provide water hammer arrestors at the end of the branch line between the last two fixtures served. Provide Precision Plumbing Products, Inc., or equal. Size units according to water hammer arrestor's Standard PDI WH-201; refer to schedule on drawings.
- B. Install all water hammer arrestors so as to attain 100% effectiveness according to Plumbing and Drainage Institute PDI-WH201 Table 5, 6 and 6-A for water hammer arrestors.
- C. All water hammer arrestors shall be installed in a vertical position.
- D. All water hammer arrestors shall be accessible and shall have access panels where required. Arrestors located above ceilings in fixture drops will not be acceptable. Refer to sizing and placement data as indicated in PDI Standard PDI-WH-201.

## PART 3 - EXECUTION

### 3.1 DRAINAGE

- A. Install water piping systems with uniform horizontal grade of 1/8 inch per 10 foot, minimum, to low points to provide complete system drainage. Where constant pitch cannot be maintained for long runs, establish intermediate low points and rise to new level. Grade branches to drain to mains or risers. Unless otherwise indicated, terminate low points of risers with drain valve piped to nearest hub or floor drain.

### 3.2 STERILIZATION

- A. Prior to starting work, verify system is complete, flushed and clean.
- B. Disinfect water distribution system as required per state and local codes.
- C. Take samples no sooner than 24 hours after flushing, from 10 percent of outlets and from water entry, and analyze in accordance with AWWA C651, AWWA C652 or local authority having jurisdiction
  - 1. Obtain a minimum of one water sample flushing from at least 10% of the outlets and from the water entry.
  - 2. Take samples from faucets located at highest point in the building, and farthest point from the main water supply.
- D. After final flushing, remove aerators, clean and replace.

### 3.3 TESTING

- A. Test under a cold water hydrostatic pressure not less than operating pressure of system and carefully check for leaks. Test shall conform to requirements of IPC and local codes.
  - a. Repair leaks and retest system until proven watertight.
- B. Test the domestic water piping system at pressure, maintained for minimum of 15 minutes.

- C. Use only potable water for the test.
- D. Perform the test before fixtures, faucets, trim or final connections are made to equipment.
- E. If the system is tested in sections, the entire domestic water piping system shall be submitted to a final test, employing the specified procedure.
- F. Do not insulate or conceal piping systems until tests are satisfactorily complete.
- G. If any leaks or other defects are observed, suspend the test and correct the condition at once. Repeat testing until leaks are eliminated and the full test period is achieved.
- H. The satisfactory completion of testing does not relieve the Contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 22 11 21

### PEX PIPE AND FITTINGS

Uponor (Pipe Sizes ½" Through 3" Copper Tube Sizes)

#### PART 1 – GENERAL

##### 1.1 PIPE

- A. All hot and cold water PEX piping shall be manufactured by Uponor North America as AquaPEX and manufactured in a Standard Dimensional Ratio of 9 (SDR 9) and satisfy ASTM F876. As recognized in IAPMO Research and Testing File No. 3558, the tubing is produced from a cross-linked polyethylene compound complying with ASTM F877, has a 100 PSI pressure rating at 180 degrees.

##### 1.2 TECHNICAL DATA

- A. APPLICABLE STANDARDS
  1. AquaPEX is available in nominal sizes of ¼" through 3" diameter.
  2. Uncoated (natural) AquaPEX has a material designation of PEX 5106.
  3. Coated (blue and Red) AquaPEX has a material designation of PEX 5206.
  4. AquaPEX is recognized as conforming to ASTM F 877 by IAPMO R&T #3558, as well as conforming to NSF 61, NSF (J-00103652).
- B. APPLICABLE CODES
  1. 2018 International Plumbing Code (IPC).

##### 1.3 FITTINGS

- A. Uponor ProPEX®
  1. Third-party certified to NSF 14 and ASTM F1960 cold expansion with PEX reinforcing ring and shall comply with ASTM F876 and ASTM F877, ½ inch through 3 inch nominal pipe size fittings manufactured from the following material types:
    - a. Reinforcing cold expansion rings shall be manufactured from the same source as PEX-a piping manufacturer and marked "F1960".
  2. Uponor multiport tees and elbows: Multiple-outlet fitting complying with ASTM F877 (CAN/CSA B137.5); with ASTM F1960 inlets and outlets.
  3. Uponor manifolds Multiple outlet assembly with ASTM F1960 outlets.
    - a. Type L copper branch manifold with lead-free brass valve outlets.
    - b. Type L copper branch manifold without valves, with lead-free brass outlets.
- B. PEX-to-metal transition fittings:
  1. Manufacturers: Provide fittings from the same manufacturer of the piping.
  2. Third-party certified to NSF 14 and ASTM F1960 cold expansion with PEX reinforcing ring and shall comply with ASTM F876 and ASTM F877, 1/2 inch through 3 inch nominal pipe size fittings manufactured from the following material types:
    - a. PEX-a to thread transition: One-piece lead free (LF) brass fitting with male or female threaded adapter and ASTM F1960 cold expansion end, with PEX-a reinforcing cold-expansion ring.
    - b. PEX-a to copper sweat transition: One-piece lead free (LF) brass fitting with sweat adapter and ASTM F1960 cold expansion end, with PEX-a reinforcing cold expansion ring.



- c. PEX-a to copper press transition: One-piece lead free (LF) brass fitting with one ASME B16.51 copper press end and one ASTM F1960 cold expansion end, with PEX-a reinforcing cold expansion ring.
  - d. PEX-a to flange transition: Two-piece fitting with one steel flange conforming to ASME B16.5 and one lead free (LF) brass adapter conforming to ASTM F1960.
  - e. PEX-a to groove transition: One-piece lead free (LF) brass fitting with one CSA B242-05 groove end in either iron pipe size (IPS) or copper tube size (CTS) and one ASTM F1960 cold expansion end with PEX-a reinforcing cold expansion ring.
  - f. PEX-a to water meter transition: Two-piece fitting with one NPSM union thread and one ASTM F1960 cold expansion end, with PEX-a reinforcing cold expansion ring.
- C. PEX-to-thermoplastic transition fittings:
- 1. PEX-a to CPVC transition: Thermoplastic fitting with one spigot or socket end and one ASTM F1960 cold expansion end, with PEX-a reinforcing cold expansion ring.

#### 1.4 BASIC USE

- A. Uponor's AquaPEX cross-linked polyethylene (PEX) tubing and fittings for use in potable hot and cold water distribution, water service in buildings of any type of construction allowed under the applicable code.

### PART 2 – PRODUCTS

#### 2.1 MATERIALS

- A. The piping systems shall be constructed from a cross-linked polyethylene (PEX) tubing and fittings compounds.

#### 2.2 MANUFACTURERS

- A. PIPE AND/OR FITTINGS
  - 1. Uponor North America.

#### 2.3 SYSTEM DESIGN

- A. System design shall be in accordance with standard industry practice for water distribution systems and the manufacturer's instructions. The design shall take into consideration such factors as pressure and flow requirements, friction loss, operating temperatures, support spacing, joining methods, and thermal expansion and contraction.
- B. A Hazen-Williams C Factor of 150 shall be used in all hydraulic calculations.
- C. AquaPEX:
  - 1. PEX-a (Engel-method crosslinked polyethylene), ASTM F876 and F877 (CAN/CSA-B137.5), SDR 9, CTS, ½ inch through 3 inch nominal pipe size.
  - 2. Tubing is certified to NSF Standards 14 and 61 and listed by the Hydrostatic Stress Board of PPI at 200 degrees F. at 80 PSI, 180 degrees F. at 100PSI and 73.4 degrees F. at 160 PSI.
  - 3. Tubing sizes 2-inch, 2-1/2-inch and 3-inch reach out to manufacturer's representative for proper design flow and velocity sizing of pipe.

## PART 3 – EXECUTION

### 3.1 INSTALLATION PROCEDURES

- A. Installation practices such as pipe support spacing, bracing, allowance for thermal expansion/contraction, handling and storage shall be in accordance with the manufacturer's instructions and this specification.
- B. Special requirements for PEX pressure pipe and fittings:
  - 1. Installing contractor shall have successfully completed the Uponor Commercial Piping Systems Training Course (previously AquaPEX Certification) as given by an Uponor employee or Uponor Manufacturer's Representative.
  - 2. Special installation requirements as indicated above for all PEX pipe systems.
- C. Installers must be factory trained. The manufacturer's published installation instructions must be available on the job site if requested by Code officials.
- D. Reference the use of Table 6-6 by manufacturer for sizing PEX-a F 1960 domestic water systems.
  - 1. Reference the use of Uponor Pressure Loss charts for sizing PEX-a domestic water systems that fall outside of Table 6-6 parameters.
  - 2. Refer to Uponor Plumbing Installation Manual for PEX pipe installation instructions with and without PEX pipe support to ensure proper support and clamping requirements.

### 3.2 WATER SERVICE AND WATER DISTRIBUTION

- A. When installing pipe horizontally it must be laid or supported in a manner that assures the temperature expansion and contraction joints are securely accommodated for. The installation must comply with applicable codes and the manufacturer's published installation instructions.

### 3.3 LIMITATIONS

- A. Pipe and fittings are intended for use at a maximum working pressure of 130 psi at 120°F
- B. When installation is in fire resistive assemblies, evidence of compliance with IBC Section 713 (penetrations), UBC Section 709 (walls and partitions), and UBC Section 710 (floor / ceiling or roof / ceiling) and, as applicable, must be provided to the Code official for approval.
- C. The tubing and fittings must be protected from exposure to direct sunlight as noted in the manufacturer's installation instructions.
- D. Clearances from heat producing equipment must be in accordance with Section 802.10-5 of the IAPMO UMC, Section 503.10.5 of the 2009 International Fuel Gas Code®, Section M1306 of the IRC, and Section 304.6 of the 1997 UMC or, as applicable. In areas enforcing the Uniform codes PEX shall not be installed within 18 inches of a water heater.
- E. The tubing must be maintained at the proposed operating pressure during placement of concrete, or prior to backfilling when used in buried applications.
- F. Minimum bending radius is six times the outside tube diameter of the PEX tube. The outside diameter is the nominal diameter plus 1/8 inch (3.2 mm) or copper tube size (CTS).

- G. Installation of tubing must be pressure-tested in the presence of the building official for any possible leaks.
- H. The tubing must not be utilized as a source of electrical ground.
- I. The products are produced under a quality control program in Apple Valley, Minnesota with inspection by IAPMO Uniform ES.

#### 3.4 TESTING

- A. Test under a cold water hydrostatic pressure of 1-1/2 times operating pressure (150 psig minimum) and carefully check for leaks. Repair leaks and retest system until proven watertight.
- B. Test the domestic water piping system at 150psig hydrostatic pressure, maintained for 6 hours.
- C. Use only potable water for the test. Do not use compressed air.
- D. Perform the test before fixtures, faucets, trim or final connections are made to equipment.
- E. If the system is tested in sections, the entire domestic water piping system shall be submitted to a final test, employing the specified procedure.
- F. Do not insulate or conceal piping systems until tests are satisfactorily complete.
- G. If any leaks or other defects are observed, suspend the test and correct the condition at once. Repeat testing until leaks are eliminated and the full test period is achieved.
- H. The satisfactory completion of testing does not relieve the Contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories.

#### 3.5 WARRANTY

- A. Consult the manufacturer for specific 25 Year System Warranty information.

END OF SECTION

## SECTION 22 11 23

### DOMESTIC WATER PUMPS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. General characteristics for pumps specified in Division 22 - Plumbing.

##### 1.2 RELATED WORK

Requirements for pumps are specified in other sections of Division 22 - Plumbing, including the following:

- A. Division 22 Plumbing - Electrical Provisions of Plumbing Work.

##### 1.3 PUMP SELECTION

- A. Select pumps conservatively for scheduled conditions. Furnish pumps that have reasonably high efficiencies, with peak efficiency at or near rated conditions. Select pumps that will operate stably at 15' suction lift despite substantial reduction in head or substantial increase in delivery.
- B. If the pumps proposed are not considered suitable, submit manufacturer's data on other pumps, for review.
- C. Scheduled design flow, design head, pump efficiency, and motor horsepower are the minimum acceptable.
- D. The pump curve shall rise continuously from maximum flow to cut-off.
- E. Shut-off head approximately 10 percent greater than design head, unless otherwise indicated in pump schedules.
- F. Pump brake horsepower shall not exceed the motor horsepower rating over the entire operating range from shut-off to run-out.
- G. Select the pump for operation at or near peak efficiency.
- H. Cavitation-free at all points on the curve.
- I. Impeller diameter shall not exceed 90 percent of the maximum published diameter.

##### 1.4 PUMP SIZE AND TYPE

- A. Provide motor-driven pumps of the type and speed scheduled. Select pumps that are not overloaded throughout the entire range of pump operation. Provide pump connection sizes as indicated.
- B. Submit copies of manufacturer's performance curves, as shop drawings on each pump. Clearly mark the curves for each pump to indicate the diameter of the impeller and the selection point.

##### 1.5 CERTIFIED DATA

- A. Submit factory certified pump curves showing pump performance characteristics with

pump and system operating points plotted. Curves shall include as a minimum, flow (gallons per minute), head (feet of water), all available impeller diameters (inches), efficiency (percent), net positive suction head required (feet of water), brake horsepower, pump size and pump model. Show pump curves with system curve plotted.

## PART 2 - PRODUCTS

### 2.1 DOMESTIC HOT WATER CIRCULATING PUMPS (SMALL) FRACTIONAL HORSEPOWER

- A. Pump Construction:
  - 1. Wet-rotor, in-line, single stage.
  - 2. Bronze housings with ½" and ¾" sweat connections.
  - 3. Stainless steel housing with union threaded connections.
  - 4. Variable speed ECM.
  - 5. Integrated check valve inside union fitting on a sweat pump housing.
  - 6. Built-in 5-foot, 115 volt AC line cord with NEMA 3 Prong male plug or line cord.
  - 7. Timer control.
  - 8. Aquastat thermostatic control.
- B. Acceptable manufacturers:
  - 1. Bell & Gossett.
  - 2. Grundfos.
  - 3. Armstrong.
  - 4. Taco.

### 2.2 SUBMERSIBLE SUMP PUMPS

- A. Pump Construction:
  - 1. Hermetically sealed motor
  - 2. Positive action air operated diaphragm switch
    - a. High water alarm contact
    - b. Oil sensor alarm
  - 3. Housing and base cast iron construction
- B. Provide an alarm terminal cabinet.
  - 1. In the event of a high water alarm, energize a pulsing 2" diameter red signal light with graphic "sump pump high water alarm".
- C. Test the sump pump package by operation of the completed system through four cycles of operation.
  - 1. Fill the sump to operational levels.
  - 2. Visually check level controls.
  - 3. Pump operation.
  - 4. Verify absence of piping leaks, sump leaks, excessive noise, and excessive vibration.
  - 5. Verify alarms.
  - 6. Verify pump capacity.
- D. Sump pump package capacity shall be as scheduled.
- E. Acceptable Manufacturers:
  - 1. Zoeller Pumps.
  - 2. Little Giant Pump Co.
  - 3. Liberty Pumps.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install the pumps in accordance with Manufacturer's "Installation, Start-up and Service Instructions".
  - 1. Provide access space around pumps for service.
  - 2. Lubricate pumps prior to start-up.
  - 3. Install hot water circulator horizontally, properly supported to wall, in an accessible location for testing and maintenance at a height not to exceed 60" above finished floor. Install line size Ernst bronze rotating wheel, flow indicator with double window, downstream of circulator.
- B. Provide a line size isolation valve and strainer on the pump suction and a line size silent check valve and balancing valve on the pump discharge.
- C. Support piping adjacent to the pump such that no weight is carried on the pump casing. Decrease from pipe size with eccentric reducer on suction side and concentric increaser on discharge side.
- D. Ensure pumps:
  - 1. Operate at specified system fluid temperatures without vapor binding and cavitation.
  - 2. Are non-overloading in parallel and individual operation.
  - 3. Operate within 25 percent of midpoint of published maximum efficiency curve.
- E. Refer to pump detail on the Contract Drawings for piping accessories to be provided.

### 3.2 MANUFACTURER START-UP SERVICE ALIGNMENT

- A. After installation, the pumps and motors are to be aligned by the manufacturer or their representative utilizing a dial indicator. After completion, a formal report must be submitted by the Manufacturer to the Engineer prior to final acceptance. This report must include pump serial number, location, beginning and final alignment at a minimum.
  - 1. Technicians, as required, shall be trained and experienced in the work they perform (Contractor start-up / alignment is unacceptable).
- B. Before starting pumps, but after connecting piping:
  - 1. Align shafts and coupling with a precision dial indicator alignment instrument to the minimum tolerances .004 (TIR) per inch of coupling radius or as recommended by the manufacturer, whichever is the greater.
  - 2. Tabulate the actual pump alignment reading with manufacturer's minimum tolerances.
  - 3. Submit readings for approval.
  - 4. Include the approved readings in the Owner's Maintenance Manual.

### 3.3 FINAL PUMP FLOW CALIBRATION

- A. Based on the results of the final phases of the test and balance sequences, if the flow of the unthrottled pump is more than 10% above the scheduled values:
  - 1. Request detailed instructions from the pump manufacturer for the correct impeller diameter.
  - 2. Trim the impeller to the diameter recommended by the manufacturer, employing precision machinery.

- B. Enter the information on the final configuration of the pump in the Owner's Manual.
  - 1. Modify the pump nameplate to reflect the correct head and flow data and the impeller diameter.

#### 3.4 SPARE PARTS

- A. Provide the following spare parts and material to the Owner for his use after the warranty period.
  - 1. A mechanical seal for each pump.
  - 2. A set of bearings for each pump.

END OF SECTION

## SECTION 22 13 16

### SOIL, WASTE AND SANITARY DRAIN PIPING, VENT PIPING AND APPURTENANCES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install piping in buildings and underground laterals to 5 foot outside of building.

##### 1.2 RELATED WORK

- A. Site Work:
  - 1. Sanitary Sewers.
  - 2. Excavation, Trenching and Backfilling for Utilities.
- B. Division 22 Plumbing:
  - 1. Pipe and Pipe Fittings.
  - 2. Plumbing Fixtures and Fixture Carriers.
  - 3. Drains, Cleanouts and Hydrants.
  - 4. Earthwork.

##### 1.3 REFERENCES

- A. CISPI - Cast Iron Soil Pipe Institute.
- B. ASTM - American Society for Testing and Materials

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. All No-Hub clamps must have 4 bands minimum.
  - 1. No-Hub Clamps – Sanitary Waste:
    - a. Husky SD 4000.
  - 2. No-Hub Clamps – Vents
    - a. Husky SD – 2000.
    - b. Mission Rubber Co., LLC Heavy Weight Couplings.
  - 3. Clamp-All Hi-TorQ 80 or approved equal.
- B. Provide Fernco “Pro-flex” shielded couplings Series 3000 with one piece neoprene gasket for all cast iron pipe transitions to Schedule 40 DWV pipe penetrations through slabs. Sizes 1-1/2” through 8” Series 3000.
- C. Cast Iron Soil Pipe and Fittings:
  - 1. AB&I.
  - 2. Charlotte Pipe and Foundry Co.
  - 3. Tyler Pipe / Soil Division.
- D. PVC Soil Pipe and Fittings
  - 1. Charlotte Pipe.
  - 2. Westlake Pipe and Fittings.
  - 3. JM Eagle.



## 2.2 DRAIN PIPE AND FITTINGS

- A. Above Slab Piping:
  - 1. Schedule 40 PVC plastic pipe and DWV fittings with solvent welded joints.
  - 2. Pipe and fittings shall conform to ASTM D 1784-82.
- B. Above Slab Piping – Commercial Kitchen Fixture Drain Piping.
  - 1. Copper Tube: ASTM B 306, DWV.
  - 2. Fittings: ASME B16.29, wrought copper, or ASME B16.32, solvent.
  - 3. Joints: ASTM B 32, alloy Sn50 solder.
- C. Below Slab on Grade Pipe:
  - 1. Schedule 40 PVC plastic pipe and DWV fittings.
  - 2. Solvent welded DWV joints shall conform to IAPMO Installation Standard IS-9.
  - 3. Pipe and fittings shall conform to ASTM D 1784, ASTM D 1785, ASTM D 2665, ASTM D 3311 and NPS Standard 14 & 61.
- D. Below Slab on Grade Piping for Grease Waste:
  - 1. Schedule 40 CPVC pipe and fittings
  - 2. Solvent welded DWV joints shall conform to ASTM D3311 and be produced to dimensions specified in ASTM F 2618, NSF International, UPC, IAPMO IGS 210 and International Plumbing Code.
  - 3. Solvent Cement, Heavy Body; mustard yellow color, as tested by ASTM F 2618 / ASTM F493.
  - 4. Manufacturer: Spears or equal.
- E. Below Slab on Grade Piping for grease waste:
  - 1. Service weight/cast iron hub and spigot pipe and fittings
  - 2. Compression type, with neoprene gaskets shall conform to ASTM C-564.
  - 3. Pipe shall conform to requirements of ASTM A74.
  - 4. All Cast Iron Soil Pipe and Fittings shall be marked with the collective trademark of the Cast Iron Soil Pipe Institute.

## 2.3 VENT PIPE AND FITTINGS

- A. Above Slab Piping. Provide Schedule 40 PVC plastic pipe and DWV fittings with solvent welded joints. Pipe and fittings shall conform to ASTM D 1784-82.
- B. Below Slab on Grade Piping:
  - 1. Provide Schedule 40 PVC with DWV fittings with solvent welded joints. Pipe and fittings shall conform to ASTM D1784-82.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. All above and below slab soil, waste, sanitary drain and vent piping installation methods shall be in accordance with Cast Iron Soil Pipe Institute Standards.
- B. Above ground installation in the horizontal position shall be supported at every hub (hub & spigot or hubless type). Hangers are to be placed within 12" of hub or coupling. For large diameter fittings, 5 inches and larger shall be braced to prevent horizontal movement. Every branch opening or change of direction, braces, blocks, rodding or other suitable method shall be used to prevent movement. Riser clamps to be used for vertical piping, not to exceed 15'-0" between clamps..

- C. All above and below slab PVC sanitary waste and vent piping installation methods shall be in accordance with IAPMO Installation Standard 18-9 for Schedule 40 PVC-DWV, per manufacturer's recommendations and applicable standards.
- D. Tracer wires shall be installed on all underground PVC sanitary sewer lines installed outside the building slab.
- E. All PVC underground shall be installed in accordance with ASTM D2321.

### 3.2 GRADE

- A. Give horizontal pipe grade of 1/4-inch per foot where possible, but not less than 1/8 inch per foot unless otherwise shown.
- B. Horizontal below grade 2" waste piping sloped at 1/4 inch per foot.
- C. Grease waste piping below grade sloped at 1/4 inch per foot.

### 3.3 DRAIN PIPE AND FITTINGS

- A. Offsets and Fittings.
  - 1. Use reduction fittings to connect two pipes of different diameter.
  - 2. Change directions by appropriate use of 45-degree wyes, long-sweep quarter-bends, and sixth-, eighth-, and sixteenth-bends. Sanitary tees can be used on vertical stacks. Use long sweeps at the base of risers.
  - 3. Provide a separate trap at each fixture, unless a trap is built into the fixture. Provide a deep seal trap at each floor drain and hub drain. Place traps so that the discharge from any fixture will pass through only one trap before reaching a building drain.
  - 4. Refer to Sanitary Drainage Code section for acceptable fittings to be used for changes in direction of drainage flow. Double combo sanitary fittings or double wye and 1/8<sup>th</sup> bend fittings are not allowed for horizontal to horizontal piping systems per Code.
- B. Hub Drains. Install hub drains where indicated, with the top of the hub 1/2 above the finished floor, unless otherwise indicated on the drawings.
- C. Cleanouts. Install cleanouts the same size as the soil waste lines in which the cleanouts are placed; however, no cleanout should be larger than 4 inches in diameter. Provide cover with vandal-resistant securing screw.
  - 1. Where cleanouts occur in pipe chases, bring the cleanouts through the walls and install covers. Where cleanouts occur in floor slabs, set flush. Reference drawing schedule.
  - 2. Provide cleanouts where soil lines change direction, every 75 foot on long runs, or as shown on the drawings, at the end of each horizontal waste line, and at the base of each riser (and at each increase in pipe size).
  - 3. Cleanouts shall occur at the end of each battery of water closets, urinals, lavatories, sinks, and single water closets. Cleanouts shall be installed so as to access the main sanitary or soil line. Extend and offset above flood rim of water closet.
  - 4. Double sanitary tees and double quarter bends do not allow for easy access to main lines, therefore these types of fittings are not allowed.

### 3.4 VENT PIPING

- A. Make vent connections to vent stacks with inverted wye fittings. Extend full-size vents through the roof to at least 12 inches above the roof.

- B. Coordinate with roof contractor for installation of vents thru roof. Flashing at vent penetration shall comply with the roofing manufacturer's requirements. Reference the Architectural Drawings for exact requirements.
- C. Locate vent piping through roof a minimum horizontal distance of not less than 10 feet from any air intake opening or supply fan.

### 3.5 TESTING

- A. Below Slab on Grade and All Floors in Multi-Story Buildings:
  - 1. Test pipe below slab on grade before backfilling and connecting to city sewers.
  - 2. Maintain not less than 10 foot of hydrostatic head for 1 hour without a leak.
  - 3. Before acceptance of the work the contractor must ensure the piping is in working order before and after the slab is poured. To ensure this the contractor must test completed systems in the presence of the Architect, Engineer and authorities having jurisdiction after installation is complete.
  - 4. Maintain the test on the system till after the slab is poured. Provide an accessible connection that may be reviewed by Architect, Engineer and authorities having jurisdiction prior to and after the slab is poured.
  - 5. Test drainage piping systems in accordance with governing codes and the requirements specified. Provide equipment and materials and make test connections required to execute tests.
  - 6. Test drainage and waste piping hydraulically by filling system to its highest point or, whichever is greater, at a static head of 10 feet. Leaks at any joint shall be sufficient cause for rejection.
  - 7. Air tests may be substituted for hydraulic tests by forcing air into the closed system at a uniform pressure sufficient to balance a column of 10 inch hg in height.
  - 8. Under any of the previously described tests, the water height shall remain constant, after stabilization, for not less than 15 minutes without any further addition of water.
- B. System Test. After the various sections of soil, waste and vent piping are installed, but before fixtures are connected, test the system by:
  - 1. Plugging outlets.
  - 2. Filling vertical sections of multiple story buildings of not less than three floors at a time with water. Provide wyes as required to facilitate plugging.
  - 3. Test for 6 hours without any drop in the water level.

### 3.6 RODDING SEWERS

- A. All sanitary soil and waste lines, both in the building and out, shall be rodded out and flushed out after completion of construction and prior to finish floor being installed. All work must be completed prior to substantial completion. All floor drains and cleanout locations must be included in this work.
- B. All sanitary soil and waste lines below building 3" and larger shall be internally videotaped at time of substantial completion. All videotaping shall include on-screen date and time, and include audio narration. All videotaping shall be provided by experienced individual in videotaping piping systems. An Owner's Representative shall be present during videotaping. Three copies of the videotape shall be delivered to the Owner for future records.
- C. This work shall be done in the presence of the Owner's Representative, as part of the Contract, to ensure all lines are clear, and any obstruction that may be discovered shall be removed immediately. Rodding shall be accomplished by utilizing the proper rotary head to clear sewer. Pipe sizes 8 inches and larger shall be hydro-flushed.

### 3.7 SMOKE TESTING

- A. Interior Plumbing Piping:
1. Contractor shall perform smoke testing on all interior sanitary sewer piping and sanitary vent piping above and below floor prior to cover-up.
  2. Artificially created smoke used must be a persistent white tracer smoke and produced by thermogenic chemical reaction. All smoke candles or smoke pencils to be used must be non-toxic and EPA approved. Provided by Superior Signal Smoke Candles.
  3. All plumbing fixtures must be installed including floor drains with wetted trap seals.
  4. Smoke testing shall be performed after completion of any videotaping, rodding or flushing of the sanitary system. Test must be performed prior to ceiling installation in new construction projects. Smoke is usually injected into the building through the two-way cleanout in the main sewer line leaving the building or a plumbing roof vent or fixture. Smoke will travel through the sanitary sewer and vent system lines and through the air spaces in the sewer lines and emanate from any leaks in the system. The smoke must reach the last roof vent in the system to indicate the entire system has been completely filled with smoke. The smoke must travel the full length of the piping system. Contractor must provide manpower as necessary to visually trace the flow of smoke through the wall cavities, annular floor/ceiling spaces, inject the smoke, observe the roof vents and to identify the integrity problems.
  5. Contractor shall provide a detailed list of findings and a drawing indicating the location, fixture type, type and size of pipe, and or description of type of problems found.
  6. Typical findings from indoor smoke testing may include:
    - a. Dry traps in floor drains.
    - b. Improperly capped sewer lines or vents.
    - c. Broken sewer lines or vents.
    - d. Cross connected sewer vents and drains.
    - e. The drawing of air emanating from sewer vents into intakes of air exchange systems.
    - f. Poorly glued pipe joints.
    - g. Loose no-hub couplings.
  7. An Owner's Representative shall be present during smoke testing.

### 3.8 SMOKE TESTING – LIQUID SMOKE SYSTEM

- A. Interior Plumbing Piping:
1. Contractor shall perform smoke testing for finding leaks in all interior of building sanitary sewer piping and sanitary vent piping above and below building slab prior to cover up.
  2. Contractor must use a laboratory tested safe liquid smoke with a patented liquid smoke generating system. The liquid smoke must be contained in a pressure tank with inline filter and quick disconnect.
  3. Smoke generating system must generate up to 3 hours or more of continuous and constant smoke. Generating system must have a metering valve to precisely control smoke flow and density. Smoke generating system must have a 4" x 6" industrial flexible mining duct for connection to vent stack or cleanout.
  4. Smoke generating system must be power full enough to push smoke through the smallest leaks.
  5. The liquid smoke must not leave any stains or odors.
  6. The liquid smoke shall not contain Zinc Chloride, a listed toxic compound in OSHA 1915,1000 – Air contaminants.

7. Smoke generating system must have a means to atomize the liquid smoke and have an enclosed fan system capable of up to 700 cfm with adjustable inlet damper control to adjust cfm as necessary for the size of system.
8. Provide Hurco "Power smoker " with Hurco "LiquiSmoke" system or approved equal.
9. All plumbing fixtures must be installed including floor drains with wetted trap seals.
10. Smoke testing shall be performed after completion of any videotaping, rodding or flushing of the sanitary system. Test must be performed prior to ceiling installation in new construction projects. Smoke is usually injected into the building through the two-way cleanout in the main sewer line leaving the building or a plumbing roof vent or fixture. Smoke will travel through the sanitary sewer and vent system and through the air spaces in the sewer lines and emanate from any leaks in the system. The smoke must reach the last roof vent in the system to indicate the entire system has been completely filled with smoke. The smoke must travel the full length of the piping system. Contractor must provide manpower as necessary to visually trace the flow of smoke through the wall cavities, annular floor/ceiling spaces, inject the smoke, observe the roof vents and to identify the integrity problems.
11. Contractor shall provide a detailed list of findings and a drawing indicating the location, fixture type, type and size of pipe, and or description of type of problems found.
12. Typical findings from indoor smoke testing may include:
  - a. Dry traps in floor drains.
  - b. Improperly capped sewer lines or vents.
  - c. Broken sewer lines or vents.
  - d. Cross connected sewer vents and drains.
  - e. The drawing of air emanating from sewer vents into intakes of air exchange systems.
  - f. Poorly glued pipe joints.
  - g. Loose no-hub couplings.
13. An Owner's Representative shall be present during smoke testing.

END OF SECTION

## SECTION 22 20 00

### PLUMBING PIPE AND PIPE FITTINGS - GENERAL

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install pipe and pipe fittings for piping systems specified in Division 22 - Plumbing.

##### 1.2 RELATED WORK

- A. Division 22 Plumbing
  1. Earthwork.
  2. Valves, Strainers and Vents.
  3. Insulation.
  4. Other Piping Sections.

#### PART 2 - PRODUCTS

##### 2.1 PIPE AND FITTINGS

- A. The particular type of pipe and fittings for each system is specified in the individual sections.

##### 2.2 JOINTS

- A. Make screwed joints using machine cut USASI taper pipe threads. Apply a suitable joint compound to the male threads only. Ream the pipe to full inside diameter after cutting. All-thread nipples are not permitted.
- B. Dissimilar Metals. Make joints between copper and steel pipe and equipment using insulating unions or couplings such as Crane Company #1259; EPCO as manufactured by EPCO Sales, Inc.; or an approved equal.
- C. Solder joints.
  1. Prior to making joints, cut pipe square and ream to full inside diameter. Clean exterior of pipe and socket. Apply a thin coat of suitable fluxing compound to both pipe and socket, and fit parts together immediately.
  2. Heat assembled joint only as required to cause the solder to flow. Run the joint full, slightly beaded on the outside, and wipe to remove excess solder.
  3. Use silver brazing alloy or Sil-Fos on underground water entry piping. Use lead free solder on all other copper piping.
- D. Make welded joints as recommended by the standards of the American Welding Society. Ensure complete penetration of deposited metal with base metal. Provide filler metal suitable for use with base metal. Keep inside of fittings free from globules of weld metal. The use of mitered joints is not approved.
- E. Flanged.
  1. Prior to installation of bolts, center and align flanged joints to prevent mechanical pre-stressing of flanges, pipe or equipment. Align bolt holes to straddle the vertical, horizontal or north-south centerline. Do not exceed 3/64" per foot inclination of the flange face from true alignment.
  2. Use flat-face companion flanges only with flat-faced fittings, valves or equipment.

- Otherwise, use raised-face flanges.
3. Install gaskets suitable for the intended service and factory cut to proper dimensions. Secure with manufacturers recommended gasket cement.
  4. Use ANSI nuts and bolts, galvanized or black to match flange material. Use ANSI 316 stainless steel nuts and bolts underground. Tighten bolts progressively to prevent unbalanced stress. Draw bolts tight to ensure proper seating of gaskets.
  5. Use carbon steel flanges conforming to ANSI B16.5 with pipe materials conforming to ASTM A 105 Grade II or ASTM A 108, Grade II, ASTM A 53, Grade B. Use slip-on type flanges on pipe only. Use welding neck type flanges on all fittings. Weld slip-on flanges inside and outside.
  6. Keep flange covers on equipment while fabricating piping. Remove when ready to install in system.
- F. No Hub. Hubless joints shall be made with wide body, neoprene sealing sleeve with stainless steel sleeve, coupling joints conforming to ASTM C 1277.
1. 4" pipe size and smaller coupling housing minimum of 3" width; 24 gauge Series 300 stainless steel with hi-torque clamps; neoprene coupling gasket.
  2. 6" through 10" pipe size coupling housing minimum of 4" width.
  3. Tighten clamps to within manufacturer's tolerances using preset torque wrench.
- G. Mechanical Joints. Provide a stuffing box type mechanical joint adapted to use gasket, cast iron gland and bolts. Coat bolts with bitumastic enamel. Use joint parts similar in design to one of the following:
1. Doublex Simplex Joint manufactured by the American Cast Iron Pipe Company, Birmingham, Alabama.
  2. U.S. joints manufactured by the United States Pipe and Foundry Company, Burlington, New Jersey.
  3. Boltite Joint manufactured by the McWane Cast Iron Pipe Company, Birmingham, Alabama.
  4. Flexlamp manufactured by the National Cast Iron Pipe Company, Birmingham, Alabama.
- H. Compression Joints for Cast Iron Water Pipe. Use Beltite, Tyton or Grip-Tite compression joints. Install in accordance with the manufacturer's recommendations for compression joints. Provide adequate concrete thrust blocks at changes of direction, as recommended by the manufacturer.
- I. Compression Gasket System. Bell and spigot cast iron pipe 4" and smaller, use flax-base lubricant, Tyler Ty-Seal Lubricant or Charlotte Regular Lubricant. 6" and larger use a neoprene base lubricant, Charlotte Adhesive Lubricant.
- J. Ring-Tite Joints: Ring-Tite gasketed sewer fittings for sanitary and storm. Furnish joints for installation manufactured per ASTM/CSA, Ipex, and J.M Eagle C900. Provide adequate concrete thrust blocks at changes in direction, as recommended by manufacturer. JM Eagle pressure rated PVC water pipe. ASTM D2241 pressure rating, ASTM D3219 joints, gaskets ASTM F477.
- K. Ball Joints. Where shown, provide flexible ball joints, made of carbon steel. Ball joints must have 15° of angular flexibility. Use welded or flanged ends, as required. Furnish with 11N gaskets.
- L. Mechanically Formed Tee Fitting. Mechanically extracted collars shall be formed in a continuous operation consisting of drilling a pilot hole and drawing out the tube surface to form a collar having a height not less than three (3) times the thickness of the branch wall. The branch tube shall be notched to conform with the inner curve of the run tube and shall have two (2) dimple / depth stops to insure that penetration of the branch tube

into the collar is of sufficient depth for brazing and that the branch tube does not obstruct the flow in the main line tube. Dimple depth stops shall be in line with the run tube. The second dimple shall be one quarter (1/4) inch above the first and shall serve as a visual point of observation. All joints shall be brazed with silver brazing alloy or Sil-Fos. Soft soldered joints shall not be allowed.

- M. Press fittings for copper pipe 1/2" to 4": Copper press fittings shall conform to the material and sizing requirements of ASTM B16.18 or ASME B16.22. O-rings for copper press fittings shall be EPDM. Pro-Press System manufactured by VIEGA. The system intended for use shall be approved by submittal. Systems from various manufacturers may vary in technology. The field personnel shall carry training credentials from the approved manufacturer for the project. Mixing of fittings from different manufacturers is strictly prohibited.
- N. Press fittings for steel pipe 1/2" to 2": Where accepted by local code for specific applications, Cold Press Mechanical Joint Fittings shall conform to material requirements of ASTM A420 or ASME B16.3 and performance criteria of ANSI/CSA LC4. Sealing system shall be EPDM or HNBR as appropriate for a defined application. MegaPress system manufactured by VIEGA or approved equal and include "Smart Connect" assurance that unpressed fittings will not hold pressure. The system intended for use shall be approved by submittal. Systems from various manufacturers may vary in technology. The field personnel shall carry training credentials from the approved manufacturer for the project. Mixing of fittings from different manufacturers is strictly prohibited.

## 2.3 UNIONS

- A. Use 150 lb. standard (300 lb. WOG) malleable iron, ground joint unions with bronze seat. Provide flanged joints on piping 2-1/2" and larger.
  - 1. Where pipe materials of different types join, use a dielectric union. Union shall be threaded, solder or as required for its intended use.

## 2.4 BRANCH CONNECTIONS

- A. Pipe 2" and Smaller. For threaded piping, use straight size reducing tee. When branch is smaller than header, a nipple and reducing coupling or swagged nipple may be used.
- B. 2-1/2" through 36": For welding piping, when branch size is the same as header size, use welding tee. Use Weld-o-let when branch is smaller than header. For threaded branch connections, use 3000 lb. full coupling or Thread-o-let welded to header.

## 2.5 GASKETS

- A. High Temperature Piping. Provide 1/16" thick ring gaskets of aramid reinforced SBR such as Garlock #3200 or 3400 or equal by Advanced Products and Systems.
- B. Other Piping. Provide ring rubber gaskets, Garlock #7992 or equal by Advanced Products and Systems. Use 1/8" thick cloth reinforced neoprene gaskets. For smaller than 6", use 1/16" thick gasket.

## 2.6 FLOORS AND CEILING PLATES

- A. Provide chrome-plated floor and ceiling plates around pipes exposed to view when passing through walls, floors, partitions, or ceilings in finished areas; size plates to fit pipe or insulation and lock in place.



## 2.7 DOMESTIC MANUFACTURE

- A. All piping material, pipe and pipe fittings shall be manufactured in the United States of America unless specifically named in these specifications.

## PART 3 - EXECUTION

### 3.1 PIPE FABRICATION AND INSTALLATION

- A. Make piping layout and installation in the most advantageous manner possible with respect to headroom, valve access, opening and equipment clearance, and clearance for other work. Give particular attention to piping in the vicinity of equipment. Preserve the required minimum access clearances to various equipment parts, as recommended by the equipment manufacturer, for maintenance.
- B. Cut all pipes to measurement determined at the site. After cutting pipe, remove burrs by reaming. Bevel plain ends of ferrous pipe.
- C. Install piping neatly, free from unnecessary traps and pockets. Work into place without springing or forcing. Use fittings to make changes in direction. Field bending and mitering is prohibited. Make connections to equipment using flanged joints, unions or couplings. Make reducing connections with reducing fittings only.
- D. Install piping without tapping out of the bottom of pipe.
- E. Press Connections: Copper and steel press fittings ½" through 4" shall be applied in accordance with the manufacturer's installation instructions. The tubing/pipe shall be fully inserted into the fitting and the tubing/pipe marked at the shoulder of the fitting. The fitting alignment shall be checked against the mark on the tubing/pipe to assure the tubing/pipe is fully engaged (inserted) in the fitting. The joints shall be pressed using the tool approved by the manufacturer. If soldering (thread adapters, etc.) near press fittings, take precautions to not damage the O-ring fittings. Maintain three pipe diameters or use a cooling agent. Viega-"Pro-Press".

### 3.2 WELD

- A. Weld and fabricate piping in accordance with ANSI Standard B31.1, latest edition, Code for Pressure Piping.
- B. Align piping and equipment so that no part is offset more than 1/16". Set fittings and joints square and true, and preserve alignment during welding operation. Use of alignment rods inside pipe is prohibited.
- C. Do not permit any weld to project within the pipe so as to restrict flows. Tack welds, if used, must be of the same material and made by the same procedure as the completed weld. Otherwise, remove tack welds during welding operation.
- D. Do not split, bend, flatten or otherwise damage piping before, during or after installation.
- E. Remove dirt, scale and other foreign matter from inside piping before tying into existing piping sections, fittings, valves or equipment.
- F. Bevel ends of ferrous pipe.

### 3.3 OFFSETS AND FITTINGS

- A. Due to the small scale of drawings, the indication of offsets and fittings is not possible. Investigate the structural and finish conditions affecting the work and take steps required to meet these conditions.
- B. Install pipe close to walls, ceilings and columns so pipe will occupy minimum space. Provide proper spacing for insulation coverings, removal of pipe, special clearances, and offsets and fittings.

### 3.4 SECURING AND SUPPORTING

- A. Support piping to maintain line and grade, with provision for expansion and contraction. Use approved clevis-type or trapeze-type hangers connected to structural members of the building. Single pipe runs to be supported by approved clevis type hangers. Multiple pipe runs to be supported by approved trapeze type hangers. Do not support piping from other piping or structural joist bridging.
- B. Provide supports both sides of elbows for pipe 6" and larger. For smaller pipe provide support within 12" of elbows and tees.
- C. Support vertical risers with steel strap pipe clamps of approved design and size, supported at each floor. Support piping assemblies in chases so they are rigid and self-supported before the chase is closed. Provide structural support for piping penetrating chase walls to fixtures. On cold water pipe, supports shall be outside the insulation.
- D. Where insulation occurs, design hangers to protect insulation from damage. Pipe saddles and insulation shields, where required, are specified in the appropriate insulation section and are sized in accordance with the schedule on the drawings.
- E. Install trapeze hangers, properly sized, to support the intended load without distortion.
- F. Use electro-galvanized or zinc plated threaded rods, nuts, washers and hangers.
- G. At outdoor locations, all supports, brackets and structural members shall be hot-dipped galvanized.
- H. Support spacing: As recommended by the project structural engineer and support manufacturer, but not more than listed below. Not to exceed spacing requirements of smallest pipe.

| Pipe Size       | Copper & Steel Max.<br>Support Spacing, Feet | Cast Iron Max.<br>Support Spacing, Ft. | Minimum Rod<br>Diameter,<br>Inches |
|-----------------|----------------------------------------------|----------------------------------------|------------------------------------|
| 1" & smaller    | 6                                            |                                        | 3/8                                |
| 1-1/4" & 1-1/2" | 8                                            | 5                                      | 3/8                                |
| 2"              | 10                                           | 5                                      | 3/8                                |
| 3"              | 10                                           | 5                                      | 1/2                                |
| 4" & 5"         | 10                                           | 5                                      | 5/8                                |
| 6" and above    | 10                                           | 5                                      | 3/4                                |

- I. PEX Piping:
  - a. Maximum hanger spacing, 2'-8".
  - b. Hanger rod diameter, 3/8 inch.
  - c. Hanger spacing per piping manufacturer's instructions when using horizontal

rigid metal channel to support piping.

### 3.5 PIPE SUPPORTS

- A. Provide P1001 or P 5000 Unistrut metal framing members and appurtenances for pipe support. Hot-dip galvanize members and appurtenances when located outside. Sagging of pipes or supports is not acceptable.
- B. Adjustable clevis hangers shall be used for single pipe supports; Anvil Fig. 260. When oversized clevis is used, a nipple shall be placed over the clevis bolt as a spacer to assure that the lower U-strap will not move in on the bolt. Provide adjustable clevis with a nut / washer above and below the hanger on the support rod. Ring type clevis hangers are not acceptable.
- C. Provide Anvil Figure 45 galvanized or primed and painted channel assembly for trapeze hangers.

### 3.6 PIPE SUPPORTS ON ROOF

- A. Support gas pipe on roof with Miro Industries Model 3-RAH-8 or approved equal with roller and fully adjustable height throughout pipe run. Base material shall be high density / high impact polypropylene with UV inhibitors and anti-oxidants. Provide with hot dip galvanized rod finish and framing. Nuts and washers shall be hot dip galvanized.

### 3.7 ANCHORS

- A. Provide anchors as required. Use pipe anchors consisting of heavy steel collars with lugs and bolts for clamping to pipe and attaching anchor braces. Install anchor braces in the most effective manner to secure desired results. Do not install supports, anchors or similar devices where they will damage construction during installation or because of the weight or the expansion of the pipe. When possible, install sleeves in structural concrete prior to pouring of concrete.

### 3.8 FLOOR PENETRATIONS

- A. At locations where pipe passes through floors, provide watertight concrete curb around penetration.

### 3.9 PIPE SLEEVES

- A. Sleeves through masonry and concrete construction:
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe.
  - 2. Size sleeve large enough to allow for movement due to expansion and to provide continuous insulation.
- B. Sleeves through gypsum wall construction.
  - 1. Fabricate sleeves of 16 gauge galvanized sheet metal.
- C. Sleeves through elevated slab construction.
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe with welded center flange in floor.
- D. Extend each sleeve through the floor or wall. Cut the sleeve flush with each wall surface. Sleeves through floors shall extend 2" above floor lines for waterproofing purposes. Slab on grade floors shall not be sleeved except where penetrating waterproofing membrane or insect control is required.

- E. Caulk sleeves water and air tight. Seal annular space between pipes and sleeves with mastic compound to make the space water and air tight.
- F. For sleeves below grades in outside walls, provide Thunderline Link-Seal or Advance Product and System Interlynx, with 316 stainless steel nuts and bolts, with cast iron pressure plate.
- G. Provide chrome plated escutcheon plates on pipes passing through walls, floors or ceilings exposed to view. At exterior walls, stainless steel sheet metal is to be used.
- H. For sleeves through fire and smoke rated walls, seal with a UL through-penetration firestop, rated to maintain the integrity of the time rated construction. Install in accordance with the manufacturer's installation instructions. Comply with UL and NFPA standards for the installation of firestops. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

### 3.10 ISOLATION VALVES

- A. Provide piping systems with line size shutoff valves located at the risers, at main branch connections to mains for equipment, to isolate central plant, and at other locations.

### 3.11 DRAIN VALVES

- A. Install drain valves at low points of water piping systems so that these systems can be entirely drained. Install a line size drain valve for pipes smaller than 2" unless indicated otherwise. For pipes 2-1/2" and larger, provide 2" drain valves unless indicated otherwise. Drain valves shall be plugged when not in use and at completion.

### 3.12 CLEANING OF PIPING SYSTEMS

- A. General cleaning of piping systems. Purge pipe of construction debris and contamination before placing the systems in service. Provide and install temporary connections as required to clean, purge and circulate.
- B. Install temporary strainers at the inlet of pumps and other equipment as necessary where permanent strainers are not indicated. Keep strainers in service until the equipment has been tested, then remove either entire strainer or straining element only. Fit strainers with a line size blow down ball valve and pipe to nearest drain. Blow down strainers, remove and clean as frequently as necessary.
- C. Phase One: Initial flushing of system. Remove loose dirt, mill scale, weld beads, rust and other deleterious substances without damage to system components. Open valves, drains, vents and strainers at all system levels during flushing procedures. Flush until "potable water clear" and particles larger than 5 microns are removed.
- D. Connect dead-end supply and return headers, even if not shown on the drawings, and provide terminal drains in bottom of pipe end caps or blind flanges.
- E. Dispose of water in approved manner.
- F. Phase Two: Cleaning of Piping Systems. Remove, without chemical or mechanical damage to any system component, adherent dirt (organic soil), oil, grease, (hydrocarbons), soldering flux, mill varnish, piping compounds, rust (iron oxide) and other deleterious substances not removed by initial flushing. Flush system and replace with clean water.

- G. Phase Three: Final flushing and rinsing: Flush and rinse until “potable water clear” and particles larger than 5 microns are removed. Operate valves to dislodge any debris in valve body. Dispose of water in approved manner.
- H. Submit status reports upon completion of each phase of work on each system.

### 3.13 TESTING

- A. Test piping after installation with water hydrostatic pressure of 1-1/2 times operating pressure (150 psig minimum) and carefully check for leaks. Repair leaks and retest system until proven watertight.
- B. Do not insulate or conceal piping systems until tests are satisfactorily complete.
- C. If any leaks or other defects are observed, suspend the test and correct the condition at once. Repeat testing until leaks are eliminated and the full test period is achieved.
- D. The satisfactory completion of testing does not relieve the Contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories.

### 3.14 PIPE MARKERS

- A. Identify interior exposed piping and piping in accessible chases or plenums with Opti-Code Brady Pressure Sensitive Adhesive Pipe Markers, consisting of pipe marker and direction of flow arrow tape. Clean pipe prior to installation. Background colors of markers, arrows and tape for each type of system shall be the same. Meet ANSI/OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- B. Identify exterior and mechanical room piping with Snap Around pipe markers through 4-inch pipe and Strap Around markers 5-inch pipe and larger. Pipe markers consisting of pipe marker and direction of flow arrow tape; background colors of markers, arrows and type for each type of system shall be the same. Meet ANSI / OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- C. Install identification in the following locations:
  - 1. Both sides of penetrations through walls, floors and ceilings.
  - 2. Close to valves or flanges.
  - 3. Intervals on straight pipe runs not to exceed 50 feet
  - 4. Apply marker where view is obstructed.
- D. Pipe markers shall meet or exceed the specifications of the ASME A13.1 “Scheme for Identification of Piping Systems”.

END OF SECTION

## SECTION 22 33 34

### ELECTRIC WATER HEATER (Commercial - Non-ASME)

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Electric water heaters for domestic water systems.

##### 1.2 RELATED WORK

- A. Division 22 Plumbing
  1. Domestic Water Piping.
  2. Plumbing Piping Insulation.
  3. Division 26 Electrical.

##### 1.3 WARRANTY

- A. Provide standard manufacturer's 1 year commercial warranty for mechanical and electrical and 5 year warranty for leaks. Warranty shall start the date of the substantial completion certificate.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. A. O. Smith.
- B. Bradford White.
- C. Rheem/Ruud.

##### 2.2 PRODUCTS

- A. Provide electric water heaters with kilowatt, recovery ratings, and storage capacities as scheduled on drawings.
- B. Provide a tank designed for 150 psig working pressure. Furnish glass-lined tank. Lining shall be corrosion-resistant.
- C. Furnish factory-assembled, integral units equipped as follows:
  1. Extruded high density anode rod.
  2. Individually mounted thermostat at each element with a high temperature cutoff.
  3. High temperature limit switch (energy cutout).
  4. UL rated.
  5. Temperature and pressure relief valve.
- D. Provide medium watt density elements having zinc-plated copper sheathing and prewired leads.
- E. The outer jacket shall be baked enamel finish and shall be provided with full size control compartment for performance of service and maintenance through hinged front panels and shall enclose the tank with foam insulation.

- F. Electrical junction box with heavy duty terminal block shall be provided.
- G. Heater shall have a three year limited warranty.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Installation shall meet or exceed all applicable federal, state and local requirements, referenced standards and conform to codes and ordinances of authorities having jurisdiction.
- B. All installations shall be in accordance with the manufacturer's published recommendations.
- C. Furnish all supports required by the equipment included in this Contract.
- D. Provide a wall support platform beneath heaters with integral drain pan.
- E. Furnish and install all necessary valves, traps, gauges, strainers, unions, etc. to facilitate proper functioning and servicing of equipment.
  - 1. Install a line size shutoff valve in cold water inlet and hot water outlet close to each heater.
  - 2. Provide a temperature gauge in the domestic hot water piping within five feet of outlet to each heater, upstream of all shut-off valves. Size and locate gauges to be easily readable from a standing position.
- F. Provide dielectric isolation device where copper lines connect to ferrous lines or equipment, such as dielectric coupling or dielectric flange fitting.
- G. Pipe relief valve discharge and all equipment drains indirectly to appropriate floor drain.
- H. Connect hot water return from circulation pump to cold water supply to heater.
- I. Set thermostats on domestic water heaters to delivery maximum water temperature as indicated on Contract Drawings. Set the operating and safety controls.
- J. Furnish and install an expansion tank on cold water supply to heater. Locate tank as close to water heater as possible between water heater and all check valves or backflow preventers. Expansion tank capacity shall be as scheduled on Contract Drawings. Install expansion tank in accordance with manufacturer's recommendations.

### 3.2 STARTUP

- A. Startup shall be performed by factory trained and authorized personnel. The factory representative shall also provide a technical and practical operation and maintenance training seminar including a hands-on operation and maintenance demonstration, and classroom presentation with handouts and visual aids, for no less than three physical plant personnel.

END OF SECTION

## SECTION 22 35 16

### INSTANTANEOUS GAS-FIRED TANKLESS WATER HEATERS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Tankless gas-fired water heaters for domestic water systems.

##### 1.2 RELATED ITEMS

- A. Division 22 Plumbing:
  - 1. Domestic Water Piping.
  - 2. Gas Piping.
  - 3. Flue Piping.
  - 4. Plumbing Piping Insulation.

#### PART 2 - PRODUCTS

##### 2.0 ACCEPTABLE MANUFACTURERS

- A. Navien
- B. Rinnai Corp.
- C. A. O. Smith.

##### 2.1 PRODUCT SPECIFICATIONS

- A. Commercial tankless, internally mounted, instantaneous, gas fired, direct vent water heater design certified to the ANSI Z21.10.3 / CSA 4.9 wall mounted for indoors.
  - a. Basis of design manufacturer: Navien.
- B. Adjustable hot water temperature range of 90°F to 140°F.
- C. Flow rates of 0.5 GPM up to 9.3 GPM (199 cfh).
- D. Heaters shall be microprocessor controlled (standard digital controller) and utilize a direct electronic ignition system (with no standing pilot) modulating gas valve, flow meter, flow control valve and temperature thermistors to maintain outlet water temperature between +/- 2°F of setpoint temperature.
- E. Safety Devices:
  - 1. Flame failure lockout.
  - 2. Boiling protection lockout.
  - 3. Thermal overheat protection.
  - 4. Lockout protection in the event of a blocked flue.
- F. Accessories:
  - 1. Temperature and Pressure Relief Valve: ASME labeled.
  - 2. Wall mounted support.
  - 3. Ball valves and unions at pipe connection points.
  - 4. Condensate drain neutralizer kit piped to floor sink.
  - 5. Provide a properly sized thermal expansion tank as scheduled on drawing.

##### 2.2 FLUE

- A. This water heater(s) shall be suitable for sealed combustion direct-venting air intake pipe



and exhaust pipe per manufacturer's instructions. Provide roof concentric vent kit.

### 2.3 ELECTRONIC DESCALER

- A. Electronic descaler to prevent calcium build-up in piping. Install unit on wall next to water heaters, coil wiring installed on cold water supply pipe to water heater per manufacturer's instructions. Coordinate 120 volt outlet for power supply with electrical contractor.
- B. Manufacturer: Clear Water Enviro technologies; model Scaleblaster SB-250 or approved equal.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install a line size valve in the cold water supply close to each heater and a line size plug cock in the gas supply close to each heater.
- B. Install all flue exhaust and air intake material and manifolds per manufacturer's instructions.
- C. Install according to manufacturer's specifications and pipes as shown. Provide accessories as required for a complete operating system.
- D. Coordinate with plumbing piping and related fuel piping, gas venting, ductwork and electrical work to achieve operating system. Locate equipment and arrange plumbing piping to provide access space for servicing all components.

### 3.2 WARRANTY

- A. Heat Exchanger: 304 stainless steel burner or copper heat exchanger warranted for 5 years from date of purchase in a commercial application. Three years from date of purchase when used as a circulating water heater with a hot water circulation loop.

END OF SECTION

## SECTION 22 40 00

### PLUMBING FIXTURES AND FIXTURE CARRIERS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install water closets, urinals, lavatories, electric drinking fountains, fixture carriers and plumbing appurtenances.

##### 1.2 RELATED WORK

- A. Division 22 Plumbing
  1. Drains, Hydrants and Cleanouts.
  2. Domestic Water Piping.
  3. Soil, Waste and Sanitary Drain Piping and Vent Piping.

##### 1.3 JOB REQUIREMENTS

- A. Furnish plumbing fixtures and trim as shown and specified. Provide faucets, fittings, supply stops and similar devices of a single manufacturer. Furnish faucets and supply stops with renewable seats. Porcelain to steel and enameled cast iron fixtures shall be acid resistant. Wall hung fixtures shall be installed with a fixture carrier.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Plumbing Fixtures (Vitreous China):
  1. American Standard.
  2. Kohler.
- B. Plumbing Faucets:
  1. American Standard.
  2. Chicago Faucets.
  3. Moen Commercial.
- C. Supports and Carriers:
  1. Wade.
  2. Zurn.
  3. J.R. Smith.
  4. Watts.
  5. MIFAB.
- D. Flush Valves:
  1. Sloan.
- E. Supplies, Stops and Chrome Plated Tubular Brass:
  1. McGuire.
  2. Brasscraft.
  3. ProFlo.
- F. Water Closet Seats:
  1. American Standard.
  2. Bemis.

3. Kohler.
- G. Floor Drains, Floor Sinks & Roof Drains:
1. Zurn.
  2. J.R. Smith.
  3. Sioux Chief.
  4. MIFAB.
  5. Wade.
- H. Cleanouts:
1. J.R. Smith.
  2. Zurn.
  3. MIFAB.
  4. Sioux Chief.
  5. Wade.
- I. Mop Sinks:
1. Fiat.
  2. Stern Williams.
  3. Acorn.
- J. Stainless Steel Sinks:
1. Elkay.
  2. ProFlo.
  3. Just.
- K. Water Hammer Arrestors:
1. Precision Plumbing Products.
  2. Sioux Chief.
  3. Watts.
- L. Thermostatic Mixing Valves
1. Watts.
  2. Caleffi.
  3. Symmons.
- M. Thermostatic Hot Water Balancing Valves
1. Caleffi.
  2. Cimberio.
  3. Jomar.
- N. Wall Hydrants:
1. Woodford.
  2. JR Smith.
  3. Wade
- O. Shower trim
1. Symmons.
  2. Moen.
- P. Laundry Box:
1. Sioux Chief.
  2. Oatey.
- Q. Water Box & Ice Machine box.
1. Sioux Chief.

2. Oatey.
- R. Trap Guards:
1. RectorSeal.
  2. Sioux Chief.
  3. MiFab
- S. Electric Water Cooler
1. Elkay
  2. Oasis.
- T. Bathtub Shower Combinations
1. Hamilton
  2. Aquatic.
  3. Aquarius.
- U. Commercial Kitchen Fixtures
1. Kitchen fixtures furnished by others. Provide rough-in and final connections as required. Coordinate with Kitchen Equipment Contractor. Refer to Architectural drawings and Plumbing Fixture Schedule on plan.

## 2.2 REQUIREMENTS

- A. Refer to the drawings for equipment to be supplied.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Installation shall be in accordance with the manufacturer's instructions. Set level and plumb. Secure in place to counters, floors and walls providing solid bearing and secure mounting. Bolt fixture carriers to floor and wall. Secure rough-in fixture piping to prevent movement of exposed piping. Cover exposed water closet bolts with bolt covers.
- B. Make rough-in and final connection of service to each fixture provided under this Section and other Sections, Equipment furnished by others, Architectural and Plumbing Drawings.
- C. Provide necessary stops, valves, traps, unions, vents, cold water, hot water, sanitary, etc. for a complete installation. Provide chrome plated rigid or stainless steel flexible supplies to fixtures with commercial grade quarter-turn loose key or removable handle stops, reducers, and escutcheons. Install fixture stops in readily accessible location for servicing.
- D. Provide isolation valves in domestic water lines to isolate all equipment, restrooms, hose bibbs, and where shown on drawings. Piping stub outs for supply stops shall be type L copper.
- E. Remove piping and services roughed-in incorrectly and install correctly, without cost.
- F. Exposed piping, fittings and appurtenances shall be chrome-plated brass. Cover pipe penetrations with escutcheons. Exposed traps, stops, piping and escutcheons to be chrome plated brass and incased with ADA compliant covers.
- G. Coordinate with the Equipment suppliers for locations and service required for equipment furnished or provided by others.
- H. All floor drains and floor sinks shall have a trap primer connection for trap seal protection.

- I. All floor drains and floor sink locations are to be coordinated with all equipment. Locate drains in mechanical equipment spaces to conform to drain locations of equipment furnished. Coordinate drain location with equipment and Architectural Drawings.
- J. All floor drains and cleanout covers are to be provided with stainless steel vandal resistant screws.
- K. Coordinate installation of exterior below grade grease interceptor and sampling port with site contractor.
- L. Coordinate with Kitchen Equipment Contractor . Provide rough-in piping, traps, tailpieces, indirect waste lines and make final and necessary connections for foodservice equipment. Install faucets, drains, vacuum breakers, check valves, water inlet fittings, filters, and strainers, furnished by foodservice equipment contractor. Provide condensate drain piping from cooler/ freezer evaporator or ice machines. Make all final and necessary plumbing connections. Provide suitable access panel as required in non-accessible ceilings and walls.
- M. Review millwork shop drawings. Confirm location and size of fixtures and openings before rough-in and installation.
- N. Test fixtures to demonstrate proper operation. Replace malfunctioning units or components. Adjust valves for intended water flow rate to fixtures without splashing, noise or overflow.
- O. Adjust stops or valves for intended water flow rate to fixtures without splashing, noise, or overflow.
- P. Clean plumbing fixtures and equipment. Do not permit use of fixtures by construction personnel.
- Q. Protect installed products from damage due to subsequent construction operations.
- R. Repair or replace damaged products before Date of Substantial Completion.

END OF SECTION

## SECTION 22 63 11

### GAS PIPING AND APPURTENANCES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install steel gas pipe inside buildings and on roof, including the supply line from the meter, service lines to gas equipment and appliances, termination of the service line with a plug valve, drip leg, pressure regulator and final connection to equipment and appliances with unions.
- B. Coordinate with Gas Company for gas meter capacity to handle increase in gas load.
- C. Extend steel gas piping from meter to inside the building and on roof to all fixtures, appliances and equipment requiring gas.

##### 1.2 RELATED WORK

- A. Division 22 Plumbing
  - 1. Plumbing Pipe and Fittings.
  - 2. Valves and Vents.

##### 1.3 UTILITY CONNECTIONS

- A. Make arrangements for and pay all fees and connection charges for obtaining service to the building.

#### PART 2 - PRODUCTS

##### 2.1 PIPE AND FITTINGS - ABOVE GRADE

- A. Pipe 2 inch and Smaller:
  - 1. Schedule 40 ASTM A 53 black steel pipe.
  - 2. Factory fabricated socket weld fittings or threaded. NFPA 54, ASME B31.1.
  - 3. Where approved for a specific project and where accepted by local code, cold press mechanical joint fittings shall conform to material requirements of ASTM A420 or ASME B16.3 and performance criteria of ANSI/CSA LC4. Sealing elements shall be HNBR and the fittings shall bear the CSA stamp to confirm acceptability for fuel gas systems. MegaPress system manufactured by VIEGA including "Smart Connect" or approved equal to assure unpressed fittings will not hold pressure. Installers shall carry training credentials from the manufacturer to confirm they have been instructed in the correct installation procedures.
- B. Pipe Larger than 2 inch:
  - 1. Schedule 40 ASTM A 53 black steel pipe.
  - 2. Factory fabricated butt weld fittings for welded steel pipes shall conform to ASTM A-234 WPB (seamless weld fittings).
- C. Unions:
  - 1. Standard 150 lb. (300 lb. water, oil or gas) malleable iron.
  - 2. Ground joint unions, with bronze seat.
  - 3. Flange joints for pipe larger than 2 inch in diameter.
- D. Flanges:
  - 1. Steel flanges. ANSI B16.5 and ASTM A-105.

## 2.2 VALVES

- A. See Section 22 05 23.

## 2.3 GAS PRESSURE REGULATOR

- A. Size the gas pressure regulator in accordance with the manufacturer's recommendations for flow quantities and reduced pressure as required for all equipment. Coordinate final equipment gas pressure requirements prior to ordering regulators. Provide Maxitrol or American Meter Company regulators or approved equal, suitable for indoor or outdoor installation. Regulators outside exposed to weather shall be installed with vent in vertical down position.
- B. All line pressure regulators shall be listed in accordance with ANSI (American National Standard) Z21.80 and CSA (Canadian Standards Association Standard) 6.22.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Installation Standards: Install gas piping in accordance with recommendations of the National Fire Protection Association.
- B. Drip Legs: Install a capped drip leg 6 inches long at the base of each vertical rise.
- C. Coating and Wrapping. Coat and wrap underground piping in accordance with the service utility company standards.
- D. Sleeves.
  - 1. Encase gas piping running in or through solid partitions with thin wall metal conduit. Sleeve piping and fittings shall be two pipe sizes, but not less than 1 inch larger than encased gas piping.
- E. Do not install gas piping exposed to view inside public area, or occupied spaces, without prior written approval.
- F. Provide test ports and isolation valves to enable proper testing of system in the future.
- G. Provide isolation valve and unions across regulators for proper removal.
- H. Provide anodeless transition risers where below grade polyethylene pipe changes to steel pipe above grade.
- I. Gas Pressure Regulators / Vents:
  - 1. Piping shall be sized in accordance with the regulator manufacturer's instructions. Never use pipe sizes smaller than the vent size; smaller pipe sizes restrict the gas flow. Where there is more than one regulator at a location, each regulator shall have a separate vent to the roof / outdoors or provide vent limiter.
  - 2. Support the vent pipe to eliminate strain on the regulator diaphragm case.
  - 3. Install vent piping from regulators to location to prevent gas smells from entering building. Do not locate the vent line terminus near windows, fans, or other ventilation equipment. See the installation instructions furnished with the regulator.
  - 4. Install double elbows and insect screen at end of piping to prevent moisture and insects from entering. Always point outdoor vent pipes in the downward position

5. to reduce the possibility of rain, snow, sleet, and other moisture entering the pipe. When installed inside building provide with vent limiter or route vents horizontally and terminate through building sidewall. The vent must be piped to the outside atmosphere using the shortest length of pipe, the fewest possible pipe elbows, and a pipe diameter as large as the vent size or larger. If a long gas run must be used, increase the pipe one nominal size every ten feet to keep the flow restriction as low as possible. Vents terminating through roof must have prior approval from Architect before installation. Through roof penetrations shall be minimized.
6. Regulators installed outside or on roof top: Install regulator vent turned downward with insect screen over vent opening. The vent shall be designed to prevent the entry of water, insects, or other foreign materials that could cause blockage.
7. Ensure the end of the vent line is away from ANY potential ignition sources. It is the installer's responsibility to ensure the vent line is exhausting to a safe environment
8. Adhere to all applicable codes and regulations.

### 3.2 TESTING GAS PIPING

- A. Preliminary gas test as required by Code, but minimum test pressure of 3 PSI held for not less than eight hours without noticeable drop.
- B. Test joints with a soap solution while lines are under pressure.
- C. Repair leaks.
- D. Final gas test shall be with a 24 inch column of mercury or a diaphragm gauge with a minimum dial size of 3-1/2 inches with a set hand and a pressure range not to exceed twenty (20) psig with 2/10-pound increments. The minimum test pressure shall not be less than 3 PSI and the maximum test pressure shall be 1.5 times system operating pressure. This test will be observed for no less than (30) thirty minutes with no drop in pressure.
- E. Provide copy of gas pressure test reports in Operations & Maintenance Manual.

### 3.3 IDENTIFICATION CONDUCTOR

- A. Spiral A #12 AWG insulated copper conductor the full length of the thermoplastic piping system. Fasten to the pipe at 3 foot intervals with plastic tie wraps.
- B. Terminate at each end in a 12 inch x 12 inch x 4 inch FRP junction box.
  1. Bolted gasketed cover with stainless steel screws.
  2. Screw type terminal strip.
  3. Legend on cover "gas pipe identification conductor."
- C. Set in concrete pad.

### 3.4 PAINT EXPOSED OUTSIDE GAS PIPE

- A. Interior and Exterior Gas piping shall be protected from rust.
- B. Paint pipe with a flat alkyd coating, clean pipe prior to painting by preparing surface by hand tool cleaning per SSPC-SP2-82, applying one coat of Glidden Y-590 Rustmaster Metal Primer White and top coat of Yellow Alkyd Flat Enamel.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 23 05 00

### MECHANICAL GENERAL PROVISIONS

#### PART 1 - GENERAL

##### 1.1 RELATED DOCUMENTS

- A. Except as modified in this Section, General Conditions, Supplementary Conditions, applicable provisions of the General Requirements, and other provisions and requirements of the contract documents apply to work of Division 23 Mechanical.
- B. Applicable provisions of this section apply to all sections of Division 23, Mechanical.

##### 1.2 CODE REQUIREMENTS AND FEES

- A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.
- B. Mechanical work shall comply with applicable inspection services:
  - 1. Underwriters Laboratories.
  - 2. National Fire Protection Association.
  - 3. State Health Department.
  - 4. Local Municipal Building Inspection Department.
- C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.
- D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.
- E. Obtain all permits required.

##### 1.3 CONTRACTOR'S QUALIFICATIONS

- A. An approved contractor for the work under this division shall be:
  - 1. A specialist in this field and have the personnel, experience, training, skill, and organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years.

##### 1.4 REFERENCE SPECIFICATIONS AND STANDARDS

- A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date bids are received. Requirements in reference specifications and standards are minimum for all equipment, material, and work. In instances where specified capacities, size, or other features of equipment, devices, or materials exceed these minimums, meet specified capacities.

##### 1.5 CONTRACT DRAWINGS

- A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of

various elements of work. Determine exact locations from field measurements.

## 1.6 PROJECT RECORD DOCUMENTS

- A. Maintain at the job site a separate set of white prints (black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various lines, valves, ductwork, traps, equipment, and other pertinent items, as installed. Include flow-line elevation of sewer lines. Record existing and new underground and under slab piping with dimensioned locations and elevations of such piping.
- B. At the conclusion of project, obtain without cost to the Owner, erasable mylars of the original drawings and transfer as-built changes to these. Prior to transmittal of corrected drawings, obtain 3 sets of blue-line prints of each drawing, regardless of whether corrections were necessary and include in the transmittal (2 sets are for the Owner's use and one set is for the Architect/Engineer's records). Delivery of these as-built prints and reproducible is a condition of final acceptance. Provide record drawings on one set each (reproducible Dayrex mylar film positives) and AutoCad 2014 files on disk (CD Rom).
- C. As-Built drawings should indicate the following information as a minimum:
  - 1. Indicate all addendum changes to documents.
  - 2. Remove Engineer's seal, name, address and logo from drawings.
  - 3. Mark documents RECORD DRAWINGS.
  - 4. Clearly indicate: DOCUMENT PRODUCED BY.
  - 5. Indicate all changes to construction during construction. Indicate actual routing of all piping, ductwork, etc. that were deviated from construction drawings.
  - 6. Indicate exact location of all underground mechanical piping and elevation.
  - 7. Indicate exact location of all underground electrical raceways and elevations.
  - 8. Correct schedules to reflect (actual) equipment furnished and manufacturer.
  - 9. Location and size of all ductwork and mechanical piping above ceiling including exact location of isolation of domestic and mechanical valves.
  - 10. Exact location of all electrical equipment in and outside of the building.
  - 11. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
  - 12. Cloud all changes.

## 1.7 SPACE REQUIREMENTS

- A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

## 1.8 RELATION WITH OTHER TRADES

- A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements.
- B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.
- C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.

- D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.
- E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under that Division. Determine from the Contractor for the various trades, the Owner, and by direction from the Architect/Engineer, the exact location of all items.

#### 1.9 CONCEALED AND EXPOSED WORK

- A. When the word "concealed" is used in connection with insulating, painting, piping, ducts and the like, the work is understood to mean hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is understood to mean open to view.

#### 1.10 GUARANTEE

- A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. At the Owner's option, replacement of failed parts or equipment shall be provided.

#### 1.11 MATERIAL AND EQUIPMENT

- A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

#### 1.12 NOISE AND VIBRATION

- A. Select equipment to operate with minimum noise and vibration. If objectionable noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, rectify such conditions at no additional cost. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

#### 1.13 ACCEPTABLE MANUFACTURERS

- A. Manufacturers names and catalog number specified under sections of Division 23 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Where equipment or accessories are used which differ in arrangement, configuration, dimensions, ratings, or engineering parameters from those indicated on the Contract Documents, the Contractor is responsible for all costs involved in integrating the equipment or accessories into the system and for obtaining the intended performance from the system into which these items are placed. Any redesign costs associated with the integration of substitute equipment into the existing Contract Documents, shall be billed by the Architect/Engineers, on an hourly basis, to the substituting contractor. Resulting change orders from the redesign are the sole responsibility of the substituting contractor.
- B. Written notification of intent to use manufacturers other than those specified is required ten days prior to bid. Submittals shall be reviewed only after bidding and may be rejected if any aspect of the equivalent product is deemed lesser than that of the specified product by the specifier. The contractor shall be responsible for ensuring alternates are equivalent to those specified. Submit a marked-up set of the relevant specification section indicating all variances, a comparison to the specified product, and of construction and performance criteria, complete design and performance data for the

specified product and the proposed substitution for comparison to the Engineer. The Architect issues approvals of acceptable manufacturers as addenda to the Construction Proposal Documents.

#### 1.14 OPERATING TESTS

- A. After all mechanical systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect/Engineer. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

#### 1.15 WARRANTIES

- A. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

#### 1.16 BUILDING CONSTRUCTION

- A. It shall be the responsibility of each sub-contractor to consult the Architectural and Engineering drawings, details, and specifications and thoroughly familiarize himself with the project and all job related requirements. Each sub-contractor shall cooperate with the General Contractor to verify that all piping and other items are placed in the walls, furred spaces, chases, etc., so there will be no delays in the job.

### PART 2 - PRODUCTS – NOT USED

### PART 3 - EXECUTION

#### 3.1 OPENINGS

- A. Framed, cast or masonry openings for ductwork, equipment or piping are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

#### 3.2 AIR FILTERS AND PIPE STRAINERS

- A. Immediately prior to substantial completion of the project, inspect, clean and service air filters and strainers. Replace air filters.

#### 3.3 LUBRICATION, REFRIGERANT AND OIL

- A. Provide a complete charge of correct lubricant for each item of equipment requiring lubrication.
- B. Provide a complete and working charge of proper refrigerant, free of contaminants, into each refrigerant system. After each system has been in operation long enough to ensure completely balanced conditions, check the charge and modify for proper operation as required.
- C. Provide a complete charge of special oil for refrigeration use, suitable for operation with refrigerant, in each system.

### 3.4 HOUSEKEEPING PADS

- A. Provide equipment housekeeping pads under all floor mounted and ground mounted HVAC equipment, and as shown on the drawings.
- B. Concrete work as specified in Division 3.
- C. Concrete pads:
  - 1. 4" high, rounded edges, minimum 2500 psi unless otherwise indicated on the drawings
  - 2. Chamfer strips at edges and corner of forms.
  - 3. Smooth steel trowel finish.
  - 4. Doweled to existing slab.
- D. Install concrete curbs around duct penetrations or multiple pipe penetrations.

### 3.5 INSTRUCTION OF OWNER'S PERSONNEL

- A. Prior to final inspection, conduct an on-site training program to instruct the Owner's operating personnel in the operation and maintenance of the mechanical systems.
  - 1. Provide the training during the Owner's regular working day.
  - 2. The Instructors shall each be experienced in their phase of operation and maintenance of building mechanical systems and with the project.
- B. Time to be allocated for instructions.
  - 1. Minimum of 4 hours dedicated instructor time.
- C. Before proceeding with the on-site training program, submit the program syllabus; proposed time and dates; and other pertinent information for review and approval.
  - 1. One copy to the Owner.
  - 2. One copy to the Architect/Engineer.
- D. The Owner will provide a list of personnel to receive instructions, and will coordinate their attendance at the agreed upon times.
- E. Use the operation and maintenance manuals as the basis of instruction. Review contents of manual with personnel in detail to explain all aspects of operation and maintenance.
- F. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shut down of each item of equipment.
- G. Demonstrate equipment functions (both individually and as part of the total integrated system).
- H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.
- I. Submit a report within one week after completion of the training program that instructions have been satisfactorily completed. Give time and date of each demonstration and hours devoted to the demonstration, with a list of people present.
- J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he/she has a proper understanding of the system,

that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.

- K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

### 3.6 EQUIPMENT IDENTIFICATION

- A. Provide a laminated engraved plastic nameplate on each piece of equipment and starter.
  - 1. Designation approved by Architect/Engineer.
  - 2. Equipment includes, but is not limited to, air handling units, fan coil units, variable volume boxes, fans, pumps, boilers and chillers.
  - 3. Submit schedule of equipment to be included and designations.
- B. Provide nameplates with 1/2" high letters and fastened with epoxy or screws.

### 3.7 OBSTRUCTIONS

- A. The drawings indicate certain information pertaining to surface and subsurface obstructions which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
  - 1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
  - 2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.
- B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

### 3.8 PROTECTION

- A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

### 3.9 INDOOR AIR QUALITY

- A. All equipment and ductwork shall be installed to allow sufficient space for testing, maintenance, and commissioning functions. Access doors or panels shall be installed in ventilation equipment, ductwork, and plenum enclosures for inspection and cleaning of outdoor air intakes, mixing plenums, up and downstream of coils, filters, drain pans and fans.
- B. Practice source control and eliminate potential contaminants in material selection, installation, and maintenance.
- C. Provide installation and disposal instructions for all materials and chemicals that are potential contaminants.
- D. Obtain and conform to the requirements of the Material Safety Data Sheets (MSDSs) in the use of materials.
- E. Utilize manufacturer's recommendations and provide installation instructions for all chemicals, compounds, and potential contaminants including pre-installation degassing if

required.

- F. Ventilate completed building prior to final completion using no less than design outside air for at least 48 hours before occupancy.
- G. Make provisions for controls to prevent the entry of air contaminants into the HVAC air distribution system.
- H. Steps shall be taken to ensure that the HVAC system continues to function effectively and are not damaged or contaminated during construction activities.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 23 05 12

### HVAC SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Prepare submittals as required by these specifications as outlined below.
- B. The term submittal, as used herein, refers to all:
  - 1. Shop Drawings.
  - 2. Coordination Drawings.
  - 3. Product data.
- C. Submittals shall be prepared and produced for:
  - 1. Distribution as specified.
  - 2. Inclusion in the Operating and Maintenance Manual, as specified, in the related section.

##### 1.2 SHOP DRAWINGS

- A. Present drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.
- B. Show all dimensions of each item of equipment on a single composite Shop Drawing. Do not submit a series of drawings of components.
- C. Identify field dimensions; show relationship to adjacent features, critical features, work, or products.
- D. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.

##### 1.3 COORDINATION DRAWINGS

- A. Present in a clear and thorough manner. Title each drawing with project name. Identify each element of drawings by reference to sheet number and detail, or room number of contract documents. Minimum drawing scale:  $\frac{1}{4}" = 1'-0"$ .
- B. Prepare coordination drawings to coordinate installations for efficient use of available space, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
- C. For each mechanical room and for each outside equipment pad where equipment is located, submit plan and elevation drawings. Show:
  - 1. Actual mechanical equipment and components to be furnished.
  - 2. Service clearance.
  - 3. Relationship to other equipment and components.
  - 4. Roof drains and leader piping.
  - 5. Fire protection piping and equipment.
- D. Identify field dimensions. Show relation to adjacent or critical features of work or products.

- E. Related requirements:
  - 1. Ductwork shop drawings.
  - 2. Coordination drawing specified in Division 26.
- F. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.
- G. Gas piping sketch indicating proposed location of piping prior to proceeding with the installation.

#### 1.4 PRODUCT DATA AND INSTALLATION INSTRUCTION

- A. Submit only pages which are pertinent to the project. All options which are indicated on the product data shall become part of the contract and shall be required whether specified are not.
- B. Mark each copy of standard printed data to identify pertinent products, referenced to specification section and article number.
- C. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions and required clearances.
- D. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.
- E. Mark up a copy of the specifications for the product. Indicate in the margin of each paragraph the following: COMPLY, DO NOT COMPLY, or NOT APPLICABLE. Explain all DO NOT COMPLY statements.
- F. Provide a separate transmittal for each submittal item. Transmittals shall indicate product by specification section name and number. Separate all submittals into appropriate specification section number. Do not combine specification sections.

#### 1.5 MANUFACTURERS INSTRUCTIONS

- A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

#### 1.6 CONTRACTOR RESPONSIBILITIES

- A. Review submittals prior to transmittal.
- B. Determine and verify:
  - 1. Field measurements.
  - 2. Field construction criteria.
  - 3. Manufacturer's catalog numbers.
  - 4. Conformance with requirements of Contract Documents.
- C. Coordinate submittals with requirements of the work and of the Contract Documents.
- D. Notify the Architect/Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.
- E. Do not fabricate products, or begin work for which submittals are specified, until such submittals have been produced and bear contractor's stamp. Do not fabricate products or

begin work scheduled to have submittals reviewed until return of reviewed submittals with Architect / Engineer's acceptance.

- F. Contractor's responsibility for errors and omissions in submittals is not relieved whether Architect / Engineer reviews submittals or not.
- G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect/Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations on reviewed documents.
- H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
  - 1. Proper sizes and capacities.
  - 2. That the item will fit in the available space in a manner that will allow proper service.
  - 3. Construction methods, materials and finishes.
- I. Schedule submissions at least 15 days before date reviewed submittals will be needed.

#### 1.7 SUBMISSION REQUIREMENTS

- A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor.
- B. Number of submittals required:
  - 1. Shop Drawings and Coordination Drawings: Submit one reproducible transparency and three opaque reproductions.
  - 2. Product Data: Submit the number of copies which the contractor requires, plus those which will be retained by the Architect/Engineer.
- C. Accompany submittals with transmittal letter, in duplicate, containing:
  - 1. Date.
  - 2. Project title and number.
  - 3. Contractor's name, address and contact number.
  - 4. The number of each Shop Drawing, Project Datum and Sample submitted.
  - 5. Other pertinent data.
- D. Submittals shall include:
  - 1. The date of submission.
  - 2. The project title and number.
  - 3. Contract Identification.
  - 4. The names of:
    - a. Contractor.
    - b. Subcontractor.
    - c. Supplier.
    - d. Manufacturer.
  - 5. Identification of the product.
  - 6. Field dimensions, clearly identified as such.
  - 7. Relation to adjacent or critical features of the work or materials.
  - 8. Applicable standards, such as ASTM or federal specifications numbers.
  - 9. Identification of deviations from contract documents.
  - 10. Suitable blank space for General Contractor and Architect/Engineer stamps.
  - 11. Contractor's signed and dated Stamp of Approval.

- E. Coordinate submittals into logical groupings to facilitate interrelation of the several items:
  - 1. Finishes which involve Architect/Engineer selection of colors, textures or patterns.
  - 2. Associated items which require correlation for efficient function or for installation.

#### 1.8 SUBMITTAL SPECIFICATION INFORMATION

- A. Every submittal document shall bear the following information as used in the project manual:
  - 1. The related specification section number.
  - 2. The exact specification section title.
- B. Submittals delivered to the Architect/Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

#### 1.9 RESUBMISSION REQUIREMENTS

- A. Make re-submittals under procedures specified for initial submittals.
  - 1. Indicate that the document or sample is a re-submittal.
  - 2. Identify changes made since previous submittals.
- B. Indicate any changes which have been made, other than those requested by the Architect / Engineer.

#### 1.10 CONTRACTOR'S STAMP OF APPROVAL

- A. Contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
- B. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect/Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.
- C. Do not deliver any submittals to the Architect/Engineer that do not bear the Contractor's stamp of approval and signature.
- D. Submittals delivered to the Architect/Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

#### 1.11 ARCHITECT / ENGINEER REVIEW OF IDENTIFIED SUBMITTALS

- A. The Architect / Engineer will:
  - 1. Review identified submittals with reasonable promptness and in accordance with schedule.
  - 2. Affix stamp and initials or signature, and indicate requirements for re-submittal or approval of submittal.
  - 3. Return submittals to Contractor for distribution or for resubmission.

- B. Review and approval of submittals will not extend to design data reflected in submittals which is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.
- C. Architect / Engineer's review and approval is only for conformance with the design concept of the project and for compliance with the information given in the contract.
  - 1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
  - 2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes or coordination with the work of other trades.
- D. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.

#### 1.12 SUBSTITUTIONS

- A. Do not make requests for substitution employing the procedures of this Section.
- B. The procedure for making a formal request for substitution is specified in Div. 1.

PART 2 - PRODUCTS - NOT USED

PART 3 - EXECUTION - NOT USED

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 05 13

### ELECTRICAL PROVISIONS OF HVAC WORK

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Electrical provisions to be provided as mechanical work are indicated in other Division 23 sections, on drawings, and as specified.
- B. Types of work, normally recognized as electrical but provided as mechanical, specified or partially specified in this Section, include but are not necessarily limited to the following:
  - 1. Motors for mechanical equipment.
  - 2. Starters for motors of mechanical equipment, but only where specifically indicated to be furnished integrally with equipment.
  - 3. Wiring from motors to disconnect switches or junction boxes for motors of mechanical equipment, but only where specifically indicated to be furnished integrally with equipment.
  - 4. Wiring of field-mounted float control switches, flow control switches, and similar mechanical-electrical devices provided for mechanical systems, to equipment control panels.
  - 5. Wiring of smoke detectors for shutdown of air handling equipment when a fire alarm system is not included in the project.
  - 6. Wiring of oil pump, vibration and oil level limit switches for cooling towers.
  - 7. Refrigerant monitor/sensor/alarming and field installed visual/audible display alarms.
  - 8. Pipe heat tracing.
  - 9. Cooling tower vibration switch/interlock/reset.
  - 10. Field interlock wiring from chiller: flow switches, pump aux. Contacts, pump start/stop.
  - 11. Power supply 120 VAC and control signal from chiller control panel to condenser water flow control valve installed in piping leaving chiller.
  - 12. Wiring of all related circulating water system chemical treatment devices.
    - a. Low voltage electric contacting water meter.
    - b. Solenoid valve/blow-down assembly.
  - 13. Radiant heater timer switches and/or thermostats.
  - 14. Low Voltage thermostat wiring.
- C. Refer to Division 23 Controls Sections for related control system wiring.
- D. Refer to Division 23 sections for specific individual mechanical equipment electrical requirements.
- E. Refer to Division 26 sections for motor starters and controls not furnished integrally with mechanical equipment.
- F. Refer to Division 26 sections for junction boxes and disconnect switches required for motors and other electrical units of mechanical equipment.

##### 1.2 RELATED WORK

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Specification Sections, apply to work of this Section.



### 1.3 QUALITY ASSURANCE

- A. Wherever possible, match elements of electrical provisions of mechanical work with similar elements of electrical work specified in Division 26 sections for electrical work not otherwise specified.
- B. For electrical equipment and products, comply with applicable NEMA standards, and refer to NEMA standards for definitions of terminology. Comply with National Electrical Code (NFPA 70) for workmanship and installation requirements.

### 1.4 SUBMITTALS

- A. Include in listing of motors, voltage, notation of whether motor starter is furnished or installed integrally with motor or equipment containing motors.

## PART 2 - PRODUCTS

### 2.1 MOTORS

- A. Provide motors for mechanical equipment manufactured by one of the following:
  - 1. Baldor Electric Company.
  - 2. Century Electric Div., Inc.
  - 3. General Electric Co.
  - 4. Louis Allis Div.; Litton Industrial Products, Inc.
  - 5. Lincoln Electric
  - 6. Marathon Electric Mfg. Corp.
  - 7. Reliance Electric Co.
  - 8. Westinghouse Electric Corp.
  - 9. WEG.
- B. Motor Characteristics. Except where more stringent requirements are indicated, and except where required items of mechanical equipment cannot be obtained with fully complying motors, comply with the following requirements for motors of mechanical work:
- C. Temperature Rating. Rated for 40 Degrees C environment with maximum 50 Degrees C temperature rise for continuous duty at full load (Class A Insulation).
- D. Provide each motor capable of making starts as frequently as indicated by automatic control system, and not less than 5 starts per hour for manually controlled motors.
- E. Phases and Current Characteristics. Provide squirrel-cage induction polyphase motors for 3/4hp and larger, and provide capacitor-start single-phase motors for 1/2hp and smaller, except 1/6hp and smaller may, at equipment manufacturer's option, be split-phase type. Coordinate current characteristics with power specified in Division 26 sections, and with individual equipment requirements specified in other Division 23 requirements. For 2-speed motors provide 2 separate windings on polyphase motors. Do not purchase motors until power characteristics available at locations of motors have been confirmed, and until rotation directions have been confirmed.
- F. Service Factor. 1.15 for polyphase motors and 1.35 for single-phase motors.
- G. Motor Construction. Provide general purpose, continuous duty motors, Design "B" except "C" where required for high starting torque.
  - 1. Frames. NEMA #56.

2. Bearings are to be ball or roller bearings with inner and outer shaft seals, regreasable except permanently sealed where motor is inaccessible for regular maintenance. Where belt drives and other drives produce lateral or axial thrust in motor, provide bearings designed to resist thrust loading. Refer to individual section of Division 23 for fractional-hp light-duty motors where sleeve-type bearings are permitted.
  3. Except as indicated, provide open drip-proof motors for indoor use where satisfactorily housed or remotely located during operation, and provide guarded drip-proof motors where exposed to contact by employees or building occupants. Provide weather-protected Type I for outdoor use, Type II where not housed. Refer to individual sections of Division 23 for other enclosure requirements.
  4. Provide built-in thermal overload protection and, where indicated, provide internal sensing device suitable for signaling and stopping motor at starter.
  5. Noise Rating: Provide "Quiet" rating on motors.
- H. All motors shall be premium efficiency.
- I. Provide an inverter duty motor on all equipment that utilizes a variable frequency drive.

## 2.2 EQUIPMENT FABRICATION

- A. Fabricate mechanical equipment for secure mounting of motors and other electrical items included in work. Provide either permanent alignment of motors with equipment, or adjustable mountings as applicable for belt drives, gear drives, special couplings and similar indirect coupling of equipment. Provide safe, secure, durable, and removable guards for motor drives. Arrange for lubrication and similar running-maintenance without removal of guards.

## 2.3 GENERAL REQUIREMENTS – SHAFT GROUNDING RINGS

- A. All motors operated on variable frequency drives shall be equipped with a maintenance-free, conductive microfiber shaft grounding ring to meet NEMA MG-1, 3.4.4.4.3 requirements, with a minimum of two rows of circumferential microfibers to discharge damaging shaft voltages away from the bearings to ground. SGR's Service Life: Designed to last for service life of motor. Provide AEGIS SGR Conductive MicroFiber Shaft Grounding Ring, or approved equal.
- B. Application Note: Motors up to 100 HP shall be provided with one shaft ground ring installed on either the drive end or non-drive end. Motors over 100 HP shall be provided with an insulated bearing on the non-drive end and a shaft grounding ring on the drive end of the motor with the exception of line contact bearings in the drive end of the machine. In this instance the line contact bearing must be electrically insulated and the AEGIS Bearing Protection Ring installed on the opposite drive end of the motor. Grounding rings shall be provided and installed by the motor manufacturer's recommendations.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install motors on motor mounting systems in accordance with motor manufacturer's instructions, anchored to resist torque, drive thrusts, and other external forces inherent in mechanical work. Secure sheaves and other drive units to motor shafts with keys and Allen set screws on flat surface of shaft. Unless otherwise indicated, set motor shafts parallel with machine shafts.

B. Verify voltage with Electrical Plans.

END OF SECTION

## SECTION 23 05 14

### HVAC CONDENSATE DRAIN PIPING SYSTEM

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide and install air conditioning condensate drains.

##### 1.2 RELATED WORK

- A. Division 23 - Mechanical
  - 1. Insulation.

#### PART 2 - PRODUCTS

##### 2.1 PIPE MATERIAL

- A. Type "L" copper with drainage pattern fittings.

#### PART 3 - EXECUTION

##### 3.1 INSTALLATION

- A. Install the system to facilitate easy removal.
  - 1. Use threaded plugged tee at each change of direction to permit cleaning.
  - 2. Install a cleanout every 50 feet of straight run piping.
  - 3. Maintain a positive slope on all piping.
- B. Install a water seal trap leg based on the fan pressure.
  - 1. Size the length of the trap leg 1 inch larger than the actual system pressure.
- C. Install traps and cleanout as shown in the drawing details.
  - 1. Confirm requirements with manufacturer's installation instructions.

##### 3.2 SIZE PIPE AS SHOWN ON DRAWINGS.

- A. Do not install piping sized smaller than the unit drain connection size.

##### 3.3 SECONDARY DRAINS

- A. Provide secondary drains where required by code, shown on the drawings, or where equipment has secondary drain connections.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 05 93

### TESTING, BALANCING AND ADJUSTING (TAB) OF ENVIRONMENTAL SYSTEMS

#### PART 1 - GENERAL

##### 1.1 SECTION INCLUDES

- A. Balance, adjust and test the air distribution system including the exhaust system.
- B. Balance, adjust and test the hydronic system.
- C. Verify and record the duct test results performed by the mechanical contractor.

##### 1.2 RELATED SECTIONS

- A. COORDINATION OF TESTING AND BALANCING

##### 1.3 SUBMITTALS

- A. History of the TAB organization.
- B. Agency certification.
- C. Personnel qualifications.
- D. TAB data forms.
- E. Instrumentation list.
- F. Name of the project supervising engineer.
- G. Name and address and contact person of five successfully completed projects of similar size and scope.
- H. To perform required professional services, the balancing agency shall have a minimum of one test and balance engineer certified by National Environmental Balancing Bureau.

##### 1.4 TAB FIRM QUALIFICATIONS

- A. The organization performing the work shall be a Certified member in good standing of the (NEBB) National Environmental Balancing Bureau.
- B. Able to furnish evidence of having contracted for and completed not less than five systems of comparable size and type that have served their Owners satisfactorily for not less than five years.
- C. A specialist in this field and have the personnel, experience, training, skill, and the organization to perform the work.
- D. The balancing agency shall furnish all necessary calibrated instrumentation to adequately perform the specified services. An inventory of all instruments and devices in possession of the balancing agency may be required by the engineer to determine the balancing agency's performance capability.

- E. The balancing agency shall have operated for a minimum of five years under its current name.
- F. Personnel:
  - 1. The project supervisor shall be a Professional Engineer registered in Texas.
    - a. Extensive knowledge of the work involved.
    - b. At least five years experience conducting tests of the type specified.
    - c. This test and balance engineer shall be responsible for the supervision and certification of the total work herein specified.
  - 2. All work shall be conducted under the direct supervision of the supervising engineer.
  - 3. Technicians shall be trained and experienced in the work they conduct.

## 1.5 WARRANTY

- A. Provide (NEBB) guarantee in writing.
- B. Extended warranty.
  - 1. Include an extended warranty of 2 years after completion of test and balance work, during which time the Architect/Engineer may request a retest or resetting of any outlet or other items as listed in the test report.
  - 2. Provide technicians and instruments to assist the Architect/Engineer in making any tests he may require during this period.
  - 3. The balancing agency shall perform an inspection of the HVAC system during the opposite season from that which the initial adjustments were made. The balancing agency shall make any necessary modifications to the initial adjustments to produce optimum system operation.

## PART 2 - PRODUCTS - NOT USED

## PART 3 - EXECUTION

### 3.1 TAB TOLERANCES

- A. The water, outside air, supply air, return air, and exhaust air for each system shall be adjusted to within +/- 5% of the value scheduled on the drawings.

### 3.2 SITE VISITS

- A. During construction, the balancing agency shall inspect the installation of the piping systems, sheetmetal work, temperature controls, energy management system, and other component parts of the heating, ventilating, and air conditioning systems. One inspection shall take place when 60% of the ductwork is installed and another inspection shall take place when 90% of the equipment is installed. The balancing agency shall submit a brief written report of each inspection to the architect and engineer.
- B. Upon completion of the installation and start-up of the mechanical equipment by the mechanical contractor, the balancing agency shall test and balance the system components to obtain optimum conditions in each conditioned space of the building. If construction deficiencies are encountered that preclude obtaining optimum conditions, and the deficiencies cannot be corrected by the mechanical contractor within a reasonable period of time, the balancing agency shall cease testing and balancing services and advise the architect, engineer, general contractor and owner, in writing, of the deficiencies.
- C. Note proper piping installation, location of valves, and flow measuring instruments.

- D. Make one series of visits, phased as required by construction progress, prior to installation of the ceiling. Note proper installation of balancing dampers.
- E. Continue the site visits up to completion of project. In each succeeding report, list corrections made from previous reports.

### 3.3 TESTING INSTRUMENTS

- A. Submit a list of all instruments to be used for the test and balance procedures.
  - 1. Catalog sheets.
  - 2. Certificate of last calibration.
  - 3. Calibration within a period of six months prior to balancing.
- B. Testing equipment shall be in good working order and tested for accuracy prior to start of work.

### 3.4 COORDINATION WITH OTHER SPECIFICATION SECTIONS

- A. Review the related ductwork shop drawings and piping shop drawings. Make recommendations concerning suitability with respect to the testing, balancing and adjusting work.
- B. Make tests to verify proper placement of the static pressure sensors for the variable air volume fan system control.
- C. In cooperation with the work specified in Building Management and Control System section, a systematic listing of the testing and verification shall be included in the final TAB report. The TAB firm shall provide a laptop computer to operate with the Building Management and Control System. Building Management and Control System shall provide all necessary software and special interface cables, as required, to communicate with the DDC system:
  - 1. Work with the temperature control contractor to ensure the most effective total system operation within the design limitations, and to obtain mutual understanding of the intended control performance.
  - 2. Verify that all control devices are properly connected.
  - 3. Verify that all dampers, valves, and other controlled devices, are operated by the intended controller.
  - 4. Verify that all dampers and valves are in the position indicated by the controller (open, closed or modulating).
  - 5. Verify the integrity of valves and dampers in terms of tightness of close-off and full open positions. This includes dampers in multizone units, terminal boxes and fire/smoke dampers.
  - 6. Observe that all valves are properly installed in piping system in relation to direction of flow and location.
  - 7. Observe the calibration of all controllers.
  - 8. Verify the proper application of all normally opened and normally closed valves.
  - 9. Observe the locations of all thermostats and humidistats for potential erratic operation from outside influences such as sunlight, drafts or cold walls.
  - 10. Observe the location of all sensors to determine whether their position will allow them to sense only the intended temperatures or pressures of the media. Control contractor will relocate as deemed necessary by the Engineer.
  - 11. Verify that the sequence of operation for any control mode is in accordance with the approved shop drawings and specifications. Verify that no simultaneous heating and cooling occurs.
  - 12. Verify the correct operation of all interlock systems and installation is per the



- manufacturer recommendations.
- 13. Check all dampers for free operation.
- 14. Verify that all controller setpoints meet the design intent.
- 15. Perform variable volume system verification to assure the system and its components track with changes from full flow to minimum flow.

D. Upon completion of the testing and balancing, submit three days prior notice that the systems are ready for a running test. A qualified representative of the test and balance organization shall be present, with a representative from the engineers office, to field verify TAB report readings. Specific and random selections of data recorded in the certified test and balance report will be reviewed.

### 3.5 INSTRUMENT TEST HOLES

- A. When it is required to make holes in the field to measure temperature, static pressure or velocity in the ducts:
- 1. Drill holes, plug and tape external duct insulation.
  - 2. Repair damaged insulation to Engineer's approval.

### 3.6 TESTING THE AIR DISTRIBUTION SYSTEM

- A. The TAB agency shall verify that all ductwork, dampers, grilles, registers, and diffusers have been installed per design and set full open. The TAB agency shall perform the following TAB procedures in accordance with National Environmental Balancing Bureau and all results shall be recorded in the TAB report:
- 1. Supply Fans:
    - a. Fan speeds: Test and adjust fan RPM to achieve design CFM requirements.
    - b. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure fan motor is not in or above the service factor.
    - c. Pitot-Tube Traverse: Perform a Pitot-Tube traverse of the main supply and return ducts, as applicable, to obtain total CFM. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. Measurements must be recorded with an Inclined Manometer or an Inclined/Vertical Manometer.
    - d. Outside Air: Test and adjust the outside air on applicable equipment using a Pitot-Tube traverse. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. If a traverse is not practical, use the mixed air temperature method, if the inside and outside temperature difference is at least 20°F, or use the difference between Pitot-tube traverse of the supply and return ducts.
    - e. Static Pressure: Test and record system static pressure, including the static pressure profile of each supply fan.
  - 2. All Other Fans:
    - a. Fan speeds: Test and adjust fan RPM to achieve design CFM requirements.
    - b. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure fan motor is not in or above the service factor.
    - c. Pitot-Tube Traverse: Perform a Pitot-Tube traverse of the main return ducts, as applicable, to obtain total CFM. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. Measurements must be recorded with an Inclined Manometer or an Inclined/Vertical Manometer.

- d. Static Pressure: Test and record system static pressure, including the static pressure profile of each return fan.
  - 3. Diffusers, Registers and Grilles:
    - a. Tolerances: Test, adjust, and balance each diffuser, grille, and register to within 5% of design requirements. Minimize drafts. Observe throws are in direction as indicated on drawings.
  - 4. Coils (including electric coils):
    - a. Air Temperature: Once air flows are set to acceptable limits, take wet bulb (cooling coil only) and dry bulb air temperatures on the entering and leaving side of each coil. Calculate the sensible and latent (cooling coil only) capacity of the coil. Provide information in TAB report.
- B. Record preliminary air handler data, including fan RPM and static pressures across filter, fans and coils.
- C. Perform a velocity traverse of the main supply ducts using a pitot-tube and inclined manometer to establish initial air delivery. Perform a Pitot-tube traverse of main supply and return ducts, as applicable, to obtain total CFM. If a pitot-tube traverse is not practical, a detailed explanation of why a traverse was not made must appear on the appropriate data sheet.
- D. Where air measuring stations are installed, use pitot tube traverse readings to verify and record the correct calibration of the stations output.
- E. Make adjustments in fan RPM and damper settings, as required, to obtain design supply air, return air, and outside air.
- F. Measure and adjust all supply and return branches to design air delivery.
- G. Measure and adjust all diffusers to design air delivery to +/- 5% of design requirements.
- H. Make a set of recordings showing final system conditions.

### 3.7 EQUIPMENT POWER READINGS

- A. Record the following information for each motor:
  - 1. Equipment designation.
  - 2. Manufacturer.
  - 3. Unit model number and serial number and frame.
  - 4. Motor nameplate horsepower; nameplate voltage; phase and full load amperes.
  - 5. Heater coil in starter.
    - a. Rating in amperes.
    - b. Manufacturer's recommendation.
  - 6. Motor RPM/driven equipment RPM.
  - 7. Power reading (voltage, amperes of all legs at motor terminals).

### 3.8 DUCT TEST

- A. Test and Balancing Contractor shall verify and record the duct test results. A copy of the duct test results, as completed, shall be submitted to the engineer for review within five days. Provide a complete report of all the duct test results in the final TAB report.

### 3.9 DIRECT EXPANSION EQUIPMENT

- A. With each unit operating at near design conditions, measure and record the following:
  - 1. Manufacturer, model number, serial number and all nameplate data.
  - 2. Ambient temperature, condenser discharge temperature.
  - 3. Amperage and voltage for each phase.
  - 4. Leaving and entering air temperatures.
  - 5. Suction and discharge pressures and temperatures.
  - 6. Tons of cooling.
  - 7. Verification that moisture indicator shows dry refrigerant.

### 3.10 TAB REPORT

- A. The activities described in this specification shall be recorded in a report form; and four individually bound copies shall be provided to the Architect and Engineer. Neatly type and arrange data. Include with the data the date tested, personnel present, weather conditions, nameplate record of the test instruments used and list all measurements taken after all corrections are made to the system. Record all failures and corrective action taken to remedy any incorrect situation. The intent of the final report is to provide a reference of actual operating conditions for the Owner's operations personnel. Provide a "Preface" which shall include a general discussion of the system and any abnormalities or problems encountered.
- B. All measurements and recorded readings (of air, water, electricity, etc.) that appear in the report must have been recorded on site by the permanently employed technicians or engineers of the TAB firm.
- C. Submit reports on forms approved by the engineer that will include the following data as a minimum:
  - 1. Title Page
    - a. Company Name.
    - b. Company Address.
    - c. Company telephone number.
    - d. Project name.
    - e. Project location.
    - f. Project Manager.
    - g. Project Engineer.
    - h. Project Contractor.
    - i. Project Identification Number.
  - 2. Summary of the TAB report data.
  - 3. Index.
  - 4. Instrument List
    - a. Instrument.
    - b. Manufacturer.
    - c. Model.
    - d. Serial Number.
    - e. Range.
    - f. Calibration Date.
    - g. What test instrument is to be used for:.
  - 5. Fan Data
    - a. Location.
    - b. Manufacturer.
    - c. Model.
    - d. Air flow, specified and actual.
    - e. Total static pressure (total external) specified and actual.
    - f. Inlet pressure.

- g. Discharge pressure.
- h. Fan RPM.
- 6. Return Air/Outside Air Data
  - a. Identification/location.
  - b. Design return air flow.
  - c. Actual return air flow.
  - d. Design outside air flow.
  - e. Actual outside air flow.
  - f. Return air temperature.
  - g. Outside air temperature.
  - h. Required mixed air temperature.
  - i. Actual mixed air temperature.
- 7. Electric Motors
  - a. Manufacturer.
  - b. HP/BHP.
  - c. Phase, voltage, amperage, nameplate, actual.
  - d. PM.
  - e. Service Factor.
  - f. Starter size, heater elements, rating.
- 8. V-Belt Drive
  - a. Identification/location.
  - b. Required driven RPM.
  - c. Drive sheave, diameter and RPM.
  - d. Belt, size and quantity.
  - e. Motor sheave, diameter and RPM.
  - f. Center-to-center distance, maximum, minimum and actual.
- 9. Duct Traverse
  - a. System zone/branch.
  - b. Duct size.
  - c. Area.
  - d. Design velocity.
  - e. Design air flow.
  - f. Test velocity.
  - g. Test air flow.
  - h. Duct static pressure.
  - i. Air correction factor.
- 10. Air Monitoring Station Data
  - a. Identification/location.
  - b. System.
  - c. Size.
  - d. Area.
  - e. Design velocity.
  - f. Design air flow.
  - g. Test velocity.
  - h. Test air flow.
- 11. Air Distribution Test Sheet
  - a. Air terminal number.
  - b. Room number/location.
  - c. Terminal type.
  - d. Terminal size.
  - e. Correction factor.
  - f. Design velocity.
  - g. Design air flow.
  - h. Test (final) velocity.
  - i. Test (final) air flow.
- 12. Cooling Coil Data

- a. Identification/number.
  - b. Location.
  - c. Service.
  - d. Manufacturer.
  - e. Entering air DB temperature, design and actual.
  - f. Entering air WB temperature, design and actual.
  - g. Leaving air DB temperature, design and actual.
  - h. Leaving air WB temperature, design and actual.
  - i. Water pressure flow, design and actual.
  - j. Water pressure drop, design and actual.
  - k. Entering water temperature, design and actual.
  - l. Leaving water temperature, design and actual.
  - m. Air pressure drop, design and actual.
  - n. Capacity - sensible and latent.
13. Heating Coil Data
- a. Identification/number.
  - b. Location.
  - c. Service.
  - d. Manufacturer.
  - e. Entering air DB temperature, design and actual.
  - f. Leaving air DB temperature, design and actual.
  - g. Water pressure flow, design and actual.
  - h. Water pressure drop, design and actual.
  - i. Entering water temperature, design and actual.
  - j. Leaving water temperature, design and actual.
  - k. Air pressure drop, design and actual.
  - l. Capacity.
14. Sound Level Report
- a. Location (Location established by the design engineer).
  - b. N C curve for eight (8) bands-equipment off.
  - c. N C curve for eight (8) bands-equipment on.
15. Vibration Test on equipment having 10 HP motors or greater in size.
- a. Location of points:
    - 1) Fan bearing, drive end.
    - 2) Fan bearing, opposite end.
    - 3) Motor bearing, center (if applicable).
    - 4) Motor bearing, drive end.
    - 5) Motor bearing, opposite end.
    - 6) Casing (bottom or top).
    - 7) Casing (side).
    - 8) Duct after flexible connection (discharge).
    - 9) Duct after flexible connection (suction).
  - b. Test readings:
    - 1) Horizontal, velocity and displacement.
    - 2) Vertical, velocity and displacement.
    - 3) Axial, velocity and displacement.
  - c. Normally acceptable readings, velocity and acceleration.
  - d. Unusual conditions at time of test.
  - e. Vibration source (if non-complying).
16. Control verification indicating date performed and any abnormalities identified.
- a. Point Location/Description.
  - b. EMS Readout (Setpoint and Actual).
  - c. Actual Readout of all points.
  - d. Interlocks.
  - e. Safeties.
  - f. Variable speed drive tracking with EMS input.

- g. Variable speed drive Bypass operation.
- h. Sequence of operation.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 07 13

### EXTERNAL DUCT INSULATION

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install external insulation on supply, return, exhaust and outside air ductwork.
- B. External insulation of concealed and exposed ducts is included in this Section. Internal acoustic duct lining is specified under ductwork and not included in this Section.

##### 1.2 RELATED WORK

- A. Division 9 - FINISHES. Painting and Color Coding.
- B. Division 23 - MECHANICAL.
  - 1. Air Handling Units. Internal insulation for air units is specified in the sections on air handling units. The units do not require external insulation.
  - 2. Internal Duct Liner. Internal duct liner is specified in the section on ductwork.
  - 3. Insulation. Refer to specific sections on individual insulation types.
  - 4. Refer to insulation and liner plan detail.

##### 1.3 QUALITY ASSURANCE

- A. The intent of insulation specifications is to obtain superior quality workmanship, resulting in an installation that is absolutely satisfactory in both function and appearance. Provide insulation in accordance with the specifications for each type of service and apply as recommended by the manufacturer and as specified.
- B. An approved contractor for this work under this Division shall be:
  - 1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that have served their Owners satisfactorily for not less than 3 years.
- C. All duct insulation used on the project inside the building must have a flame spread rating not exceeding 25 and a smoke developed rating not exceeding 50 as determined by test procedures ASTM E84, NFPA 255 and UL 723. These ratings must be as tested on the composite of insulation, jacket or facing, and adhesive. Components such as adhesives, mastics and cements must meet the same individual ratings as the minimum requirements and bear the UL label.
- D. Condensation on any insulated system is not approved.
- E. Replace insulation damaged by either moisture or other means. Insulation that has been wet, whether dried or not, is considered damaged. Make repairs where condensation is caused by improper installation of insulation. Also repair any damage caused by the condensation.
- F. Where existing insulated ductwork or other services are tapped, remove existing insulation back to undamaged sections and replace with new insulation of the same type and thickness as existing insulation. Apply as specified for insulation of the same service.



## 1.4 APPROVALS

- A. Submittals. Submit product data on each insulation type, adhesive, and finish to be used in the work. Make the submittal as specified in Division 1 General Requirements and obtain approval before beginning installation. Include product description, list of materials and thickness for each service and location, and the manufacturer's installation instructions for each product.
- B. Sample Application. Make an application of each type of insulation to display the material, quality and application method. Obtain approval of the sample application before proceeding with installation of the work.

## PART 2 - PRODUCTS

### 2.1 INSULATION

- A. Glass fiber rigid duct insulation.
  - 1. Minimum density of 3 pcf, installed R value to be 6.0 (when located in a conditioned plenum) and minimum density of 0.75 pcf, installed R value to be 8.0 (when located in an unconditioned plenum) at 75°F mean, facing of 0.7 mil aluminum foil reinforced with glass yarn mesh and laminated to 40 lbs. fire-resistant Kraft. R-value to be indicated on exterior side of insulation to be verified by City inspector.
  - 2. Acceptable Manufacturers
    - a. Schuller 814 spin-glas FSK.
    - b. Owens-Corning Type 703 board RKF.
    - c. Knauf 3 PCF FSK.
- B. Glass fiber blanket duct insulation.
  - 1. Minimum density of 1.0 pcf, installed R value to be 6.0 (when located in a conditioned plenum) and minimum density of 0.75 pcf, installed R value to be 8.0 (when located in an unconditioned plenum) at 75°F mean, facing of 0.35 mil foil reinforced with glass yarn mesh and laminated to 40 lbs. fire resistant Kraft. R-value to be indicated on exterior side of insulation to be verified by City inspector.
  - 2. Acceptable Manufacturers
    - a. Manville R-series Microlite FSKL.
    - b. Owens-Corning ED100 RKF.
    - c. Knauf 1.0 PCF FSK.
- C. Fireboard Insulation
  - 1. Totally encapsulated with foil facing.
  - 2. Two hour rated fire protection.
  - 3. Zero clearance to combustible protection.
  - 4. System shall be listed and labeled by an NRTL.
  - 5. Tested per ISO 6944, Type A Duct and achieve a 2 hour rating for stability, integrity and insulation.
  - 6. Provided system is subject to the approval of the Local Authority Having Jurisdiction.
  - 7. Acceptable Manufacturers
    - a. Unifrax ON Fyrewrap Elite 1.5
    - b. Partak Insulation, Inc. Paroc Fireboard
    - c. Thermal Ceramics FireMaster 3M
    - d. Premier Refractories International, Pyroscat.

- D. Rigid Closed Cell Insulation
  - 1. Acceptable Manufacturers
    - a. Dow Trymer.
    - b. Phenolic Foam.
- E. Reinforced Foil Tape
  - 1. Acceptable Manufacturers
    - a. Venture 1525CW.
    - b. 3" FSK.
  - 2. Thickness 6.5 mils.
  - 3. Color: silver.

## 2.2 COATING AND ADHESIVE

- A. Coating. Provide Childers CP-38 or Foster 30-80 vapor barrier coating. Coating must meet MIL Spec C-19565C, Type II and be QPL Listed. Permeance shall be 0.013 perms or less at 43 mils dry. Tested at 100°F and 90% RH per ASTM E96.
- B. Outdoors: Provide as insulation coating Childers Encacel X or Foster Monolar 60-90. Permeance shall be 0.03 perms or less at 30 mils dry. Tested at 100°F and 90% RH per ASTM F 1249.
- C. Adhesive. Provide Childers CP-82 or Foster 85-20 vapor barrier adhesive.
- D. Reinforcing Mesh. Provide 10 x 10 white glass or polyester reinforcing mesh.

## 2.3 OUTDOOR DUCT LAMINATED JACKETING

- A. Rubberized bitumen compound material:
  - 1. Ultraviolet resistant
  - 2. Weatherproof
  - 3. Vapor retarding jacketing
  - 4. Laminated jacketing
  - 5. Cross-laminated high strength polyethylene film
  - 6. Laminated to aluminum foil
  - 7. Minimum 60-mil thickness
- B. Acceptable Manufacturers:
  - 1. Alumaguard 60
  - 2. Flex Clad 400
  - 3. Venture Clad 1577CW

## PART 3 - EXECUTION

### 3.1 FIRE SAFETY REQUIREMENTS

- A. Do not extend duct coverings through walls or floors required to be fire-stopped or required to have a fire resistance rating. Interrupt duct coverings in the immediate vicinity of heat sources such as electric resistance or fuel-burning heater.

### 3.2 CONCEALED DUCT

- A. Provide flexible glass fiber insulation with factory-applied, reinforced UL labeled Foil-Skrim-Kraft (FSK) facing.
- B. Standing Seams. Insulate standing seams and stiffeners, which protrude through the insulation with 0.6 lb. per cubic foot density, 1-1/2" thick, faced, flexible blanket insulation.

Insulation shall not prevent adjustment of damper operators.

- C. Insulation shall be wrapped tightly on the ductwork with all circumferential joints butted and longitudinal joints overlapped a minimum of 2". In addition, secure insulation to the bottom of rectangular ductwork by the use of either weld pins with washers or cup-head pins welded to the ductwork or perforated based insulation hangers glued to the duct on twelve inch centers to prevent sagging of insulation.
- D. Ductwork in mechanical rooms is considered concealed spaces.

### 3.3 EXPOSED DUCT INSULATION

- A. Ductwork in exposed locations is to be insulated with fiberglass rigid / semi-rigid board insulation.
  - 1. Apply fabric and mastic to provide a smooth surface for painting.
- B. Standing Seams: Insulate standing seams and stiffeners which protrude through the insulation with 0.6 lb per cubic foot density, 1-1/2 inch thick, faced insulation. As a vapor seal, use reinforcing mesh with vapor barrier coating. Insulation shall not prevent adjustment of damper operators.
- C. Insulation shall be wrapped tightly on the ductwork. Adhere insulation to ductwork with adhesive. In addition, secure insulation to the bottom of rectangular ductwork by the use of either weld pins with washers or cup-head pins welded to the ductwork or perforated based insulation hangers glued to the duct on 12 inch centers to prevent sagging of insulation.
- D. Cover all seams, joints, pin penetrations and other breaks with coating reinforced with reinforcing mesh. Fabric shall not be visible after coating.

### 3.4 OUTDOOR DUCTWORK COVERING

- A. Cover all supply and return ductwork outdoors:
  - 1. 1-1/2" thick, rigid closed cell insulation with reinforced foil facing.
- B. Install a high point in center and slope in both directions so water will not stand on horizontal surfaces.
- C. Impale the insulation over mechanical fasteners and washers.
  - 1. A minimum of 2 rows of fasteners per side on 12-inch centers.
  - 2. Seal all breaks, joints and punctures by applying a 1/8" thick vapor barrier mastic coating, embedded in open mesh reinforcing mesh.
- D. Standing S, or flanged connections shall be covered with the same thickness of insulation overlapped a minimum of 4".
- E. Apply a tack coat of Childers CP-10/11 or Foster 46-50 weather barrier mastic over the entire surface.
  - 1. While this coat is still tacky, Childers #5 glass fiber reinforcing mesh shall be smoothly applied and pressed into the mastic. The cloth shall be taut with adjacent edges overlapped a minimum of 4".
  - 2. After the first coat of mastic has taken its set, the second coat shall be applied over the cloth by palm, trowel, or spray to sufficient thickness that, when dried, the combined thickness of mastic and cloth is not less than 1/8".
  - 3. Upon completion, the openings in the cloth shall be completely sealed and the yarn shall not be visible. The completed work shall be completely smooth and present a plane surface.

- 4. Aluminum gray or white finish as approved by the Architect.
- F. Standing water on horizontal surfaces is not approved.
- G. Apply outdoor duct laminated jacketing protection over entire insulation surface. Apply rubberized bitumen compound, applied to a cross-laminated high strength polyethylene film, laminated to aluminum foil.

### 3.5 KITCHEN GREASE EXHAUST DUCTWORK / KILN DUCTWORK / FUME HOOD DUCT

- A. Secure fireboard insulation to duct with impaling pins and 3" square speed clips. In addition, provide a wire mesh support system and additional sealing or support as required by the code enforcing authority. The insulation support system shall include framed access to allow the insulation to be removed and replaced without damage at the access doors in the duct system for inspection and cleaning. Coordinate location of access openings to correspond accurately. Provide stainless steel banding on 12" centers.

### 3.6 GENERAL INSTALLATION

- A. Install materials in accordance with manufacturer's instructions.
- B. Apply insulation on clean, dry surfaces only.
- C. Continue insulation with vapor barrier through penetrations.
- D. Neatly finish insulation at supports, protrusions and interruptions.
- E. Install insulation on clean, dry surfaces, and only after building is weatherproofed sufficiently to preclude any rainwater on insulation.
- F. Apply mastic over the fiberglass reinforcing mesh to a thickness where fabric is not visible after completion.
- G. Install fiberglass blanket duct insulation on top of supply air grilles not fire rated.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 07 19

### HVAC PIPING INSULATION

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install piping insulation, jackets, accessories and covering of specified materials. The insulation shall be used for high and low temperature piping applications including refrigerant lines and condensate piping.

##### 1.2 QUALITY ASSURANCE

- A. The intent of insulation specifications is to obtain superior quality workmanship resulting in an installation that is absolutely satisfactory in both function and appearance. Provide insulation in accordance with the specifications for each type of service and apply as recommended by the manufacturer and as specified.
- B. An approved contractor for this work under this Division shall be:
  - 1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that have served their owners satisfactorily for not less than 3 years.
- C. All piping insulation used on the project inside the building must have a flame spread rating not exceeding 25 and a smoke developed rating not exceeding 50, as determined by test procedures ASTM E 84, NFPA 255 and UL 723. These ratings must be as tested on the composite of insulation, jacket or facing, and adhesive. Components such as adhesives, mastics and cements must meet the same individual ratings as the minimum requirements and bear the UL label.
- D. Condensation on any insulated piping system is not acceptable.
- E. Replace insulation damaged by either moisture or other means. Insulation that has been wet, whether dried or not, is considered damaged. Make repairs where condensation is caused by improper installation of insulation. Also repair any damage caused by the condensation.
- F. Where existing insulated piping, or other surfaces are tapped, remove existing insulation back to undamaged sections for hot surfaces or to nearest insulation stop for cold surfaces, and replace with new insulation of the same type and thickness as existing insulation. Apply as specified for insulation of the same service.

##### 1.3 SUBMITTALS

- A. Submit product data on each insulation type, adhesive, and finish to be used in the work. Make the submittal as specified in General Requirements and obtain approval before beginning installation. Include product description, list of materials and thickness for each service and location and the manufacturer's installation instructions for each product.
- B. Make a field application of each type of insulation to display the material, quality and application method. Obtain approval of the sample application before proceeding with installation of the work.

#### 1.4 RELATED WORK

- A. Finishes. Painting and color-coding.
- B. Pipe Heat Tracing.

#### PART 2 PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Glass fiber pipe insulation:
  - 1. Johns-Manville Micro-Lok AP-T.
  - 2. Owens-Corning ASJ/SSL.
  - 3. Knauf ASJ/SSL.
- B. Cellular Glass Insulation (Foamglass):
  - 1. Pittsburg Corning.
  - 2. Cell-U-Foam.
- C. Rigid Foam Insulation:
  - 1. Kingsapan Tarec.
  - 2. Dow Trymer.
  - 3. Tarec Ecophen – Phenolic Foam.
- D. Aluminum Jacketing:
  - 1. ITW Lock-on (Childers).
  - 2. ITW Z-lock (Pabco).
- E. Fiberglass reinforcing cloth mesh:
  - 1. Perma Glass Mesh.
  - 2. Alpha Glass Mesh.
  - 3. Childers Chil-Glas.
  - 4. Foster Mast a Fab.
  - 5. Vimasco.
- F. Mastics, Sealants, Coatings and Adhesives
  - 1. Childers.
  - 2. Foster.
  - 3. Vimasco.
  - 4. Armacell 520 Adhesive.
- G. Elastomeric Insulation
  - 1. Armacell.
- H. Weather Resistant Coating
  - 1. WB Armaflex Finish.
  - 2. Foster 30-64.
- I. Glass fiber blanket insulation
  - 1. Manville R-series Microlite FSKL.
  - 2. Owens-Corning eD75 or ED100 RKF.
  - 3. Knauf 0.75 PCF FSK.

## 2.2 RIGID FOAM PIPE INSULATION

- A. Polyisocyanurate pipe insulation or phenolic foam pipe insulation, with all service reinforced vapor barrier jacket having integral laminated vapor barrier.
  - 1. Polyisocyanurate: Thermal conductivity 0.14 @ 75°F mean (ASTM C518).
  - 2. Phenolic Foam: Thermal conductivity 0.13 @ 75°F mean (ASTM C 518); minimum 2.5# density.
  - 3. Polyisocyanurate is not to be used inside of buildings without 25/50 rating.

## 2.3 FIBERGLASS PIPE INSULATION

- A. Heavy density, dual temperature fiberglass insulation with factory applied, all service, reinforced vapor barrier jacket having integral laminated vapor barrier. Provide with a factory applied pressure sensitive tape closure system and matching butt strips. Supply in thickness as shown.
  - 1. Thermal conductivity 0.23 @ 75°F mean (ASTM 335).

## 2.4 ELASTOMERIC INSULATION

- A. Insulation material shall be flexible, closed-cell elastomeric insulation in tubular or sheet form. Material shall have a flame spread rating of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E84, latest revision. Sheet material with a thickness greater than ¾" shall have a flame spread rating of 25 or less and a smoke developed rating of 100 or less when tested in accordance with ASTM E84, latest revision. In addition, the product, when tested, shall not melt or drip flaming particles, and the flame shall not be progressive. In addition, all materials shall pass simulated end-use fire test.
  - 1. Thermal conductivity 0.27 at 75°F mean (ASTM C177 or C518).

## 2.5 CELLULAR GLASS INSULATION

- A. ASTM C552:
  - 1. "k" value of 0.35 @ 75°F ("ksi" value of 0.047 @ 24°C);
  - 2. 8.0 lb/cu.ft. (128 kg/cu.m.) density.

## 2.6 INSULATION/SHIELD AT HANGERS

- A. Field fabricated: Use 360° sections of rigid foamglass insulation that will support the bearing area at hangers and supports. Further support insulation at hangers and supports with a shield of galvanized metal covering at least half of the pipe circumference, and conforming to the schedule. Insulation shall extend at least 1" beyond metal shield on each end. When pipe is guided at top and bottom, metal shields shall cover the whole pipe circumference. Adhere metal shield to insulation so that metal will not slide with respect to insulation with ½" aluminum bands (2) per shield.
  - 1. Sections of foam glass insulation may be used of the same outside diameter of the adjoining pipe insulation.
  - 2. Minimum thickness of foam glass insulation shall not be less than 1" thick.
- B. Pipe saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter or more than 22". Provide 18 gauge through 4" pipe and 16-gauge 5" pipe and above.



## 2.7 SEALANT, ADHESIVE AND FINISH

- A. Lap Adhesive. Provide Childers CP-82 or Foster 85-20 adhesive.
- B. Vapor Barrier Finish:
  - 1. Indoors: Provide as insulation coating Childers CP-38 or Foster 30-80, white. Coating must meet MIL Spec C-19565C, Type II and be QPL Listed. Permeance shall be 0.013 perms or less at 43 mils dry. Tested at 100°F and 90% RH per ASTM E96.
  - 2. Outdoors: Provide as insulation coating Childers Encacel X or Foster 60-90. Permeance shall be 0.03 perms or less at 30 mils dry. Tested at 100°F and 90% RH per ASTM F 1249 and must be Hypalon rubber based.
  - 3. Underground: Provide Childers CP-22/24 or Foster 60-25/26 for fittings and areas. Pittwrap cannot be used.
- C. Insulation Joint Sealant. Provide Childers CP-76 or Foster 95-50 vapor barrier sealant.
- D. Metal Jacketing Sealant. Provide Childers CP-76 or Foster 95-44 metal jacketing sealant for all outdoor metal jacketing laps.
- E. Lagging Adhesive. Provide Childers CP-50AMV1 or Foster 30-36.
- F. Other products of equal quality will be acceptable only upon approval.

## 2.8 ALUMINUM JACKETING

- A. Finish insulated piping outdoors with a smooth prefabricated Z-lock aluminum jacket 0.016" thick with factory applied 1 mil polyethylene/40 lb and Fab strap. Kraft moisture barrier.
- B. Valves, Fittings and Flanges. For finishing valves, fittings, flanges and similar installations, provide formed aluminum covers, 0.024" thick.
- C. Straps and Seals. Provide ½" x 0.020 stainless steel strapping and seals for jackets and covers according to manufacturer's recommendations.

## 2.9 GLASS FIBER BLANKET INSULATION

- A. Minimum density of 1.0 PCF, 2" thick, installed R value to be 6.0 or better at 75°F mean, facing of 0.35 mil foil reinforced with glass yarn mesh and laminated to 40 lbs fire resistant kraft.

## PART 3 - EXECUTION

### 3.1 INTERIOR PIPING

- A. Cover all piping with glass fiber, heavy density, dual temperature pipe insulation with a vapor barrier jacket. Apply insulation to clean, dry pipes. Longitudinal seams shall be joined firmly together and sealed with self-sealing lap joints. Butt insulation joints firmly together and seal with a 3" wide ASJ butt strip seal. Longitudinal seams and butt strip laps shall be coated and sealed with CP-38 or Foster 30-80 vapor barrier coating for chilled water piping applications.
- B. Install hanger with protective shield, on the outside of all insulation.
- C. Where domestic water pipes (1/2" & ¾" pipe sizes) are installed on trapeze type hangers,

provide galvanized sheet metal protection shields at these locations. Place insulation jacket directly on hanger. Incompressible, load bearing insulation segments are not required.

- D. Pipe Saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter. Provide 18-gauge through 4" pipe and 16-gauge for 5" pipe and above.
- E. Seal ends of pipe for chilled water insulation with vapor barrier mastic at valves, flanges, fittings and every 21' on straight runs of piping. Mastic should extend on top of ASJ jacket, across the glass, down onto the pipe making a complete seal.
- F. Apply a smooth flood coat of white lagging adhesive Foster 30-35 or Childers CP-35 over all exposed insulation within mechanical rooms.
- G. Piping to be insulated as specified above:
  - 1. Chilled water and heating water.
  - 2. Make-up water.
  - 3. Horizontal sanitary drain piping that receives condensate.
  - 4. Condenser water.

### 3.2 REFRIGERANT AND CONDENSATE PIPING

- A. Cover all pipe with elastomeric insulation by slitting tubular sections or sliding unslit sections over the open ends of piping or tubing. Seams and butt joints shall be adhered and sealed using Foster 85-75, Childers CP-82 or Armstrong 520 Adhesive.
- B. All fittings shall be insulated with the same insulation thickness as the adjacent piping. All seams and mitered joints shall be adhered with Foster 85-75, Childers CP-82 or 520 Adhesive.
- C. Pipe Saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter.
- D. Outdoor exposed piping shall be painted with two coats of either WB or SB Armaflex finish or Foster 30-64 elastomer foam coating. All seams shall be located on the lower half of the pipe.
- E. Outdoor exposed piping after being sealed as noted above apply aluminum jacketing to protect piping insulation exposed to weather, from damage from sunlight, moisture, equipment maintenance, wind, and shall provide shielding from solar radiation. Adhesive Tape shall not be permitted.

### 3.3 FLANGE, VALVE AND FITTING INSULATION

- A. Cover valves and flanges with fabricated segments, fittings with two-piece factory molded fittings, and both of matching pipe insulation type and thickness equal to that of the adjoining pipe. Fittings and fabricated segments shall be securely held in place.
  - 1. Apply a tack coat of insulating coating/mastic to the insulated fitting to produce a smooth surface.
  - 2. After mastic is dry, apply a second coat of vapor barrier coating/mastic. Neatly embed with 10 x 10 fiberglass or polyester reinforcing mesh into the tack coat.
  - 3. Overlap coating/mastic and fiberglass/polyester reinforcing mesh by 2" on adjoining sections of pipe insulation.

4. Apply a second coat of coating/mastic over the fiberglass/polyester reinforcing mesh to present a smooth surface.
5. Apply coating/mastic to a wet film thickness of 3/64".
6. Fabric shall not be visible after completion.
7. Vapor seal flanges, valves and fittings with Childers CP-38 or Foster 30-80. Coating must meet MIL Spec C-19565C, Type II and be QPL Listed. Permeance shall be 0.013 perms or less at 43 mils dry. Tested at 100°F and 90% RH per ASTM E96.

B. PVC fitting covers are not acceptable.

### 3.4 MISCELLANEOUS

- A. Insulate pumps.
- B. Install materials after piping has been tested and approved.
- C. Apply insulation on clean, dry surfaces only.
- D. Apply weather protective finish on elastomeric insulation installed in non-conditioned spaces. Provide a minimum of three coats.

### 3.5 INSULATION THICKNESS

| <u>INSULATED UNIT</u> | <u>THICKNESS</u><br><u>(Inches)</u> |
|-----------------------|-------------------------------------|
| Refrigerant Piping    | 1-1/2                               |
| Condensate Drains     | 1                                   |

END OF SECTION

## SECTION 23 20 00

### HVAC PIPE AND PIPE FITTINGS - GENERAL

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install pipe and pipe fittings for piping systems specified in Division 23 - Mechanical.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical:
  - 1. Vibration Isolation.
  - 2. Insulation.
  - 3. Other Piping Sections.

#### PART 2 - PRODUCTS

##### 2.1 PIPE AND FITTINGS

- A. The particular type of pipe and fittings for each system is specified in the individual sections.

##### 2.2 JOINTS

- A. Make screwed joints using machine cut USASI taper pipe threads. Apply a suitable joint compound to the male threads only. Ream the pipe to full inside diameter after cutting. All-thread nipples are not permitted.
- B. Dissimilar Metals. Make joints between copper and steel pipe and equipment using insulating unions or couplings such as Crane Company #1259; EPCO as manufactured by EPCO Sales, Inc.; or an approved equal.
- C. Solder joints.
  - 1. Prior to making joints, cut pipe square and ream to full inside diameter. Clean exterior of pipe and socket. Apply a thin coat of suitable fluxing compound to both pipe and socket, and fit parts together immediately.
  - 2. Heat assembled joint only as required to cause the solder to flow. Run the joint full, slightly beaded on the outside, and wipe to remove excess solder.
  - 3. Use silver brazing alloy or Sil-Fos on refrigerant piping and on underground piping. Use lead free solder on all other copper piping.
- D. Make welded joints as recommended by the standards of the American Welding Society. Ensure complete penetration of deposited metal with base metal. Provide filler metal suitable for use with base metal. Keep inside of fittings free from globules of weld metal. The use of mitered joints is not approved.
- E. Flanged.
  - 1. Prior to installation of bolts, center and align flanged joints to prevent mechanical pre-stressing of flanges, pipe or equipment. Align bolt holes to straddle the vertical, horizontal or north-south centerline. Do not exceed 3/64" per foot inclination of the flange face from true alignment.
  - 2. Use flat-face companion flanges only with flat-faced fittings, valves or equipment. Otherwise, use raised-face flanges.

3. Install gaskets suitable for the intended service and factory cut to proper dimensions. Secure with manufacturers recommended gasket cement.
  4. Use ANSI nuts and bolts, galvanized or black to match flange material. Use ANSI 316 stainless steel nuts and bolts underground. Tighten bolts progressively to prevent unbalanced stress. Draw bolts tight to ensure proper seating of gaskets.
  5. Use carbon steel flanges conforming to ANSI B16.5 with pipe materials conforming to ASTM A 105 Grade II or ASTM A 108, Grade II, ASTM A 53, Grade B. Use slip-on type flanges on pipe only. Use welding neck type flanges on all fittings. Weld slip-on flanges inside and outside.
  6. Keep flange covers on equipment while fabricating piping. Remove when ready to install in system.
- F. Mechanical Joints: Provide a stuffing box type mechanical joint adapted to use gasket, cast iron gland and bolts. Coat bolts with bitumastic enamel. Use joint parts similar in design to one of the following:
1. Doublex Simplex Joint manufactured by the American Cast Iron Pipe Company, Birmingham, Alabama.
  2. U.S. joints manufactured by the United States Pipe and Foundry Company, Burlington, New Jersey.
  3. Boltite Joint manufactured by the McWane Cast Iron Pipe Company, Birmingham, Alabama.
  4. Flexlamp manufactured by the National Cast Iron Pipe Company, Birmingham, Alabama.

## 2.3 UNIONS

- A. Use 150 lb. standard (300 lb. WOG) malleable iron, ground joint unions with bronze seat. Provide flanged joints on piping 2-1/2" and larger.
1. Where pipe material of different types join, use a dielectric union. Union shall be threaded, solder or as required for its intended use.

## 2.4 BRANCH CONNECTIONS

- A. Pipe 2" and Smaller: For threaded piping, use straight size reducing tee. When branch is smaller than header, a nipple and reducing coupling or swagged nipple may be used.
- B. 2-1/2" through 36": For welding piping, when branch size is the same as header size, use welding tee. For threaded branch connections, use 3000 lb. full coupling or Thread-o-let welded to header.

## 2.5 GASKETS

- A. High Temperature Piping: Provide 1/16" thick ring gaskets of aramid reinforced SBR such as Garlock #3200 or 3400 or equal by Advanced Products and Systems.
- B. Other Piping: Provide ring rubber gaskets, Garlock #7992 or equal by Advanced Products and Systems. Use 1/8" thick cloth reinforced neoprene gaskets. For smaller than 6", use 1/16" thick gasket.

## 2.6 FLOORS AND CEILING PLATES

- A. Provide chrome-plated floor and ceiling plates around pipes exposed to view when passing through walls, floors, partitions, or ceilings in finished areas; size plates to fit pipe or insulation and lock in place.

## 2.7 DOMESTIC MANUFACTURE

- A. All piping material, pipe and pipe fittings shall be manufactured in the United States of America.

## PART 3 - EXECUTION

### 3.1 PIPE FABRICATION AND INSTALLATION

- A. Make piping layout and installation in the most advantageous manner possible with respect to headroom, valve access, opening and equipment clearance, and clearance for other work. Give particular attention to piping in the vicinity of equipment. Preserve the required minimum access clearances to various equipment parts, as recommended by the equipment manufacturer, for maintenance.
- B. Cut all pipes to measurement determined at the site. After cutting pipe, remove burrs by reaming. Bevel plain ends of ferrous pipe.
- C. Install piping neatly, free from unnecessary traps and pockets. Work into place without springing or forcing. Use fittings to make changes in direction. Field bending and mitering is prohibited. Make connections to equipment using flanged joints, unions or couplings. Make reducing connections with reducing fittings only.
- D. Install piping without tapping out of the bottom of pipe.

### 3.2 WELD

- A. Weld and fabricate piping in accordance with ANSI Standard B31.1, latest edition, Code for Pressure Piping.
- B. Align piping and equipment so that no part is offset more than 1/16". Set fittings and joints square and true, and preserve alignment during welding operation. Use of alignment rods inside pipe is prohibited.
- C. Do not permit any weld to project within the pipe so as to restrict flows. Tack welds, if used, must be of the same material and made by the same procedure as the completed weld. Otherwise, remove tack welds during welding operation.
- D. Do not split, bend, flatten or otherwise damage piping before, during or after installation.
- E. Remove dirt, scale and other foreign matter from inside piping before tying into existing piping sections, fittings, valves or equipment.
- F. Bevel ends of ferrous pipe.

### 3.3 OFFSETS AND FITTINGS

- A. Due to the small scale of drawings, the indication of offsets and fittings is not possible. Investigate the structural and finish conditions affecting the work and take steps required to meet these conditions.
- B. Install pipe close to walls, ceilings and columns so pipe will occupy minimum space. Provide proper spacing for insulation coverings, removal of pipe, special clearances, and offsets and fittings.

### 3.4 SECURING AND SUPPORTING

- A. Support piping to maintain line and grade, with provision for expansion and contraction. Use approved clevis-type or trapeze-type hangers connected to structural members of the building. Single pipe runs to be supported by approved clevis type hangers. Multiple pipe runs to be supported by approved trapeze type hangers. Do not support piping from other piping or structural joist bridging. Review structural drawings for additional information.
- B. Provide supports both sides and within 12" of each horizontal elbow for pipe 6" and larger.
- C. Support vertical risers with steel strap pipe clamps of approved design and size, supported at each floor. Support piping assemblies in chases so they are rigid and self-supported before the chase is closed. Provide structural support for piping penetrating chase walls to fixtures. On chilled water pipe supports shall be outside the insulation.
- D. Where insulation occurs, design hangers to protect insulation from damage. Pipe saddles and insulation shields, where required, are specified in the appropriate insulation section and are sized in accordance with the schedule on the drawings.
- E. Install trapeze hangers, properly sized, to support the intended load without distortion. Use hangers with 1-1/2" minimum vertical adjustment.
- F. Use electro-galvanized or zinc plated beam clamps if acceptable to the structural engineer, threaded rods, nuts, washers and hangers. All hanger rods shall be trimmed neatly so that no more than 1 inch of excess hanger rod protrudes beyond the hanger nut. Use only on beams as directed by the Structural Engineer.
- G. At outdoor locations, all supports, brackets and structural members shall be hot-dipped galvanized.
- H. Provide hangers within 3' of pipe length from all coil connections.
- I. Support spacing: As recommended by the project structural engineer and support manufacturer, but not more than listed below. Not to exceed spacing requirements of smallest pipe.

| Pipe Size       | Copper & Steel Max.<br>Support Spacing, Ft. | Cast Iron Max.<br>Support Spacing, Ft. | Minimum Rod<br>Diameter, Inches |
|-----------------|---------------------------------------------|----------------------------------------|---------------------------------|
| 1" & smaller    | 6                                           |                                        | 3/8                             |
| 1-1/4" & 1-1/2" | 8                                           | 5                                      | 3/8                             |
| 2"              | 10                                          | 5                                      | 3/8                             |
| 3"              | 10                                          | 5                                      | 1/2                             |
| 4" & 5"         | 10                                          | 5                                      | 5/8                             |
| 6" and above    | 10                                          | 5                                      | 3/4                             |

### 3.5 PIPE SUPPORTS

- A. Provide P1001 or P 5000 Unistrut metal framing members and appurtenances for pipe support. Hot-dip galvanized members and appurtenances when located outside. Sagging of pipes or supports is not acceptable.
- B. Adjustable clevis hangers shall be used for single pipe supports; Anvil Fig. 260. When oversized clevis is used, a nipple shall be placed over the clevis bolt as a spacer to

assure that the lower U-strap will not move in on the bolt. Provide adjustable clevis with a nut / washer above and below the hanger on the support rod. Ring type clevis hangers are not acceptable.

- C. Provide Anvil Figure 45 galvanized or primed and painted channel assembly for trapeze hangers.

### 3.6 PIPE SUPPORTS ON ROOF

- A. Support condensate drain pipe on roof with Portable Pipe Hanger Model PP-10 with roller and fully adjustable height throughout pipe run. Base material shall be high density / high impact polypropylene with UV inhibitors and anti-oxidants. Provide with hot dip galvanized rod finish and framing. Nuts and washers shall be hot dip galvanized.

### 3.7 ANCHORS

- A. Provide anchors as required. Use pipe anchors consisting of heavy steel collars with lugs and bolts for clamping to pipe and attaching anchor braces. Install anchor braces in the most effective manner to secure desired results. Do not install supports, anchors or similar devices where they will damage construction during installation or because of the weight or the expansion of the pipe. When possible, install sleeves in structural concrete prior to pouring of concrete.

### 3.8 FLOOR PENETRATIONS

- A. At locations where pipe passes through floors, provide watertight concrete curb around penetration.

### 3.9 PIPE SLEEVES

- A. Sleeves through masonry and concrete construction:
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe.
  - 2. Size sleeve large enough to allow for movement due to expansion and to provide continuous insulation.
- B. Sleeves through gypsum wall construction.
  - 1. Fabricate sleeves of 16 gauge galvanized sheet metal.
- C. Sleeves through elevated slab construction.
  - 1. Fabricate sleeves of Schedule 40 galvanized steel pipe with welded center flange in floor.
- D. Extend each sleeve through the floor or wall. Cut the sleeve flush with each wall surface. Sleeves through floors shall extend 2" above floor lines for waterproofing purposes. Slab on grade floors shall not be sleeved except where penetrating waterproofing membrane or insect control is required.
- E. Caulk sleeves water and air tight. Seal annular space between pipes and sleeves with mastic compound to make the space water and air tight.
- F. For sleeves below grades in outside walls, provide Thunderline Link-Seal or Advance Product and System Interlynx, with 316 stainless steel nuts and bolts, with cast iron pressure plate.
- G. Provide chrome plated escutcheon plates on pipes passing through walls, floors or ceilings exposed to view. At exterior walls, stainless steel sheet metal is to be used.



- H. For sleeves through fire and smoke rated walls, seal with a UL through-penetration firestop, rated to maintain the integrity of the time rated construction. Install in accordance with the manufacturer's installation instructions. Comply with UL and NFPA standards for the installation of firestops. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

### 3.10 ISOLATION VALVES

- A. Provide piping systems with line size shutoff valves located at the risers, at main branch connections to mains for equipment, to isolate central plant, and at other locations.

### 3.11 DRAIN VALVES

- A. Install drain valves at low points of water piping systems so that these systems can be entirely drained. Install a line size drain valve for pipes smaller than 2" unless indicated otherwise. For pipes 2-1/2" and larger, provide 2" drain valves unless indicated otherwise. Drain valves shall be plugged when not in use and at completion.

### 3.12 CLEANING OF PIPING SYSTEMS

- A. General cleaning of piping systems. Purge pipe of construction debris and contamination before placing the systems in service. Provide and install temporary connections as required to clean, purge and circulate. Flush the chilled and hot water systems utilizing the filter feeders.
- B. Install temporary strainers at the inlet of pumps and other equipment as necessary where permanent strainers are not indicated. Keep strainers in service until the equipment has been tested, then remove either entire strainer or straining element only. Fit strainers with a line size blow down ball valve and pipe to nearest drain. Blow down strainers, remove and clean as frequently as necessary.
- C. Phase One: Initial flushing of system. Remove loose dirt, mill scale, weld beads, rust and other deleterious substances without damage to system components. Open valves, drains, vents and strainers at all system levels during flushing procedures. Flush until "potable water clear" and particles larger than 5 microns are removed.
- D. Connect dead-end supply and return headers, even if not shown on the drawings, and provide terminal drains in bottom of pipe end caps or blind flanges.
- E. Dispose of water in approved manner.
- F. Phase Two: Cleaning of Piping Systems. Remove, without chemical or mechanical damage to any system component, adherent dirt (organic soil), oil, grease, (hydrocarbons), welding and soldering flux, mill varnish, piping compounds, rust (iron oxide) and other deleterious substances not removed by initial flushing. Chemical shall be equal to Nalco 2578 prepping compound. Insert anti-foam compound as necessary. Circulate for 48 hours or as recommended by the manufacture. Dispose of water in approved manner. Flush system and replace with clean water. Verify compatibility of chemicals used with existing chemical treatment program on remodel projects.
- G. Phase Three: Final flushing and rinsing: Flush and rinse until "potable water clear" and particles larger than 5 microns are removed. Operate valves to dislodge any debris in valve body. Dispose of water in approved manner.
- H. Submit status reports upon completion of each phase of work on each system.

- I. Special requirements, if any, are specified in the sections on each type of piping or in the section on Water Treatment Systems.

### 3.13 TESTING

- A. Test piping after installation with water hydrostatic pressure of 1-1/2 times operating pressure (150 psig minimum) and carefully check for leaks. Repair leaks and retest system until proven watertight.
- B. Do not insulate or conceal piping systems until tests are satisfactorily complete.
- C. If any leaks or other defects are observed, suspend the test and correct the condition at once. Repeat testing until leaks are eliminated and the full test period is achieved.
- D. The satisfactory completion of testing does not relieve the Contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories.

### 3.14 PIPE MARKERS

- A. Identify interior exposed piping and piping in accessible chases or plenums with Opti-Code Brady Pressure Sensitive Adhesive Pipe Markers, consisting of pipe marker and direction of flow arrow tape. Clean pipe prior to installation. Background colors of markers, arrows and tape for each type of system shall be the same. Meet ANSI/OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- B. Identify exterior and mechanical room piping with Snap Around pipe markers through 4-inch pipe and Strap Around markers 5-inch pipe and larger. Pipe markers consisting of pipe marker and direction of flow arrow tape; background colors of markers, arrows and type for each type of system shall be the same. Meet ANSI / OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.
- C. Install identification in the following locations:
  - 1. both sides of penetrations through walls, floors and ceilings.
  - 2. Close to valves or flanges.
  - 3. Intervals on straight pipe runs not to exceed 50 feet
  - 4. Apply marker where view is obstructed.
- D. Pipe markers shall meet or exceed the specifications of the ASME A13.1 "Scheme for Identification of Piping Systems".

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 23 00

### REFRIGERANT PIPING AND APPURTENANCES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install copper tubing, valves, strainers and sight glass for refrigerant piping.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical.
  - 1. Pipe and Pipe Fittings.
  - 2. Piping Insulation.

#### PART 2 - PRODUCTS

##### 2.1 PIPE AND FITTINGS

- A. Furnish refrigerant piping of Type K hard-drawn copper tubing with sweat-type, wrought copper fittings. Cast fittings are not permitted.

##### 2.2 SERVICE VALVES

- A. Provide angle or globe service valves, with sweat connections. Use packed-type, wrench operated, valves with gasketed seal cap and back seat feature. Furnish valves designed for refrigerant service, in conformance with the ARI code.
- B. Place service valves at the inlet and outlet of each compressor, on both sides of each strainer and solenoid valve, and as otherwise shown and specified.

##### 2.3 SOLENOID VALVES

- A. Furnish pilot-operated, floating-piston solenoid valves suitable for operation with refrigerant.
- B. Use valves with a bronze body and sweat-type connections.
- C. Provide stainless steel stem and plunger assembly and a stainless steel piston.
- D. Furnish sealed and moisture proof solenoid coils.
- E. Use electrical characteristics of 115 volt, 60 Hertz.

##### 2.4 SIGHT GLASSES

- A. Provide suitable moisture and liquid sight glass in the liquid line leaving the condenser or receiver.

##### 2.5 FILTER DRYER

- A. Furnish replaceable core liquid line filter dryer.
- B. Provide filter dryer constructed to permit the removal of the core element without removing the filter dryer from the line.

## PART 3 - EXECUTION

### 3.1 BRAZING

- A. During the brazing process, dry nitrogen shall be purged through the tubing to prevent oxides from forming.

### 3.2 PRESSURE TEST

- A. After refrigeration and piping system items are installed, charge the system with dry nitrogen and test to 450 psig.
  - 1. Test joints with a Halide torch or an electronic leak detector.
  - 2. Repair leaks and retest each system until proved tight.

### 3.3 EVACUATION AND DRYING

- A. After refrigerant system has been pressure-tested, connect a suitable vacuum pump and evacuate piping system, including lines and equipment.
  - 1. Maintain a vacuum as high as practicable for long enough to evaporate the moisture in the system (at least 48 hours).
  - 2. Check the humidity within the system with a wet bulb indicator, and maintain the vacuum until the wet bulb temperature is reduced to -40°F. After the system has been evacuated and dried, break the vacuum by charging proper refrigerant into the system.

### 3.4 PIPE SIZE

- A. Pipe shall be routed and sized per condensing unit manufacturer's instructions.

END OF SECTION

## SECTION 23 31 13

### DUCTWORK

#### PART 1 - GENERAL

##### 1.1 SECTION INCLUDES

- A. Duct construction, support and accessories. Dimensions shown on the drawings are free area dimensions.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical
  1. Air Devices.
  2. Insulation.
  3. Fan Coil Units
  4. Fans
  5. Packaged Rooftop Air Conditioners.
  6. Testing, Balancing and Adjusting (TAB) of Environmental Systems.
- B. Division 9 – Finishes, Painting and Color Coding.

##### 1.3 QUALITY ASSURANCE

- A. The intent of ductwork specifications is to obtain superior quality workmanship resulting in an installation that is absolutely satisfactory in both function and appearance. Provide ductwork in accordance with the specifications for each type of service.
- B. An approved contractor for this work under this division shall be:
  1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
  2. Able to furnish evidence of having contracted for and installed not less than 5 systems of comparable size and type that have served their owners satisfactorily for not less than 5 years.

##### 1.4 GUARANTEE

- A. Guarantee ductwork for 1 year from the date of substantial completion. The guarantee covers workmanship, noise, chatter, whistling, or vibration. Ductwork shall be free from pulsation under conditions of operation.

##### 1.5 CONTRACTOR COORDINATION

- A. Erect ducts in the general locations shown, but conform to structural and finish conditions of the building. Before fabricating any ductwork, check the physical conditions at the job site and make necessary changes in cross sections, offsets, and similar items, whether they are specifically indicated or not.
- B. Coordinate location of ductwork with structural members and Architectural drawings and requirements.

##### 1.6 SHOP DRAWINGS AND SAMPLES

- A. Submit shop drawings of all ductwork layouts, including enlarged plans and elevations of all air handling equipment, and submit details of duct fittings, including particulars such as gauge sizes, welds, and configurations prior to starting work.

- B. Submit product data and sealing materials to be used.
- C. Submit sound attenuation data.
- D. Submit shop drawings in plan, elevation and sections, and three-dimensional view showing equipment in mechanical equipment areas.

## PART 2 - PRODUCTS

### 2.1 STANDARDS AND CODES

- A. Except as otherwise indicated, sheet metal ductwork material and installation shall comply with the latest edition of SMACNA HVAC Duct Construction Standards. Air distribution devices (such as dampers) included in this specification shall comply with the latest applicable SMACNA Fire, Smoke and Radiation Damper Installation Guide for HVAC Systems and NFPA 90A.

### 2.2 DUCT MATERIAL AND CONSTRUCTION

- A. Except for the special ducts specified below use lock forming quality prime galvanized steel sheets or coils up to 60" wide. Stencil each sheet with gauge and manufacturer's name. Stencil coils of sheet steel throughout on 10' centers with gauge and manufacturer's name. Provide certification of duct gauge and manufacturer for each size duct.
- B. Rectangular low and medium pressure duct constructed of sheet metal in accordance with the latest edition of SMACNA HVAC Duct Construction Standards.
- C. Low pressure round ducts shall be shop fabricated with snap lock longitudinal seams. Ducts shall be constructed for a minimum of 2" w.g. static pressure.
- D. Dishwasher Hood Exhaust System: Welded 304 Stainless steel.
- E. Kitchen exhaust duct: Welded Black steel, minimum 16 gauge

### 2.3 DUCT SEALING OF SEAMS AND JOINTS

- A. Follow seal classification as indicated in Table 1-2 of SMACNA "HVAC AIR DUCT LEAKAGE TEST MANUAL". Use seal class A for 4" w.g. static. All longitudinal and transverse joints and seams shall be sealed by use of a fireproof, non-hardening, and non-migrating elastomeric sealant. With the exception of continuously welded joints and machine made spiral lock seams, joints and seams made air tight with duct sealer.
  - 1. Indoor applications – Foster 32-14.
  - 2. Outdoor applications – Foster 32-17.

### 2.4 FLEXIBLE DUCT LOW PRESSURE

- A. Construction:
  - 1. Continuous galvanized spring steel wire helix, with reinforced metalized cover
    - a. The fabric shall be mechanically fastened to the steel helix without the use of adhesives.
  - 2. UL 181 Class I air duct label.
  - 3. Reinforced vapor barrier jacket.
  - 4. Rated for use at system pressure (6" wc minimum).
  - 5. Flexible duct connections from lateral taps to variable volume boxes or terminal boxes shall be rated at twice the maximum pressure rating of the medium pressure system.

- B. Fire hazard classification:
  - 1. Flame spread rating 25 maximum.
  - 2. Smoke developed rating 50 maximum.
- C. Thermal characteristics:
  - 1. R-6 BTU/hr/sq. ft./°F (when located in a conditioned plenum).
  - 2. R-8 BTU/HR/Sq.Ft./°F (when located in an unconditioned plenum).
  - 3. 2" minimum wall thickness insulation with 1" overlap.
- D. Acceptable manufacturers:
  - 1. Flexmaster.
  - 2. Hart & Cooley.
  - 3. Omniair.
  - 4. Peppertree Air Solutions.

## 2.5 FIRE DAMPERS

- A. Fire dampers for required wall ratings that are 95% minimum free area. Provide Type B or Type C UL dampers for low, medium and high-pressure rectangular, square or round ducts. Dampers shall be activated by a fusible link designed to react at 165°F. Install per manufactures recommendations to provide a UL assembly. Provide sealed sleeve to meet desired leakage performance.
- B. Acceptable Manufacturers:
  - 1. Ruskin
  - 2. Prefco Products
  - 3. Air Balance
  - 4. Greenheck, Inc.
  - 5. Nailor Industries
  - 6. Pottoroff

## 2.6 WALL LOUVERS

- A. Refer to schedule on drawings. Coordinate with Architectural Drawings.
- B. All louver frames shall be a minimum of 0.08" extruded aluminum. All blades shall be a minimum of 0.081" extruded aluminum. Beginning point of water penetration at 0.01 oz/sq.ft. Shall be a minimum of 800 ft/min.
- C. Provide all louvers with removable aluminum bird screen with 1/4" mesh.
- D. Louvers shall be AMCA-550 tested and approved.
- E. Acceptable manufacturers:
  - 1. American Warming and Ventilation
  - 2. Arrow
  - 3. Greenheck
  - 4. NCA
  - 5. Pottorff
  - 6. Ruskin

## 2.7 STORM SHELTER WALL LOUVERS

- A. Refer to schedule on drawings. Coordinate with Architectural Drawings.
- B. All louver frames shall be a minimum of 0.08" extruded aluminum. All blades shall be a minimum of 0.081" extruded aluminum. Beginning point of water penetration at 0.01 oz/sq.ft. Shall be a minimum of 800 ft/min.



- C. Provide all louvers with removable aluminum bird screen with 1/4" mesh.
- D. Louver performance shall be certified in accordance with the AMCA 511 Certified Ratings Program for AMCA 500-L Air Performance and Water Penetration and shall be licensed to bear the AMCA seal.
- E. Louvers shall be UL Classified (Wind-storm Rated) and shall be tested in accordance with the ICC 500-2014 debris impact standard of a 15 lb. 2 x 4 traveling at 100 mph as per the requirements indicated within the FEMA 361 construction guidelines for a FEMA 361 or FEMA 320 compliant storm shelter or safe room.
- F. Louvers shall be capable of withstanding positive or negative wind pressure loads up to 250 psf when installed in accordance with the manufacturer's published installation instructions.
- G. Acceptable manufacturers:
  - 1. Ruskin (XP500)
  - 2. United Enertech (FEMA-5)
  - 3. Greenheck (AFL-501)
  - 4. Pottorff (XAV-505)
  - 5. Airolite ( AFG501)

## 2.8 DUCT LINING

- A. Duct lining shall be 1" thick, 1-1/2 lb. density, flexible lining coated on the air stream side to reduce attrition. Liner shall be Schuler Lina-Coustic, Certain-Teed Ultralite, or equal meeting requirements of NFPA 90-A. Provide I.A.Q. rated liner.

## 2.9 CONTROL DAMPERS

- A. Opposed blade dampers for 2-position and modulating control. Construct frames of 13-gauge galvanized sheet metal with provisions for duct mounting. Damper blades not exceeding 8" in width, of corrugated-type construction, fabricated from two sheets of 22-gauge galvanized sheet metal spot-welded together or a single 16-gauge sheet. Make bearings of nylon or oil-impregnated, sintered bronze. Make shafts of 1/2" zinc-plated steel. Blades suitable for high velocity performance. Construct damper so that leakage does not exceed 1/2% based on 2000 fpm and 4" static pressure. Provide replaceable resilient seals along top, bottom and sides of frame and along blade edge. Submit leakage and flow characteristics data with shop drawings. Linkage shall be concealed out of the air stream within damper frame to reduce pressure drop and noise.

- B. Acceptable Model is Ruskin Model CD60.

## 2.10 VOLUME DAMPERS

- A. Manual balancing dampers that meet or exceed the following minimum construction standards:
  - 1. Frame 16-gauge.
  - 2. Blades 16-gauge.
  - 3. Bearings corrosion resistant.
  - 4. Concealed linkage.
  - 5. Opposed blade dampers.
- B. Acceptable manufacturer:
  - 1. Ruskin Model MD-35 or approved equal, by.
  - 2. Arrow.
  - 3. American Warming and Ventilating.
  - 4. Nailor Industries.
  - 5. Pottorff.

## 2.11 DIFFUSER FITTINGS LOW PRESSURE TAPS

- A. Fitting shall meet or exceed the following minimum construction standards:
  - 1. Conical with a base diameter two inches larger than the tap diameter.
  - 2. Construct fitting and damper of galvanized steel in accordance with ASTM A 527, G90 finish.
    - a. Fitting with a 3/16-inch high stop bead approximately 2-1/2-inches from the discharge end of the fitting.
    - b. Provide the fitting with a butterfly damper, damper rod, end bearings and heavy duty locking quadrant.
    - c. Size the length of the straight section of the fitting to match the damper blade diameter. Center the damper blade in the straight section.
  - 3. Match the fitting body gauge to the SMACNA duct gauge, but not less than:
    - a. Through 8 inches: 26 gauge; Damper blade 22 gauge.
    - b. 10 inches and 12 inches: 24 gauge; Damper blade 22 gauge.
    - c. 14 inches and 16 inches: 22 gauge; Damper blade 22 gauge.
    - d. 18 inches and 20 inches: 20 gauge; Damper blade 20 gauge.
  - 4. Fasten damper blade to a 3/8 X 3/8 continuous square rod with minimum (2) galvanized U-bolts.
  - 5. Support the damper rod to the fitting with airtight nylon end bushings / bearings.
  - 6. Provide the damper with a self-locking regulator and handle.
  - 7. Provide a 2" sheet metal stand-off to extend the regulator.
  - 8. Flex duct grip area – 2 inches behind retaining bead.
  - 9. Flex duct retaining bead – 1 inch from end.
  - 10. Conical length of at least 3 inches.
  - 11. Barrel length of at least 9 inches.

## 2.12 AUXILIARY DRAIN PANS

- A. Galvanized steel, same gauge and same bracing or cross breaks as a duct with same dimensions. Sides of pan turned up to 1-1/2", all joints soldered watertight. Pan is to be large enough to complete cover drip lines of unit.

## 2.13 DUCTWORK SUPPORTS ON ROOF

- A. Support ductwork on roof with Portable Pipe Hanger Model PHP-D fully adjustable height and width. Base material shall be high density / high impact polypropylene with UV inhibitors and anti-oxidants. Provide with hot dip galvanized framing. Nuts and washers shall be hot dip galvanized.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Use construction methods and requirements as outlined in SMACNA HVAC Duct Construction Standards as well as SMACNA Balancing and Adjusting publications, unless indicated otherwise in the specifications. Refer to details on the drawings for additional information.
- B. Reinforce ducts in accordance with recommended construction practice of SMACNA. Provide additional reinforcement of large plenums as required to prevent excessive flexing and or vibration.
- C. Cross break or bead sheet metal for rigidity, except ducts that are 12" or less in the longest dimension.

- D. Where ducts pass through walls in exposed areas, install suitable escutcheons made of sheet metal angles as closers.
- E. At locations where ductwork passes through floors, provide watertight concrete curb around penetration.
- F. Support ducts where passing through floors with galvanized steel structural angles of adequate bearing surface.
- G. Metal or lined ductwork exposed to view through grilles, registers, and other openings shall be painted flat black. Do not install grilles, registers, or similar items until painting is complete.
- H. Fire Dampers shall be installed per manufacturer's recommendations to create a UL rated assembly.
- I. Install end bearing at all location where damper shaft penetrates duct wall.
- J. Clean duct to remove accumulated dust. Ducts shall be closed on ends between phases of fabrication to assure that no foreign material enters the ducts.

### 3.2 DUCTWORK

- A. Construct rectangular ducts and round ducts in accordance with the latest SMACNA HVAC Duct Construction Standards. Use the static pressure specified on the air handling unit schedule or fan schedules as a minimum for duct construction. All ductwork between the variable volume air handling units and the terminal units shall be constructed to the medium pressure ductwork specification.
- B. Provide adjustable, galvanized splitter-dampers, pivoted at the downstream end with appropriate control device at each supply duct split.
- C. For branch ducts wider than 18", and when shown on drawings provide extractors with an appropriate control device at each rectangular zone or branch supply duct connection. Provide controllers for extractors. Branch ducts shall have a 45° angle in the direction of flow. Do not provide extractor at branch ducts to sidewall registers where the registers are within 10 feet of the main duct.
- D. Shop manufactured curved blade scoops may be used for branch duct takeoffs up to 18" wide. Taper scoop blade to the end, to prevent any sagging that may cut into, or damage duct liner if specified during operation.
  - 1. Construct shop manufactured scoops and splitter blades of galvanized sheet metal 2 full gauges heavier than equivalent sheet metal gauge of branch duct (up to 16 gauge).
  - 2. Check extractors, scoops and splitter blades thoroughly for freedom of operation. Oil bearing points before installing.
- E. Use pushrod operator with locking nut and butt hinges assembly.
- F. Provide opposed-blade volume dampers with an appropriate control device in each of the following locations:
  - 1. Return air ductwork
  - 2. Outside air branch duct
  - 3. Exhaust branch duct
  - 4. Exhaust connections to hoods except kitchen grease hoods or equipment
  - 5. In each zone at multi-zone unit discharge installed downstream of duct mounted re-heat coils

6. At each outside air and return air duct connection to plenum of constant volume units
  7. At discharge side of constant volume boxes
  8. Where otherwise indicated or required for balancing coordinate location of additional dampers required by TAB Contractor.
  9. Provide multi-blade dampers when blade width exceeds 12". Provide end bearing where damper shaft penetrates duct wall.
- G. Elbows:
1. Rectangular: Where square elbows are shown, or are required for good airflow, provide and install single-wall or airfoil turning vanes. Job-fabricated turning vanes, if used, shall be single-thickness vanes of galvanized steel sheets of the same gauge metal as the duct in which they are installed. Furnish vanes fabricated for the same angle as the duct offset. The use of radius elbows with a centerline radius of not less than 1-1/2 times the duct width may be provided in lieu of vaned elbows where space and air flow requirements permit.
  2. Round Oval Duct. Provide elbows with a centerline radius of 1-1/2 times the duct diameter or duct width. For round ducts, furnish smooth elbows or 5 piece, 90° elbows and 3 piece, 45° elbows.
- H. For control devices concealed by ceilings, furring, or in other inaccessible locations, furnish extension rods and appropriate recessed-type Young regulators, mounted on the surface of the ceiling or the furring, unless specified, or shown otherwise. Provide with chrome plated cover plates. Use only one mitered gear set for each control device.
- I. Install streamline deflectors at any point where dividing a sheet metal duct around piping or where other such obstruction is permitted. Where such obstructions occur in insulated ducts, fill space inside streamliner and around obstructions with glass fiber insulation.
- J. Insulated Flexible Duct:
1. Install in accordance with manufacturer's instructions, and the terms of its UL listing. Duct shall not exceed 6' in length. Make connections by use of sheet metal collars and stainless steel circular screw clamps. Clamps shall encircle the duct completely and be tightened with a worm gear operator to the point that will provide an airtight connection without unnecessary deformation of the duct. Provide one clamp on flexible duct and one clamp on external insulation. Vapor barrier jacket shall be tucked inside to conceal insulation material.
  2. Construct bends over 45° with sheet metal elbows.
- K. Duct Supports:
1. Horizontal ducts up to 40". Support horizontal ducts up to and including 40" in their greater dimension by means of #18 U.S. gauge galvanized iron strap hangers attached to the ducts by a minimum of two locations per side by means of screws, rivets or clamps, and fastened to inserts with toggle bolts, beam clamps or other approved means. Place supports on at least 8' centers. Use clamps to fasten hangers to reinforcing on sealed ducts.
  2. Horizontal ducts larger than 40". Support horizontal ducts larger than 40" in their greatest dimension by means of hanger rods bolted to angle iron trapeze hangers. Place supports on at least 8' centers in accordance with SMACNA Standards.
  3. Support vertical ducts where they pass through the floor lines with 1-1/2" x 1-1/2" x 1/4" angles for ducts up to 60". Above 60", the angles shall be increased in strength and sized on an individual basis considering space requirements.
  4. Supports shall be suspended from structural or by independent support. Do not support from structural bridging. Upper attachments should be selected with a safety factor of 4 or 5 times actual load conditions and subject to Engineers

approval. Double wrap straps over open web of joist.

- L. Branch connections for medium pressure ductwork shall be made with a conical lateral. Field installed conical branch ducts shall be minimum 20-gauge galvanized sheet metal, "Everdur" welded and coated with "Galvabar".

### 3.3 PLENUMS

- A. Return air plenums shall be rectangular galvanized sheet metal ductwork.
- B. Fabricate plenums upstream of fan of 16-gauge material.
- C. Fabricate plenums upstream of filters minimum 18-gauge material.

### 3.4 FLEXIBLE CONNECTIONS

- A. Where ducts connect to fans or air handling units that are not internally isolated, make flexible airtight connections using "Ventglas" fabric. The fabric shall be fire-resistant, waterproof and mildew resistant with a weight of approximately 30 ounces per square yard. Provide a minimum of 1/2" slack in the connections, and a minimum of 2-1/2" distance between the edges of the ducts. Also, provide a minimum of 1" slack for each inch of static pressure on the fan system. Fasten fabric to apparatus and to adjacent ductwork by means of galvanized flats or draw bands. Where connections are made in outdoor locations, seal fabric to metal with mastic.

### 3.5 DUCT LINING

- A. Install glass fiber acoustical lining where shown on drawings. Secure to duct surfaces with Foster 85-62 / 85-60 or Childers CP-125-1 / CP-127 adhesive and sheet metal fasteners on 12" centers. Coat exposed edges and leading edges of cross-joints with adhesive.
- B. Provide metal nosing that is either channeled or "Z" profiled or are integrally-formed from the duct wall securely installed over transversely oriented liner edges facing the air stream at fan discharge and at any interval of lined duct preceded by unlined duct.
- C. Refer to Insulation & Liner Detail on drawings for locations requiring liner to be installed.
- D. Do not install liner in multi-zone unit ductwork.

### 3.6 SEALING OF SEAMS AND JOINTS

- A. Seal supply, return, exhaust and outside air duct systems.

### 3.7 FLUES

- A. Provide and install flues for all gas fired equipment.
- B. Refer to plans for all related locations.
- C. Contractor is responsible for coordinating stack sizing, stack drains, stack test ports, stack termination fittings and all other required fittings with the selected equipment manufacturers.
- D. All fittings and accessories shall be manufactured by the flue manufacturer. The flue shall be installed per manufacturer's instruction.
- E. Terminate flues at height above roof to prevent flue gas from entering the building.

### 3.8 DISHWASHER HOOD EXHAUST SYSTEM

- A. All material and fittings shall be 304 Stainless steel, welded joints, watertight construction. Grade horizontal duct 1/4" per lineal foot to drain toward the washer.

### 3.9 KITCHEN EXHAUST DUCT

- A. All material and fittings shall be minimum 16 gauge, coated black steel to prevent rusting. All seams and joints in the kitchen exhaust duct, and penetrations of the hood enclosure to its lower outermost perimeter that directs and captures grease-laden vapors and exhaust gases shall have a liquid tight continuous external weld. All ducts shall be installed without forming dips or traps that might collect residues. Provide 18" x 18" or equal area at each elbow and as required for cleaning access, in direction of air flow. UL Listed access panel shall be located on the vertical wall of the duct 1-1/2" from the bottom of duct and shall be fitted with two handles, grease and air tight fitting access door and latch. All interior surfaces of ducts shall be accessible for cleaning and inspection purposes. Duct shall maintain minimum 1/4" per lineal foot slope to the exhaust hood. Provide duct over lay at the roof curb for a complete seal. Install kitchen exhaust system per local authority. In the absence of a local authority, the requirements of the Uniform Mechanical Code and NFPA 96 shall govern.

### 3.10 CONNECTIONS TO LOUVERS

- A. Make watertight connections to all louvers. Ductwork behind louver shall have watertight soldered joints for a minimum of three feet and be sloped to bottom of louver. Lap duct to be over bottom louver blade where possible.
- B. Where plenums are installed on inside of louver, construct such that bottom of plenum will lap over bottom blade of louver to drain any water that may enter.

### 3.11 PLENUMS

- A. Construct plenums with galvanized steel framing members and galvanized sheet steel, cross braced and rigidly braced with galvanized angles. Gauges and bracing shall conform to SMACNA recommendations for ductwork of like sizes. Openings for fans, access doors, etc., shall be framed with galvanized steel angles.
- B. Provide access doors.

### 3.12 AUXILIARY DRAIN PANS

- A. Where coils that have a condensate drain are located above ceiling.

### 3.13 TESTING OF LOW PRESSURE DUCTWORK

- A. Test ductwork for leaks before concealing. Maximum allowable leakage is 5% of total airflow.
- B. Provide equipment necessary for performing tests, including rotary blower large enough to provide required static pressure at allowed CFM quantity, certified orifice section with proper papers, traceable serial numbers and pressure vs CFM leakage rate scale, U-tube gauge board complete with cocks, tubing, and inclined manometer for leakage rates.
- C. Mains: Test mains after risers and branches are tied in and all equipment set. Close runout connections and place fan in operation. Provide pressure in mains at 1-1/2 times design pressure. Visually inspect joints. Repair leaks detected by sound or touch. Release mains for completion after joints are tight.

- D. Ductwork down stream of terminal boxes, return, exhaust, and outside air ducts are to be visually inspected.

END OF SECTION

## SECTION 23 34 16

### FANS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install fans, including centrifugal, axial and propeller types, with supplemental equipment.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical:
  - 1. Ductwork.
  - 2. Vibration Isolation.
  - 3. Air Balance.
  - 4. Electrical Provisions of Mechanical Work.

##### 1.3 PERFORMANCE

- A. Provide fan type, arrangement, rotation, capacity, size, motor horsepower, and motor voltage as shown. Fan capacities and characteristics are scheduled on the drawings. Provide fans capable of accommodating static pressure variations of +10% of scheduled design at the design air flow.
- B. Rate fans according to appropriate Air Moving and Conditioning Association, Inc. (AMCA), approved test codes and procedures. Supply fans with sound ratings below the maximums permitted by AMCA Standards. All fans provided must be licensed to bear the Certified Ratings Seal.
- C. Statically and dynamically balance all fans.
- D. Motors shall be sized so that they do not operate within the motor service factor.
- E. Fans shall be capable of 120% of the scheduled air capacities.
- F. All static pressures shown on schedules are external to fans. Manufacturer shall add damper and accessory losses to scheduled value before selecting fan.

##### 1.4 SUBMITTALS

- A. Submit fan performance curves with system operating point plotted on curves.
- B. Submit manufacturer's printed installation instructions.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Cook.
- B. Greenheck.
- C. Penn Barry Ventilator.



- D. Twin City Fans

## 2.2 SUPPLEMENTAL EQUIPMENT

- A. Motor Covers. Provide weatherproof motor covers for installations out of doors. Apply the same finish as used on the fan.
- B. Belt Drives:
  - 1. Unless otherwise specified for belt-driven fans, equip the fan motors with variable pitch sheaves. Select the sheave size for the approximate midpoint of adjustment and to provide not less than 20% speed variation from full open to full closed. Size drives for 150% of rated horsepower. Key the fan sheave to the fan shaft.
  - 2. Nonadjustable motor sheaves may be used for motor sizes over 15 horsepower, at the Contractor's option. However, if changing a nonadjustable sheave becomes necessary to produce the specified capacity, the change must be made at no additional cost.
  - 3. Provide belt guards and apply the same finish as used on the fan.
  - 4. Oil and heat resistant, nonstatic type belts.
  - 5. Bearings shall be designed and individually tested specifically for use in air handling applications. Construction shall be heavy duty, regreasable, ball type, in a pillow block, cast iron housing, selected for a minimum L50 life in excess of 200,000 hours at maximum catalog operating speed.
- C. Safety Disconnect Switch: Provide a factory-wired to motor, safety disconnect switch on each unit.
- D. Relief Vents and Air Inlets: Provide vents and inlets with aluminum frames and 1/2" mesh, galvanized bird screens. Include dampers where shown.
- E. Prefabricated Roof Curbs: Furnish prefabricated roof curbs as detailed. The minimum height is 14". Include a resilient pad on each roof curb so the equipment can be mounted on the top flange for proper seal. Coordinate roof slope and curb to ensure equipment is installed in level position. Provide double shell to protect insulation from damage.
- F. Dampers. Where automatic backdraft damper is scheduled:
  - 1. Multi-bladed.
  - 2. Heavy duty.
  - 3. Roll formed aluminum blades.
  - 4. Nylon bearings.
  - 5. Neoprene weather strip on blade edge.
- H. All fans are to be provided with a durable, deep etched, .025" thick, factory installed aluminum identification plate with the following information. Plates are to be furnished with four mounting holes.
  - 1. Fan mark as indicated on the Contract Drawings.
  - 2. Serial number.
  - 3. Model number.
  - 4. Capacity (CFM) and static pressure.
  - 5. Motor HP.
  - 6. Motor Amps.
  - 7. Manufacturer.
  - 8. Motor phase.
  - 9. Number of Belts/Make/Size.
  - 10. Motor volts.

- I. Utility Vent Set Fans, provide minimum  $\frac{3}{4}$  inch threaded coupling drain connection at lowest point of housing.

## 2.4 VENTILATION AND EXHAUST FANS

- A. Provide the ventilation and exhaust fans shown on the drawings.
- B. Provide each motor with internal overload protection.
- C. Provide each belt driven fan with approved, totally enclosed belt guard.
- D. Provide approved safety screen where inlet or outlet is exposed.
- E. Provide duct flanges where required for connections.
- F. Furnish kitchen hood exhaust fans with vented curb extension that meets NFPA 96, cleanout port, grease tap, curb seal, drain connection and hinge kit.
- G. Furnish supply fans with 1" aluminum, washable filter section.

## 2.5 ROOFTOP VENTILATION AND EXHAUST SYSTEMS

- A. Provide the rooftop ventilation and exhaust systems shown on the drawings.
- B. Provide each motor with internal overload protection.
- C. Components:
  - 1. Aluminum, stainless steel or plastic coated bird guard.
  - 2. Screws and fasteners of stainless steel or nonferrous material.
  - 3. All aluminum construction unless indicated otherwise on fan schedule.
- D. Welded construction, corrosion resistant fasteners, minimum 16 gauge marine alloy aluminum.
- E. Aluminum base shall be continuously welded curb cap corners.

## 2.6 GRAVITY ROOF-TOP INTAKE AND RELIEF VENTS

- A. Provide the rooftop intake and relief vent systems shown on the drawings.
- B. Provide with aluminum, stainless steel or plastic coated bird guard.
  - 1. Screws and fasteners of stainless steel or nonferrous material
  - 2. All aluminum construction
- C. Welded construction, corrosion resistant fasteners, minimum 16-gauge marine alloy aluminum.
- D. Aluminum base shall be continuously welded curb cap corners.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install fans according to the manufacturer's instructions and in the locations shown on the drawings. Ensure fan location is installed at minimum distance from roof edge to meet code requirements.
- B. Do not operate fans or fan powered devices for any purpose until ductwork is clean, filters in place, bearings lubricated and the fan has been run under observation.
- C. Roof mounted fans and gravity roof-top intake and relief vents shall be secured to the curb with stainless steel lag screws at a minimum of 6-inches on center. Follow manufacturer's installation instructions if they are more stringent. Install roof mounted equipment in a level position. Units shall be seated on properly sized curb. Gap between base of the fan and top of the curb shall be sealed with neoprene 1" x 1/4" gasket. Gasket shall be glued or attached with pressure sensitive adhesive.
- D. Install curbs and equipment in level position.
- E. Ceiling mounted in-line centrifugal blowers
  - 1. Shall be suspended from structure with 1/2-inch zinc plated all-thread rods secured to structure.
  - 2. Provide sub-structure where required.
  - 3. Mount bottom of fan no more than 18-inches above the finished ceiling height.

### 3.2 EXTRA MATERIALS

- A. Provide two sets of belts for each fan, not including the set installed on the fans. Tag set to identify fan.

END OF SECTION

## SECTION 23 37 13

### AIR DEVICES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install air distribution devices, including grilles, diffusers, registers, dampers, and extractors.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical.
  - 1. Ductwork.
  - 2. Air Balance.
  - 3. Electrical Requirements for Mechanical Work.

##### 1.3 COOPERATION WITH OTHER TRADES

- A. Coordinate this work with work under Division 26 Electrical, to ensure that intended functions of lighting and air systems are achieved.

##### 1.4 SUBMITTALS

- A. Submit product data for outlets, grilles, registers, control devices, and similar equipment for review prior to placement of purchase order.
- B. Submittal shall include performance sheet for each air device type. Performance sheet shall include NC levels, throw, and total pressure loss at various air flows.

##### 1.5 FINISHES

- A. Paint exposed devices with factory standard prime coat, or factory finish coat, as specified.

#### PART 2 - PRODUCTS

##### 2.1 DIFFUSERS, GRILLES AND REGISTERS - Refer to Drawing Schedule.

##### 2.2 ACCEPTABLE MANUFACTURERS

- A. Titus.
- B. Krueger.
- C. Nailor Industries.
- D. Price.
- E. Metal-Aire.

##### 2.3 ACCESSORIES

- A. Supply Grille Extractors. Provide supply grilles with an air control device capable of positively regulating the volume of air extracted from the supply duct.

Select extractors similar to Titus Model AG25, tight-closing in the minimum position. Include a key-operated or worm-gear adjusting mechanism to facilitate positioning from the grille opening. Where adjustment is not accessible at the grille opening, provide a square control rod equipped with a locking quadrant.

- B. Mounting Frames. Provide each grille or register not equipped with a removable core with a companion, all-purpose mounting frame constructed like grille frame to facilitate installation and removal of the grille or register without marring adjacent mounting surfaces.
  - 1. Furnish frames with 1/2" thick sponge rubber gasket to prevent air leakage.
  - 2. Provide a frame that neatly fits the grille. Mounting frames will not be required for grilles or registers mounted directly on exposed ductwork.

### PART 3 - EXECUTION

#### 3.1 INSPECTION

- A. Do not install ceilings adjacent to fixtures until installation of fixtures, air supply assemblies, return-air blank-off strips and flexible duct have been approved. Remove and reinstall any part of the installation found incorrect.

#### 3.2 INSTALLATION

- A. Louvered diffuser outlets mount tight against the ceiling. Fasten outlets to ductwork with sheet metal screws. For perforated diffusers, attach the frame assembly by a concealed hinge assembly to an outer frame compatible with the type of ceiling on which the diffuser is installed.

END OF SECTION

## SECTION 23 55 13

### GAS FIRED DUCT FURNACE

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide and install gas fired duct furnaces complete with combustion chamber, standing pilot, automatic control valve, high limit control, burner, control manifold, and 24 volt transformer.

##### 1.2 RELATED WORK

- A. Division 23 - Mechanical
  - 1. Electrical Provisions of Mechanical Work
  - 2. Ductwork

##### 1.3 REFERENCES

- A. Units shall be approved by the American Gas Association.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Modine.
- B. Reznor.
- C. Sterling.
- D. Trane.

##### 2.2 COMPONENTS

- A. Casing constructed of sheet metal, fully welded with side burner access. Apply enamel or lacquer finish to manufacturer's standard.
- B. Heat Exchanger: Direct-fired primary heat exchanger tubes constructed of 20 gauge 409 stainless steel.

##### 2.3 CONTROLS

- A. Furnish automatic controls, factory mounted and prewired to the junction box, except for the room thermostat.
- B. Furnish an electric main burner gas valve.
- C. Provide a pilot safety control valve arranged for 100% safety shutoff. Provide unit with automatic electric pilot ignition.
- D. Furnish high limit temperature control, a space thermostat, a gas pressure regulator, and manual gas shutoff valve.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Furnish units with suitable connections for mounting as shown or as otherwise approved.

END OF SECTION

## SECTION 23 63 00

### AIR-COOLED CONDENSING UNITS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install air-cooled condensing units complete with casing, compressor, condenser coil, condenser fan and controls required for a split air conditioning system.

##### 1.2 RELATED WORK

- A. Refrigerant Piping.
- B. Electrical Provisions of Mechanical Work.

##### 1.3 PERFORMANCE

- A. Provide performance as scheduled on drawings, and head pressure control to enable unit to operate in temperatures as low as 20 degrees F. ambient.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Carrier.
- B. Trane.
- C. Daikin.
- D. York.
- E. Lennox.

##### 2.2 COMPRESSOR

- A. Provide a hermetic or semi-hermetic compressor with crankcase heaters, inherently protected motors, spring mounts and capacity modulation. Provide each compressor with a 5-year warranty.

##### 2.3 CONDENSER COILS

- A. Provide copper tubes with mechanically bonded aluminum fins. Protect condenser coils with a heavy gauge, corrosion resistant wire guard.

##### 2.4 FANS AND MOTORS

- A. Provide propeller-type fans with direct drive or belt drive and vertical discharge. Protect fan with a heavy-gauge, corrosion resistant wire guard. Provide inherently protected, permanently lubricated, and weatherproof motors.



## 2.5 CASING

- A. Furnish a unit designed for outdoor mounting. Fabricate the casing of heavy gauge steel, zinc coated and finished with enamel. Provide removable access panels.

## 2.6 CONTROLS

- A. Provide safety and operating controls factory wired and mounted in a separate enclosure. Include thermostatic expansion valve, high and low pressure switches and compressor motor overload devices. Furnish a time delay device to prevent short cycling. Employ a control transformer, a pressure relief device and suction and discharge valves with service connections.

## 2.7 THERMOSTAT

- A. Low voltage, 7-day programmable thermostat is a component of the unit manufacturer unless specified in another Section.
  - 1. Individual Heating/Cooling setpoints.
  - 2. Automatic Heat/Cool change-over.
  - 3. Sub-Base On-Off-Auto fan selection.
  - 4. Sub-Base Heat-Off-Cool-Auto system selection.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Mount condensing units on 4" foundation pads and pipe as shown on Drawings or as recommended by the equipment manufacturer. Install removable core refrigerant filter dryer and sight indicating glass.

### 3.2 CONTROL WIRING

- A. Furnish and install control wiring as required. Install control wiring in conduit.

END OF SECTION

## SECTION 23 73 13

### AIR HANDLING UNITS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install air handling units with casing, fans, coils, filters, and special items.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical
  - 1. Air Balance.
  - 2. Ductwork.
  - 3. Controls.
  - 4. Electrical Provisions of Mechanical Work.
  - 5. Other applicable sections.

##### 1.3 PERFORMANCE

- A. Unit capacities and characteristics as indicated.
  - 1. Units must be certified in accordance with ARI Standard 430-66.
  - 2. UL 1995 certification for safety including electric heat.
  - 3. ARI 430 listed and meet NFPA 90A requirements.

##### 1.4 SHOP DRAWINGS

- A. Indicate assembly, unit dimensions, weight loading required clearances, construction details, field connection details, and electrical characteristics and connection requirements.
- B. Submit fan performance curve for each unit:
  - 1. Plot fan volume against static pressure, horsepower, and efficiency.
  - 2. Show point of rating based on static requirements of the system.
  - 3. Chart of specific sound power level at each octave band center frequency.
  - 4. For variable volume units, plot fan volume over entire range.
- C. Submit for review a unit internal static pressure loss calculation.
  - 1. Provide an itemized list of static pressure loss at the scheduled CFM for each unit component including and not limited to:
    - a. Coils.
    - b. Dirty filters.
    - c. Fan and unit system effect.
    - d. Cabinet and cabinet inlet and outlet.
    - e. Unit mounted dampers.
  - 2. If a unit mounted outside air pretreatment section without supply fan, "piggyback" is specified:
    - a. Provide an itemized static pressure loss as indicated above.
    - b. Determine losses for unit configuration, i.e. parallel or series.
    - c. Include losses in the primary unit internal static pressure required by configuration.
  - 3. The air handling unit schedule indicates static pressure external to the unit and does not include any losses associated with the air handling equipment.

## 1.5 ENVIRONMENTAL REQUIREMENTS

- A. Do not operate units until ductwork is clean, filters are in place, bearings lubricated, condensate properly tapped, piping connections verified and leak tested, belts aligned and tensioned, all shipping braces have been removed, and fan has been tested under observation.

## 1.6 DELIVERY, STORAGE AND HANDLING

- A. Inspect for transportation damage and store in a clean, dry location. Protect from weather and construction traffic.

## PART 2 - PRODUCTS

### 2.1 ACCEPTABLE MANUFACTURERS

- A. Carrier.
- B. York.
- C. Daikin.

### 2.2 MISCELLANEOUS REQUIREMENTS

- A. Provide factory assembled units. Large units may be shipped in sections, at contractor's option, to enable entrance to building, or for oversize shipping reasons only.
- B. Furnish units with sealing and fastening hardware supplied by the manufacturer. Include written instructions needed to complete field assembly of the components.
- C. Provide units designed and constructed so that coils, panels, fan housing and fans can be removed without affecting the structural integrity of the unit.
- D. Unit casing panels shall be a minimum of 2" double wall construction with solid galvanized exterior and solid galvanized interior. Panels shall have a minimum thermal resistance of R-13. The casing shall not exceed 0.0042-inch deflection per inch of panel span at 1.5 times the design static pressure up to a maximum of +8 inches in all positive pressure sections and -8 inches in all negative pressure sections.
- E. Provide full perimeter base rail channel under units constructed of heavy gauge galvanized steel (minimum 10 gauge) and intermediate cross members to assure unit integrity. Provide minimum size base rail to ensure proper trapping and slope of condensate drain (minimum 6 inch from bottom of drain opening).
- F. Fan assembly shall be provided with 1" deflection internally mounted spring vibration isolation under the fan and motor base on units with coils less than 8 sq. ft. and 2" deflection internally mounted spring vibration isolation under the fan and motor base with coils greater than 8 sq. Ft. Units with coils over 35 sq. ft. shall have spring thrust restraints securing the fan housing to the discharge opening panel on units. Fan motor shall be internally mounted. Provide internal flex connection of fan discharge. Maximum acceptable RPM of fan shall not exceed 1000.
- G. Provide factory installed removable hinged access doors in the following locations:
  - 1. Entering side of all coils to allow for cleaning of coils on both sides of unit.
  - 2. Each side of filter compartment to allow changing of filters from either side.
  - 3. Each side of motor compartment to allow motor and isolation access.

4. Each side of condensate drain pan to allow for cleaning and inspection.
  5. Swing the doors against the casing static pressure.
- H. Provide all coil modules, including heating coil modules, with stainless steel drain pans to facilitate cleaning and maintenance of the coils. Drain pan to extend 10" minimum downstream of cooling coil.
- I. Provide coils with stainless steel casings, end plates, tube supports and top & bottom plates.
- J. Units shall meet ASHRAE III Class 6 Low Leakage Standard. Casing shall have less than a 1% leakage rate at plus or minus 8 inches W.G.
- K. Provide units with a low velocity angled filter section unless otherwise specified.

## 2.3 DRAW THROUGH AIR HANDLING UNITS – CONSTANT VOLUME (BELT DRIVEN FORWARD CURVE)

- A. Provided with:
1. V-belt drive assembly and motor with totally enclosed belt guard.
  2. Insulated sheet metal cabinet with removable panels for access to the interior.
  3. Hinged double wall doors with two-step safety handles.
- B. Drive assembly:
1. Size for 50% overload.
  2. Matched belts.
  3. Minimum two belt drive.
  4. Provide adjustable pitch motor pulley for motors.
  5. Provide motor and fan pulley of cast iron keyed to the shaft.
- C. Select the motor so that the brake horsepower required to deliver the design air quantity at the system static pressure will not exceed the motor nameplate rating.
1. Totally enclosed, fan cooled, variable speed. 1750 rpm
  2. Minimum 90% nominal efficiency at loads of 70% to 100%.
  3. Premium efficiency
  4. Cast iron frame and end plate
  5. Forged steel lifting eye
  6. Oversized conduit box with ground lug
  7. Provide with factory installed shaft grounding ring by Aegis on units which utilize a variable frequency drive.
- D. Supply Fans:
1. Double width, double inlet, forward curve blades.
  2. Statically and dynamically balanced.
  3. Tested after being installed in the fan sections.
  4. Selected for the design air quantities and pressure of the system.
  5. Mounted on a common shaft if multiple wheels.
- E. Select fan to operate at or near its maximum efficiency point when handling the required air quantity and static pressure.
- F. Stainless steel condensate pan with positive slope in all directions to outlet. Line the condensate drain pan with minimum 1-1/2" waterproof insulation.
- G. Fan bearings:
1. Remote grease fittings grouped on the motor access side of the unit.

2. Self-aligning.
  3. Select for an average life of 200,000 hours.
- H. Insulation, vapor barriers, facings and adhesives shall have:
1. Flame spread not higher than 25.
  2. Smoke developed rating not higher than 50.
- I. Double wall casing construction. Construct interior casing panels with 3 lb. minimum density insulation for acoustical and condensation control.
1. Condensation on the exterior of the air handling units is not acceptable.
- J. Filter section:
1. Constructed with substantial hinges.
  2. Neoprene gasketing.
  3. Permanent quick release latching devices.
  4. Arranged to accommodate the 2" thick filters as specified.
  5. Low velocity angled filter section unless otherwise specified.
- K. Cooling coils as specified. Extend drain and vent piping through cabinets. Provide grommets at all pipe penetrations through cabinets.
- L. Heating coils as specified. Extend drain and vent piping through cabinets. Provide grommets at all pipe penetrations through cabinets.
1. Location as indicated.
- M. Factory dynamic fan balancing shall be conducted from 16Hz to 60Hz to identify and eliminate critical speeds to ensure stable operation through the entire operating range of the fan and drive assembly. Field fan balancing is not acceptable. Forward factory balancing test report to Engineer upon request.

#### 2.4 DRAW THROUGH AIR HANDLING UNITS CONSTANT VOLUME (DIRECT DRIVE STANDARD MOTORS)

- A. Provided with:
1. Non-Overloading direct drive plenum fans. Provide minimum number of fans as indicated on drawings.
  2. Insulated sheet metal cabinet with removable panels for access to the interior.
  3. Hinged double wall doors with two-step safety handles.
- B. Drive assembly:
1. Sized for 50% overload.
- C. Motors and Control:
1. Totally enclosed, fan cooled, Variable speed, 1750 rpm.
  2. Maximum operating point of 70 Hz.
  3. Minimum 90% nominal efficiency at loads of 70%-100%.
  4. Premium efficiency inverter duty
  5. NEMA B design, with Class B insulation, capable to operate continuously at 104 deg F without tripping overloads.
  6. +/- 10% voltage utilization range to protect against voltage variation.
  5. Cast iron frame and end plate
  6. Forged steel lifting eye
  7. Oversized conduit box with ground lug
  8. Provide with factory installed shaft grounding rings by Aegis
  9. Motor selected so that the brake horsepower required to deliver the design air quantity at the system static pressure will not exceed the motor nameplate rating.

- D. Supply Fans:
1. Single width, single inlet, backward curved welded aluminum plenum fan.
  2. Statically and dynamically balanced to a BV-3 per AMCA 204 test standard.
  3. Tested after being installed in the fan sections.
  4. Selected for the design air quantities and pressure of the system.
  5. Mounted on a common shaft if multiple wheels.
  6. The fan shall be rated in accordance with AMCA 210 for performance and AMCA 260 for sound.
  7. Minimum of Class II fan.
- E. Fans selected with isolation shall be internally isolated with spring isolators. A flexible connection shall be installed between fan and unit casing to ensure complete isolation. Flexible connection shall comply with NFPA 90A and UL 181 requirements. If fans and motors are not internally isolated, then the entire unit shall be externally isolated from the building, including supply and return duct work, piping, and electrical connections. External isolation shall be furnished by the installing contractor to avoid transmission of noise and vibration through the ductwork and building structure.
- F. Each direct drive fan in a multiple-fan array shall be provided with integral back flow prevention: a backdraft damper that prohibits recirculation of air in the event a fan or multiple fans become disabled. Dampers are tested and rated based on AMCA Standard 500. Dampers to be heavy duty type capable of a maximum back pressure that exceeds the design total static pressure with minimal leakage. The dampers should have a minimal total effect on airflow performance; both pressure drop when open and system effect on the fan. The damper blades and frame shall be extruded aluminum with blade edge seals locked into the blade edge. Adhesive type seals are unacceptable. AHU manufacturer responsible for providing proper spacing upstream of dampers to ensure full, uniform airflow through upstream components. For units where the damper(s) are supplied at the jobsite, the installing contractor shall contract a certified TAB contractor to verify uniform airflow thru upstream components.
- G. Select fan to operate at or near its maximum efficiency point when handling the required air quantity and static pressure.
- H. Stainless steel condensate pan with positive slope in all directions to outlet. Line the condensate drain pan with minimum 1-1/2" waterproof insulation.
- I. Insulation, vapor barriers, facings and adhesives shall have:
1. Flame spread not higher than 25.
  2. Smoke developed rating not higher than 50.
- J. Double wall casing construction. Construct interior casing panels with 3 lb. minimum density insulation for acoustical and condensation control.
1. Condensation on the exterior of the air handling units is not acceptable.
- K. Filter section:
1. Constructed with substantial hinges.
  2. Neoprene gasketing.
  3. Permanent quick release latching devices.
  4. Arranged to accommodate the 2" thick filters as specified.
- L. Cooling coils as specified. Extend drain and vent piping through cabinets. Provide grommets at all pipe penetrations through cabinets.
- M. Heating coils as specified. Extend drain and vent piping through cabinets. Provide

grommets at all pipe penetrations through cabinets.

- N. Provide units with factory fabricated mixing box section that include an additional 2" thick metal perforated inner liner which utilizes fiberglass insulation. Liner shall be installed on all walls and top surface.
- O. Provide each fan section with an additional 2" thick perforated metal inner liner which utilizes fiberglass insulation. Liner shall be installed on all walls and top surface.
- P. Factory dynamic fan balancing shall be conducted from 16Hz to 60Hz to identify and eliminate critical speeds to ensure stable operation through the entire operating range of the fan and drive assembly. Field fan balancing is not acceptable. Forward factory balancing test report to Engineer upon request.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. Install air handling units according to manufacturer's instructions.
- B. Provide additional drive packages as required by the Testing and Balancing firm.
- C. Air leaks detectable by sound or touch are to be corrected.
- D. Air handling units are to be properly supported to prevent flexing, bending, or distorting base rails.
- E. All coils are to be cleaned prior to substantial completion if units are used during construction.
- F. Clean all air handling units and return to original manufacturer's condition prior to substantial completion. Vacuum clean all debris from inside air handling equipment.
- G. Install piping to unit with full size 6-inch-long dirt leg with 1/2" valve at bottom for cleaning.
- H. Provide for positive gravity drainage of coil condensate. Pipe full size of unit connection.
- I. Adjust fan drives as required to obtain scheduled capacities as directed by the Test and Balance Firm to include sheave and belt replacement.
- J. Align belts to eliminate wear and vibration of belts.
- K. Verify correct drainage of condensate from condensate pan.
- L. Verify correct rotation of fan and wiring of motor.
- M. Lubricate all greaseable ball bearings with manufacturer's suggested lubricant.
- N. Replace filters as required if units are used during construction.
- O. Provide piping installation so that after piping is completed and insulated there is full access to service unit and remove fan housing. Piping to coils shall not block fan section access or cause damage to piping insulation during access.

### 3.2 IDENTIFICATION

- A. Furnish each unit with a durable, deep etched, .025" thick, factory installed aluminum identification plate, permanently mounted with the following information:
1. Unit identification as indicated on Contract Drawings.
  2. Serial Number.
  3. Model Number.
  4. Capacity (CFM) and static pressure.
  5. Motor HP.
  6. Unit power supply: Volts / PH / Amps.
  7. Supply Fan Type.
  8. Coil GPM and pressure drop.
  9. Sales Order #.
  10. Date unit manufactured.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 23 81 18

### SINGLE PACKAGE ROOFTOP AIR CONDITIONERS (100% Outside Air)

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide and install a single-package, single-zone, electric air conditioner with gas-fired heat for rooftop application.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical
  1. Ductwork.
  2. Air Balance.
  3. Electrical provisions for mechanical work.
  4. Air Filtration.
  5. Vibration Isolation.

##### 1.3 PERFORMANCE

- A. As scheduled on drawings.

##### 1.4 SUBMITTALS

- A. Manufacturer's certified capacity data.
- B. Submit manufacturer's installation, start-up and service instructions.
- C. Submit recommended clearance dimensions for air flow and service.
- D. Submit coordination drawings as specified. Consideration shall be given to adjacent structures and their effect on air flow patterns.
- E. Submit internal wiring diagram of Control Center.
- F. Submit sequence of operation in narrative form.
- G. Mark-up a copy of the specifications indicating in the margin of each paragraph the following:  
COMPLY, DO NOT COMPLY, NOT APPLICABLE.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Mammoth.
- B. Addison.
- C. Captive Aire.
- D. Accurex.

## 2.2 COMPRESSOR

- A. Provide a thermally protected, serviceable semi-hermetic compressor with service valves, vibration isolation, crankcase heaters, sight glass and filter drier. Provide with a 5-year parts and labor warranty.
- B. Provide a minimum of three stages of cooling with hot gas reheat.

## 2.3 EVAPORATOR AND CONDENSER COILS

- A. Provide copper tubes with mechanically bonded aluminum fins for evaporator and condenser coils. Provide hot gas bypass for evaporator coil.
- B. Provide louvered condenser coil.
- C. Provide factory installed hail / vandalism guards for condenser coils.
- D. Provide coils with stainless steel casings, end plates, tube supports and top and bottom plates.

## 2.4 EVAPORATOR FANS

- A. Provide a belt-driven, forward-curved, centrifugal evaporator fan, with adjustable motor sheaves. Motor shall contain permanently lubricated bearings. Provide motor HP as indicated on the drawings.

## 2.5 GAS HEATING SECTION

- A. Unit shall be equipped with stainless steel burners and heat exchangers.
- B. Gas Controls.
  - 1. Automatic gas valve and pressure regulator.
  - 2. A manual shutoff valve.
  - 3. Pilot valve.
  - 4. Two flame rollout limit switches.
  - 5. An adjustable fan control.
  - 6. Fixed high limit controls.
- C. Unit shall be equipped with an electric spark pilot ignition system.
  - 1. Electronic flame detection.
  - 2. 100% safety shutoff.
- D. Combustion air shall be induced by a positive pressure power venting fan.
  - 1. Pre-purge of combustion chamber.

## 2.6 CASING FILTERS AND DUCT CONNECTION

- A. Provide a cabinet constructed of galvanized or zinc-coated steel, primed and coated with baked enamel and suitable for outdoor installation.
- B. Provide duct connections on the bottom of each unit, as indicated on drawings.
- C. Provide manually operated outdoor air balancing dampers and motorized shut-off damper.
- D. Furnish 2" thick filters as specified.

- E. Provide stainless steel or polymer fully IAQ condensate drain pan with positive slope in all directions to outlet.
  - 1. Externally line the condensate drain pan with 1-1/2" waterproof insulation.
  - 2. Provide a hinged access door with quick release handle adjacent to condensate drain pan for inspection. Install access door on drain connection side of unit.
- F. Double wall casing construction
  - 1. Construct interior casing panels with 1-1/2 lb. insulation for acoustic and condensate control.
- G. Furnish through-the-bottom electrical service connection.

## 2.7 ROOF CURB

- A. Install a roof curb of the same manufacture as the air conditioning unit.
  - 1. Curb to support the unit and provide a watertight enclosure to protect ductwork and utility services.
  - 2. Use a design complying with National Roofing Contractors Association requirements.
  - 3. Level curb according to manufacturer's recommendations.
  - 4. Curb height shall be minimum 14".

## 2.8 OUTDOOR FANS

- A. Provide propeller type with direct-driven permanently lubricated motor. Fan shall discharge upward.

## 2.9 SHORT CYCLE CIRCUIT

- A. Provide circuit to prevent compressor from short cycling as a result of a rapid change in thermostat setting. Circuit also prevents compressor restart at least 5 minutes after shutdown.

## 2.10 CONVENIENCE OUTLET

- A. Provide 120V GFI outlet in unit cabinet.

## 2.11 SERVICE DISCONNECT SWITCH

- A. Non-fused disconnect switch with external locking handle.

## 2.12 TEMPERATURE CONTROL

- A. Unit shall be controlled by maintaining a constant suction pressure with a leaving air temperature as scheduled on the drawings. When the outside air drops below the scheduled leaving air temperature, a duct mounted temperature sensor shall stage the heating to maintain the set point. Open outside air damper prior to starting fan.

## 2.13 MOTORIZED OUTSIDE AIR DAMPER

- A. Low leakage 14-gauge galvanized steel
  - 1. Airfoil blades.
  - 2. Ruskin CD60.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install according to manufacturer's recommendations and as shown on drawings.
- B. Unit is to be provided with a through-the-bottom service connection accessory package and must be used for electrical connections to unit. Use bulkhead connectors to make a waterproof connection.
- C. Seal all duct connections to roof curb for air tight connection. Install a 90 degree flanged ductwork connection to the roof curb. Provide and install gasketing around duct flanges. Provide and install gasketing around outer edge of roof curb.

### 3.2 STARTUP

- A. Provide the services of a factory trained service technician employed full time by the unit manufacturer to start-up the system, or manufacturer's factory authorized representative under the supervision of the factory trained service technician. Upon completion of the installation, the system shall be started and commissioned by the manufacturer's factory authorized representative who will verify a complete fully functional system. The factory authorized representative will verify that accessories are installed and performing the specified functions. (Contractor startup is unacceptable.)
- B. The written startup report shall be provided to the owner and engineer upon completion.

END OF SECTION

## SECTION 23 82 17

### DUCTED MINI SPLIT DX UNITS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install mini split system. Complete with a compact, ducted fan coil section with wired wall mounted thermostat and a slim silhouette horizontal discharge outdoor condensing unit. Unit shall be provided with inverter driven compressor, pre-charged with R410A refrigerant. air-cooled condensing units complete with casing, compressor, condenser coil, condenser fan and controls required for a split air conditioning system.

##### 1.2 RELATED WORK

- A. Refrigerant Piping.
- B. Electrical Provisions of Mechanical Work.

##### 1.3 PERFORMANCE

- A. Provide performance as scheduled on drawings, and head pressure control to enable unit to operate in temperatures as low as 20 degrees F. ambient.

##### 1.4 QUALITY ASSURANCE

- A. The units shall be tested by a Nationally Recognized Testing Laboratory (NRTL) and bear the ETL label.
- B. All wiring shall be in accordance with the National Electrical Code (N.E.C.).
- C. The units shall be rated in accordance with Air-conditioning, Heating, and Refrigeration Institute's (AHRI) Standard 210 and bear the AHRI Certification label.
- D. The units shall be manufactured in a facility registered to ISO 9001 Quality assurance Standards and ISO 14001 which are set of standards applying to sustainability and environmental protection set by the International Standard Organization (ISO).
- E. A pressure charge of R410A refrigerant sufficient for up to twenty-five (25) feet of refrigerant tubing shall be provided in the outdoor condensing unit.
- F. A dry air holding charge shall be provided in the indoor section.

##### 1.5 WARRANTY

- A. Unit shall have a manufacturer's parts and defects warranty for a period five (5) years from the date of the original installation. The compressor shall have a warranty of seven (7) years from date of installation. Warranties shall start at the date of substantial completion.

#### PART 2 - PRODUCTS

##### 2.00 ACCEPTABLE MANUFACTURERS

- A. Carrier.

- B. Daikin.
- C. Trane.
- D. LG.

## 2.1 INDOOR UNIT GENERAL

- A. The indoor shall be factory assembled, wired and run tested. Contained within the unit cabinet shall be all factory wiring, internal piping, electronic control circuit board and fan with fan motor.
- B. The unit shall have a self-diagnostic function, 3-minute time delay mechanism, and auto restart after power interruption function, an emergency operation function and a test run switch.
- C. Indoor unit and refrigerant pipes shall be charged with dry air before shipment from the factory. All refrigerant piping must be insulated.

## 2.2 CABINET

- A. The casing shall be constructed from galvanized steel with flanged edges, removable panels for servicing, and insulation on back of panel.
- B. Multi directional drain offering four two (2) directions for draining shall be standard.
- C. The cabinet shall be located into the ceiling and ducted to the supply and return openings.
- D. The cabinet shall be constructed with sound absorbing foamed polystyrene and polyethylene insulation.

## 2.3 FAN

- A. The fan shall be direct-drive DC (ECM) type fan, statically and dynamically balanced impeller with three fan speeds available.
- B. The unit shall be equipment with an automatically adjusting external static pressure logic selectable during commissioning.
- C. The fan motor shall operate on 208/230 volts, 1 phase, 60 hertz with a motor output range of 0.12 to 0.47 HP respectively.
- D. The airflow rate shall be available in three settings.
- E. The fan motor shall be thermally protected.
- F. The fan motor shall be equipped as standard with adjustable external static pressure (ESP) settings.

## 2.4 FILTER

- A. The units shall be provided with a fabricated rear return angled filter housing (field installed). Filter box shall be configured to accept owner's standard sizes of 16x20x2, 16x25x2, 20x20x2, 20x25x2 only.

- B. Provide minimum MERV 11 filter during construction. Contractor to install clean MERV 13 filters just prior to owner acceptance.

## 2.5 COIL

- A. Coils shall be of the direct expansion type constructed from copper tubes expanded into aluminum fins to form a mechanical bond.
- B. The coil shall be of a waffle louver fin and high heat exchange, rifled bore tube design to ensure highly efficient performance.
- C. The coil shall be a 3 row cross fin copper evaporator coil with 13 FPI design completely factory tested.
- D. The refrigerant connections shall be flare connections and the condensate will be 1-1/4" outside diameter PVC.
- E. A condensate pan shall be located under the coil.
- F. A condensate pump with an 18-3/8" lift shall be located below the coil in the condensate pan with a built in safety alarm.
- G. A thermistor will be located on the liquid and gas line.

## 2.6 ELECTRICAL

- A. Power for the indoor unit shall be supplied from the outdoor unit.
- B. Power supply shall be as indicated on the drawings.
- C. The unit shall be equipped with a micro-processor control system directing indoor and outdoor unit coordinated operation.

## 2.7 CONTROL

- A. This system shall have a wired wall mounted thermostat/controller to perform input functions necessary to operate the system. The controller shall consist of a Power On / Off switch, Mode Selector, Temperature Setting, Timer Control, Fan Speed Select and Auto Vane Selector.
- B. Temperature changes shall be by 1°F increments with a range of 65°F to 87°F.
- C. There shall be a 24 hour On / Off timer.
- D. The microprocessor located in the indoor unit shall have the capability of sensing return air temperature and indoor coil temperature, receiving and processing commands from the space controller, providing emergency operation and controlling the outdoor unit.
- E. The control voltage between the indoor unit and the outdoor unit shall be 115 volts, AC.
- F. The system shall be capable of automatic restart when power is restored after power interruption.
- G. The control system shall control the operation of the air sweep louvers, as well as provide on / off and system / mode function switching.



## 2.8 OUTDOOR UNIT GENERAL

- A. The outdoor unit is designed specifically for use with the indoor units. The outdoor unit shall be completely factory assembled, internally piped and wired. Each unit shall be run tested at the factory.
- B. When refrigerant lines are exposed on exterior of building provide "LINE-HIDE" line set cover system.
  - 1. Material, Weather resistant, UV stabilized, ASA/PVC/ABS/Poly/PE
  - 2. Assembly Screws, stainless steel.

## 2.9 UNIT CABINET

- A. The casing shall be fabricated from zinc coated steel, bonderized with an electrostatically applied, thermally bonded, acrylic or polyester powder coating for corrosion protection.
- B. Case and mounting feet shall be as follows:
  - 1. The base shall be of Aluminum-Zinc-Magnesium alloy coated steel, with welded mounting feet.
- C. Cabinet mounting and construction shall be sufficient to withstand 155 MPH wind speed conditions for use in Hurricane condition areas. Mounting, base support, and other installation to meet Hurricane Code Conditions shall be by others.

## 2.10 FAN

- A. The unit shall be furnished with a directive drive propeller type fan, statically and dynamically balanced for smooth and quiet operation.
- B. The fan motor shall have inherent protection, be equipped with permanently lubricated bearings. The fan motor shall be mounted and isolated for quiet operation.
- C. The fan shall be provided with a raised guard to prevent contact with moving parts.
- D. The outdoor unit shall have horizontal discharge airflow.

## 2.11 COMPRESSOR

- A. The compressor shall be a high performance, inverter driven rotary type.
- B. Compressor shall be mounted using rubber isolating bushings to avoid the transmission of vibration.
- C. Compressor shall be protected by an automatic over current relay and a thermal overload switch.

## 2.12 OPERATION

- A. The outdoor unit shall have an accumulator.
- B. The outdoor unit must have the ability to operate with a maximum height difference of 35 feet between indoor and outdoor units.
- C. The unit shall have a maximum refrigerant tubing length of 65 feet between indoor and outdoor units without the need for line size changes, traps or additional oil. All refrigerant lines must be insulated.

- D. The unit shall be pre-charged for a maximum of 25 feet of refrigerant tubing.

#### 2.13 ELECTRICAL

- A. Power supply shall be as indicated on the drawings.
- B. The outdoor unit shall be controlled by the microprocessor located in the indoor unit. The control voltage between the indoor unit and the outdoor unit shall be 115 volts, AC.

#### 2.14 WALL BRACKET

- A. As indicated on the drawings, provide each unit 3 tons and below with a stainless steel mini-split condenser bracket.
- B. Unit shall be constructed for a maximum weight of 300 lbs.
- C. Unit shall be manufactured by Rectorseal model #WBB-300SS or Diveritech model #QSWB4000SS.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. Mount condensing units on 4" foundation pads and pipe as shown on Drawings or as recommended by the equipment manufacturer. Install refrigerant filter dryer and sight indicating glass.
- B. Install units on vibration isolation pads.
- C. Ensure unit provided will meet the refrigerant and line lengths required by the installation as indicated on the drawings.
- D. Provide convenience water and electrical within 50 feet of new condensing unit.

#### 3.2 CONTROL WIRING

- A. Furnish and install control wiring as required. Install control wiring in conduit.

#### 3.3 DELIVERY, STORAGE AND HANDLING

- A. Unit shall be stored and handled according to the manufacturer's recommendations.
- B. The wired controller shall be shipped inside the carton with the indoor unit and able to withstand 105°F storage temperatures and 95% relative humidity without adverse effect.

#### 3.4 START-UP

- A. Follow the manufacturer's start-up procedures.
- B. Provide flexible elastomeric rubber closed cell insulation to prevent condensation from occurring on suction piping. After completion of successful start-up, installing contractor shall seal all openings in insulation and apply a protective aluminum sheetmetal jacket over insulation exposed on exterior of building.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 82 23

### GAS FIRED FURNACE WITH DX EVAPORATOR

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Floor mounted high efficiency gas fired furnace with DX evaporator configured for a vertical installation.

##### 1.2 RELATED WORK

- A. Division 23 Mechanical
  - 1. Air Balance.
  - 2. Controls.
  - 3. Electrical Provisions of Mechanical Work.
  - 4. Ductwork.
  - 5. Air filtration.

##### 1.3 REFERENCES

- A. ANSI/AHRI 410 - force circulation air cooling and air heating coils.
- B. National Electrical Code.

##### 1.4 SUBMITTALS

- A. Submit manufacturer's dimensioned product data sheets.
  - 1. Show location of filter access doors.
- B. Submit fan performance curve for each unit:
  - 1. Plot fan volume against static pressure, horsepower and efficiency.
  - 2. Show point of rating based on static requirements of the system.
- C. Submit the fan performance plot at each motor speed position with consideration for the reduced internal static.
- D. Submit a chart of specific sound power level at each octave band center frequency.
- E. Submit manufacturer's certified heating and cooling coil capacity data.
- F. Submit filter manufacturer's product data sheets and capacity information.
- G. Submit manufacturer's data on housing insulation material.

##### 1.5 CAPACITY

- A. Refer to equipment schedule.

##### 1.6 WARRANTY

- A. Provide a full parts and labor warranty for a period of one year. Warranty shall start the date of the substantial completion certificate. Warranty shall be provided by manufacturer only.

## PART 2 - PRODUCTS

### 2.1 ACCEPTABLE MANUFACTURERS

- A. Carrier.
- B. Trane.
- C. Lennox.
- D. York.
- E. Daikin.

### 2.2 COMPONENTS

- A. Direct Expansion coil section.
- B. Fan section with a direct drive blower.
- C. Gas fired furnace section.
- D. Filter section.
- E. Insulated sheet metal cabinet with removable panels for access to the interior.

### 2.3 DIRECT EXPANSION EVAPORATOR SECTION

- A. Coil module shall be designed for either a vertical or horizontal installation as indicated on drawings.
- B. Reference Schedule and Specification Section 23 82 16.
- C. Coil module shall be designed to avoid condensate blow off and moisture carry over into ductwork.
- D. Coil shall be provided with a corrosion resistant IAQ style drain pan.

### 2.4 FAN SECTION AND GAS FIRED FURNACE

- A. Locate the motor and drive assembly inside the cabinet.
- B. Fan motor shall be a multi-speed direct drive ECM type with integrated vibration isolation.
- C. Select the fan motor so that the brake horsepower required to deliver the design air quantity at the system static pressure will not exceed the motor nameplate amperage rating.
- D. Select fan to operate at or near its maximum efficiency point when handling the required air quantity and static pressure.
- E. Furnace shall be a pilot free, hot surface power heat ignition with single stage operation. Induction motor shall be a fixed speed motor.
- F. Primary heat exchanger shall be an aluminized steel clamshell design and the secondary heat exchanger shall be a stainless steel fin and tube design.

## 2.5 UNIT CABINET

- A. Construct the unit of galvanized steel sheets, and formed members.
  - 1. Provide structure to brace the assembly for the pressure of the system.
- B. Cabinet shall be fully internally insulated and be equipped with a noise reduction insulating system.
- C. Insulation, vapor barriers, facings and adhesives:
  - 1. Flame spread not higher than 25.
  - 2. Smoke developed rating not higher than 50.
- D. Condensation on the exterior of the unit is not approved.
- E. Provide a duct flange on four sides of the return air inlet and supply air outlet of the unit.
  - 1. Sized to permit connection of the flexible connection to the ductwork.
  - 2. Extend beyond the primary drain pan.
  - 3. Minimum dimension 2".
- F. Provide insulated, removable panels for access to the interior.
  - 1. Plated captive screws and nuts.
  - 2. Neoprene gaskets.

## 2.6 FILTER SECTION

- A. Locate behind access doors.
  - 1. Construct with substantial hinges.
  - 2. Neoprene gaskets.
  - 3. Permanent quick-release latching devices.
- B. Arranged to accommodate the 1" thick filters as specified.
  - 1. Single section filter.
- C. Provide full length tracks to support the filter.

## PART 3 - EXECUTION

### 3.1 SPARE PARTS

- A. Provide the following spare parts and material to the Owner for use after the warranty period.
  - 1. One spare fan motor for each size of fan motor on the project.
  - 2. One spare set of filters or filter media for each fan coil unit on the project.

### 3.2 ELECTRICAL REQUIREMENTS

- A. Bring electrical connections to a common junction box.

### 3.3 STORAGE

- A. Storage and shipping in accordance with manufacturer's recommendations.

### 3.4 INSTALLATION

- A. Install unit so motor connections and filters are accessible.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 23 82 39

### ELECTRIC UNIT HEATERS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide and install electric unit heaters complete with heating element, propeller mounting brackets and other options as specified.

##### 1.2 RELATED WORK

- A. Division 23 - Mechanical.
  - 1. Electrical Provisions of Mechanical Work.
  - 2. Ductwork.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Modine.
- B. Reznor.
- C. Chromalox.
- D. Trane.
- E. Berko.

##### 2.2 COMPONENTS

- A. Casing:
  - 1. Construct casing of sheetmetal with a structural frame.
  - 2. Enamel or lacquer finish to manufacturers standard.
- B. Electric Heating Elements:
  - 1. Shall bear the UL label.
  - 2. Corrosion resistant materials.
  - 3. Heating coil of 80-20 nickel-chrome wire.
- C. Components:
  - 1. Fused control circuits.
  - 2. Contactors in accordance with the staging requirements.
  - 3. Control power transformer.
  - 4. Control voltage 120.
- D. Louvers:
  - 1. Adjustable vertical and horizontal louvers for air discharge.
- E. Mounting brackets:
  - 1. As indicated.



## 2.3 CONTROLS

- A. Automatic controls:
  - 1. Factory mounted.
  - 2. Prewired to the junction box.
  - 3. Unit mounted thermostats 24-volt low voltage.
- B. Safety Controls:
  - 1. A primary and secondary thermal cut-off to de-energize each circuit.
  - 2. Manual reset high limit.
  - 3. Automatic reset thermal protection.

## 2.4 FAN

- A. Propeller blade fan:
  - 1. Construct the fan of aluminum or other corrosion-resistant material.
  - 2. Statically and dynamically balanced.
  - 3. Substantial fan guard.

## 2.5 MOTOR

- A. Totally enclosed ball bearing motor:
  - 1. Permanently lubricated bearings.
  - 2. 120 volt, single phase, 60 cycle motor .
  - 3. Sized to operate the fan at the required capacity.

## 2.6 ELECTRICAL

- A. Single point connection:
  - 1. Factory wiring.
  - 2. Only direct line supply and thermostat field connections.
  - 3. Terminal blocks for line voltage wiring.
  - 4. Wiring diagram permanently attached.
  - 5. Balance phases.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Furnish units with suitable connections for mounting as shown or as otherwise approved.
- B. Provide start-up to ensure correct operation of unit.
- C. Adjust discharge louvers to control direction of air flow.

END OF SECTION

## SECTION 26 05 00

### ELECTRICAL GENERAL PROVISIONS

#### PART 1 - GENERAL

##### 1.1 RELATED DOCUMENTS

- A. Except as modified in this Section, General Conditions, and Supplementary Conditions, applicable provisions of Division 1 General Requirements, and other provisions and requirements of the Contract Documents apply to work of Division 26 Electrical.
- B. Applicable provisions of this section apply to all sections of Division 26, Electrical.

##### 1.2 CODE REQUIREMENTS AND FEES

- A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.
- B. Electrical work shall comply with applicable inspection services:
  - 1. Underwriters Laboratories.
  - 2. National Fire Protection Association.
  - 3. State Health Department.
  - 4. Local Municipal Building Inspection Department adopted codes with amendments.
  - 5. National Electrical Code with local amendments.
  - 6. State Regulatory Agencies.
  - 7. Where the project is located outside a municipal jurisdiction, and has no municipal inspection services, the National Electrical Code with amendments of the municipality with extraterritorial jurisdiction shall govern.
  - 8. Where the project is located outside any municipal jurisdiction, including extraterritorial jurisdictions, the National Electrical Code with local adopted amendments of the largest municipality located in the same county or parish shall govern.
  - 9. International Energy Conservation Code.
  - 10. National Electrical Safety Code.
- C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.
- D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.
- E. Obtain all permits required.

##### 1.3 CONTRACTOR'S QUALIFICATIONS

- A. An approved contractor for the work under this division shall be:
  - 1. A specialist in this field and have the personnel, experience, training, and skill, and the organization to provide a practical working system.
  - 2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years.

## 1.4 REFERENCE SPECIFICATIONS AND STANDARDS

- A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, APWA, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date proposals are received. Referenced specifications and standards are minimum requirements for all equipment, material and work. In instances where specified capacities, size or other features of equipment, devices or materials exceed these minimums, meet specified capacities.
- B. Use electrical materials and equipment that is constructed and tested in accordance with the standards of NEMA, ANSI, ASTM, or another recognized commercial standard. If materials and equipment is labeled, listed, or recognized by any Nationally Recognized Testing Laboratory (NRTL) acceptable to the Occupational Safety and Health Administration (OSHA), then provide NRTL-labeled, listed, or recognized material and equipment. Acceptable NRTLs include but are not limited to:
  - 1. Underwriters Laboratories, Inc. (UL)
  - 2. Factory Mutual Research Corp. (FMRC) (also referred to as "Factory Mutual Global," or "FM Global")
  - 3. Intertek Testing Services NA, Inc. (ITSNA, formerly ETL)
  - 4. Canadian Standards Association (CSA)
  - 5. A complete listing of acceptable NRTLs is published on the OSHA website at <http://www.osha.gov/dts/otpc/nrtl/>.
- C. Where material and equipment are not labeled, listed, or recognized by any NRTL, provide a manufacturer's Certificate of Compliance indicating complete compliance of each item with applicable standards of NEMA, ANSI, ASTM, or other recognized commercial standard.
- D. Do not install or use electrical material or equipment for any use other than that for which it was designed, labeled, listed, or identified unless formally approved for such use by the Owner's AHJ. This *National Electrical Code*® requirement is re-stated for emphasis.
- E. Codes and Standards applicable to this Division:
  - 1. ANSI – American National Standards Institute
    - a. ANSI Z535.1, Safety Colors
    - b. ANSI Z535.2, Environmental and Facility Safety Signs
    - c. ANSI Z535.3, Criteria for Safety Symbols
    - d. ANSI Z535.4, Product Safety Signs and Labels
  - 2. ASHRAE – American Society of Heating, Refrigeration, and Air Conditioning Engineers:
    - a. ASHRAE Standard 90.1, *Energy Standards for Buildings Except for Low Rise Residential Buildings* [ANSI, IESNA]
  - 3. ASTM – American Society for Testing and Materials
  - 4. CBM – Certified Ballast Manufacturers
  - 5. ICC – International Code Council
    - a. International Building Code® (IBC)
    - b. International Existing Building Code® (IEBC)
  - 6. ICEA – Insulated Cable Engineers Association
    - a. ICEA S-93-639, *Shielded Power Cables 5-46kV* (NEMA WC-74)
  - 7. IEEE® - Institute of Electronics and Electrical Engineers
    - a. IEEE C2™, *National Electrical Safety Code* (NESC) [ANSI]
    - b. IEEE Std 141™, *Recommended Practice for Electric Power Distribution for Industrial Plants* ("Red Book")
    - c. IEEE Std 143™, *Recommended Practice for Grounding of Industrial and Commercial Power Systems* ("Green Book")

- d. IEEE Std 241™, *Recommended Practice for Electric Power Systems in Commercial Buildings* (“Gray Book”)
- e. IEEE Std 242™, *Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems* (“Buff Book”)
- f. IEEE Std 315™, *Graphic Symbols for Electrical and Electronics Diagrams*
- g. IEEE Std 399™, *Recommended Practice for Power Systems Analysis* (“Brown Book”)
- h. IEEE Std 446™, *Recommended Practice for Emergency and Standby Power Systems for Industrial and Commercial Applications* (“Orange Book”)
- i. IEE Std 493™, *Recommended Practice for the Design of Reliable Industrial and Commercial Power Systems* (“Gold Book”)
- j. IEEE Std 519™, *Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems*
- k. IEEE Std 739™, *Recommended Practice for Energy Management in Industrial and Commercial Facilities* (“Bronze Book”)
- l. IEEE Std 902™, *Guide for Maintenance, Operation, and Safety of Industrial and Commercial Power Systems* (“Yellow Book”)
- m. IEEE Std 1015™, *Recommended Practice Applying Low-Voltage Circuit Breakers Used in Industrial and Commercial Power Systems* (“Blue Book”)
- n. IEEE Std 1100™, *Recommended Practice for Powering and Grounding Electronic Equipment* (“Emerald Book”)
- o. IEEE Std 1584™, *Guide for Performing Arc-Flash Hazard Calculations*
- 8. IESNA – Illuminating Engineering Society of North America
  - a. IESNA *Lighting Handbook*, Ninth Edition
  - b. IESNA RP-1, *American National Standard Practice for Office Lighting*
  - c. IESNA RP-7, *American National Standard Practice for Lighting Industrial Facilities*
- 9. NECA – National Electrical Contractors Association:
  - a. NECA 1, *Good Workmanship in Electrical Construction* [ANSI]
  - b. NECA 90, *Recommended Practice for Commissioning Building Electrical Systems* [ANSI]
  - c. NECA 100, *Symbols for Electrical Construction Drawings* [ANSI]
  - d. NECA 101, *Standard for Installing Steel Conduits (Rigid, IMC, EMT)* [ANSI]
  - e. NECA 104, *Recommended Practice for Installing Aluminum Building Wire and Cable* [ANSI]
  - f. NECA / NEMA 105, *Recommended Practice for Installing Metal Cable Tray Systems* [ANSI]
  - g. NECA 111, *Standard for Installing Nonmetallic Raceways (RNC, ENT, LFNC)* [ANSI]
  - h. NECA / NACNA 120, *Standard for Installing Armored Cable (Type AC) and Metal-Clad Cable (Type MC)* [ANSI]
  - i. NECA 202, *Recommended Practice for Installing and Maintaining Industrial Heat Tracing Systems* [ANSI]
  - j. NECA 230, *Standard for Selecting, Installing and Maintaining Electric Motors and Motor Controllers* [ANSI]
  - k. NECA 331, *Standard for Building and Service Entrance Grounding and Bonding*
  - l. NECA 400, *Standard for Installing and Maintaining Switchboards* [ANSI]
  - m. NECA 402, *Standard for Installing and Maintaining Motor Control Centers* [ANSI]
  - n. NECA / EGSA 404, *Standard for Installing Generator Sets* [ANSI]

- o. NECA 407, *Recommended Practice for Installing and Maintaining Panelboards* [ANSI]
- p. NECA 408, *Recommended Practice for Installing and Maintaining Busways* [ANSI]
- q. NECA 409, *Recommended Practice for Installing and Maintaining Dry-Type Transformers* [ANSI]
- r. NECA 410, *Recommended Practice for Installing and Maintaining Liquid-Filled Transformers* [ANSI]
- s. NECA 411, *Recommended Practice for Installing and Maintaining Uninterruptible Power Supplied (UPS)* [ANSI]
- t. NECA 420, *Standard for Fuse Applications* [ANSI]
- u. NECA 430, *Standard for Installing Medium-Voltage Metal-Clad Switchgear* [ANSI]
- v. NECA / IESNA 500, *Recommended Practice for Installing Indoor Lighting Systems* [ANSI]
- w. NECA / IESNA 501, *Recommended Practice for Installing Exterior Lighting Systems* [ANSI]
- x. NECA / IESNA 502, *Recommended Practice for Installing Industrial Lighting Systems* [ANSI]
- y. NECA / MACSCB 600, *Recommended Practice for Installing and Maintaining Medium-Voltage Cable* [ANSI]
- z. NECA / NEMA 605, *Installing Underground Nonmetallic Utility Duct* [ANSI]
- 10. NEMA – National Electrical Manufacturers Association
- 11. NETA – International Electrical Testing Association, Inc.:
  - a. NETA ATS, *Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems*
  - b. NETA MTS, *Maintenance Testing Specifications for Electrical Power Distribution Equipment and Systems*
  - c. NETA ETT, *Standard for Certification of Electrical Testing Technicians* [ANSI]
- 12. NFPA – National Fire Protection Association:
  - a. NFPA 20®, *Standard for the Installation of Stationary Pumps for Fire Protection®*
  - b. NFPA 70™, *National Electrical Code® (NEC®)*
  - c. NFPA 70E, *Standard for Electrical Safety in the Workplace.*
  - d. NFPA 101®, *Life Safety Code®*
  - e. NFPA 110, *Standard for Emergency and Standby Power Systems*
  - f. NFPA 111, *Standard on Stored Electrical Energy Emergency and Standby Power Systems*
  - g. NFPA 780, *Standard for the Installation of Lightning Protection Systems*
  - h. All other NFPA codes and standards except NFPA 5000
- 13. OSHA – Occupational Safety and Health Administration
- 14. IECC – International Energy Conservation Code
- 15. ISO – International Organization for Standardization
- 16. State and Local Energy Conservation Code
- 17. Applicable County and Municipal Codes

## 1.5 CONTRACT DRAWINGS

- A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.
- B. Every effort has been made by the Engineer to indicate wiring of all receptacles, light fixtures, switches, telephone outlets, HVAC equipment, other equipment, elevator equipment, and all other devices / appliances requiring electrical power. It is the intent of

the Engineer that all light fixtures be powered and controlled unless specifically noted on the plans; that all wiring devices (receptacles and direct connected equipment) be circuited to a power source of the correct voltage and that all HVAC, elevator equipment and other equipment be properly wired to the correct voltage power source; that all communications and security systems devices and equipment and all fire alarm system devices and equipment are installed, wired and systems are fully operational.

- C. It is the responsibility of the Contractor to review the construction drawings (reflected ceiling plans) for light fixtures, casework elevation details for electrical devices which are not indicated on the electrical drawings; to review the mechanical and plumbing documents and all other drawings to determine the electrical rough-ins for all equipment requiring power connections, and to include in their proposals the correct and complete electrical rough-ins for all of these items which were inadvertently not indicated on the electrical drawings, OR the Contractor shall specifically enumerate each item requiring electrical rough-in which is not specifically shown on the electrical drawings, and indicate the electrical provisions of these items as specifically excluded from his proposal.
- D. It is the responsibility of the Contractor to compare the scale of all electrical drawings with the scale of the architectural drawings and make adjustments to all electrical drawings which have the incorrect drawing scale so that his material takeoffs are not in error due to an incorrectly labeled drawing scale and his proposal is complete.
- E. No proposal shall be accepted which specifically excludes any of the provisions of paragraphs B, C, or D above.

#### 1.6 PROJECT RECORD DOCUMENTS

- A. Maintain at the job site a separate set of white prints (black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is significantly at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various major and minor feeders, equipment, and other pertinent items, as installed. Record underground and under slab service and feeders installed, dimensioning exact location and elevation of such installations.
- B. At conclusion of project, obtain without cost to the Owner, electronic PDF and AutoCAD 2014 and / or Revit CAD files of the original drawings and transfer as-built changes to these. Provide the following as-built documents including all contract drawings regardless of whether corrections were necessary and include in the transmittal: "2 sets of CDs and prints for Owner's use, one set of CDs, prints, and mylars for Architect / Engineers Records". Delivery of these as-built electronic, reproducible and prints is a condition of final acceptance.
  - 1. 3 sets of electronic AutoCAD (2014 dwg) and / or Revit CAD drawing files, on CD-ROM media, of each contract as-built drawing.
  - 2. One reproducible Dayrex Mylar film positive of each contract as-built drawing.
  - 3. Three sets of blue-line prints of each contract as-built drawing.
  - 4. Three sets of pdf prints of each contract as-built drawing on CD.
- C. As-Built Drawings should indicate the following information as a minimum:
  - 1. Indicate all addendum changes to documents.
  - 2. Remove Engineer's Seal, name, address, and logo from drawings.
  - 3. Mark documents RECORD DRAWINGS.
  - 4. Clearly indicate: DOCUMENT PRODUCED BY:
  - 5. Indicate all changes to construction during construction. Indicate actual routing of all conduits, etc. that was deviated from construction drawings.

6. Indicate exact location of all underground electrical raceways, and elevations.
7. Correct schedules to reflect (actual) equipment furnished and manufacturer.
8. During the execution of work, maintain a complete set of Drawings and specifications upon which all locations of equipment, devices, and all deviations and changes from the construction documents in the work shall be recorded.
9. Exact location of all electrical equipment in building. Label panel schedules to indicate actual location.
10. Exact location of all electrical equipment in and outside of the building.
11. Exact location of all outdoor lighting poles and equipment.
12. Location, size and routing of all feeder conduits, equipment, etc. shall be accurately and neatly shown to dimension.
13. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
14. Cloud all changes.
15. Update all panel schedules with all additional circuits added or deleted through construction. Identify each circuit to include all information specified for directory cards for circuit identification in panelboards.

#### 1.7 SPACE REQUIREMENTS

- A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

#### 1.8 RELATION WITH OTHER TRADES

- A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements. Extend electrical services and final connections to all items requiring same.
- B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.
- C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.
- D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.
- E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under other Division. Determine from the General Contractor / Construction Manager for the various trades, the Owner, and by direction from the Architect / Engineer, the exact location of all items. The construction trades involved shall furnish all roughing-in drawings and wiring diagrams required for proper installation of the electrical work.
  1. Make final electrical connections to all electrically operated equipment indicated on the drawings, except as noted.
  2. The responsibility for alignment of motor and driven equipment is specified in the related division.
- F. Request all Shop Drawings required in ample time to permit proper installation of all electrical provisions.

- G. Extend services as indicated to the various items of equipment furnished by others. Rough-in for the various items and make final connections ready for operation upon placing of the equipment.

#### 1.9 CONCEALED AND EXPOSED WORK

- A. When the word "concealed" is defined as hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is defined as open to view, in plain sight.

#### 1.10 GUARANTEE

- A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. Replacement of failed parts or equipment shall be provided.

#### 1.11 MATERIAL AND EQUIPMENT

- A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

#### 1.12 NOISE AND VIBRATION

- A. Select equipment to operate with minimum noise and vibration. If noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, and judged objectionable by the Owner, Architect, or Engineer, rectify such conditions at no additional cost to the Owner. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

#### 1.13 ACCEPTABLE MANUFACTURERS

- A. Manufacturers names and catalog number specified under sections of Division 26 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Where equipment or accessories are used which differ in arrangement, configuration, dimensions, ratings, or engineering parameters from those indicated on the Contract Documents, the Contractor is responsible for all costs involved in integrating the equipment or accessories into the system and for obtaining the intended performance from the system into which these items are placed. Written notification of intent to use manufacturers other than those specified is required ten days prior to bid. Submittals shall be reviewed only after bidding and may be rejected if any aspect of the equivalent product is deemed lesser than that of the specified product by the specifier. The contractor shall be responsible for ensuring alternates are equivalent to those specified.. Submit a marked-up set of the relevant specification section indicating all variances, a comparison to the specified product, and of construction and performance criteria, complete design and performance data for the specified product and the proposed substitution for comparison to the Engineer. The Architect issues approvals of acceptable manufacturers as addenda to the Construction Proposal Documents.

#### 1.14 UTILITIES, LOCATIONS AND ELEVATIONS

- A. Locations and elevations of the various utilities included within the scope of this work:
  - 1. Obtained from utility maps and other substantially reliable sources.
  - 2. Are offered separate from the Contract Documents as a general guide only without guarantees to accuracy.



- B. Examine the site and verify the location and elevation of all utilities and of their relation to the work. Existing utilities indicated on the site plans are for reference only and shall be field verified by the Contractor with the respective public or private utility.

#### 1.15 OPERATING TESTS

- A. After all electrical systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect / Engineer and Owner. Provide minimum 24-hour advance notice of scheduling of all tests. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

#### 1.16 WARRANTIES

- A. All normal and extended warranties shall include parts, labor, miscellaneous materials, travel time, incidental expenses, normal freight / shipping, refrigerant, oils, lubricants, belts, filters and any expenses related to service calls required to diagnose and correct warranty problems.
- B. Manufacturer's warranty shall be from one year from date of substantial completion. Contractor shall be responsible for extending the warranties regardless of date of installation or commissioning.
- C. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

#### 1.17 BUILDING CONSTRUCTION

- A. It shall be the responsibility of the sub-contractor to consult the Contract Drawings, details and specifications and thoroughly familiarize himself as to the construction and all job-related requirements. All construction trades shall cooperate with the General Contractor / Construction Manager Job site superintendent and lay out work so that all raceways and other items are placed in the walls, furred spaces, chases, etc., so that there shall be no delay in the job.

#### 1.18 TEMPORARY FACILITIES

- A. General: Refer to Division 1 for general requirements on temporary facilities.
- B. Temporary Wiring: Temporary power and lighting for construction purposes shall be provided under this Division. Installation of temporary power shall be in accordance with NEC Article 527.
- C. Temporary facilities, wire, lights and devices are the property of this Contractor and shall be removed by this Contractor at the completion of the Contract.

#### PART 2 - PRODUCTS – NOT USED

## PART 3 - EXECUTION

### 3.1 IDENTIFICATION OF EQUIPMENT

#### A. Identification of Equipment:

1. All major equipment shall have a manufacturer's label identifying the manufacturer's address, equipment model and serial numbers, equipment size, and other pertinent data. Take care not to obliterate this nameplate. The legend on all nameplates or tags shall correspond to the identification shown on the Operating Instructions. All panels, cabinets, or equipment requiring 120 volt or higher power shall be labeled as required which includes circuit designation and circuit panelboard location, regardless of which discipline installs the equipment.
2. Three layer laminated plastic engraved identifying nameplate shall be permanently secured to each switchboard, distribution panel, motor control center, transformer, panelboard, safety disconnect switch, enclosed circuit breaker, transfer switches, remote generator transfer devices not installed inside light fixtures, wireway, busduct plug, terminal cabinet, surge protective device, capacitor, individual motor controller, contactor, fire alarm panels (main and remote booster), and communications (voice, data, video) cabinet or rack, security panels, time clocks, BMCS cabinets, sound reinforcement cabinets and racks, miscellaneous control cabinets, equipment integral disconnect switches, toggle or motor switches, disconnects for equipment, exterior junction boxes, exterior pull boxes, exterior wireways and gutters, and rooftop equipment (i.e.: supply and exhaust fans, rooftop HVAC equipment) with stainless steel screws.
  - a. Utility Power: White letters on black background.  
Generator Power (White letters on red background.  
UPS Power: White letters on blue background.  
Load Bank Circuits: White letters on green background.  
Solar or Wind Power Generation: White on orange background.
  - b. Identifying nameplates shall have 1/2-inch high, engraved letters for equipment designation and 1/4-inch letters indicating source circuit designation, (i.e.: "PANEL HA –fed from MDP-6 located in Mech. Rm. 100"). The words "fed from" and "located" shall be included in the labeling.  
Example:           Panel HA  
                      Fed From MSB  
                      Located Main Elec. RM 100  
Example:           Disconnect for Panel LK  
                      Location: Kitchen  
                      Fed From Transformer TLK  
                      Located Main Elec. RM 100
  - c. Each switchboard, distribution panel, transfer switch, generator transfer device (GTD) for emergency lighting, and motor control center feeder or branch circuit device shall have a nameplate showing the load and location of load served in 1/4-inch high, engraved letters. Circuit breaker name and kirk key designation if applicable.
  - d. Each section of multiple section panelboards shall also indicate panelboard section number (i.e.: Panel "HA-Section 2 – fed from MDP-6 located in Mech. Rm. 100").
  - e. Motor Controllers, starters, and contactors: Provide neatly typed label inside each motor controller and contactor enclosure door identifying motor or load served, nameplate horsepower, full load amperes, code letter, service factor, and voltage / phase rating.
  - f. Individual motor controller and contactor nameplates shall include load served, location of load served, panel and circuit numbers serving load, location of panel serving load, panel and circuit number serving control

circuit, location of panel serving control circuit (if different from panel serving load), description and location (if applicable) of control controlling contactor (i.e. Controlled: Switch in RM 100, and Controlled: BMCS). Contactor nameplate is to include whether it is a lighting or receptacle contactor and name of contactor. i.e., C-1.

| Lighting Contactor Example                                                                                                                                                                                  | Receptacle Contactor Example                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lighting Contactor C1<br>West Parking Lot Pole Lights<br>Fed From Panel HA-2,4,6<br>Located Main Elec. Rm. 100<br>Control Circuit-Panel LA 42<br>Located Main Elec. Rm. 100<br>Controlled-BMCS              | Receptacle Contactor C2<br>Table Recpts Lab Rm 100<br>Fed From Panel LA-2,4,6,8<br>Located Mech. Rm. 110<br>Control Circuit-Panel LA-42<br>Controlled-Emer Shut Off Mushroom<br>Switch Rm 101 |
| GTD Example                                                                                                                                                                                                 |                                                                                                                                                                                               |
| Exterior lighting wall packs /<br>north soffit / west metal canopy<br>Fed from Panels EHA-2<br>located in Elec. RM 105 and<br>HA-1 via Lighting Contactor<br>controlled by BMCS located in<br>Elec. RM 200. |                                                                                                                                                                                               |

- g. Exterior J-boxes, pull boxes, and gutters shall have panel identification, circuit numbers, and location of panel listed on name plate. Low voltage shall be identified per contents, examples: DATA, BMCS, F/A
- h. Name plates on equipment served from switchboards, distribution panels, I-Line panels, and motor control centers are not to include circuit numbers shown on drawings as the circuit numbers are for construction drawing purposes only.
- i. Panel names for 277/480v shall start with the letter "H" and 120/208v, 120/240v shall start with the letter "L". No panel shall be named to include a number other than multi sectional panels, example HA-section 2. New panels installed in renovation or site additions shall have names approved or designated by Owner's electrical representative. Panel names shall not include the letter "I". Transformer names shall start with the letter "T" followed by the panel name it serves, i.e., TLA.
- j. Main service ATS label shall include equipment name, emergency source and location, normal power source and location, panel served and location. Wall mounted ATS serving lighting loads shall include type of lighting and location, emergency panel and circuit ID and location of panel, normal panel and circuit ID and location of panel.  

|                           |                                   |
|---------------------------|-----------------------------------|
| Main Service ATS Example  | Wall Mounted Lighting ATS Example |
| ATS-1                     | ATS                               |
| Emer Power-Emer Generator | Exterior Wall Packs/Soffit Lights |
| Located Chiller Yard      | North/West Metal Canopy Lights    |
| Normal Power-MSB          | Fed from EHA-2                    |
| Located-Mech Rm 100       | Located Mech Rm 200               |
| Serves Panel EHA          | Fed From HB-4                     |
| Located-Mech Rm 100       | Located Mech Rm 150               |
- k. Name plates shall include rated bus amperage, voltage, number of phases, number of wires and type of essential electrical system as applicable.
- l. Switchgear, switchboards, panelboards, motor control centers, or service equipment available fault current labeling: Provide a 2x3 inch permanently affixed (notice) label with white lettering on contrasting blue background permanently affixed to the equipment prior to energizing the equipment. The label shall include the date of installation and the date of

calculation and comply with ANSI Z535.4 current standards design and durability. The date of calculation shall be the date indicated by the Engineer of Record's seal on the Construction Documents. Example:

AVAILABLE FAULT CURRENT: ##, ### AMPS

DATE OF INSTALLATION: MM/DD/YY

DATE OF CALCULATION: MM/DD/YY

3. Cardholders and directory cards shall be furnished for circuit identification in panelboards. Cardholder shall be located on inside of panel door and shall be in a metal frame with clear plastic front. Circuit lists shall be typewritten. Circuit descriptions shall include explicit description and identification of items controlled by each individual breaker, including final graphics room number or name designation and name of each item served. If no building appointed room number or name is given, list locations per the following examples – A. Storage in Rm 100 – B. Office in Rm 100 – C. Storage west of Rm. 100. List corridors as "corridors". Identify circuits controlled by contactors using a separate notation for each contactor used. List notation at bottom of schedule stating the circuits are controlled by a contactor, list exact location of contactor, and how switched. Do not use architectural room number designation shown on plans. Obtain final graphics room number identification from Architect's final room number graphics plan. All locations served by breakers shall be listed on schedule. Panel schedule shall be large enough to contain all information required. Also refer to Section 26 24 16.
  4. Permanent, waterproof, black markers shall be used to identify each lighting and power grid junction box, gutter and wireway. Clearly indicate the panel and branch circuit numbers available at that junction box, gutter or wireway. Where low voltage relay panels are used for lighting control, identify the low voltage relay panel and number in addition to the branch circuit panel and number.
  5. Pull Boxes, Transformers, Disconnect Switches, etc.: Field work each with a name plate showing identity, voltage and phase and identifying equipment connected to it. The transformer rating shall be shown on the panels or enclosures. For an enclosure containing a motor starter, the nameplate shall include the Owner's motor number, motor voltage, number of motor phases, motor load being serviced, motor horsepower, and motor full load current. Nameplates shall also indicate where panel is fed from.
- B. Prohibited Markings: Markings intended to identify the manufacturer, vendor, or other source from whom the material has been obtained are prohibited for installation in public, tenant, or common areas within the project. Also prohibited are materials or devices that bear evidence that markings or insignias have been removed. Certification, testing (example, Underwriters Laboratories), and approval labels are exceptions to this requirement.
- C. Warning Signs: Provide warning signs where there is hazardous exposure associated with access to or operation of electrical facilities. Provide text of sufficient size to convey adequate information at each location, mount permanently in an appropriate and effective location. Comply with industry standards for color and design.
- D. Wire and Cable Markers: Provide vinyl cloth markers with split sleeve or tubing type, except in manholes provide stainless steel with plastic ties.
- E. Wire and Cable Labeling: Provide wire markers on each conductor in all boxes, pull boxes, gutters, wireways, contactors, and motor controllers and load connection. Identify with panelboard / switchboard branch circuit or feeder number for power and lighting

circuits, and with control wire number as indicated on equipment manufacturer's shop drawings for control wiring.

- F. Underground Warning Tape: Thomas and Betts or approved equal. Six-inch wide plastic tape, colored red for 50 volts or above electrical, or orange for communications and control with suitable warning legend describing buried electrical lines; telephone lines and data lines per APWA recommendations. All underground electrical conduits shall be so identified. Tape shall be buried at a depth of 6-inches below grade and directly above conduits or ductbanks. Provide magnetic marking tape below all underground electrical conduits.
- G. Lighting Controls and Equipment: Provide self-adhesive machine typed tape labels with  $\frac{1}{4}$ " high white letters on  $\frac{1}{2}$ " tall black background for digital lighting modules as "DLM". Modules or relays located above ceiling: adhere label to bottom of ceiling T-grid below relay location. Modules or relays located in mechanical or electrical rooms or other areas other than above ceiling: Adhere label to the cover of the module or relay and identify the area they control as "MAIN GYM", "BAND HALL", or "CORRIDOR 100", etc. Remote lighting control switches or push-button stations located remotely from the area they control: Adhere label to device face plate, not obstructing screw fasteners, and intuitively identify function such as "GYM LTG LOW-HIGH" or "CAFE LTG DIM", etc.

### 3.2 CUTTING AND PATCHING

- A. General: Comply with the requirements of Division 1 for the cutting and patching of other work to accommodate the installation of electrical work. Except as authorized by the Architect / Engineer, cutting and patching of electrical work to accommodate the installation of other work is not permitted.

### 3.3 INSTRUCTION OF OWNER'S PERSONNEL

- A. Prior to substantial completion, conduct an on-site training program to instruct Owner's operating personnel in the operation and maintenance of the electrical systems.
  - 1. Provide the training during regular working day.
  - 2. The instructors shall be experienced in their phase of operation and maintenance of the electrical systems and with the project.
  - 3. Refer to other specification sections for additional training and commissioning requirements.
- B. Time to be allocated for instructions.
  - 1. Minimum of 20 hours dedicated instructor time.
  - 2. 4 hours on each of 5 days.
  - 3. Additional instruction time for specific systems as specified in other Sections.
- C. Before on-site training, submit the program syllabus; proposed time and dates; for review and approval, minimum 48 hours prior to proposed training time and date.
  - 1. One copy to the Owner.
  - 2. One copy to the Architect / Engineer.
- D. The Owner shall provide a list of personnel to receive instructions and shall coordinate their attendance at the agreed upon times.
- E. Use operation and maintenance manuals as the basis of instruction. Review manual with personnel in detail. Explain all aspects of operation and maintenance.
- F. Demonstrate start-up, operation, control, adjustment, troubleshooting, servicing, maintenance, and shut down of each item of equipment.

- G. Demonstrate equipment functions (both individually and as part of the total integrated system).
- H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.
- I. Submit a report within one week after completion of training. List time and date of each demonstration, hours devoted to the demonstration, and a list of people present, with their respective signatures.
- J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he / she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.
- K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

### 3.4 OPENINGS

- A. Framed, cast or masonry openings for boxes, equipment or conduits are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

### 3.5 HOUSEKEEPING PADS

- A. Provide concrete equipment housekeeping pads under all floor and outdoor mounted electrical equipment.
- B. Concrete and reinforcing steel shall be as specified in Division 3, or as indicated or noted.
- C. Concrete pads:
  - 1. 6-inches thick minimum indoors; 8-inches thick minimum outdoors or match existing if indicated on the drawings to extend existing pads, or in other sections of the specifications.
  - 2. Chamfer strips at edges and corner of forms.
  - 3. Smooth steel trowel finish.
  - 4. Extend 3-inches minimum indoors beyond perimeter of equipment unless otherwise shown.
  - 5. 6-inch x 6-inch #8 wire reinforcement mesh.

### 3.6 OBSTRUCTIONS

- A. The drawings indicate certain information pertaining to surface and subsurface obstructions, which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
  - 1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
  - 2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.

- B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

### 3.7 VANDAL RESISTANT DEVICES

- A. Where vandal resistant screws or bolts are employed on the project, deliver to the Owner 2 suitable tools for use with each type of fastener used, and 25 percent spare fasteners.
- B. Proof of delivery of these items to the Owner shall be included in the Operating and Maintenance Manuals.

### 3.8 PROTECTION

- A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.
- B. Do not deliver equipment to this project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather shall be rejected, and the contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.

### 3.9 COORDINATION OF BRANCH CIRCUIT OVERCURRENT AND PROTECTION DEVICES

- A. Review with equipment specified which requires electrical connections. Review equipment shop drawings and manufacturer's nameplate data and coordinate exact branch circuit overcurrent protective device and conductors with equipment provided.
  - 1. Provide equipment manufacturer's recommended overcurrent protective device indicated on nameplate at no additional cost to the Owner.
  - 2. If branch circuit conductors and / or conduit sizing is less than the minimum required by equipment manufacturer, notify the Architect / Engineer immediately, prior to rough-in.
  - 3. If equipment manufacturer is a substitution to the specified equipment manufacturer, provide the greater of the conductors specified or those required for the installed equipment manufacturer's minimum circuit conductors, at no additional cost to the Owner.
  - 4. If conductors indicated on plans are in excess of that permitted by equipment manufacturer, notify Architect / Engineer immediately, prior to rough-in.
  - 5. If conductors indicated on plans are in excess of that permitted by the equipment manufacturer, provide the maximum conductors permitted by the equipment manufacturer based on NEC ampacity tables, either in a single set, or as a set of parallel conductors as permitted by the NEC. Conductor size and quantity entering the equipment enclosures shall not exceed the equipment manufacturer's maximum recommendations.

### 3.10 FAULT CURRENT AND ARC FLASH STUDY FOR OVERCURRENT DEVICE COORDINATION

- A. Contractor shall provide a coordination study, fault current analysis, and Arc-Flash study report for new electrical distribution equipment downstream to the last new overcurrent device in each feeder or branch circuit, conducted and prepared by the switchgear manufacturer. The coordination study and fault current analysis shall include the manufacturer's recommendations for all adjustable overcurrent devices specified or provided. Study does not require inclusion of existing switchgear, except it shall include existing or new overcurrent devices in existing switchgear serving new switchgear. Contractor shall submit the report results prior to submitting switchgear submittals to allow changes or modifications to equipment selection.

- B. Contractor shall adjust all overcurrent device settings based on manufacturer's recommendations, or as directed by Owner / Architect at no additional cost to Owner. Settings for GFI shall be set at maximum as permitted by the NEC.
- C. Arc-Flash & Shock-Hazard Warning Labels: Provide arc-flash and shock hazard-warning labels that comply with ANSI Z535.4 on switchgear, switchboards, transformers, motor control centers, panelboards, motor controllers, safety switches, industrial control panels and other equipment that is likely to require examination, adjustment, servicing, or maintenance while energized. Locate the marking to be clearly visible to qualified persons before examination, adjustment, servicing, or maintenance of the equipment. On renovation projects, install arc-flash warning labels on existing equipment where lock-out / tag-out will be required for the renovation work. Provide the information listed below on each label. Specify that arc-flash warning label information be produced by the electrical equipment manufacturer or supplier as a part of the final power system studies to be submitted by the Contractor in accordance with the electrical acceptance testing.
1. Note: In addition to the final arc-flash analysis, the final power system studies include load flow and fault-current calculations, and an overcurrent protective device (OCPD) coordination study based on the actual equipment to be installed for the project.
- D. Information to be determined and applied to electrical equipment:
1. Arc-Flash Protection Boundary.
  2. Arc-Flash incident energy calculated in accordance with IEEE Std 1584<sup>TM</sup>.
  3. Working distance calculated in accordance with IEEE Std 1584a<sup>TM</sup>.
  4. NFPA 70E Hazard / Risk Category Number or the appropriate personal protective equipment (PPE) for operations with doors closed and covers on.
    - a. Typical operations include operating circuit breakers, fused switches, and meter selector switches.
  5. System phase-to-phase voltage.
  6. Condition(s) when a shock hazard exists (e.g., "With cover off").
  7. Limited Approach Boundary as determined from NFPA 70E, Table 130.2(C).
  8. Restricted Approach Boundary as determined from NFPA 70E, Table 130.2(C).
  9. Prohibited Approach Boundary as determined from NFPA 70E, Table 130.2(C).
  10. Unique equipment designation or code (described under "Component Identification").
  11. Class for insulating gloves based on system voltage (e.g., Class 00 up to 500V).
  12. Voltage rating for insulated or insulating tools based on system voltage (e.g., 1000V).
  13. Date that the hazard analysis was performed.
  14. "Served from" circuit directory information including the serving equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
  15. If applicable, the "serves" circuit directory information including the served equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
  16. An abbreviated warning label may be used where it has been determined that no dangerous arc-flash hazard exists in accordance with IEEE 1584a<sup>TM</sup>, paragraph 9.2.3.
  17. Use a "DANGER" label where the calculated arc-flash incident energy exceeds 40 cal/cm.
- E. Submittals: Submit four copies of coordination study and certified fault current study results to the Architect for review.



### 3.11 EQUIPMENT BACKBOARDS

- A. Backboards:  $\frac{3}{4}$  inch, fire retardant, exterior grade plywood, painted gray, both sides.
  - 1. Provide minimum of two 4-ft. by 8-ft. sheets of plywood for each new telephone equipment terminal location.
  - 2. Provide minimum of two 4-ft. by 4-ft. sheets of plywood for each new data / voice / video / communications equipment location / cable TV head end equipment, or security equipment location.

### 3.12 TESTING

- A. The contractors for the various sub-systems shall submit proposed testing procedures for their systems, subject to review and approval and Owner acceptance. The contract will not be declared to be substantially complete until the functional operation of the subsystems have been demonstrated and verified and reports have been provided, reviewed and accepted.
- B. The project will not be declared substantially complete until the following has taken place.
  - 1. The "As-Built" drawings have been submitted, reviewed and accepted by the Architect / Owner / Owner's Construction Representative.
  - 2. The building emergency lighting system and other systems including but not limited to those listed below have been tested, completed factory start-up and programming and adjusting as required for a complete and fully operational system acceptable to the Architect and Owner.
    - a. Occupancy Sensor and Lighting Controls.
    - b. Surge protective device equipment.
    - c. Overcurrent devices.
    - d. Motor Controllers.
    - e. Emergency Lighting.
    - f. Building Fire Alarm System.
    - g. Clock System.
    - h. Television Distribution System.
    - i. Building Data / Voice Cabling System.
    - j. Surveillance and Security System.
    - k. Intercom / Telephone.
    - l. Sound Reinforcement Systems.
    - m. Building Lightning protection System.

### 3.13 LOAD BALANCING

- A. Balance the loads on each low-voltage feeder so that the voltage on each phase is within +/- 1.0% of the average voltage of the three phases. Refer to the DOE Office of Industrial Technologies, "Motor Tip Sheet #7" dated September 2005 available for download to PDF format at no charge at:  
[http://www1.eere.energy.gov/industry/bestpractices/pdfs/eliminate\\_voltage\\_un\\_balanced\\_motor-systems7.pdf](http://www1.eere.energy.gov/industry/bestpractices/pdfs/eliminate_voltage_un_balanced_motor-systems7.pdf).

END OF SECTION

## SECTION 26 05 09

### ELECTRIC UTILITY COORDINATION AND SERVICE ENTRANCE

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. General: Electrical service shall be provided by local utility company.
- B. Power Company Data: Obtain from utility company information and installation standards for electrical service installation.
- C. Responsibilities: Determine what equipment and labor is provided by utility company and what equipment and labor is required of this Contractor.

#### PART 2 - PRODUCTS

##### 2.1 GENERAL

- A. Service Data: Ensure that utility company service data is accurate and verified.

##### 2.2 PRIMARY SERVICE

- A. General: Division 26 shall provide primary service conduit, concrete transformer pads, concrete duct bank, utility service and metering equipment enclosures, manholes, and pull boxes as required and as specified.
- B. Utility company shall provide primary cables, splices, utility metering instruments, terminations, and primary underground and overhead service conductors.

##### 2.3 TRANSFORMERS AND SWITCHGEAR

- A. General: Division 26 shall make provisions for service as required by utility company, including, but not limited to permanent or removable/lockable vehicular barriers, grounding rods, grounding conductors, and sleeves.
- B. The utility company shall provide service transformers, primary switchgear, primary protective relaying, and connections to the customer service.

##### 2.4 SECONDARY SERVICE CONDUCTORS

- A. General: Division 26 shall provide secondary service entrance conductors, conduit and concrete duct bank.

with anchor bolts. Hot dipped tubular steel cross members as required for equipment support. Support structure shall support approximately 1,200 pounds of equipment and minimum 150 MPH wind loading.

##### 2.5 SECONDARY SERVICE CABLE TAP BOXES

- A. General: Division 26 shall provide secondary service cable tap boxes only if required or specified and as approved by the utility company. Where required or specified, enclosure shall be constructed of aluminum or stainless steel NEMA 3RX construction.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Standards: The installation of the service entrance provisions shall comply with the published standards and requirements of the utility company, the utility company's specific construction requirements for this project, and with requirements of this Division.
- B. Correction: Any failure to meet the standards and requirements shall be corrected to the satisfaction of the utility company and Owner without any additional cost to the Owner.
- C. Contractor shall provide all construction materials and labor that the utility company determines to be the responsibility of the customer, at no additional cost to the Owner.
- D. The materials and labor required by the for a complete installation shall be provided by the contractor and includes, but is not limited to permanent or removable / lockable vehicular barriers, grounding rods, grounding conductors, sleeves, concrete pads, concrete reinforced ductbanks, conduits, metering racks and metering enclosures.
- E. Utility distribution poles and service entrance ductbank locations shall be staked and surveyed prior to pole installation by the Contractor to verify their proper placement is within the Owner's property and respective utility easements. Contractor shall verify by survey that the pole and service entrance ductbank location and easements do not interfere with existing easements, right-of-ways, or other restricted properties. Conflicts with existing easements and restrictions shall be brought to the attention of the Architect prior to construction.
- F. Contractor shall initiate contact with the power provider (retail seller), utility (transmission and distribution), and Owner within 14 days of Notice to Proceed to ensure permanent power will be available to the site. Any delays resulting from lack of this coordination shall be the responsibility of the Contractor.

END OF SECTION

## SECTION 26 05 12

### ELECTRICAL SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Prepare submittals as required by Division 01 and as outlined below.
- B. Provide individual submittals based on the project specification section number and description and only items specified or required in that specific project specification section.
- C. Submit product data shop drawings only for the following items indicated below when included as part of the project specifications, and for items specifically requested elsewhere in the Contract Drawings and Specifications. Architect / Engineer reserves the right to refuse shop drawings not requested for review, typically for basic materials and commodity off-the-shelf materials, and/or to imply that materials shall be provided as specified without exception.
- D. The term submittal, as used herein, refers to all:
  - 1. Shop Drawings.
  - 2. Coordination Drawings.
  - 3. Product data.
- E. Submittals shall be prepared and produced for:
  - 1. Distribution as specified
  - 2. Inclusion in the Operating and Maintenance Manual, in the related O&M manual section.

##### 1.2 ARCHITECT / ENGINEER REVIEW OF SUBMITTALS

- A. The Architect / Engineer will:
  - 1. Review requested submittals with reasonable promptness. Specific equipment submittal within a materials specification section that may be required to be expedited shall be submitted separately without other submittal items not requiring the same prompt attention.
  - 2. Affix stamp and initials or signature and indicate requirements for resubmittal or exceptions to submittal as submitted.
  - 3. Return submittals to Contractor for distribution or for resubmission.
- B. Review of submittals will not extend to design data reflected in submittals that is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.
- C. Architect / Engineer's review is only for conformance with the design concept of the project and for compliance with the information given in the contract.
  - 1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
  - 2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes, or coordination with the work of other trades.
- D. The review of a separate item as such will not indicate approval of the assembly in which the item functions.

### 1.3 SUBSTITUTIONS

- A. Do not make requests for product or material substitution employing the procedures of this Section. The procedure for making a formal request for substitution is specified in Division 01.

### PART 2 - PRODUCTS

- A. Each individual submittal shall be an individual specific electronic data file with the file name resembling the product specification section number and title. Refer to Division 01 for additional data file format and media requirements.

### PART 3 - EXECUTION

#### 3.1 SPECIFICATION COMPLIANCE REVIEW

- A. Do not submit an outline form of compliance, submit a complete copy with the product data.
- B. Mark up a complete copy of the complete specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect / Engineer / Owner (Does Not Comply, Explanation:).
- C. Variances for product or materials typically include updated model numbers or updated versions of the specified product from the same manufacture or an equal or better product from the approved manufactures list. Substitutions from manufacture's not on the approved manufacture's will not be reviewed unless prior approval using one of the procedures for substitutions or changes in the contract documents are followed as required in Division 01.

#### 3.2 COMPOSITE COORDINATION DRAWINGS

- A. Produce a set of composite coordination drawings for above ceiling, below ceiling, and below floor of electrical, mechanical, and technology equipment rooms and equipment yards for review and comment within four (4) weeks of receipt of Owner's official Notice to Proceed. Show coordination of items including but not limited to structural and architectural elements, all mechanical and plumbing piping, ductwork, equipment, electrical conduit, low voltage communications and safety/security systems cabling, cable trays, lighting, electrical switchgear, generators and UPSs, and any public or private building utility services.
  - 1. Prepare the composite plans at one-quarter inch (1/4") equals one-foot scale. Include larger scale sections with vertical elevations of elements as required to confirm coordinate of all elements.
  - 2. For each room containing major electrical switchgear and each outside equipment area with major electrical switchgear and other equipment also include NEC working space, NEC equipment space, and NEC access to NEC working space, and housekeeping pad location and dimensions.
  - 3. Prepare coordination drawings to coordinate installations for efficient use of available space allowing for future additional equipment wherever possible, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
  - 4. Identify field dimensions. Show relation to adjacent or critical features of work or products.

- B. Submit composite coordination shop drawings in plan, elevation and sections, showing receptacles, outlets, electrical and telecommunication devices in casework, cabinetwork and built-in furniture.
  - 1. Verify location of wiring devices and outlets, communication devices and outlets, safety and security devices, and other work specified in this Division.
  - 2. Coordinate with drawing details, site conditions, composite coordination drawings, and millwork other equipment shop drawings prior to installation.
  - 3. Submit coordination and shop drawings prior to rough-in and fabrication.

### 3.3 EQUIPMENT SHOP DRAWINGS AND PRODUCT DATA

- A. Submittals shall not be combined or bound together with any other material submittal. Do not submit entire product catalogs, submit only specific data sheets indicating required product information and available product options or accessories.
- B. Submittal Specification Information:
  - 1. Every submittal document shall bear the following information as used in the project manual:
    - a. The related specification section number.
    - b. The exact specification section title.
    - c. Additional identifiers as required in Division 01.
  - 2. Submittals delivered to the Architect / Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been submitted or delivered.
- C. All product options specified shall be clearly indicated on the product data submittal. All options listed on the standard product printed data not clearly identified as either part of or not part of the product data submitted shall become part of the Contract and shall be assumed to be provided with the product submitted.
- D. Mark each copy of standard manufacture's printed data to identify pertinent products, referenced to specification section and article number.
- E. Show reference standards, performance characteristics and capacities; wiring diagrams and controls; component parts; finishes; dimensions and required clearances.
- F. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete or strike through information not applicable.
- G. Submit drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.
- H. Show all dimensions of each item of equipment in its to be installed assembled condition with all components assembled. Include a series of drawings of individual components as necessary for reference.
- I. Identify field dimensions; show relation to adjacent or critical features or work or products.
- J. Submit individually bound shop drawings and product data for the following when specified or provided.
- K. The Fault Current and Overcurrent Device Coordination Analysis shall be submitted prior to other electrical switchgear dependent on the results of the study for specific product selection by the vendor or contractor for compliance with the study.
  - 1. The emergency life safety power system equipment shall be fully coordinated as

- required by the NEC.
  - 2. The AIC and WCR ratings of all products meet or exceed the available fault current at that equipment's location.
  - 3. Electrical systems other than life safety power systems shall be coordinated as much as practicable while reducing arc flash energy as much as practical.
- L. Required submittals when products are indicated or specified:
  - 1. Fault Current and Overcurrent Device Coordination Analysis. Submit this analysis at a minimum of three (3) weeks prior to any overcurrent device submittal to allow review for modifications to overcurrent device product selection submittal based on the manufacture's analysis and recommendations. Manufacture's recommendations for code compliance equipment fault tolerance are a project requirement and shall be provided at no additional cost to the Owner. Manufacture's recommendations for arc flash reduction that result in no additional cost to the Owner shall be provided. Manufacture's recommendations for arch flash reduction which would result in additional cost to the Owner are considered recommendations only and will be reviewed by the Engineer during the submittal review and may or may not result in changes to the specified or submitted equipment.
  - 2. Enclosed Switches, non-fused, fused, or circuit breaker.
  - 3. Panelboards.
  - 4. Load centers.
  - 5. Wiring devices.
  - 6. Lighting fixtures.
  - 7. Lighting Controls.
  - 8. Surge Protection Devices.
  - 9. Transformers.
  - 10. Electrical Contactors.
  - 11. Enclosed Motor Controllers.
  - 12. Site Lighting Photometrics, Poles, and Fixtures.
  - 13. Switchboards, including renewal components for existing switchboards.
  - 14. Elevator Power Module fused switches.
  - 15. Fuses.
  - 16. Recessed floor boxes and fittings.
  - 17. Metering equipment for building management energy monitoring, usage, IECC compliance.
  - 18. Modular metering equipment for multi-tenant utility electrical services.
  - 19. Emergency/Standby generators.
  - 20. Automatic transfer switches.
  - 21. Manual transfer switches with or without integral generator docking stations.
  - 22. Remote generator docking stations.
  - 23. Emergency lighting inverters.
  - 24. Theatrical Lighting Systems.
  - 25. Architectural Dimming Systems.
  - 26. Electrical cable trays.
  - 22. Sports Lighting Equipment, Photometrics, Fixtures, and Poles.
  - 27. Surface Raceways.
  - 28. Electrical controls and time switches.
  - 29. Motor control centers, including renewal components for existing motor control centers.
  - 30. Busway.
  - 31. Uninterrupted Power Supply systems.
  - 32. Power quality improvement filters or capacitors.
  - 33. Lightning protection system.
  - 34. Fire Rated Cables and Connectors.
  - 35. Low Voltage Switchgear.

- 36. Medium Voltage Cable and Connectors.
- 37. Medium Voltage Switchgear.

### 3.4 MANUFACTURERS INSTRUCTIONS

- A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

### 3.5 CONTRACTOR RESPONSIBILITIES

- A. Review, make corrections or annotations for clarification of manufacturer supplied data, stamp and sign submittals prior to transmittal.
- B. Determine and verify:
  - 1. Field measurements.
  - 2. Field construction criteria.
  - 3. Manufacturer's catalog numbers.
  - 4. Conformance with the Contract Documents.
- C. Coordinate submittals with requirements of the work and of the Contract Documents.
- D. Notify the Architect / Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.
- E. Do not fabricate products, or begin work for which submittals are required, until such submittals have been produced and bear contractor's stamp of acceptance or approval. Do not fabricate products or begin work until return of reviewed submittals with Architect / Engineer's acceptance.
- F. Contractor's responsibility for errors, omissions, or un-approved substitutions in submittals is not relieved whether Architect / Engineer reviews submittals or not.
- G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect / Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations identified by the Contractor on reviewed documents.
- H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
  - 1. Proper sizes and capacities.
  - 2. That the item will fit in the available space in a manner that will allow proper service; manufacture's and code required clearances.
  - 3. Construction methods, materials and finishes.
- I. Schedule submissions at least 15 days before date reviewed submittals will be needed by the Contractor for processing or for making corrections for re-submittal.
- J. General and Electrical Contractor's Stamp of Approval
  - 1. The general contractor and the electrical contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
  - 2. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect / Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that



Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.

3. Do not deliver any submittals to the Architect / Engineer that do not bear the Contractor's stamp of approval and signature.
4. Submittals delivered to the Architect / Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

### 3.6 SUBMISSION REQUIREMENTS

- A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor. Product and equipment related to site work or other trades which require extensive rough-in, foundations, or structural support shall be submitted as soon as possible after given notice to proceed with construction.
- B. Number of submittals required:
  1. Coordination Drawings: Submit one electronic data file (pdf) and three opaque reproductions or coordination drawings.
  2. Product Data: Submit electronic data PDF files. Refer to Division 01 for specific requirements. PDF files that are 20MB or larger may indicate that a submittal includes information not specifically relevant to the specific product being provided, information not required for the review of the specific product such as a complete product catalog or catalog section. Contractor shall include only the product data required to review the specific products characteristics for compliance with the contract documents.
- C. Accompany submittals with transmittal letter containing:
  1. Date.
  2. Project title and number.
  3. Contractor's name, address and contact information.
  4. The number of each Shop Drawing, Project Datum and Sample submitted.
  5. Other pertinent data as required in Division 01.
- D. Submittals shall include:
  1. The date of submission.
  2. The project title and number.
  3. Contract Identification.
  4. The names of:
    - a. Contractor.
    - b. Subcontractor.
    - c. Supplier.
    - d. Manufacturer.
  5. Identification of the product.
  6. Field dimensions, clearly identified as such.
  7. Relation to adjacent or critical features of the work or materials.
  8. Applicable standards.
  9. Identification of deviations from contract documents.
  10. Suitable blank space for General Contractor and Architect / Engineer stamps.
  11. Contractor's signed and dated Stamp of Approval.
- E. Coordinate submittals into logical groupings to facilitate interrelation of the several items.
  1. Finishes which involve Architect / Engineer selection of colors, textures or patterns.
  2. Associated items requiring correlation for efficient function or for installation.

### 3.7 RESUBMISSION REQUIREMENTS

- A. Make resubmittals under procedures specified for initial submittals. Re-submittals shall be a complete submittal as if it were the initial submittal unless otherwise instructed in the review comments on the original submittal.
  - 1. Indicate that the document or sample is a resubmittal
  - 2. Identify changes made since previous submittals
- B. Indicate any additional changes which have been made by the contractor other than those requested by the Architect / Engineer.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 26 05 16

### EXCAVATING, BACKFILLING AND COMPACTING FOR ELECTRICAL

#### PART 1 – GENERAL

##### 1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 1 apply to this section.
- B. Refer to Instructions for substitution of materials and products.
- C. Addenda issued during the bidding period that affect this section of the specifications.

##### 1.2 WORK INCLUDED

- A. Coordinating all excavating and backfilling for the electrical underground, and all related appurtenances. Provide concrete duct banks as specified in other related Division 26 specification sections.
- B. The extent of raceways, excavation, and backfill shall be in conformance with the locations, raceways, elevations and grades shown on the drawings.

##### 1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM) Use current edition.
  - 1. ASTM D698, Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft<sup>3</sup>).
  - 2. ASTM D1556, Standard Test method for Density and Unit Weight of Soil in Place by the Sand-Cone Method.
  - 3. ASTM D4253, Standard Test Methods for Maximum Index Density and Unit Weight of Soils Using a Vibratory Table.
  - 4. ASTM D4254, Standard Test Method for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density.
- B. Local Authority Having Jurisdiction Standards.
- C. Local Governing Agencies or Utilities.

##### 1.4 WARRANTY

- A. Provide written warranty against defects in the material and workmanship for the work of this Section for a period of one year from the Date of Substantial Completion of the Project. Refer to Division 1 for Warranty form.

#### PART 2 – PRODUCTS

##### 2.1 MATERIALS

- A. Concrete: Refer to other Division 26 specification section where concrete encasement is required or specified.
- B. Cement-Stabilized Sand: Clean, local sand mixed with not less than 1-1/2 sacks of Portland cement per ton; mix in a mill-type mixer.

- C. Sand: Clean, local sand
- D. Earth Backfill: Clean local material consistent with the surrounding earth material and free of large clods, roots, organic materials, rocks or other debris.

## PART 3 – EXECUTION

### 3.1 EXCAVATION

- A. General:
  - 1. All utility trenches shall be constructed in conformance with OSHA trench safety standards.
  - 2. Refer to project Geotechnical Report for additional requirements for excavating and backfilling of utility trenches.
  - 3. Sheet piling and shoring shall be accomplished to the extent necessary to maintain the sides of the trench in a vertical position throughout the construction period for trenches five feet in depth or deeper. Where approved, trench sides may be laid back in lieu of shoring to meet OSHA safety standards.
  - 4. Utilities shall not be constructed or laid in a trench in the presence of water. All water shall be sufficiently removed from the trench prior to the raceway placing operation to ensure a dry, firm bed on which to place the raceway.
- B. Appurtenances:
  - 1. Any overdepth excavation below appurtenances shall be refilled with cement-stabilized sand.
- C. Electrical Trenches:
  - 1. Electrical underground raceways must be the minimum depth required by the local governing authority and Power Company.
  - 2. Trench width for the electrical raceway shall be a minimum of the outside raceway encasement plus 12 inches.
  - 3. Trenches shall be excavated to a depth of at least 6 inches below the conduit raceway. The conduit raceway bedding or concrete encasement shall then be placed in accordance with the specifications, local governing authority, and Power Company standard details.

### 3.2 BEDDING AND BACKFILL

- A. Electrical Trenches:
  - 1. Place backfill, consisting of sand or cement stabilized sand, to a depth of one foot above top of raceway or concrete duct bank and compact to 90% maximum density.
  - 2. Backfill the remainder of the trench in 6 inch lifts with select excavated material and compact as required to achieve density of soil of surrounding area.
- B. Utility Locators:
  - 1. Provide metallic locators for utility company raceways as required by respective utility.
  - 2. Refer to other specification sections for additional requirements for underground raceway locators and markers.

END OF SECTION

## SECTION 26 05 19

### CONDUCTORS AND CONNECTORS – 600 VOLT

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide electrical conductors, wire and connector work as shown, and specified.
- B. Types: The types of conductors and connectors required for the project include the following:
  - 1. 600V building conductors.
  - 2. 600V building conductor connectors.
- C. Application: The applications for conductors and connectors required on the project are as follows:
  - 1. Power distribution circuitry.
  - 2. Lighting branch circuitry.
  - 3. Appliance, receptacle, and equipment branch circuitry.
  - 4. Motor branch circuitry.
  - 5. Control wiring.
  - 6. Line voltage.
- D. Refer to other specific specification sections for voice, video, data, alarm and instrumentation cables.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Conductors and connectors shall be UL labeled.

##### 1.3 REFERENCES

- A. Refer to other specific specification sections regarding specialized wiring and connections.

#### PART 2 – PRODUCTS – Provide products manufactured in the USA

##### 2.1 CONDUCTORS AND CONNECTORS

- A. General: Except as indicated, provide conductors and connectors of manufacturer's standard materials, as indicated by published product information, designed and constructed as instructed by the manufacturer, and as required for the installation.
- B. Cable Lubricant: Fire resistant, nonflammable, water-based type for standard building conductors. Provide cable lubricants for fire rated cables as recommended by the cable manufacturer.
- C. Conductors: Provide factory-fabricated conductors of the size, rating, material, and type as indicated for each use. Conductors shall be soft or annealed copper wires meeting, before stranding, the requirements of ASTM B 3, Standard Specification for Soft or Annealed Copper Wire for Electrical Purposes, latest edition.
  - 1. Conductors for control wiring sized #14 AWG through #10 AWG shall be stranded.
  - 2. Conductors for power and lighting shall be stranded. Stranding shall be Class B meeting the requirements of ASTM B 8, Standard Specification for Concentric-

Lay-Stranded Copper Conductors, Hard, Medium Hard, or Soft.

- D. Insulation for standard building conductors: Insulation shall meet or exceed the requirements of UL 83, Standard for Thermoplastic Insulated Wires.
1. All wiring inside lighting fixtures shall be temperature rated per NEC.
  2. Insulation for copper conductors shall be UL Type THHN/THWN, 90 degrees C.

## 2.2 COLOR CODES FOR CONDUCTORS FOR BRANCH CIRCUITS AND FEEDERS

- A. Color coding for conductors as required by NEC 210.5. Color coding for phase and voltage shall be as required by local codes and local standards. Where such standards do not exist, color coding shall be as follows:

| Color Code Table | USE CONTINUOUS COLOR CODED INSULATION THROUGHOUT |        |        |       |       |                        |
|------------------|--------------------------------------------------|--------|--------|-------|-------|------------------------|
| System/Phase     | A                                                | B      | C      | N     | G     | IG                     |
| 120/208<br>3 Ph  | Black                                            | Red    | Blue   | White | Green | Green/Yellow<br>Stripe |
| 120/240<br>3 Ph  | Black                                            | Orange | Blue   | White | Green | Green/Yellow<br>Stripe |
| 120/240<br>1 Ph  | Black                                            | N/A    | Blue   |       |       |                        |
| 277/480          | Brown                                            | Purple | Yellow | Gray  | Green | Green/Yellow<br>Stripe |

Notes to Color Code Table:

1. 120/208, 120/240, and 277/480 Volt Systems shall be routed in separate raceways.
2. Switched legs of phase conductors for lighting and appliance branch circuits shall be of the same color as described above throughout the entire circuit.
3. Conductors shall be the same color from breaker to device or outlet.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. General: Install electrical conductors and connectors as shown, in accordance with the manufacturer's written instructions, the requirements of NEC, the NECA Standard of Installation, and industry practices.
- B. Coordination: Coordinate conductor installation work with electrical raceway and equipment installation work, as necessary for interface.
- C. Conductors:
1. Provide a grounded (neutral) conductor for each branch circuit. Do not share grounded (neutral) conductors.
  2. No more than six phase conductors shall be installed in a single raceway. Any combination of phase conductors and grounded (neutral) conductors in any raceway shall not exceed nine.
  3. When any combination of four or more phase and grounded (neutral) conductors are installed in a raceway, the minimum size for all conductors including equipment ground conductor shall be #10 AWG, and they shall be de-rated accordingly.
  4. When more than four (4) conductors are size #10 AWG, they shall be installed in

- a one-inch conduit.
5. Pull conductors together when more than one is being installed in a raceway. Whenever possible, pull conductors into their respective conduits by hand. Use pulling lubricant when necessary.
  6. Before any conductor is pulled into any conduit, thoroughly swab the conduit to remove foreign material and to permit the wire to be pulled into a clean, dry conduit.
  7. Run feeders their entire length in continuous section without joints or splices.
  8. No wire smaller than #12 AWG shall be permitted for any lighting or power circuit. No wire smaller than #14 AWG shall be used for any control circuit, unless shown otherwise.
  9. Provide the same size wire from the panelboard to last outlet on circuit. For 20 amp branch circuits operating at 150V or less, provide #10 AWG wire when the first outlet is over 75-feet from the panelboard. For branch circuits operating at 150 to 600 volts, provide #10 AWG wire when the first outlet is over 150-feet from the panelboard.
  10. Branch circuit voltage drop shall not exceed 3% of rated voltage.
    - a. Total voltage drop from the point of service to the last outlet or utilization equipment of the same voltage shall not exceed five-percent of rated voltage.
    - b. Total voltage drop from the point of service to transformers with adjustable taps, buck-boost transformers, uninterruptable power supplies (UPS), or voltage regulators shall not exceed five-percent of rated voltage.
    - c. Total voltage drop from a separately derived system, transformer with adjustable taps, buck-boost transformer, uninterruptable power supply (UPS), or voltage regulator to the last outlet or utilization equipment of the same voltage shall not exceed five-percent of rated voltage.
    - d. Total voltage drop from the point of service to distribution equipment of the same voltage shall not exceed two-percent of rated voltage.
    - e. Branch circuit voltage drop from distribution equipment to the last outlet or utilization equipment shall not exceed three-percent of rated voltage.
    - f. Provide the same size branch circuit conductors to last outlet on circuit unless specifically noted or indicated otherwise on the drawings. For 20 amp branch circuits operating at 150-Volts or less, provide #10 AWG wire when the first outlet is over 75-feet from the panelboard. For branch circuits operating above 150-Volts to 600-Volts, provide #10 AWG wire when the first outlet is over 150-feet from the panelboard.
  11. No tap or splice shall be made in any conductor except in outlet boxes, pull boxes, junction boxes, splice boxes, or other accessible locations. Make taps and splices using an approved compression connector. Insulate taps and splices equal to the adjoining conductor. Make splices or taps only on conductors that are a component part of a single circuit, protected by approved methods. Taps or splices in feed through branch circuits for connection to light switches or receptacles shall be made by pigtail connection to the device.
  12. Support conductors in vertical raceways, as required by the NEC.
  13. Do not permit conductors entering or leaving a junction or pull box to deflect to create pressure on the conductor insulation.
  14. Make joints in branch circuits only where circuits divide. These shall consist of one through circuit to which the branch from the circuit shall be spliced.
  15. Make connections in conductors up to a maximum of one #6 AWG wire with two #8 AWG wires using twist-on pressure connectors of required size.
  16. Make connections in conductors or combinations of conductors larger than specified using cable fittings of type and size required for specific duty.
  17. After a splice is made, insulate entire assembly with UL-approved insulating tape to a value equivalent to the adjacent insulation.



18. Make splices and connections in control circuit conductors using UL-approved solderless crimp connectors.
  19. All conduits shall be installed with an insulated grounding conductor per NEC 250.122. Where green conductor insulation is not available, the ground conductor shall be identified with green phasing tape at all accessible locations.
  20. Neatly train and lace wiring inside boxes, equipment and panelboards. Provide tie-straps around conductors with their shared neutral conductor where there are more than two neutral conductors in a conduit.
  21. Clean conductor surfaces before installing lugs and connectors.
  22. Make splices, taps and terminations to carry full ampacity of conductors with no perceptible temperature rise.
  23. Provide stranded conductors connected with pressure type connectors / compression fittings and terminal lugs UL listed for the type of conductor used (AL-CU) and correctly sized to the diameter of the bare conductors.
  24. Run mains and feeders their entire length in continuous pieces without splices or joints.
  25. Color code conductors.
  26. Do not install a pull string in conduits containing conductors.
  27. Conductors shall be the same color from load side of overcurrent protection device to outlet or utilization equipment.
  28. Spare conductors shall not be installed in any conduit, gutter, raceway, panel or enclosure unless noted otherwise.
- D. Identification: Label each phase conductor in each junction box with corresponding circuit number, using self-adhesive wire markers.
- E. Splices and Joints:
1. In accordance with UL 486A, C, D, E, and NEC.
  2. Aboveground Circuits (No. 10 AWG and smaller):
    - a. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220° F, with integral insulation, approved for copper and aluminum conductors.
    - b. The integral insulator shall have a skirt to completely cover the stripped wires.
    - c. The number, size, and combination of conductors, as listed on the manufacturers' packaging, shall be strictly followed.
  3. Motor connections:
    - a. All AHU motors connections shall be split bolt connectors.
    - b. All non-AHU motors 10 HP and larger shall be split bolt connectors.
    - c. All non-AHU motors less than 10 HP shall be split bolt connectors or as recommended by the manufacturer.
- F. Aboveground Circuits (No. 8 AWG and larger):
1. Connectors shall be indent, hex screw, or bolt clamp type of high conductivity and corrosion resistant material, listed for use with copper and aluminum conductors.
  2. Provide field-installed compression connectors for cable sizes 250 kcmil and larger with not less than two clamping elements or compression indents per wire.
  3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
  4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

- G. Underground Branch Circuits and Feeders:
1. Submersible connectors in accordance with UL 486D, rated 600 V, 190°F, with integral insulation.

### 3.2 TESTING

- A. Pre-Energization Check: Before energizing, check cable and conductors for circuit continuity and short circuits. Correct malfunctions.
- B. Service Entrance and Feeder Insulation Resistance Test: Each main service entrance conductor and each feeder conductor shall have its insulation resistance tested after the installation is complete except for connection at its source and point of termination. Testing shall be performed by qualified technicians who have been trained in testing procedures and in the use of all test equipment.
1. Make tests using a Biddle Megger or equivalent test instrument at a voltage of not less than 1000 VDC; measure resistance from conductor to conductor, conductor to neutral (if present) and from conductor to ground. Insulation resistance shall not be less than the following:

| Wire Size (AWG)  | Insulation Resistance (Ohms) |
|------------------|------------------------------|
| #8               | 250 K                        |
| #6 through #2    | 100 K                        |
| #1 through #4/0  | 50 K                         |
| Larger than #4/0 | 25 K                         |
  2. Conductors that do not meet or exceed the insulation resistance values listed above shall be removed, replaced, and retested.
- C. Submittals: Contractor shall furnish instruments and personnel required for tests. Submit 4 copies of certified test results to Architect for review. Test reports shall include conductor tested, date and time of test, relative humidity, temperature, and weather conditions.
- D. Voltage and Current Values: The voltage and current in each conductor shall be measured and recorded after connections have been made and the conductor is under load.

SAMPLE DC HIGH VOLTAGE CABLE TEST REPORT  
(Specification Paragraph 3.2, C)

Date \_\_\_\_\_

Contract and Work Location: \_\_\_\_\_

Contract (Project) No.: \_\_\_\_\_

Circuit Identification: \_\_\_\_\_

(Dwg., Title, Number and Ckt. Number)

Test Equipment: \_\_\_\_\_

(Make, Model, Serial No., Etc.)

Applied Test Voltage \_\_\_\_\_

Normal Oper. Voltage \_\_\_\_\_

Cable Installation: New \_\_\_\_\_ Used \_\_\_\_\_  
(Date) (No. Years)

Cable Size \_\_\_\_\_ AWG

Cable Length \_\_\_\_\_ Ft.

Cable Material \_\_\_\_\_ Cu \_\_\_\_\_ Al

Temperature \_\_\_\_\_ Humidity \_\_\_\_\_

TEST DATA - RESISTANCE IN KILO OHMS

| CONDUCTOR<br>PER<br>PHASE | A-N | B-N | C-N | A-G | B-G | C-G | A-B | B-C | A-C |
|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                           |     |     |     |     |     |     |     |     |     |

END OF SECTION

## SECTION 26 05 26

### ELECTRICAL GROUNDING

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Grounding shall conform to the requirements of:
  - 1. National Electrical Code.
  - 2. Governing local codes.
  - 3. All Local Utility Companies.
- B. Ground effectively and permanently.
  - 1. Neutral conductor at the main service disconnect and other separately derived systems.
  - 2. All conduit systems.
  - 3. All electrical equipment and related current carrying supports or structures.
  - 4. All metal piping systems.
  - 5. All building structural metal frames.
  - 6. All telephone/voice/video/CATV/data utilities.

##### 1.2 REFERENCE STANDARDS

- A. ANSI/IEEE Standard 142 - "Recommended Practice for Grounding of Industrial and Commercial Power Systems."
- B. ANSI/UL 467 - "Safety Standard for Grounding and Bonding Equipment."
- C. Article 250 of the NEC (NFPA 70) for grounding.
- D. NECA – Standard of Installation.
- E. NETA ATS – Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.
- F. EIA / TIA 607.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Copperweld.
- B. nVent ERICO.
- C. Burndy.
- D. O. Z Gedney.
- E. Eaton.

##### 2.2 GROUNDING ELECTRODES

- A. Driven Rod Electrode

1. 3/4" x 10'-0" copper clad grounding electrode.
2. UL listed.
3. Approved thermal fusion connector methods (exothermic).

B. Metal frame of building or enclosure.

C. Foundation concrete encased rebar.

## 2.3 DATA / VOICE COMMUNICATIONS CLOSET GROUND BAR

- A. MDF closets/head end rooms: Erico Cadweld #B544A028 ground bar with 7/16-inch holes.
- B. IDF closets, Erico Cadweld #B542A004 ground bar with 7/16-inch holes.
- C. Heavy-duty, two bolt type, copper alloy or bronze for grounding and bonding applications, in configurations required for particular installation.

## 2.4 EXOTHERMIC CONNECTIONS

- A. Exothermic type for underground and structural steel; Cadweld
- B. Exothermic materials, accessories, and tools for preparing and making permanent field connections between grounding system components.

## 2.5 WIRE

- A. Stranded, copper cable
- B. Foundation Electrodes: 4/0 AWG
- C. Grounding Electrode Conductor: Size to meet NFPA 70 requirements

# PART 3 - EXECUTION

## 3.1 GROUNDING AND BONDING

- A. In the service equipment, provide a separate (dedicated) ground bus.
  1. Bond the ground bus with copper bus bar or cable, of equal or greater current carrying capacity of the service grounding conductor, to the neutral bar.
  2. Resistance of neutral to ground shall not exceed 10 Ohms.
  3. Connect the electric service grounding electrode conductors to the incoming metal water pipe system (when available, using a suitable ground clamp) and to a supplemental electrode such as a ground rod or ground .ring.
  4. Provide grounding and bonding at the power company's metering equipment.
  5. Provide access and cover for access to the ground grid and removable connections for testing the system.
- B. Connect the grounding electrode conductor between the ground bus and the grounding electrode system.
  1. In rigid PVC conduit.
  2. Provide thermo fusion connection for each rod ground electrode.
    - a. All rod electrodes shall be located outside the building in non-paved areas where available. Access cover top shall be flush with finish grade or floor.
    - b. Install rod electrodes as required. Install additional rod electrodes as

- required to achieve specified resistance to ground.
    - c. The minimum distance between driven ground rod electrodes shall be 10'.
  - 3. The total ground resistance shall not exceed 10 Ohms for service entrance grounds and 25 Ohms for equipment grounds.
    - a. Where this condition cannot be obtained with one electrode, install a longer electrode, deep-driven sectional electrodes, or additional grounding electrodes until the required ground resistance is obtained.
- C. Provide an insulated equipment grounding conductor inside all conduits, raceways, surface raceways, gutters and wireways. The ground wire shall be bonded to each box to suitable lug, bus, or bushing. All bonding jumpers shall be routed inside conduit or raceway.
- D. Provide an insulated isolated equipment grounding conductor in addition to the insulated equipment grounding conductor for all isolated grounding feeders, branch circuits, outlets and isolated grounding receptacles.
- E. Provide all conduit terminating in switchgear, transformers, switchboards, panelboards and voice/data outlets with grounding bushings, where required, and ground wire extended to ground bus in equipment. Install grounding bushings where reducing washers are used and concentric and eccentric knock-outs are used.
- F. Main bus and building grounding electrode conductor installation shall be witnessed by the Architect / Engineer.
- G. Provide bonding to meet Regulatory Requirements.
- H. Interface with lightning protection system when lightning protection system is specified.
- I. Locate and install anchors, fasteners, and supports in accordance with NECA "Standard of Installation".
- J. Do not fasten supports to pipes, ducts, mechanical equipment, or conduit.
- K. Do not use spring steel clips and clamps.
- L. Do not use powder-actuated anchors.
- M. Do not drill or cut structural members.
- N. Do not use compression or mechanical connectors underground.
- O. Do not use sheetmetal or self-drilling screws for bonding connections. Provide listed or approved connectors.
- P. Provide grounding access well for each driven ground electrode, not located in manholes or pull boxes.
  - 1. Access well top shall be flush with finish paved surfaces.
  - 2. Ground access wells located in non-paved areas shall be set two-inches above surrounding finished grade. Provide 12-inch wide by 8-inch deep reinforced concrete crown around neck or opening and sloped down away from pull box opening.
  - 3. Provide thermal fusion (exothermic) connectors approved for direct burial.

### 3.2 METAL FRAME OF BUILDING OR STRUCTURE

- A. Effectively ground the building steel or structure per NEC 250-52 (2).

### 3.3 UFER GROUND

- A. Provide a UFER ground at bottom of building slab per NEC 250.52 (3), bond to building steel.

### 3.5 MISCELLANEOUS REQUIREMENTS

- A. Continuity of the equipment grounding system shall be maintained throughout the project. Equipment grounding jumpers shall be installed across conduit expansion fittings, liquid-tight flexible metal and flexible metal conduit, and other non-electrically continuous raceway fittings.
- B. Equipment grounding conductors and grounding electrode conductor shall be stranded copper conductors and run in a suitable raceway. Grounding conductors and grounding electrode conductor shall be continuous, without joints or splices over their entire length, except as allowed by NFPA 70/NEC.
- C. For separately derived alternating current system grounds, bond the case and neutral of each transformer secondary winding directly to the nearest available effectively grounded structural metal member as required in NEC 250.
- D. Exterior Electrical Equipment Racks:
  - 1. Provide driven ground electrode.
- E. Technology/Data/Voice Communications, CATV, CCTV, and MATV Equipment Grounding: Provide grounding electrode conductor from the communications service equipment to the building grounding system as required. Grounding shall conform to ANSI/TIA/EIA 607(A) – Commercial Building Grounding and Bonding Requirements for Telecommunications, National Electrical Code®, ANSI/NECA/BICSI-568 and manufacturer's grounding requirements as minimum. Bonding shall be of low impedance to assure electrical continuity between bonded elements.
  - 1. MDF Closets Telecommunications Main Ground Bar (TMGB): Provide Erico #EGBA14424MM ground bar, wall mounted to the telecommunications plywood backboard. Provide one #3 AWG insulated ground conductor from ground bar to building steel. Provide #2/0 AWG insulated ground conductor to the building electrical service ground at the nearest electrical switchboard or panelboard.
  - 2. IDF Closets Telecommunications Ground Bar (TGB): Provide Erico #EGBA14410FF ground bar mounted to the telecommunications plywood backboard. Provide one #6 AWG insulated ground conductor from ground bar to building steel and to ground bus of nearest electrical panelboard or switchboard.
  - 3. Provide #2/0 AWG insulated ground conductor between each TMGB and all TGBs.
  - 4. Provide #2/0 AWG insulated ground conductor from TMGB to electrical service ground bus at main electrical service switch.
  - 5. Bond each equipment rack, cabinets, frames, together and with #6 AWG insulated ground conductor to the local TMGB / TGB. Bond and ground equipment racks, housings, messenger cables, raceways, and rack-mounted conduit.
  - 6. Route TMGB – TGB ground conductor using the shortest, straightest, route practical with long radius curves.
  - 7. All conduits terminating to cable trays, wireways, and racks shall be mechanically fastened. When connected to a cable tray or rack, it must be connected with

ground bushings, wire bonded to the tray or rack, and grounded to the main building grounding system or IDF room grounding bar using #6 AWG copper.

- F. Ground lighting fixture bodies to the conduit grounding system.
- G. Bond receptacle ground to the box and conduit ground system, except where and insulated/isolated grounding receptacle or outlet is specified.
- H. Ground connections to building steel, grounding electrodes and all underground connections shall be by thermal fusion (exothermic).
- I. Provide OZ Type "BJ" bonding jumper at all expansion joints, points of electrical discontinuity or connections in conduit where firm mechanical bond is not possible, such as flexible connections, insulating couplings, etc.
- J. Ground each lighting and power panelboard by connecting the grounding conductors to the grounding stud.
- K. Ground each secondary dry-type transformer to the ground bus of the primary side panelboard. Provide a bonding jumper between the ground stud and the neutral. Ground transformer ground stud to ground ring if a ground ring is installed or the nearest structural steel member.
- L. Bond every item of equipment served by the electrical system to the building equipment ground system. This includes, but is not limited to, switchboards, panelboards, disconnect switches, receptacles, cable trays, controls, fans, air handling units, pumps and flexible duct connections.
- M. Ground each light pole, power distribution poles, and metal conduit stub-ups at each light pole base.
- N. Ground all metal conduit including metal conduit used for bends and penetrations through concrete.
- O. Bond hot water and cold water piping together at each domestic water heater.

### 3.6 MANHOLE AND/OR PULL BOX GROUNDING

- A. Provide a driven ground rod and ground bond ring in each power and telephone manhole or pull box. Bond cable racks and medium voltage cable shields at splices and terminations, ductbank conduit ground bushings and all other metal components in manholes or pull box to the ground ring.

### 3.7 COORDINATION

- A. General: Coordinate installation of grounding connections for equipment with equipment installation work.

### 3.8 TESTING

- A. Ground Resistance Test: Perform a ground resistance test for comparison to future inspection and testing data by the Owner. Test shall be performed using a Biddle Megger Earth Tester or equivalent test instrument. The test shall not be performed within 48 hours after the last rainfall.
  - 1. Inspect and test in accordance with NETA ATS except Section 4
  - 2. Grounding and Bonding: Perform inspections and tests listed in NETA ATS,



### Section 7.13

- B. True Root Mean Square (RMS) AC measurements: The True RMS AC Measure test should be performed for all bonding conductors. The recommended maximum AC current value on any bonding conductor should be less than 1 ampere (A). The recommended maximum DC current value should be less than 500 milliamperes (mA). If abnormally high AC current levels are present on any bonding conductor, a dangerous faulty wiring condition likely exists within the room.
- C. Two-Point Bonding Measurements: The Two-point Bonding test should be performed for all bonding conductors. This test should be performed using an earth grounding resistance tester configured for a continuity test. The test is performed by connecting the meter leads between the nearest available grounding electrode (e.g., structural steel) and the TMGB or TGB. The recommended maximum value for the bonding resistance between these two points is 0.1 Ohms (100 milliohms).
- D. Submittals: Furnish instruments and personnel required for tests. Personnel shall be trained in all aspects of testing grounding systems and shall be formally trained on using all test equipment required. Submit 2 copies of certified test results for Owner's record and submit 4 copies of certified test results to Architect / Engineer for review. Test reports shall include date and time of tests, relative humidity, temperature, and weather conditions.

END OF SECTION

## SECTION 26 05 33

### CONDUIT SYSTEMS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Furnish and install a complete system of electrical conduits and fittings.

##### 1.2 REFERENCE STANDARDS

- A. National Electrical Code.
- B. Local codes and ordinances.
- C. UL.
- D. ETL.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS – Provide products manufactured in the USA

- A. Raceways:
  - 1. Allied, International Metal Hose, Ipex, Heritage Plastics, Wheatland, Can-Tex, Carlon, Certain-Teed, Anamet, Inc., Electri-Flex Co., Western Tube and Conduit, Sentinel Conduit.
  - 2. PVC Coated RGC: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions.
  - 3. Stainless Steel: Robroy, Calbrite, Gibson.
  - 4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products.
  - 5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass, United Fiberglass.
- B. Fittings:
  - 1. Appleton, Crouse Hinds, Topaz, Steel City, O.Z. Gedney, Carlon, Heritage Plastics, Racor, Ipex, International Metal Hose, Lew Electric Fittings Co.
  - 2. PVC Coated ferrous fittings: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions.
  - 3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds.
  - 4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products.
  - 5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass.
- C. Condulets and Conduit Bodies:
  - 1. Appleton, Form 85.
  - 2. PVC Coated: Robroy Perma-cote or Plasti-Bond, – no exceptions.
  - 3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds.
  - 4. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass.
- D. Steel MC Cable for light fixture whips:
  - 1. AFC.

2. Southwire.
3. General Cable.
4. Kaf-Tech.

## 2.2 GENERAL

- A. The minimum conduit size shall be ¾-inch unless indicated otherwise in Divisions 26, 27 or 28.
  1. Branch Circuits: Minimum conduit size shall be ¾-inch.
  2. Feeder Circuits: Minimum conduit size shall be ¾-inches.
  3. Technology, telecommunications, and low voltage systems: The minimum conduit size shall be ¾-inches unless noted or indicated otherwise.
  4. The minimum conduit size between buildings for technology, voice, data, fire alarm, video, security, surveillance, BMCS, and other telecommunications shall be 2-inch unless indicated otherwise.
- B. The minimum conduit size for flexible metallic conduit for tap connections to individual light fixtures shall be ½ inch, or steel metal clad (MC) cable with insulated ground conductor maximum 6 feet.
- C. Electrical nonmetallic tubing, flexible polyethylene or PVC tubing shall not be used on this project.
- D. BX and AC cable shall not be used on this project.
- E. PVC elbows shall not be used on this project.
- F. Intermediate metal conduit (IMC) shall not be used on this project.

## 2.3 RIGID METAL CONDUIT

- A. UL labeled, Schedule 40:
  1. Mild steel pipe, zinc coated inside and out.
  2. Aluminum Alloy 6063, T-1 temper.
  3. Threaded ends.
  4. Insulated bushings.
- B. Fittings shall meet the same requirements as rigid metal conduits.
  1. UL labeled.
  2. Threaded fittings.

## 2.4 ELECTRICAL METALLIC TUBING (EMT)

- A. UL labeled, standard weight:
  1. Cold rolled steel tubing, zinc coated inside and out.
  2. Aluminum Alloy 6005, 6063. Temper T-1.
- B. Fittings shall meet the same requirements as EMT conduits.
  1. UL labeled.
  2. Insulated throat connectors.
  3. Steel fittings with setscrews with lock nuts on threaded ends, no snap locks.
  4. Cast metal fittings are not approved.
  5. Uni-couple type connectors are not approved.
  6. Split ring, anti-short bushings are not approved.

## 2.5 RTRC CONDUIT FITTINGS AND CONDUIT BODIES

- A. UL listed.
- B. Standard wall thickness sizes ¼-inch through 4-inch.
- C. Underground medium wall thickness sizes 5 and 6-inch.
- D. Conduit interface joints above grade, gasket joint below grade.
- E. Extra heavy wall for above ground and/or UL Class 1 Division 2 and Class 1 Zone 2 applications.

## 2.6 PVC COATED RIGID STEEL WITH URETHANE INTERIOR COATING

- A. The PVC coated galvanized rigid conduit and fittings must be ETL Listed and Verified. The PVC coating must have been investigated and verified by ETL as providing the primary corrosion protection for the rigid metal conduit. Ferrous fittings for general service locations must be ETL Listed with PVC as the primary corrosion protection. Hazardous location fittings, prior to plastic coating must be UL listed for the hazard conditions to which they are to be used. All conduit and fittings must be new, unused material. Applicable UL standards may include UL 6 Standard for Safety, Rigid Metal Conduit, and UL514B Standard for Safety, Fittings for Conduit and Outlet Boxes.
- B. The PVC coated galvanized rigid conduit and fittings must be ETL Verified to the Intertek ETL SEMKO High Temperature H<sub>2</sub>O PVC Coating Adhesion Test Procedure for 200 hours. The PVC coated galvanized rigid conduit must bear the ETL Verified PVC-001 label to signify compliance to the adhesion performance standard.
- C. The conduit shall be hot dip galvanized inside and out with hot galvanized threads.
- D. A PVC sleeve extending one pipe diameter or two inches, whichever is less, shall be formed at every female fitting opening except unions. The inside sleeve diameter shall be matched to the outside diameter of the conduit.
- E. The PVC coating on the outside of conduit couplings shall have a series of longitudinal ribs 40 mils in thickness to protect the coating from tool damage during installation.
- F. Form 8 Condulets, ½-inch through 2-inch diameters, shall have a tongue-in-groove gasket to effectively seal against the elements. The design shall be equipped with a positive placement feature to ease and assure proper installation. Certified results confirming seal performance at 15 psig (positive) and 25 inches of mercury (vacuum) for 72 hours shall be available.
- G. Form 8 Condulets shall be supplied with plastic encapsulated stainless-steel cover screws.
- H. A urethane coating shall be uniformly and consistently applied to the interior of all conduit and fittings. This internal coating shall be a nominal 2 mil thickness. Conduit or fittings having areas with thin or no coating shall be unacceptable.
- I. The PVC exterior and urethane interior coatings applied to the conduit shall afford sufficient flexibility to permit field bending without cracking or flaking at temperatures above 30°F (-1°C).
- J. All male threads on conduit, elbows and nipples shall be protected by application of a urethane coating.

- K. All female threads on fittings or conduit couplings shall be protected by application of a urethane coating.
- L. Independent certified test results shall be available to confirm coating adhesion under the following conditions
  - 1. Conduit and conduit exposure to 150°F (65°C) and 95% relative humidity with a minimum mean time to failure of 30 days. (ASTM D1151)
  - 2. The interior coating bond shall be confirmed using the Standard Method of Adhesion by Tape Test (ASTM D3359).
  - 3. No trace of the internal coating shall be visible on a white cloth following six wipes over the coating which has been wetted with acetone (ASTM D1308).
  - 4. The exterior coating bond shall be confirmed using the methods described in Section 3.8, NEMA RN1. After these tests the physical properties of the exterior coating shall exceed the minimum requirements specified in Table 3.1, NEMA RN1.
- M. Right angle beam clamps and U bolts shall be specially formed and sized to snugly fit the outside diameter of the coated conduit. All U bolts shall be provided with plastic encapsulated nuts that cover the exposed portions of the threads.
- N. All fittings, clamps, straps, struts, and hardware used with PVC coated conduit shall be PVC coated or 316 stainless steel.

## 2.7 STEEL FLEXIBLE CONDUIT

- A. Steel flexible metallic conduit:
  - 1. Zinc coated inside and out.
  - 2. 18-inches minimum length, 24-inches maximum length.
- B. Steel flexible metallic conduit for tap connections to light fixtures where steel MC Cable fixture whips are not used:
  - 1. 18 inches minimum length; 6 feet maximum length.
- C. Liquid tight flexible steel conduit
  - 1. Type L.A. - Grounded - UL Approved.
  - 2. 18-inches minimum length, 24-inches maximum length.

## 2.8 PVC CONDUIT

- A. UL labeled Schedule 40 and Schedule 80.
- B. PVC fittings and solvent welded joints.
- C. Acceptable PVC conduit manufacturer: Ipex, Cantex .

## 2.9 CONDULETS AND CONDUIT BODIES

- A. UL Labeled.
- B. Form 85.
- C. PVC Coated: Form 8.
- D. LBC Condulets shall be used for size 2 inch and above.

- E. LL and LR Condulets shall not be used for 2 inch and above.

## 2.10 ROOF MOUNTED CONDUIT AND BOX SUPPORTS

- A. Conduit supports and pads suitable for direct sunlight, conduit size, weight, quantity and roof system with unistrut supports and accessories. Conduit supports shall allow for conduit expansion and contraction.
- B. Refer to roofing specifications for additional information. The limitations and restrictions contained in any roofing specification shall prevail and supercede these specifications for roof mounted supports for conduits and boxes.
- C. Approved Manufacturer:
  - 1. Portable Pipe Hangers.
  - 2. Eaton B-Line.
  - 3. Miro Industries, Inc.

## 2.11 ALUMINUM CONDUIT

- A. UL Labeled.
- B. Aluminum fittings shall meet the same requirements of aluminum conduits, compatible steel fittings.
  - 1. UL Labeled for use with aluminum conduit.

## 2.12 STAINLESS STEEL CONDUIT

- A. UL Labeled
- B. Rigid Stainless Steel:
  - 1. Type 304 Stainless Steel.
  - 2. Threaded ends.
  - 3. Insulated Bushings.
- C. EMT:
  - 1. Type 304 Stainless Steel.
  - 2. Compression Fittings.
  - 3. Insulated Bushings.
- D. Fittings, elbows, nipples, strut, device box, clamps straps, etc.
  - 1. Type 304 Stainless Steel.

## 2.13 ELECTRICAL NON-METALLIC TUBING (ENT)

- A. UL labeled Schedule 40.
- B. PVC fittings and solvent welded joints.
- C. Acceptable manufacture: Carlon.

## 2.14 EXTERIOR IN-GRADE PULL BOXES

- A. Enclosures, boxes and covers are required to conform to all test provisions of the most current American Association of State Highway and Transportation Officials (AASHTO) standards for H-20 loading applications.
  - 1. AASHTO H-20 certified precast concrete, cast iron or other AASHTO recognized

- materials, rated for deliberate traffic.
- 2. Conduit entry knock-outs as required.
- 3. Bolt down galvanized steel/cast iron covers.
- 4. Thin wall knocks outs as required .
- 4. Integral bottom.
- 5. Box height as required for specified conduit depth and required top elevation.
- 6. Concrete design strength of minimum 5,500 PSI at 28-days.
- 7. Place enclosures on a minimum of 6 inches of coarse gravel with a border of 6-inches beyond the enclosures exterior dimension.
- 8. Size and volume as required for application.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install electrical conduits and fittings for all wiring of any type unless specifically specified or instructed to do otherwise. Install conduits and fittings in accordance with local codes and applicable sections of the NECA "Standard of Installation", concealed where possible.
  - 1. Fasten conduit supports to building structure and surfaces; do not support to roof deck.
  - 2. Arrange supports to prevent misalignment during wiring installation.
  - 3. Do not support conduit with wire or perforated pipe straps. Remove wire used for temporary supports.
  - 4. Do not attach conduit to ceiling support wires.
  - 5. Arrange conduit to maintain head room and present neat appearance.
  - 6. Maintain 4-inch clearance between conduit and rooftop surfaces.
  - 7. Cut conduit square using saw or pipe cutter; de-burr cut ends.
  - 8. Bring conduit to shoulder of fittings; fasten securely.
  - 9. Conduit penetrations to all individual motor controllers, VFDs, and motor control cabinets shall only be made at the bottom of the enclosure. For other equipment, provide listed water sealing conduit hubs to fasten conduit to sides or tops of electrical equipment enclosures, device box, gutter, wireway, disconnect, etc.
  - 10. Use suitable caps to protect installed conduit against entrance of dirt and moisture.
  - 11. Ground and bond conduit as required.
  - 12. Identify conduit as required.
  - 13. Route all conduits above building slab perpendicular or parallel to building lines.
  - 14. Do not use no-thread couplings and connectors for galvanized steel, PVC coated galvanized steel, or aluminum rigid conduit.
- B. Group related conduits; support using conduit rack. Construct rack using steel channel; provide space on each for 25 percent additional conduits.
- C. In areas where raceway systems are exposed and acoustical or thermal insulating material is to be installed on walls, partitions, and ceilings, raceways shall be blocked out proper distance to allow insulating material to pass without cutting or fitting. Also provide Kindorf galvanized steel channels to serve as standoffs for panels, cabinets and gutters.
- D. Securely fasten conduits, supports and boxes, to ceiling (not roof deck), walls, with Rawl Plugs or approved equal anchors. Use lead cinch anchors or pressed anchors. Use only cadmium plated or galvanized bolts, screws. Plastic anchors and lead anchors shall not be used for overhead applications.
- E. Provide separate raceway systems for each of the following when specified, indicated or required:

1. 120/208 volt circuits.
  2. 277/480 volt circuits.
  3. Emergency
    - a. Life safety branch.
    - b. Critical branch.
    - c. Equipment branch.
  4. Voice/Data.
  5. Sound reinforcement.
  6. Theatrical and Architectural Dimming Controls.
  7. MATV/CATV.
  8. Security CCTV.
  9. Security System.
  10. Communications / PA Systems / Sound System Line Input and Speakers.
  11. Fire Alarm.
  12. Lighting Control Systems.
  13. Building Management Control Systems.
- F. Unless shown otherwise, do not install conduit in or below concrete building slabs.
- G. Unless shown otherwise, do not install conduit horizontally in concrete slabs.
- H. Roof penetrations shall be made in adequate time to allow the roofing installer to make proper flashing. Conduit for equipment mounted on roof curbs shall be routed through the roof curb. Conduit, gutters, pull boxes, junction boxes, etc. shall not be routed on roof unless specified otherwise. Where specifically indicated to be routed or mounted on the roof, supports shall be as specified, as recommended by roofing manufacturer and roof support manufacturer and as required by NEC. Place supports every five feet along conduit run and within 3 feet of all bends, condulets, and junction boxes. Provide roofing pad under stands as directed by Architect and as recommended by roofing manufacturer and roof support manufacturer. Provide additional unistrut supports and accessories as required.
- I. PVC coated conduit shall have all nicks and cuts to the protective coating repaired using manufacturer's approved touch-up material as recommended by manufacturer. Provide a minimum of two-wraps of 3M-50 type tape over touch-up.
- J. Installation of the PVC Coated Conduit System shall be performed in accordance with the Manufacturer's Installation Manual. To assure correct installation, the installer shall be certified by Manufacturer to install coated conduit. Submit copies of training certification with submittal. Contractor shall coordinate installation with manufacturer's representative for field training and observation of installed PVC coated rigid galvanized conduit and fittings. Manufacturer's representative shall certify the installation is in accordance with manufacturer's installation instructions. Submit copies of installation certification prior to cover-up of underground installation.
- K. All conduit terminations at locations including but not limited to, switchgear, pull boxes, outlet boxes, stub-up, and stub-outs:
  1. Provide insulated throat connectors for EMT conduits.
  2. Provide insulated bushing on all rigid conduit terminations.
  3. Provide locknuts inside and outside of all boxes and enclosures.
  4. Provide threaded type plastic bushing at all boxes and enclosures.
- L. In suspended ceilings, support conduit runs from the structure, not the ceiling system construction.
  1. Do not support from structural bridging.
  2. Do not support from metal roof deck.



- M. Completely install each conduit run prior to pulling conductors. All boxes are to be accessible after completion of construction.
- N. All conduits must be kept dry and free of water or debris with approved pipe plugs or caps. Cap or plug conduit ends prior to concrete pours.
- O. Ream ends of conduits after cutting and application of cutting die to remove rough edges.
- P. Install all above concrete slab conduits perpendicular or parallel to building lines in the most direct, neat and workmanlike manner.
  - 1. Cable Tension:
    - a. 0.008 lb./cmil for up to 3 conductors, not to exceed 10,000 pounds.
    - b. 0.0064 lb./cmil for more than 3 conductors, not to exceed 10,000 pounds.
    - c. 1000 lbs. per basket grip.
  - 2. Sidewall pressure: 500 lbs./ft.
  - 3. Conduit runs within the following limits of bends and conduit length between pull points shall not exceed the above installation pulling tension and sidewall pressure limits.
    - a. Three (3) equivalent 90-degree bends: not more than fifty feet (50') between pull points.
    - b. Two (2) equivalent 90-degree bends: not more than one hundred feet (100') between pull points.
    - c. One (1) equivalent 90-degree bend: not more than one hundred fifty feet (150') between pull points.
    - d. Straight pull: not more than two hundred feet (200') between pull points.
  - 4. Indicate sizes of conduits, wireway sections, and cable tray sections on the as-built drawings.
  - 5. Hold horizontal and vertical conduits as close as possible to walls, ceilings and other elements of the building construction. Conduits shall be kept a minimum of 6 inches clear of roof deck / insulation, and 2 inches clear of above floor deck / insulation.
  - 6. Install conduits to conserve building space and not obstruct equipment service space or interfere with use of space. Conduit shall not be routed on floors, paved areas or grade.
  - 7. Where a piece of equipment is wired from a switch or box on adjacent wall, the wiring shall go up the wall from the box, across at or near the ceiling, and back down to the equipment. Wiring shall not block the walkway between wall and equipment.
  - 8. Horizontal runs of conduit on exposed walls shall be kept to a minimum.
  - 9. Conduit for mechanical / plumbing equipment installed outdoors shall be routed with the associated mechanical / plumbing pipe support rack system where practical, coordinate with Divisions 22 and 23.
  - 10. Conduits installed in public areas, not concealed by architectural ceilings, shall be supported by galvanized steel channel racks to bottom of roof deck or floor deck. Conduits shall be grouped for neat workman-like appearance.
- Q. Install expansion and deflection fittings and bonding jumpers on straight runs which exceed 200-feet, on center, and at 200-feet maximum, on center, on straight runs which exceed 400-feet, and where conduits cross building expansion joints.
- R. Provide grounding bushings at concentric/eccentric knockouts or where reducing washers are used.
- S. Run conduit to avoid proximity to heat producing equipment, piping surfaces with

temperatures exceeding 104 degrees F., and flues, keeping a minimum of 13-inches clear.

- T. Install conduit as a complete system, without conductors, continuous from outlet to outlet and from fitting to fitting. Make up threaded joints of conduit carefully in a manner to ensure a tight joint. Fasten the entire conduit system into position. A run of conduit between outlet and outlet, between fitting and fitting, or between outlet and fitting shall not contain more than the equivalent of four quarter bends, including those bends located immediately at the outlet or fitting.
- U. Conceal conduit systems in finished areas. Conduit may be exposed in mechanical and electrical rooms, and where otherwise shown or indicated only. Run the conduit parallel and perpendicular to the structural features of the building and support with malleable iron conduit clamps at intervals as required by NEC or on conduit racks, neatly racked and bent in a smooth radius at corners.
- V. Conduit bends shall be factory elbows or shall be bent using equipment specifically designed to bend conduit of the type used to maintain the conduit's UL listing. Conduit hanger spacing shall be 10 feet or less and as required by the NEC for all conduit. Beam clamp attachments to steel joist chords is prohibited. Beam clamps may only be used at beams, no exceptions. Connections to joists shall be made with galvanized channel extended between joist chords or with galvanized channel bearing on the vertical legs of joist chord angles.
- W. Support conduit on galvanized channel, using compatible galvanized fittings (bolts, beam clamps, and similar items), and galvanized threaded rod pendants at each end of channel and secure raceway to channel and channel to structure. Where rod pendants are not used, channel supports are to be secured to structure at each end. Conduit supports are to be secured to structure using washers, lock washers, nuts and bolts or rod pendants; use of toggle bolt "wings" are not acceptable. Support single conduit runs using a properly sized galvanized conduit hanger with galvanized closure bolt and nut and threaded rod. Raceway support system materials shall be galvanized and manufactured by Kindorf, Unistrut, Superstrut, Caddy, or Spring Steel Fasteners, Inc. Provide chrome or nickel-plated escutcheon plates on conduit passing through walls and ceilings in finished areas. Do not support conduit from other conduit, structural bridging or fire rated ceiling system. Do not support more than one conduit from a single all-thread rod support. Provide electrical insulating sleeve or wrapping for aluminum conduit supported by zinc coated supports or fasteners. Channel supports shall have cut ends filed smooth. When installed outside of the building, or in areas subject to moisture, the cut ends shall be painted with ZRC galvanized paint or equivalent.
- X. Terminate all motor connection conduits in mechanical room spaces with a floor pedestal and with "Tee" conduit at motor outlet height for flexible conduit.
- Y. Where conduit is not embedded in concrete or masonry, conduit shall be firmly secured by approved clamps, half-straps or hangers. Tie wire and short pieces of conduit used as supports and or hangers are not approved.
- Z. Where "LB" condulets are used, 2-inches and larger shall be type "LBD".
- AA. No more than 12 conduits containing branch circuits may be installed in junction boxes, pull boxes or gutters.
- BB. Flexible metal conduit and liquid tight flexible metal conduit shall only be used for final connections from junction box to equipment, light fixtures, power poles, etc. They are not to be used in lieu of conduit runs. They shall not be used for wall or roof penetrations

unless they are installed in a PVC coated RGC conduit sleeve at least one size larger than the OD of the flexible conduit.

- CC. Where 3-1/2-inch conduit is specified and the required or specified material is Schedule 80 PVC, provide 4-inch conduit.
- DD. "Daisy Chaining" light fixtures installed for lay-in ceiling areas is not allowed. Each light fixture shall have its own fixture whip from junction box. The only exception being light fixtures installed end to end using chase nipples between them, or light fixtures recessed in non-accessible ceilings.
- EE. In above ceiling applications, do not install raceways, junction boxes, gutters, disconnects, etc. within 36 inches directly in front of HVAC control boxes or other equipment requiring access from a point starting from the top of control box / equipment down to ceiling.
- FF. Do not install conduit, junction boxes, etc. within 18 inches of outside edges of roof access openings.
- GG. Install minimum size 2-inch nipple, at least one, between multi-sectional panels for branch circuit independent of feeder conductors.

### 3.2 CONDUITS

- A. Conduit above grade indoors:
  - 1. Concealed Conduits: EMT with set screw fittings
  - 2. Exposed conduits:
    - a. Below nine feet AFF where not directly attached and against building walls, ceiling, or structure: Rigid metal conduit or x-wall RTRC.
    - b. Where subject to physical damage: Rigid metal conduit or x-wall RTRC.
    - c. Wet locations: PVC coated galvanized rigid steel or aluminum conduit
    - d. Damp Locations: Aluminum rigid conduit or x-wall RTRC.
    - e. Exposed conduits in mechanical rooms or electrical rooms shall be rigid galvanized steel or x-wall RTRC when installed below 18-inches above finished floor.
- B. Conduit installed above grade outdoors:
  - 1. Galvanized rigid steel or x-wall RTRC for conduits up utility poles and where subject to physical damage or where located less than four feet above finished floor.
  - 2. Aluminum or x-wall RTRC where not subject to physical damage and where located four feet above finished floor.
- C. Conduit where indicated underground:
  - 1. PVC Coated Galvanized rigid steel or RTRC conduit elbows and Schedule 80 PVC, RTRC, or PVC coated galvanized steel straight run conduits. PVC conduits for underground branch circuits shall be Schedule 80 or Schedule 40 PVC.
    - a. PVC conduit and fittings shall be used only for straight horizontal runs and for vertical risers at site lighting pole bases. Bending straight sections of PVC conduit to less than 25-foot radius or the use of PVC factory bends is not allowed.
    - b. Change in direction of conduit runs, either vertical or horizontal, shall be with RTRC or PVC coated galvanized steel elbows or long sweep bends of straight PVC conduit sections. Long sweep bends of straight PVC 20-foot sections shall have a minimum radius of curvature of 25 feet and a maximum arc of 22.5degrees. Multiple long sweep bends of straight PVC

- sections shall be separated by a minimum of 20-feet of straight, linear, PVC sections.
- c. Provide RTRC or PVC coated rigid galvanized steel conduit elbows and fittings with urethane interior coating at all changes in direction with radius of less than 25-feet and at all vertical runs to 18 inches above finished floor elevation. For interior slab penetrations, provide continuous RTRC or PVC coated rigid galvanized steel conduit and fittings with urethane interior coating from change in direction to 18 inches above finished floor elevation, except where stubbed-up under and inside equipment or switchgear where conduit shall be terminated at minimum two inches above concrete housekeeping pad.
  - d. Elbows for underground electrical service entrance, feeders, transformer primary / secondary, telecommunication, and low voltage conduits shall be RTRC or PVC coated rigid galvanized steel with long radius as follows:
    - 1) Up to 1-inch conduit, minimum 12-inch radius.
    - 2) 1.5-inch conduit, minimum 18-inch radius.
    - 3) 2-inch conduit, minimum 24-inch radius.
    - 4) 2.5-inch conduit, minimum 30-inch radius.
    - 5) 3-inch conduit, minimum 36-inch radius.
    - 6) 3.5 to 6-inch conduit, minimum 48-inch radius.
  - e. Conduit for all floor boxes shall be routed below building slab from floor box to nearest column, wall, or as indicated.
  - f. Conduits shall not be routed horizontally in building slab, grade beams or pavement.
2. Encase all underground conduits in concrete.
- a. Concrete shall be tinted red throughout with a ratio of 10 pounds of dye per yard of concrete unless prohibited by utility for utility conduits. Concrete encasement for utility installed conductors shall be as specified by the utility and comply with their standards and specifications. Where utility does not require but allows concrete encasement of conduits, provide concrete encasement as specified herein.
  - b. Provide minimum 3-inch concrete encasement around conduits.
  - c. Provide conduit spacers for parallel branch/feeder conduits.
  - d. When prior written approval from Owner and Architect to omit concrete encasement of conduits below building slab is given, conduits either specified or approved in writing to be routed under building slab without concrete encasement for electrical branch circuits or voice / data / video / communications horizontal drops or outlets shall be installed 18 inches below finished floor and on select fill. All other conduits, including but not limited to electrical feeders, voice / data / video / communications vertical, riser, tie, trunk, or service cable conduits shall be installed 48-inches below finished floor and on select fill.
  - e. Use suitable manufactured separators and chairs installed 4 feet on centers. Securely anchor conduit at each chair to prevent movement during backfill placement.
3. Install building voice / data / video / communications main service conduits and electrical service transformer primary and secondary conduits with top of concrete encasement minimum 48-inches below finished grade or pavement. Voice / data / video / communications conduits and electrical service primary conduits for utility owned electrical service transformers shall also comply with the respective utility company requirements and standards. All other underground conduits outside of building other than voice / data / video / communications main service conduits and electrical service transformer primary and secondary conduits shall have top of concrete encasement at 36 inches minimum below finished grade or pavement.

4. Provide two "caution" plastic tapes at 6-inches and 18-inches below finished slab, grade, or pavement; identify as specified in Section 26 05 00.
  5. Conduits located outside building, provide magnetic locator tape at top of first compacted layer of backfill or concrete.
  6. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the underground conduit is completed, a testing mandrel with diameter 1/4-inch smaller than the conduit, shall be drawn through each conduit. A brush with stiff bristles shall be drawn through until conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.
  7. Utility underground conduit for Utility Company cable shall be installed per Utility Company standards, and their specifications for this project.
  8. Concrete shall be Portland Cement conforming to ASTM-C-150, Type 1, Type III or Type V if specified. Cement content shall be sufficient to product minimum strength of 2,500 PSI.
  9. Contractor shall stake out routing and location of underground conduits using actual field measurements. He shall obtain approval of the Owner and Architect before beginning trenching, horizontal drilling, and excavation.
  10. Verify location and routing of all new and existing underground utilities with the Owner and Architect on the job site. Stake out these existing utilities so that they will not be damaged. Stake out new utilities to provide coordination with other trades and with new and existing utilities, easements, property lines, restricted land use areas, and right-of-ways. Verify existing public utilities with Call811.
- D. Conduit shown in concrete walls, floor or roof slab:
1. PVC Coated Galvanized Rigid steel.
- E. Conduits that penetrate concrete slab, or within 100 feet of cooling towers, or at designated corrosive locations.
1. RTRC.
  2. PVC coated galvanized rigid steel.
- F. Connections to equipment mounted on roof, rotating equipment, transformers, and kitchen or food processing equipment, or where flexible conduit is required outdoors.
1. Liquid tight flexible metal conduit (1/2 inch may be used for roof top supply / exhaust fans only).
  2. Liquid tight flexible metal conduit for 24-inch maximum length.
  3. Conduit for roof-mounted equipment shall be routed inside the roof curb assembly roof opening. Provide permanent lock-off device at panelboard circuit breakers serving roof equipment and accessories to enable tag-out procedures for all power routed through roof curb and to the roof mounted equipment and accessories.
- G. Light fixture whips:
1. Accessible ceilings and open structure: 1/2-inch flexible steel conduit or steel MC cable, length not to exceed 6-feet.
  2. Non-accessible ceilings: 1/2-inch flexible steel conduit. Length as required to make a tap at an accessible j-box. Recessed light fixtures in non-accessible ceilings may be daisy chained using the light fixture's integral, UL listed j-box or internal wire way that is accessible through fixture from below the ceiling.
  3. Dedicated insulated ground wire.
  4. Light fixture whips shall not rest on ceiling grid or tile.
  5. Light fixture whips shall not be supported from the ceiling suspension system. Support from the structure with #13 AWG galvanized iron wire pendants and Caddy clips. Do not support conduit from structural bridging. Flexible conduit and steel MC cable shall be kept a minimum of 2 inches clear of roof deck.

- H. Conduits at Natatorium or therapeutic pool areas:
  - 1. Underground conduit shall be as specified in this section.
  - 2. Exterior conduits and boxes within 100 feet of exhaust openings shall be x-wall RTRC or PVC coated galvanized rigid steel or stainless steel.
  - 3. Exposed conduits in chemical storage rooms, pool mechanical equipment (pump rooms, and pool equipment storage rooms shall be Schedule 80 PVC. Boxes shall be PVC, or 304 Stainless Steel.
  - 4. Exposed conduits and boxes in indoor pool areas and all other indoor public areas shall be Type 304 Stainless Steel.
- I. Conduits located inside greenhouses and natatorium pump and water treatment rooms:
  - 1. X-wall RTRC.
  - 2. Schedule 80 PVC.
  - 3. PVC coated galvanized rigid steel conduit and fittings.
- J. Conduits in classified hazardous (Classified) locations:
  - 1. Conduit fittings and seals UL listed for the classification.
- K. Conduits embedded in parking structure traffic wearing surface and concrete support structures:
  - 1. Schedule 40 PVC, RTRC, PVC coated rigid galvanized conduit.
  - 2. Schedule 40 ENT may only be used for flat runs embedded in traffic wearing surface concrete topping.
  - 2. Solvent welded fittings only for PVC conduit and ENT.
  - 3. Verify with Structural Engineer prior to construction for any additional limitations for raceway installation restrictions installed in parking structure including but not limited to maximum outside diameter of raceways permitted to be used in the wearing surface, and field cutting or drilling through parking structure structural members or support structures.
  - 4. All raceways shall be securely fastened to prevent floating during concrete installation. ENT raceways shall be completely embedded in concrete material to maintain fire and smoke integratory as required by the NEC.
  - 5. When using ENT or PVC conduits, provide transition to x-wall RTRC or PVC coated rigid galvanized conduit elbows and vertical risers to ensure that only flat horizontal runs of PVC conduit or ENT are used along the top of the parking structure structural support deck and that they are completely concealed and embedded by the wearing surface concrete material topping.

### 3.3 CONDUIT PENETRATIONS, SLEEVES AND ESCUTCHEONS

- A. Furnish sleeves for placing in construction for all conduit passing through concrete or masonry walls, partitions, beams, all floors other than grade level, and roofs. A conduit sleeve shall be one size larger than the size of conduit, which it serves except where larger sizes are required for manufactured water, fire, or smoke stop fittings.
  - 1. Sleeves set in concrete floor construction shall be minimum Schedule 40 galvanized steel.
  - 2. Sleeves shall extend 3-inches above the finished floor.
- B. Sleeves in concrete or masonry walls shall be RTRC or Schedule 40 galvanized steel. Sleeves shall be set flush with finished wall.
- C. Install manufactured UL listed water, fire, and smoke stop fittings, or caulk around conduit or cables in sleeves with sufficient UL listed fire safe insulation or foam to maintain wall or floor slab fire or smoke rating. Refer to Architecture drawings for locations of rated walls.

- D. Provide Linkseal Mechanical Seals around conduit penetrations through walls below grade. Provide a pull box to install a water stop inside wall penetration. Internally seal low voltage cabling conduit penetrations with waterproof caulking.
- E. Sleeves penetrating walls below grade shall be Schedule 40 black steel pipe with ¼-inch thick steel plate secured to the pipe with continuous fillet weld. The plate shall be located in the middle of the wall and shall be 2-inches wider all around than the sleeve that it encircles. The sleeve should extend a minimum of 24-inches on either side of the penetration. The entire assembly shall be hot-dipped galvanized after fabrication. Do not sleeve or penetrate grade beams.
- F. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with a threaded steel bushing. Route conduit through roof openings, for piping and ductwork or through suitable roof jack, with pitch pocket. Coordinate location with roofing installation as required.
- G. Conduit passing through fire rated wall shall be sealed with Fire Stop. Route conduit to preserve fire resistance rating of partitions and other elements, using materials and methods under the provisions of Division 7.

#### 3.4 POWER DISTRIBUTION UNDERGROUND FEEDER CONDUIT AND UNDERGROUND SERVICE ENTRANCE CONDUIT

- A. Power underground feeder and service entrance shall be of individual conduit encased in concrete. Unless shown otherwise, the type of conduit used shall not be mixed in any one underground conduit and shall be the size indicated on the drawings. The concrete encasement surrounding the underground conduit shall be rectangular in cross-section, having a minimum concrete thickness of 3-inches, except that conduit for 120V and above shall be separated from control and signal conduits by a minimum concrete thickness of 3-inches. Encasement concrete shall be tinted in red.
- B. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the underground conduit is completed, a testing mandrel shall be drawn through until each conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.
- C. Furnish the exact dimensions and location of power underground conduit to be encased in time to prevent delay in the concrete work.
- D. Conduit for service entrance underground conduits shall be as indicated on the drawings.
- E. Primary power underground conduit shall be installed in accordance with utility company standards and the utility company specifications for this project.

#### 3.5 TELECOMMUNICATIONS, LOW VOLTAGE AND EMPTY CONDUIT SYSTEM RACEWAYS

- A. Conduit shall be installed in accordance with the specified requirements for conduit and with the additional requirements that no length of run shall exceed 100-feet for 1 inch or smaller trade sizes and shall not contain more than two 90-degree bends or the equivalent. Pull or junction boxes shall be installed to comply with these requirements. Provide plastic bushings at all conduit terminations. Provide a grounding bushing on each data and voice conduit.
- B. Conduits shall be installed from outlet box to above an accessible ceiling. All cables routed through open spaces (no-ceiling below roof deck or above floor deck) shall be

routed in conduit. Telecommunications systems, CATV, CCTV, fire alarm and BMCS cables can be installed above accessible ceilings without conduit. Cables installed above accessible ceiling shall be plenum rated. Conduit rough in of these cables shall include a 90-degree turn-out to an accessible location with insulated bushings on the end of the conduit.

1. Provide conduit from each telecommunications outlet box to accessible ceiling plenum.
  2. Provide conduit from each security / surveillance device outlet box to accessible ceiling plenum.
  3. Provide two conduits for each multi-media outlet box and each outlet box indicated to contain more than four data, audio, or video drops to accessible ceiling plenum.
  4. Provide the following minimum conduits for telecommunications and multi-media wall, floor, and ceiling mounted outlet boxes. Use the largest diameter conduit indicated below unless instructed otherwise in writing from the Architect:
    - a. Non-masonry outlet box: Two 1-inch conduits.
    - b. Masonry outlet box: Two 1-inch conduits, or three 3/4-inch conduits.
    - c. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation.
- C. All conduit in which cable is to be installed by others shall have pull string installed. The nylon pull string shall have not less than 200 lb. tensile strength. Not less than 12-inches of slack shall be left at each end. Provide blank cover plate before substantial completion if box is for a future installation after substantial completion of the project. Conduit shall extend to a minimum six inches above nearest accessible ceiling and be turned horizontally with plastic bushing at terminations.
- D. Conduits for Building Entrance Facilities:
1. Underground Outside Plant: Install a pull box every 300-feet or after 180 degree turns.
  2. Inside Plant: Install a pull box every 150-feet or after 180 degree turns. All turns shall be large sweeps, not sharp 90s, with the radius of the sweep at least 10X the diameter of the conduit. Hence, a 4-inch conduit requires a 40-inch minimum radial sweep. If field conditions absolutely mandate a sharp 90-degree bend to be installed, then a pull box shall be installed at that location regardless of distance.
  3. Building entrance facilities shall not terminate in an IDF or any other space except the MDF.
  4. Coordinate the termination location of the building entrance facilities in the MDF with the room layout and equipment configuration.
  5. Provide 4-inch conduit unless indicated otherwise. Provide (3) fabric innerducts in each 4-inch conduit.

### 3.6 EXTERIOR IN-GRADE PULL BOXES

- A. Provide pull boxes where specified and as required.
- B. Pull boxes located in pavement shall be set with proper extensions so that top of cover is flush with pavement.
- C. Pull boxes located in non-paved areas shall be set two-inches above surrounding finished grade. Provide 12-inch wide by 8-inch deep reinforced concrete crown around neck or opening and sloped down away from pull box opening.



### 3.7 ALUMINUM ALLOY CONDUCTORS

- A. Where aluminum alloy conductors are specified, approved and substituted for copper conductors, provide the required conduit size based on conduit fill using NEC or recognized cable manufacturer's conduit fill tables for aluminum alloy compact conductors.

### 3.8 IDENTIFICATION

- A. Conduit Systems: Provide adequate marking of conduit larger than one inch exposed or concealed in interior accessible spaces to distinguish each run as either a power (120/208V or 277/480V) or signal / telecommunication conduit (Fire Alarm, BAS, BMCS, Security, CCTV, Access Control, Intrusion Detection, Telecom, etc.). Except as otherwise indicated, use orange banding with black lettering. Provide self-adhesive or snap-on type plastic markers. Locate markers at ends of conduit runs, near switches and other control devices, near items of equipment served by the conductors, at points where conduit passes through walls or floors or enters non-accessible construction, and at spacing of not more than 50-feet along each run of exposed conduit. Switch-leg conduit and short branches for power connections need not be marked, except where conduit is larger than 1-inch.

END OF SECTION

## SECTION 26 05 35

### ELECTRICAL CONNECTIONS FOR EQUIPMENT

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Electrical connections as required and scheduled, and as specified.

##### 1.2 RELATED WORK

- A. Refer to other Divisions for specific individual equipment electrical requirements.

##### 1.3 QUALITY ASSURANCE

- A. UL Label: Products shall be UL listed to the extent possible.

#### PART 2 - PRODUCTS

##### 2.1 MATERIALS AND COMPONENTS

- A. General: For each electrical connection indicated, provide a complete assembly including, but not limited to, pressure connectors, terminals (lugs), electrical insulating tape, heat-shrinkable insulating tubing, cable ties, solderless wire nuts, and other items and accessories needed to complete splices and terminations.
- B. Raceways: Refer to related sections.
- C. Conductors and Connectors: Refer to related section. Conductors at equipment terminations shall be copper.
- D. Terminals: Provide electrical terminals as indicated by the terminal manufacturer for the application.

#### PART 3 - EXECUTION

##### 3.1 INSTALLATION OF ELECTRICAL CONNECTIONS

- A. General: Install electrical connections as shown, in accordance with applicable portions of the NECA Standard of Installation, and industry practices.
- B. Conductors: Connect electrical power supply conductors to equipment conductors in accordance with equipment manufacturer's written instructions and wiring diagrams. Where possible, match conductors of the electrical connection for interface between the electrical supply and the installed equipment.
- C. Splice Insulation: Cover splices with electrical insulation equivalent to, or of a higher rating than, insulation on the conductors being spliced.
- D. Appearance: Prepare conductors by cutting and stripping covering, jacket, and insulation to ensure a uniform and neat appearance where cables and wires are terminated.
- E. Routing: Trim cables and wires to be as short as practical. Arrange routing to facilitate inspection, testing, and maintenance.

- F. Motor Connections: Where possible, terminate conduit in conduit boxes at motors. Where motors are not provided with conduit boxes, terminate the conduit in a suitable conduit, and make motor connections. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with an approved grommet. For all AHU or fan motors and all other motors 10 HP and larger, at the motor connection do not use wire nuts. Provide copper alloy split bolt connectors or compression lugs and bolts. Insulate connection with Scotch Super 88 vinyl electrical tape over rubber tape, or Tyco Gelcap Motor Connection Kit.
- G. Conduit connections to equipment including, but not limited to, Variable Frequency Drives, Manual and Automatic Transfer Switches, Surge Suppression Devices, motor controllers, electrical disconnects, food service / processing equipment, electronics, control panels and Owner furnished equipment:
1. Make conduit penetrations only at the bottom flat surface of the equipment and only where permitted by the equipment manufacturer to avoid un-intentional water entry. Coordinate installation of electrical connections for equipment with equipment installation work. Where equipment manufacture does not permit a bottom conduit entry, verify with Owner/Engineer and locate the conduit entry at the side surface as close as possible to the bottom of the enclosure.
  2. Where conduit originates from an elevation above the conduit entry, provide a "T" conduit below the enclosure's bottom elevation. Provide conduit from the conduit up to the enclosure bottom horizontal surface for electrical connection.
- H. Identification: Refer to Electrical General Provisions for identification of electrical power supply conductor terminations with markers approved as to type, color, letter and marker size by the Architect. Fasten markers at each termination point, as close as possible to each connecting point.
- I. Equipment and Furnishings: Refer to other Divisions. Coordinate power and control provisions shown for equipment and furnishings with the provisions required for the furnished equipment and furnishings. Where the power and control requirements are less than or equal to those specified, modifications to power and control provisions shall be made at no cost as a part of coordination. Where power and control requirements are in excess of those shown, notify the Architect in writing of the requirements.
- J. Elevators and Escalators, and Wheelchair Lifts: Refer to Other Divisions. Coordinate power and control provisions shown with the provisions required for the furnished equipment. Where the power and control requirements are less than or equal to those specified, modifications to power and control provisions shall be made at no cost as a part of coordination. Where power and control requirements are in excess of those shown, notify the Architect in writing of the requirements. Provide lockable disconnect switches for main power, control power, lighting power, etc. as required by the NEC and all local codes. Provide all necessary means of two-way communication for emergency phones.

END OF SECTION

## SECTION 26 05 37

### ELECTRICAL BOXES AND FITTINGS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide electrical box and fitting work as required, scheduled, indicated, and specified.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Electrical boxes and fittings shall be UL listed.

#### PART 2 - PRODUCTS

##### 2.1 FABRICATED MATERIALS

- A. Interior Outlet Boxes: Provide galvanized steel interior outlet wiring boxes, of the type, shape, and size, including depth of box, to suit respective locations and installation. Construct with stamped knockouts in back and sides. Provide gang boxes where devices are shown grouped. Single box design; sectional boxes are not acceptable, except for wall mounted electronic displays.
  - 1. Type of Various Locations:
    - a. Wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations; recessed wall mounted box for power and/or multi-media (low voltage) outlets: Arlington Industries #TVBS 613, 4-gang steel box with white trim plate.
    - b. Technology, data, voice, video and multi-media outlet boxes at locations other than wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations: minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes. Raco #260H large capacity box with ½ through 2-inch knockouts.
    - c. Security, access control, and video surveillance outlet boxes: single gang, 3-inch deep outlet boxes mounted long axis vertically.
    - d. All other applications: minimum 4-inch square (2-gang) 2-1/8-inch deep boxes.
    - e. Masonry Walls: Galvanized switch boxes made especially for masonry installations; depths of boxes must be coordinated for each installation.
    - f. Surface: Type FS or FD box with surface cover.
    - g. Corrosive locations or natatorium areas: 316 stainless steel construction suitable for the installation.
    - h. Hazardous (Classified) Locations: Explosion proof boxes, seals and fittings.
    - i. Special: Where above types are not suitable, boxes as required, taking into account space available, appearance, and Code requirements
  - 2. Interior Outlet Box Accessories: Outlet box accessories required as for installation, including covers or wall device plates, mounting brackets, wallboard hangers, extension rings, plaster rings for boxes in plaster construction, fixture studs, cable clamps and metal straps for supporting outlet boxes. Accessories shall be compatible with outlet boxes used and meet requirements of individual wiring.
- B. Damp Location Outlet and Damp or Wet Location Switch Boxes: Deep type, hot dipped galvanized cast-metal weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends, and stainless steel cover plate

with spring-hinged waterproof caps suitable for application. Include faceplate gasket and corrosion-resistant, tamper / vandal proof fasteners.

- C. Wet Location Outlet Boxes: Hot dipped galvanized cast-iron weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends.
- D. Junction and Pull Boxes: Galvanized sheet steel junction and pull boxes, with screw-on covers, of type, shape, and size, to suit respective location and installation.
  - 1. Type for Various Locations:
    - a. Minimum Size: 4-inch square, 2-1/8-inches deep.
    - b. 150 Cubic Inches in Volume or Larger: Code gauge steel with sides formed and welded, screw covers unless shown or required to have hinged doors. All boxes mounted above ceiling shall have screw covers. Boxes in all other areas with covers larger than 12-inches shall have hinged with screw covers. Knockouts factory stamped or formed in field with a cutting tool to provide a clean symmetrically cut hole.
    - c. Exterior or Wet Areas: 304 stainless steel NEMA 4X construction with gaskets and corrosion-resistant fasteners.
- E. Conduit Bodies: Provide galvanized cast-metal conduit bodies, of type, shape, and size, to suit location and installation. Construct with threaded conduit ends, removable cover, and corrosion-resistant screws.
- F. Bushings, Knockout Closures, and Locknuts: Provide corrosion-resistant punched-steel box knockout closures, conduit locknuts, and insulated conduit bushings of type and size to suit use and installation.
- G. Outlet boxes in fire rated walls: Provide 2-hour rated gasket within box and below cover, equal to Rectorseal Metacaulk box guard and cover guard.

## PART 3 - EXECUTION

### 3.1 INSTALLATION OF BOXES AND FITTINGS

- A. Install electrical boxes and fittings as shown and as required, in compliance with NEC requirements, in accordance with the manufacturer's written instructions, in accordance with industry practices.
- B. Provide recessed device boxes for wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations.
- C. Provide minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes for technology, data, voice, video, and multi-media outlet boxes at locations other than wall mounted interactive boards, video or visual displays. Provide single gang only, 3-inch deep outlet boxes mounted long axis vertically for security, access control, and video surveillance, coordinate with security equipment installation. Provide minimum 4-inch square (2-gang) 2-1/8-inch deep boxes for all other applications. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation. Box extenders or plaster rings shall not be used to increase size. Provide increased box size as required.
- D. Junction and pull boxes, condulets, gutters, located above grid ceilings shall be mounted within 18-inches of ceiling grid. Junction and pull boxes above grid ceilings shall be mounted in the same room served. Junction boxes and pull boxes required for areas with inaccessible ceilings shall be located above the nearest accessible ceiling area. All junction box or pull box openings shall be side or bottom accessible. Removal of light

fixtures, mechanical equipment or other devices shall not be required to access boxes. Outlet boxes above ceiling for low voltage terminations shall face towards the floor.

- E. Use outlet and switch boxes for junctions on concealed conduit systems except in utility areas where exposed junction or pull boxes can be used.
- F. Determine from the drawings and by measurement the location of each outlet. Locate electrical boxes to accommodate millwork, fixtures, marker boards, and other room equipment at no additional cost to the Owner. The outlet locations shall be modified from those shown to accommodate changes in door swing or to clear interferences that arise from construction as well as modifying them to center in rooms. The modifications shall be made with no cost as part of coordination. Check the conditions throughout the job and notify the Architect of discrepancies. Verify modifications before proceeding with installation. Set wall boxes in advance of wall construction, blocked in place and secured. Set all wall boxes flush with the finish and install extension rings as required extending boxes to the finished surfaces of special furring or wall finishes. Provide wall box support legs attached to stud to prevent movement of box in wall.
- G. Unless noted or directed otherwise at installation, place outlet boxes as indicated on architectural elevations and as required by local codes.
- H. Outlets above counters, mount long axis horizontally. Refer to architectural elevations and coordinate to clear backsplash and millwork.
- I. Provide pull boxes, junction boxes, wiring troughs, and cabinets where necessary for installation of electrical systems. Surface mounted boxes below 9 feet and accessible to the public shall not have stamped knockouts.
- J. Provide weatherproof boxes for interior and exterior locations exposed to weather or moisture.
- K. Provide knockout closures to cap unused knockout holes in boxes.
- L. Locate boxes and conduit bodies to ensure access to electrical wiring. Provide minimum 12-inch clearance in front of box or conduit body access.
- M. Secure boxes to the substrate where they are mounted, or embed boxes in concrete or masonry.
- N. Boxes for any conduit system shall not be secured to the ceiling system, HVAC ductwork or piping system.
- O. Provide junction and pull boxes for feeders and branch circuits where shown and where required by NEC, regardless of whether or not boxes are shown.
- P. Coordinate locations of boxes in fire rated partitions and slabs to not affect the fire rating of the partition or slab. Notify the Architect in writing where modification or construction is required to maintain the partition or slab fire rating.
- Q. Exterior boxes installed within 50-feet of cooling towers or water treatment areas shall be of 304 stainless steel, weatherproof NEMA 4X construction.
- R. Identification: Paint the exterior and cover plates of building interior junction boxes and pull boxes located above accessible ceilings or non-finished areas to correspond to the following colors:
  - 1. Orange: - 480/277 VAC systems.

2. Light Blue: - 240 VAC three phase delta systems.
  3. Red – All Emergency circuits, regardless of voltage, and fire alarm system.
  4. Light Green - 120/208 VAC 3 phase and 120/240 VAC single-phase systems
  5. Yellow – Building Management and Control System – BMCS.
  6. White - Security and Surveillance equipment circuits.
- S. All box covers shall be labeled with Panel ID and circuit numbers of all circuits available in box using permanent black marker. Boxes containing main feeders are to list where fed from and load (example “MSB to Panel HA”). Information listed is to be legible, markovers are not acceptable. Multi-sectional panel numbers are not to be listed on covers (example “LA2” referring to Panel LA sec. 2 is to be listed as “LA”). Label covers for special applications explaining contents (example “Emerg. Gen. Annunciator controls”, “IDF ground”). Do not attach box covers that have both sides painted or labeled differently. In public areas where boxes are painted same color as room per architect, label inside covers. Boxes that are not used shall be labeled as not used and include panel ID. Example “Not Used Panel LA”. Unused raceways not in sight of panel shall be terminated in a box and labeled not used and include panel identification.
- T. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.
- U. Use flush mounting outlet box in finished areas unless specifically indicated as being used with exposed conduit.
- V. Locate flush-mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.
- W. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches with stud separation. Provide minimum 24 inches with separation in acoustic rated walls.
- X. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness. Provide UL listed materials to support boxes in walls to prevent movement. Ensure box cannot be pushed inside wall.
- Y. Use stamped steel bridges to fasten flush mounting outlet box between studs.
- Z. Install flush mounting box without damaging vapor barriers, wall insulation or reducing its effectiveness.
- AA. Use adjustable steel channel fasteners for hung ceiling outlet box.
- BB. Do not fasten boxes to ceiling support wires.
- CC. Support systems are to hang vertically straight down. All-thread supports, when used, are not to be installed at an angle or bent.
- DD. Use gang box where more than one device is mounted together. Do not use sectional box.
- EE. Use gang box with plaster ring for single device outlets.
- FF. Support outlets flush with suspended ceilings to the building structure.
- GG. Mount boxes to the building structure with supporting facilities independent of the conduits or raceways.

- HH. Where multiple feeders are in one pull box, conductors shall be wrapped with 3M No. 7700 Arc and fireproof tape.
- II. Provide plaster rings of suitable depth on all outlet boxes. Face of plaster ring shall be within 1/8 inch from finished surface.
- JJ. Equip boxes supporting fixtures designed to accept fixture studs with 3/8-inch stud (galvanized malleable iron) inserted through back of box and secured by locknut. Boxes not equipped with outlets shall have level metal covers with rust-resisting screws.
- KK. Do not mount junction boxes above inaccessible ceilings or in inaccessible spaces. Do not mount junction boxes above ceilings accessible only by removing light fixture, mechanical equipment or other devices. At inaccessible spaces use junction box furnished with light fixture or light fixture wiring compartment UL listed for through wiring.
- LL. No more than 12 conduits containing branch circuits may be installed in any junction or pull box.
- MM. All junction boxes shall be protected from building finish painters' over spray and from fire proofing overspray. Remove protective coverings when painting and fire proofing are complete.
- NN. Bond equipment grounding conductor to all junction and pull boxes.
- OO. Do not mount boxes or conduit bodies on walls directly above electrical panels or switchgear located next to walls.
- PP. Do not mount boxes or conduit bodies within 18 inches of outside edges of roof access openings.
- QQ. Box extenders or plaster rings shall not be used to increase the Code mandated cable capacity of a box. Provide proper size box.

### 3.2 ADJUSTING

- A. Adjust flush-mounting outlets to make front flush with finished wall material.
- B. Install knockout closures in unused box openings.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 26 05 38

### ELECTRICAL FLOOR BOXES AND FITTINGS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide electrical floor box and fitting work as required, scheduled, indicated, and specified.
- B. All floor boxes and all poke-throughs for line voltage wiring devices or telecommunication outlets shall be the concealed service type.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Electrical boxes, covers, and fittings shall be UL listed.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS – Provide products that are Buy American Act Compliance

- A. Wiremold.
- B. Hubbell.

##### 2.2 CONCEALED SERVICE - FLOOR BOXES

- A. Wiremold Evolution RFBA 4/6/10 Series.
- B. Floor box shall be electro-galvanized sheet steel with fusion-bonded epoxy suitable for direct contact with concrete on grade.
- C. Cover assembly shall die-cast aluminum, finish as selected by Architect.
- D. Shall deliver electric power and telecommunications from non-proprietary building standard wiring devices and non-proprietary building standard telecommunications ports installed below the surface of the floor.
- E. Shall deliver telecommunications without interference from the electric power delivery.
- F. Hinged cover shall accept carpet or tile to match floor covering and be 180 degrees reversible.
- G. Shall accept conduit sizes up to 2-inches.
- H. When hinged cover is closed and no services in place, device shall have no obstructions above surface of floor.

##### 2.3 CONCEALED SERVICE, FIRE RATED, POKE-THROUGH DEVICE

- A. Wiremold Evolution Series - 6AT (3-gang) / 8AT (5-gang) / 10AT (8-gang)
- B. Shall be UL classified two-hour fire rating. Where floor fire rating is three-hour, provide only the 6AT series with a 3-hour fire rating.

- C. Shall be UL listed for use with power and low voltage in a single service fitting and shall protect against ingress of water or foreign materials.
- D. Shall deliver electric power and telecommunications from non-proprietary building standard wiring devices and non-proprietary building standard telecommunications ports installed below the surface of the floor.
- D. Center data channel for six-inch 6AT poke throughs shall accept a minimum of (22) Category 6a cables, center data channel shall accept a minimum of (5) Category 6a cables.
- E. Shall be installed in a single core drilled hole.
- F. Shall permit use with "H" cut opening in carpet so carpet can be restored if position is vacated.
- G. Shall have interchangeable service fitting accessories including hinged guard and low voltage communication inserts.
- H. Service fitting cover shall be aluminum, finish as selected by Architect.

#### 2.4 RECESSED FURNITURE FEED POKE-THROUGH DEVICES

- A. Wiremold Evolution 6ATCFF Series.
- B. Shall be UL classified for use in up to two-hour fire rated floors.
- C. Shall be UL listed for use with power and low voltage in a single service fitting and shall protect against ingress of water or foreign materials.
- D. Shall be installed in a single core drilled hole.
- E. Die-cast aluminum covers, finish as selected by Architect.

#### 2.5 SERVICE FITTING HEADS

- A. Shall be brushed aluminum or stainless steel.
- B. Shall deliver electrical power from receptacles as designated on the plans.
- C. Shall deliver telephone/data through precut bushed opening.
- D. Provide non-proprietary building standard line voltage wiring devices.
- E. Shall be furnished standard with conduit nipple for direct screw threading into cover assembly.

### PART 3 - EXECUTION

#### 3.1 GENERAL

- A. Locate position for floor boxes and runs of conduit as shown on the plans, or as required. Coordinate with the Structural Engineer and Architect for dimensional locations of floor boxes prior to cutting or pouring slab.

- B. Select appropriate size of floor boxes, poke-through, or multiple services floor boxes for quantity of wiring devices or cables indicated and as recommended by manufacturer.

### 3.2 INSTALLATION

- A. Position floor boxes and install conduits at locations approved by the Architect.
- B. After concrete pour, pull wires and install devices according to manufacturer's recommendations.
- C. Activate in accordance with the National Electrical Code.
- D. Coordinate with floor covering contractor to complete installation.
- E. Core drill openings for poke-through service fitting and installation in accordance with manufacturer's instructions and where approved by the Structural Engineer and Architect.
  - 1. Minimum spacing of 2-feet on center and not more than one unit per each 65-square feet of floor area in each span as required by Fire Resistance Directory.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 26 05 40

### ELECTRICAL GUTTERS AND WIREWAYS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide electrical gutter work as shown, as specified and as required.
- B. Application: The types of electrical gutters required for the project include the following:
  - 1. Electrical wiring gutters.
  - 2. Voice / Data / Video / Communication and signal distribution wireway.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Gutters and wireways shall be UL labeled.

#### PART 2 - PRODUCTS

##### 2.1 ELECTRICAL GUTTERS AND WIREWAYS

- A. General: Provide hinged electrical gutters and wireways in the types and sizes indicated or required, minimum 16 gauge thickness, with rounded edges and smooth surfaces; constructed in compliance with applicable standards; with features required.
- B. Size: Provide size indicated. Where size is not indicated, construct in accordance with the NEC and other standards. Gutters shall be of manufacturer's standard lengths, without field cutting or field extensions.
- C. Accessories: Provide gutter and wireway accessories where indicated, constructed of same metal and finish as gutters or wireways.
- D. Supports: Provide gutter and wireway supports indicated, conforming to NEC, and as recommended by the manufacturer, and as specified in Section 26 05 33 Conduit Systems.
- E. Materials and Finishes: NEMA 1 gutters and wireways shall have gray powder coat finish over galvanized steel. Gutters and wireways installed outside shall be NEMA 3RX minimum. Gutters or wireways installed within 100-feet of cooling towers, at kitchen or food preparation areas, and natatorium, spa or therapy pool areas shall be of 304 stainless steel NEMA 4X construction.

#### PART 3 - EXECUTION

##### 3.1 INSTALLATION

- A. Provide gutters and wireways only where specified or required. Use of gutters and wireways shall be kept to a minimum.
- B. Finishing: Remove burrs and sharp edges of gutters and wireways wherever they could be injurious to conductor insulation or jacket.
- C. Installation: Install gutters and wireways where shown or required, in accordance with the manufacturer's written instructions, NEC, NECA "Standard of Installation," and with recognized industry practices to ensure that the gutters and wireways comply with the

specified requirements. Comply with requirements of NEMA and the NEC pertaining to installation of electrical gutters.

- D. Grounding: Electrically ground gutters and wireways to ensure continuous electrical conductivity. Provide equipment grounding conductor.
- E. Conductors:
  - 1. Complete gutter and wireway installation before starting the installation of conductors.
  - 2. Provide sufficient space to permit access for installing, splicing, and maintaining the conductors.
- F. A maximum of 12 conduits containing branch circuits shall be allowed to be installed in any gutter or wireway.

END OF SECTION

## SECTION 26 05 50

### FIRESTOPS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide firestop as required, and as specified. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.
- B. Types: Firestop required for the project includes smokestop.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Firestops shall be UL labeled.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Nelson.
- B. 3M (Minnesota Mining Manufacturing).
- C. Hilti.
- D. Specified Technologies, Inc.
- E. Metacaulk.

##### 2.2 MATERIAL AND COMPONENTS

- A. General: Except as otherwise indicated, provide firestop manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by the manufacturer, and as required for installation.

##### 2.3 FIRESTOP

- A. Conduits: Provide a soft, permanently flexible sealant for 1-1/2 to 2 hour rated fireproofing for steel conduits (up to 4" diameter).
- B. Low Voltage Cables, Fiber Optic Cable and Innerduct: Provide Specified Technologies, Inc. EZ-Path single, double, or triple pathways as required.

#### PART 3 - EXECUTION

##### 3.1 INSTALLATION OF FIRESTOPS

- A. General: Install firestops in accordance with the manufacturer's installation instructions and industry practices to ensure that the firestops comply with requirements. Comply with UL and NFPA standards for the installation of firestops.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 26 09 44

### LIGHTING CONTROLS

#### PART 1 – GENERAL

##### 1.1 SECTION INCLUDES

- A. Lighting control system and components:
  - 1. Touch panel controls.
  - 2. Low and line voltage wall stations.
  - 3. Power interfaces.
  - 4. Sensors.

##### 1.2 SUMMARY

- A. The lighting control system specified in this section shall provide manual lighting control, sensor-based (both occupancy and daylight control when indicated, specified, or required by AHJ).
- B. The system shall be capable of turning lighting and plug loads on/off as well as dimming lights (if lighting load is capable and indicated to be dimmed). Dimmers shall be capable of smooth dimming lights to off.
- C. All system devices within a group or controlled area shall be networked together, enabling wired or wireless digital communication between devices within that group.
- D. The system architecture shall be stand-alone groups (areas) of devices.
- E. The system shall not require any centrally hardwired switching equipment.
- F. The system shall be capable of wireless, wired, or hybrid wireless/wired communication architectures. All powered devices shall be wired for power. Battery operation shall not be used unless specifically indicated on the drawings, typically due to existing conditions which prohibit wired power sources.
- G. The term “occupancy sensor” shall be interchangeable with the term “vacancy sensor” as the control hardware shall be the same device and be capable of either function.

##### 1.3 SUBMITTALS

- A. Specification line-by-line compliance review consisting of a marked-up copy of these specifications with contractor comments. Refer to Submittals specification section for additional instructions.
- B. Product Datasheets (general device descriptions, dimensions, electrical specifications, wiring details, nomenclature).
- C. Riser Diagrams – typical per room type (detailed drawings showing device interconnectivity of devices).
- D. Other Diagrams – as needed for special operation or interaction with other system(s).
- E. Example Contractor Startup/Commissioning Worksheet – must be completed prior to factory start-up and commissioning.

- F. Hardware Operation Manuals.
- G. Other operational descriptions as needed.

#### 1.4 PROJECT CLOSEOUT DOCUMENTATION

- A. Provide a factory published manual
  - 1. Warranty.
  - 2. Technical support contact.
  - 3. Electronic manual on manufacturer's website for free download.
- B. Completed Startup/Commissioning Worksheet with Owner's acceptance and date clearly noted.

#### 1.5 QUALITY ASSURANCE

- A. All components and the manufacturing facility where product was manufactured must be RoHS compliant.
- B. In high humidity or cold environments, the sensors shall be conformably coated and rated for condensing humidity and -40 degrees Fahrenheit (and Celsius) operation.
- C. All applicable products must be UL or ETL Listed or other acceptable national testing organization.

#### 1.6 PROJECT CONDITIONS

- A. Only install equipment after the following site conditions are maintained:
  - 1. Ambient Temperature 14 to 105 degrees F (-10 to 40 degrees C).
  - 2. Relative Humidity less than 90% non-condensing.
- B. Standard electrical enclosures shall be permanently installed.
- C. Equipment shall be protected from dust, debris and moisture.

#### 1.7 WARRANTY

- A. Five (5) year manufacturer's warranty parts replacement beginning upon completion of Factory Start-up and Commissioning date as noted on the Owner accepted Startup / Commissioning Worksheet.

#### 1.8 MAINTENANCE & SUSTAINABILITY

- A. Provide new parts, upgrades, and/or replacements available for a minimum of 5 years available to the end user.
- B. Provide free telephone technical support.
- C. Spare Parts: Provide minimum of 1 unit up to 5% of each hardware device product used, whichever is greater.

## PART 2 - PRODUCTS

### 2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
  - 1. Acuity Brands Lighting, Inc.
  - 2. Legrand North America, LLC.
  - 3. Cooper Lighting Solutions.
  - 4. Douglas Lighting Controls.
  - 5. Lutron – Athena.
  - 6. Leviton.
  - 7. Crestron.
  - 8. Hubbell.
  - 9. ILC – Intelligent Lighting Controls.

### 2.2 SYSTEM REQUIREMENTS

- A. System shall have an architecture that is based upon three main concepts; 1) intelligent lighting control devices 2) standalone lighting control zones. Intelligent lighting control devices shall consist of one or more basic lighting control components; occupancy sensors, photocell sensors, relays, UL 924 emergency lighting relays, dimming outputs, manual switch stations, manual dimming stations. Combining one or more of these components into a single device enclosure is permissible so as to minimize overall device count of system.
- B. Lighting control zones shall consist of one or more intelligent lighting control components and fully functional in stand-alone operation.
- C. Low voltage devices within a lighting control zone shall be capable of being connected with low voltage cabling in any order.
- D. Lighting control zone shall be capable of automatically configuring itself for default operation without any start-up labor required.
- E. Power for devices within a lighting control zone shall come from either resident devices already present for that zone. Standalone power supplies are not acceptable.
- F. All switching and dimming for a specific lighting zone shall take place within the devices located in the zone itself (i.e. not in remotely located devices such as panels) to facilitate system robustness and minimize wiring requirements.
- G. Individual lighting zones requiring or indicated with intelligent room controllers shall be capable of being segmented into several local channels of occupancy, photocell, and switch functionality for more advanced configurations and sequences of operation.
- H. Operating modes shall be utilized only in manners consistent with local energy codes. Where daylight controls are indicated or required the photocell functions noted below shall be incorporated.
  - 1. Auto-On / Auto-Off (via occupancy sensors)
    - a. Zones with occupancy sensors automatically turn lights on when occupant is detected.
    - b. Zones with occupancy and/or photocell sensors turn lights off when vacancy or sufficient daylight is detected.
    - c. Pressing a switch will turn lights off. The lights will remain off regardless of occupancy until switch is pressed again, restoring the sensor to Automatic On functionality.

2. Manual-On / Auto-Off (also called Semi-Automatic or Vacancy)
  - a. Pushing a switch will turn lights on.
  - b. Zones with occupancy and/or photocell sensors turn lights off when vacancy or sufficient daylight is detected.
3. Auto On / Predictive Off
  - a. Zones with occupancy sensors automatically turn lights on when occupant is detected.
  - b. Zones with occupancy and/or photocell sensors turn lights off when vacancy or sufficient daylight is detected.
  - c. Pressing the switch will turn the lights off and a short "exit timer" begins. After the timer expires, sensor scans the room to detect whether occupant is still present. If no occupancy is detected, zone returns to auto-on. If occupancy is detected, lights must be turned on via the switch.
4. Auto ON at 50% or less / Auto Off (Occupancy with dimming)
  - a. Operating mode designed specifically IECC compliance using occupancy mode for specific areas.
  - b. Zones with occupancy sensors automatically turn lights on to maximum 50-percent (adjustable and programmable to 50-percent max) when occupant is detected.
  - c. Pushing a switch will raise or lower light levels.
  - d. Zones with occupancy and/or photocell sensors turn lights off when vacancy or dim accordingly when daylight is detected to maintain desired light level.
  - e. Pushing a switch will turn lights off.
5. Manual-On to Auto-On/Auto-Off
  - a. Pushing a switch will turn lights on.
  - b. After initial lights on, zones with occupancy and/or photocell sensors turn lights on/off according to occupancy/vacancy and/or daylight conditions.

## 2.3 INDIVIDUAL DEVICE SPECIFICATIONS

- A. Occupancy sensors:
  1. Occupancy sensors shall sense the presence of human activity within the desired space and fully control the on/off function of the lights.
  2. Only passive infrared (PIR) technology, which detects occupant motion, shall be used to initially turn lights on from an off state, thus preventing false on conditions.
  3. Dual technology sensors shall be used. Only where ultrasonic or microphonic technology might create a false occupied state, not allowing the lights to automatically turn off shall PIR only be used. Acceptable dual technology includes PIR/Microphonics technology (also known as Passive Dual Technology or PDT) which both looks for occupant motion and listens for sounds indicating occupants or PIR/Ultrasonic technology.
  4. Sensors shall include a minimum of one integrated dry contact switching relay, capable of switching 1 amp at 24 VAC/VDC (resistive only) for BAS/BMCS control.
  5. Sensors shall be available in multiple lens options which are customized for specific applications.
  6. Embedded luminaire sensors shall be capable of both PIR and Dual Technology occupancy detection. Embedded sensors shall have an optional photocell.
  7. Ceiling, fixture, recessed, & corner mounted sensors shall be available.
  8. Sensors shall have optional features for photocell/daylight override, dimming control, and low temperature/high humidity operation.
- B. Daylight (photocell and/or dimming) sensors:
  1. Photocell shall provide for an on/off set-point, and a deadband to prevent the artificial light from cycling. Delay shall be incorporated into the photocell to prevent rapid response to passing clouds.

2. Photocell and dimming sensor's set-point and deadband shall be automatically calibrated through the sensor's microprocessor by initiating an "Automatic Set-point Programming" procedure. Min and max dim settings as well as set-point may be manually entered.
  3. Deadband setting shall be verified and modified by the sensor automatically every time the lights cycle to accommodate physical changes in the space (i.e., furniture layouts, luminaire depreciation, or luminaire outages).
  4. Combination units that have all features of on/off photocell and dimming sensors may be used
  5. Luminaire mounted dimming photocells shall be embedded into luminaire such that only the lens shows on luminaire face.
- C. Power (Relay) Packs:
1. Power Packs shall incorporate one Class 1 relay, a 0-10 VDC dimming output, and contribute low voltage power to the rest of the system.
  2. Power Packs shall accept 120 or 277 VAC, rated for a minimum 16 Amps for any type of lighting load or motor load rated to 1 HP, provide 0-10 VDC dimming control, be plenum rated, and provide Class 2 power to the system.
  3. Every Power Pack parameter shall be available and configurable locally.
  4. Power Pack shall securely mount to junction location through a threaded ½ inch chase nipple or be capable of being secured within a luminaire ballast channel. Plastic clips into junction box shall not be accepted. All Class 1 wiring shall pass through chase nipple into adjacent junction box without any exposure of wire leads. Note: UL Listing under Energy Management or Industrial Control Equipment automatically meets this requirement, whereas Appliance Control Listing does not meet this safety requirement.
  5. When required by local code, Power Pack shall install inside standard electrical enclosure and provide UL recognized support to junction box. All Class 1 wiring is to pass through chase nipple into adjacent junction box without any exposure of wire leads.
  6. Secondary Packs shall be available that provide up to 5 Amps of switching and can line voltage dim 120 VAC incandescent/halogen lighting loads.
  7. Secondary Packs shall be available that provide up to 5 Amps of switching and can dim line voltage 120/277 VAC magnetic low voltage transformers.
  8. Secondary Packs shall be available that provide up to 4 Amps of switching and can dim 120 VAC electronic low voltage transformers.
  9. Power/Secondary Packs shall be available that are UL924 listed for switching of Emergency Power circuits and control of 0-10 VDC dimming circuit.
  10. Secondary Packs shall be available that control louver/damper motors for skylights.
  11. Secondary Packs shall be available that provide a pulse on/pulse off signal for purposes of controlling shade systems via relay inputs.
  12. Power (Secondary) Packs shall be available that provide up to 20 Amps switching of general purposed receptacle (plug-load) control.
- D. Relay & Dimming Room Controller (Panel)
1. Panel shall incorporate up to 3 normally closed latching relays capable of switching 120/277 VAC or up to 2 Dual Phase relays capable of switching 208/240/480 VAC loads.
  2. Relays shall be rated to switch up to a 30A ballast load at 277 VAC.
  3. Panel shall provide one 0-10VDC dimming output paired with each relay.
  4. Panel shall power itself from an integrated 120/277 VAC supply.
  5. Panel shall supply current limited low voltage power to other devices in the same lighting zone.
  6. Panel shall provide auxiliary low voltage device power connected wired directly to a dedicated terminal connection.

- E. Auxiliary Input / Output (I/O) Devices for enhanced room controls:
1. Devices shall be plenum rated and be inline wired, screw mountable, or have an extended chase nipple for mounting to a ½" knockout.
  2. Specific I/O devices shall have a dimming control output that can control 0-10 VDC LED drivers by sinking up to 20 mA of current.
  3. Specific I/O devices shall have an input that reads a 0-10 VDC signal from an external device.
  4. Specific I/O devices shall have a switch input that can interface with either a maintained or momentary switch and run a switch event (toggle the lighting load) or run a local/remote control profile.
  5. Specific I/O devices shall sense state of low voltage outdoor photocells.
  6. Specific I/O devices shall enable RS-232 communication between lighting control system and Touch Screen based A/V control systems.
  7. Specific I/O devices shall sense momentary and maintained contact closures, and either toggle a connected load after a momentary contact or ramp the load high/low during a maintained contact (stopping when the contact releases).
- F. Low Voltage Wall Switches & Dimmers:
1. Devices shall provide toggle on/off switch control.
  2. Devices color shall match building standard line voltage wiring device color.
  3. Devices with mechanical push-buttons shall provide tactile with LED user feedback.
  4. Devices with mechanical push-buttons shall be made available with custom button labeling.
- G. Graphic Wall Station:
1. Minimum 3.5-inch full color touch screen for selecting up to 16 programmable lighting control preset scenes or acting as up to 16 on/off/dim control switches.
  2. Color shall match building standard for line voltage switching.
  3. Device shall enable configuration of all switches, dimmers, and lighting preset scenes via password protected setup screens.
  4. Device shall enable user supplied .jpg screen saver image to be uploaded.
  5. Surface mount to single-gang recessed switch box.
  6. Micro-USB style connector for local computer connectivity.
- H. Scene Controllers:
1. Two, three, four, or eight buttons for selecting programmable lighting control profiles or acting as on/off switches.
  2. Color shall match building standard for line voltage switching.
  3. Devices shall provide LED user feedback.
  4. Device shall be capable of reprogramming other devices in its zone so as to implement user selected lighting scene.
  5. Device shall have LEDs indicating current selection.

## 2.4 START-UP & SUPPORT FEATURES

- A. To facilitate start-up, all devices daisy-chained together shall automatically be grouped together into a functional lighting control zone.
- B. All lighting control zones shall be able to function according to default settings once adequate power is applied and before any field programming is performed.

## PART 3 - EXECUTION

### 3.1 GENERAL

- A. Provide the quantity of sensors required for complete and proper coverage to completely cover the controlled areas. Contractor shall verify room coverage and ceiling heights with manufacturer and provide the quantity and type of occupancy sensors as required. Rooms shall have one hundred (100) percent coverage of small motion detection to completely cover the controlled areas to accommodate all occupancy habits of single or multiple occupants at any location within the room(s). The locations and quantities of sensors shown on the drawings are diagrammatic and indicate only rooms that are to be provided with sensors. Proper judgment must be exercised in executing the work so as to ensure the best possible installation in the available space and to overcome local difficulties due to space limitations or interference of structural components, architectural components, or Owner installed equipment which may cause obstructions to sensor coverage.
- B. Provide ceiling mounted sensors. Wall mounted sensors shall only be used where ceiling mounted sensors are proven by the manufacturer to be impractical, or if specifically indicated on the drawings.
- C. For ceilings up to 12-feet AFF, control equipment shall be mounted above an accessible ceiling. Control equipment shall be wall mounted on 24x24-inch fire resistive 0.75-inch thick plywood back board mounted to the wall above the ceiling. Do not paint fire resistive plywood or obliterate the fire resistive labeling. Locate the control equipment directly above the space/area main entry wall switch station, observing good installation practice and shall be consistent throughout the project. Where the ceiling is over 12-feet, the control equipment shall be located in an adjoining ancillary room/area where the ceiling is 12-feet AFF or lower, typically adjacent to the ancillary room/area above ceiling control equipment location, verify exact location with Owner.
- D. Control units used for the security or fire systems shall be powered from the emergency power source as indicated on the drawings. Other control units shall be powered from the lighting circuit, which they control.
- E. Refer to other specification sections for line voltage wiring device requirements, including momentary on/off toggle switches used with low voltage sensors.

### 3.2 INSTALLATION

- A. Use lighting control wiring with jacket color that matches Owner's cable color standards.
- B. Install the work of this Section in accordance with manufacturer's printed instructions unless otherwise indicated.
- C. The installing electrical contractor shall complete, prior to request of factory start up and site commissioning, complete installation of all devices, their respective loads landed and confirmed operations, switches installed, and confirmed operational.
- D. The installing contractor shall, prior to request of factory start up and site commissioning, request an on-site meeting by including the manufacture's local authorized representative, the Owner and the general contractor, to assist in identification of any open-ended issues, thereby eliminating potential for delays and system commission interruptions.
- E. Upon confirmation of progress by local factory representative, the installing electrical contractor shall complete the manufacture's start up request form(s), including any field changes from the contract documents.



- F. The installing electrical contractor shall provide a preliminary as-built drawing prior to commissioning to the manufacturer's representative. Drawing shall include all wire routing, room by room device ID's and locations of all lighting control devices.
- G. Install sensors in accordance with manufacturer's written instructions, requirements of NEC, and in accordance with industry practices. Do not install devices until wall construction and wiring is completed.
- H. Install sensors and switches only in electrical boxes that are clean, free from excess building materials, debris, and similar matter.
- I. Install sensors plumb and aligned in the plane of the wall, or ceiling in where they are installed.
- J. Install wall occupancy sensor switches in boxes on the strike side of doors as hung. Where more than one switch is in the same location, install switches in a multi gang box with a single cover plate.
- K. Provide a cover plate for every switch. Refer to Architectural drawing, elevations, etc. for exact location of wall switches where indicated on the Architectural plans. Coordinate location of all wall switches with other specialty items and millwork and avoid conflicts. Coordinate with all trades to avoid conflicts during construction. Mounting heights of all switches shall comply with current Accessibility Standards and local codes.
- L. Unless indicated otherwise, circuit relays/switchpacks ahead of local control switches. Source → relay/switchpack → local toggle switch(s).
- M. Coordinate with BMCS/BAS Contractor for interface of BMCS/BAS System and wiring connections.
- N. Low voltage cabling installed above ceiling shall be supported every 5 feet at a minimum height of 3 feet above grid/ceiling but no closer than six inches below deck. Support system shall be ceiling wire attached to structure and clipped to ceiling support grid using Caddy drop wire securing clip #EC311. Cabling shall hang plumb to devices.

### 3.3 SENSOR TESTING AND ADJUSTMENT

- A. At the time of installation, the contractor shall test and adjust each sensor for proper detection of motion appropriate to room usage. The contractor shall follow the testing and adjustment procedures as written in the manufacturer's installation instructions for each sensor model. Relocate sensors as needed for proper coverage.
- B. Prior to testing and adjusting, verify with Owner/Architect the initial settings for each type of area based on its intended function and use.
- C. Verify with Owner all adjustable functions of each type of occupancy sensor prior to installation. Set all adjustable functions of each type of occupancy sensor as directed by Owner. Initial settings unless directed by Owner / Architect (some settings may not apply to all sensors):
  - 1. Time delay = 10-minutes.
  - 2. Zero Time Delay = OFF.
  - 3. Auto-On = OFF.
  - 4. Manual-On = ON.
  - 5. Self-Adjust = OFF.
  - 6. Disable Self-Adjust = OFF.

- 7. Energy Saver (Dual Level) = ON.
- 8. Manual Override = OFF.
- D. Bi-level occupancy wall switches shall be initially set with the energy saver feature enabled.
- E. Before energizing, check for continuity of circuits, short circuits, and grounding connections. After energizing, check devices to demonstrate proper operation.
- F. Operate each wall switch with circuit energized and verify proper operation.

### 3.3 FACTORY COMMISSIONING

- A. Upon completion of the installation, the system shall be commissioned by the manufacturer's factory authorized representative who will verify a complete fully functional system.
- B. The factory commissioning shall include the following services. Programming of all button stations, configuration and of all occupancy sensors and photocells.
- C. Provide written or computer-generated documentation on the commissioning of the system including room by room description including:
  - 1. Sensor parameters, time delays, sensitivities, and daylighting set points.
  - 2. Sequence of operation, (e.g. manual ON, Auto OFF. etc.).
  - 3. Load Parameters.
- D. The electrical contractor shall provide in writing to the manufacturer, General Contractor, Architect, and the Owner with 21 Owner's business days' written notice of the requested system startup and adjustment date.
- E. The electrical contractor shall provide at least (1) journeyman electrician familiar with the installation of the system dedicated to assisting the factory start-up technician for the entire duration of the commissioning process.
- F. Upon completion of the system commissioning the factory-authorized technician shall provide the proper training to the Owner's personnel on the adjustment and maintenance of the system.
- G. Re-commissioning – After 90 days from full certificate of occupancy, re-calibrate all sensor time delays and sensitivities to meet the Owner's Project Requirements. Provide a detailed report to the Architect / Owner of re-commissioning activity.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 26 12 15

### DRY-TYPE TRANSFORMERS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Work Included: Low Voltage (less than 600 Volt) transformer work as shown, scheduled, indicated, and specified.
- B. Types: Transformers required for the project include dry-type transformers.

##### 1.2 QUALITY ASSURANCE

- A. Standards: Transformers shall be designed and tested in accordance with NEMA and ANSI C33.4 and C89.2 standards.
- B. UL Label: Transformers shall be UL labeled.

##### 1.3 STANDARDS

- A. UL-506.
- B. ANSI C75.11.
- C. NEMA ST-20.
- D. DOE 2016 Efficiencies.

##### 1.4 SUBMITTALS

- A. Include outline and support point dimensions of enclosures and accessories, unit weight, voltage, KVA, and impedance ratings and characteristics, sound level, tap configurations, insulation system type and rated temperature rise.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Schneider Electric - Square D.
- B. General Electric.
- C. Siemens.
- D. Eaton.
- E. Acme.
- F. Hammond.

##### 2.2 MATERIALS AND COMPONENTS

- A. Except as otherwise indicated, provide transformer manufacturer's standard materials and components as indicated by published product information, designed and

constructed as recommended, and as required for a complete installation.

## 2.3 DRY-TYPE TRANSFORMERS

- A. General: Indoor transformers shall be dry-type, multiple-winding transformers, rated as shown, and shall have manufacturer's standard impedance.
- B. Construction: Transformer core shall be constructed of cold-rolled, oriented, high permeability silicon steel, either formed as a coil or laminated.
- C. Taps: Transformers 15 to 30 kva shall have two 5% taps, one above and one below normal. Transformers 45 kva and larger shall have four 2-1/2% taps, two above and two below normal.
- D. Temperature Rating: Transformers shall use an insulation system that has been temperature classified and approved by UL. Transformers shall have a maximum winding temperature rise of 150°C with an insulation system temperature classification of 220°C.
- E. Load Rating:
  - 1. Transformers shall be capable of operating at 100% of nameplate rating continuously while in an ambient temperature not exceeding 40°C.
  - 2. Transformers shall be capable of meeting the daily overload requirement of ANSI C57.12.
- F. Vibration Isolation: Each transformer core and coil shall be mounted in the transformer enclosure on rubber vibration isolators.
- G. Sound Rating: The transformer shall have sound levels equal to or lower than those ratings established in NEMA ST-20 and as shown in the following table. Sound ratings shall be measured in accordance with ANSI C89.91.

| Transformer Rating (kva)<br>(600 Volt Class) | Maximum Sound Level<br>Decibels: NEMA ST-20 |
|----------------------------------------------|---------------------------------------------|
| 0 to 9                                       | 40                                          |
| 10 to 50                                     | 45                                          |
| 51 to 150                                    | 50                                          |
| 151 to 300                                   | 55                                          |
| 301 to 500                                   | 60                                          |

- H. Testing:
  - 1. The manufacturer shall have tested each transformer for proper operation before shipment.
  - 2. The manufacturer shall have performed the following additional tests on units identical to the design type being supplied. Furnish proof of performance of these tests in the form of test data sheets upon request:
    - a. Sound levels.
    - b. Temperature rise tests.
    - c. Full-load core and winding losses.
    - d. Percent regulation with 80 and 100% power factor load.
    - e. Percent impedance.
    - f. Exciting current.
    - g. Insulation resistance.

## PART 3 - EXECUTION

### 3.1 INSTALLATION OF TRANSFORMERS

- A. General: Install transformers where shown, in accordance with the manufacturer's written instructions and industry practices to ensure that the transformers meet the specifications. Comply with requirements of NEMA and NEC standards, and applicable portions of NECA Standard of Installation, for installation of transformers. Transformers shall be floor mounted. Ceiling mounted transformers are not acceptable.
- B. Dry-Type Transformer Mounting: Indoor, floor mount transformer on properly sized Amber/Booth Type RVD rubber-in-shear vibration isolators. Only where specifically indicated on the plans or approved in writing by the Owner/Engineer, transformers shall be trapeze mounted using properly sized Amber/Booth type BRD rubber-in-shear hangers. Transformer enclosures shall make no contact with wall surfaces.
- C. Conduit: Conduit directly connected to transformer enclosures shall be flexible liquid tight conduit extending for a minimum of 18-inches and a maximum of 24 inches from transformer enclosure as measured along the conduit centerline. Include a ground wire, size in accordance with NEC, internal in each length of flexible conduit.
- D. Grounding: Ground and bond transformers as a separately derived system unless noted otherwise, refer to NEC 250. Installation of bonding strap or bonding conductor between ground and neutral bus shall be witnessed by the Engineer prior to applying power and terminating secondary conductors.

### 3.2 TESTING

- A. Insulation Tests: Before energizing, check transformer windings for continuity.
- B. Winding Current: During initial no-load energizing, check current in each primary winding.
- C. Tap Settings: Measure and record load current and voltage of transformers while loaded to verify proper transformer tap settings.
- D. Submittals: Furnish instruments and personnel required for tests. Submit four copies of certified test results to Engineer for review. Reports include transformer tested, date and time of tests, relative humidity, temperature, and weather conditions.
- E. Notification: Notify Engineer in writing of any deviation from manufacturer's pre-shipment test data.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 26 24 13

### SWITCHBOARDS

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Work Included: Switchboard work as shown, scheduled, indicated, required, and specified.

##### 1.2 QUALITY ASSURANCE

- A. UL Labels: Provide switchboards UL labeled for service entrance and meeting requirements of UL 891.
- B. NEMA Compliance: Comply with National Electrical Manufacturers Association (NEMA) Standard PB2, "Dead-Front Distribution Switchboards."

##### 1.3 SUBMITTALS

- A. Indicate:
  - 1. Detailed dimensions for equipment foot print, front and side elevations.
  - 2. Conduit entrance locations and requirements and restrictions.
  - 3. Enclosure material, finish, and NEMA classification type.
  - 4. Nameplate legends.
  - 5. Size and number of bus bars.
  - 6. Switchboard instrument details.
  - 7. Electrical characteristics including voltage, ampacity, overcurrent device frame size and trip ratings, withstand ratings, and time current curves of all overcurrent devices and components.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Schneider Electric - Square D.
- B. ABB General Electric Co.
- C. Siemens.
- D. Eaton.

##### 2.2 MATERIALS AND COMPONENTS

- A. Except as otherwise indicated, provide switchboard manufacturer's materials and components as indicated and as required for a complete installation.

##### 2.3 DEAD-FRONT DISTRIBUTION SWITCHBOARDS

- A. The overcurrent protective device short circuit, coordination and arch flash studies performed by the overcurrent protective device manufacturer shall be used by the respective switchgear vendor(s) to select appropriate equipment, switchgear, and overcurrent protective device characteristics such as but not limited to: equipment bracing, AIC rating, circuit breaker frame size and trip settings, and fuse type/class. The



appropriate equipment suitable and required by the studies for code compliance shall be included with the submittal data for review and provided at no additional cost to the Owner. The appropriate equipment recommended by the studies for enhanced selective coordination or enhanced arc flash energy reduction beyond code compliance shall be included with the submittal data for review and consideration purposes by the engineer.

- B. Provide a factory-assembled, dead-front construction, metal enclosed, self supporting, switchboard of voltage, phase, ampacity, and short circuit interrupting rating and bracing shown.
  - 1. Switchboard shall consist of the required number of front and rear aligned vertical sections bolted together to form one metal enclosed rigid switchboard. The switchboard shall be designed as a free-standing with only front access. Rear and/or side access only where indicated to reduce switchboard depth and where NEC required rear access clearance is available.
  - 2. Switchboard shall include protective devices and equipment shown with interconnections, instrumentation, and control wiring. Small wiring, necessary fuse blocks, and terminal blocks in the switchboard shall be provided. Groups of control wires leaving the switchboard shall be furnished with terminal blocks with numbering strips.
  - 3. Factory installed permanent lock-off provision for pad-locking in the off position for all protective devices.
- C. Enclosure Construction: The switchboard framework shall be fabricated for floor mounting. The framework shall be formed code gauge steel, welded and bolted together to support cover plates, busing, and component devices.
  - 1. Each section shall have an open bottom and individually removable top plates for installation and termination of conduit. Top and bottom conduit areas shall be shown and dimensioned on the shop drawings. Front plates used for mounting meters, selector switches, or other front-mounted devices shall be hinged, with wiring installed and laced, and with flexibility at the hinged side. Closure plates shall be screw removable and small enough for easy handling by one technician.
  - 2. Weatherproof enclosure front door(s) shall be pad-lockable and suitable for the intended environmental conditions. When indicated or specified, rear doors shall also be pad-lockable.
- D. Busing: The switchboard busing shall be copper.
  - 1. The bus bars shall be braced to comply with the integrated equipment rating of the switchboard. The main horizontal bus bars between sections shall be located on the back of the switchboard to permit maximum available conduit entry area. The horizontal main bus bar supports, connections, and joints shall be bolted or welded, as required, so as not to require periodic maintenance. Bolted joint connections shall have at least two bolts per joint per phase. Half lapped bus joint construction is not acceptable.
  - 2. Buses shall be arranged A-B-C, left-to-right, top-to-bottom, and front-to-rear throughout. A ground bus shall be secured to each vertical section structure and extend the entire length of the switchboard.
  - 3. The main horizontal bus and incoming line shall be isolated and insulated from outgoing busing and cable connections.
  - 4. Each group mounted section shall have maximum full height bus. Where space is indicated, space shall be bused to install future switches or future circuit breakers sized as shown or a 600 Amp frame size circuit breaker or switch, whichever is greater.
  - 5. The main horizontal bus shall be non-tapered, fully rated, extended and drilled for future additions and splice plates.
- E. Integrated Equipment Rating: Each switchboard, as a complete unit, shall be given a

single integrated equipment rating by the manufacturer. The integrated equipment short circuit rating shall certify that equipment can withstand the stresses of a fault equal to that shown in RMS symmetrical amperes. Ratings shall have been established by actual tests by the manufacturer on similar equipment construction as the subject switchboard. This test data shall be available and furnished, if requested, with or before the submittal of shop drawings.

- F. Indicating Instruments: Switchboard instrumentation shall be digital display, panel mounted, rated for 120V, 60 hertz. The display unit shall be UL listed in accordance with UL 508. The electronic metering device shall have the following features:
1. Voltmeter, phase to phase and phase to ground or neutral.
  2. Current, per phase RMS and 3 phase coverage.
  3. Demand current per phase.
  4. Power factor per phase and 3 phase average.
  5. Real power, 3 phase total.
  6. Reactive power, 3 phase total.
  7. Apparent power, 3 phase total.
  8. Frequency.
  9. Average demand real power.
  10. Adjustable demand interval (5 to 60 minutes).
  11. Nonvolatile memory.
  12. Password protected set-up and reset.
  13. 3 current transformers with primary to match bus size and 5 ampere secondary with metering class accuracy.
  14. Full scale readouts with the following accuracy:
    - a. Current and voltage measurement  $\pm 0.1\%$
    - b. Power and energy  $\pm 0.2\%$
    - c. Frequency  $\pm 0.5\%$
    - d. Power Factor  $\pm 1.0\%$
    - e. Data update time 0.5 seconds (4 wire)
  15. Metering Output.
    - a. Pulse output based on kWh, kvarh, or kVAh.
    - b. Analog output 4-20mA based on kWh, kvarh, or kVAh.
  16. Monitoring:
    - a. Harmonic analysis through 63<sup>rd</sup> with THD and TIF.
    - b. Event recorder.
    - c. Waveform capture.
    - d. Data logger.
    - e. Triggered trace memory.
  17. Communication:
    - a. Front port and dual rear mounted RS485 ports.
    - b. BACnet protocol (coordinate with BMCS contractor).
    - c. Mini RTU: digital 4 in/4 out.
    - d. Analog 1 in/4 out.
    - e. Local/remote display of all values.
  18. Software:
    - a. Windows based software shall be provided to enable setpoint programming.
- G. The Main Protective Device(s) shall be individually mounted molded case circuit breaker(s):
1. Adjustable: current, I<sup>2</sup>t settings, ground fault (where required), instantaneous trip, and short time trip. Solid state true RMS sensing, without fusible elements, 100-percent continuous current rating.
  2. Main protective devices with frame rated at 1000 Amps or greater shall have integral ground fault interrupter and provided with a portable test set or test

- switch.
  - 3. Circuit breakers with 1,200 Amp frame and above shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).
  - 4. Provide shunt trip capability and wiring to terminal block for remote shunt trip switch wiring termination weather remote trip device is indicated or not.
- H. Feeder and Branch Protective Devices greater than 1,200 Amps shall be individually mounted:
- 1. Molded case circuit breakers:
    - a. Adjustable: current,  $I^2t$  settings, ground fault (where required), instantaneous trip, and short time trip. Solid state trip true RMS sensing, without fusible elements; 100-percent continuous current rating.
    - b. Energy Reducing Maintenance System switch with local status indicator (ERMS).
    - c. Shunt trip capability and wiring to terminal block for remote shunt trip switch wiring termination weather remote trip device is indicated or not.
  - 2. Fusible switches:
    - a. Each switch shall have an individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.
    - b. Fused switches 600 Amps and below, equipped for class J fuses.
    - c. Fused switches 601 Amps and above shall be equipped with Class R or L rejection type fuse holders. Class RK1 or L of ampere rating and type as indicated on the plans suitable for application of the system.
    - d. When required by the latest edition of the NEC or the AHJ, 1,200 Amp switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).
- I. Feeder and Branch Protective Devices 1,200 Amps and below shall be group mounted:
- 1. Molded case circuit breakers:
    - a. Greater than 250 Amp: Solid state true RMS sensing with adjustable: current,  $I^2t$  settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
    - b. 250 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.
    - c. 1,200 Amp frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).
  - 2. Fusible switches:
    - a. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.
    - b. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.
    - c. 600 Amps and below equipped for Class J fuses.
    - d. 601 Amps and above shall be equipped for Class R or L rejection type fuse holders.
    - e. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

- J. Ground Fault Interrupter (GFI) protection: Where shown or required, ground fault protection shall be achieved with adjustable pickup for ground fault currents, field-adjustable from 200 amperes and instantaneous to 60 cycle time delay. The ground fault protection system shall include necessary current sensors, internal wiring, and relays to coordinate opening the monitored faulted circuits.
1. Ground fault protection shall be set at minimum setting for both current and time during construction. The switchboard manufacturer shall include in the submittal data for the switchboard, the minimum setting of the devices and the recommended setting for normal building operation.
  2. The ground fault system shall be factory-tested before shipment as specified:
    - a. The switchboard manufacturer shall provide a factory ground fault protection system test for circuit testing and verification of tripping characteristics. The manufacturer shall pass predetermined values of current through the sensors and measure the tripping time for each phase and neutral. The measured time-current relationships shall be compared to the trip-characteristic curves. If the ground fault device trips outside the range of values indicated on the curve, the ground fault device shall be replaced or recalibrated.
    - b. Relays, electrically operated switches, shunt-trip switches, circuit breakers, and similar items shall have proper voltages applied to their circuits and satisfactory operation demonstrated.
    - c. Upon completion of the factory ground fault protection system test, the current and time on each ground fault device shall be set to minimum values.
- K. Mimic bus: Indicate busing, connections, and devices in single line form on the front panels of the switchboard using red colored plastic strips, fastened flat against the panel face with screws.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION OF SWITCHBOARDS

- A. Install switchboards where shown, in accordance with the manufacturer's written instructions, and industry practices to ensure that the switchboards meet the specifications. Provide weatherproof NEMA 3R enclosure housing outdoors, at wet locations, or where indicated on the drawings. Provide NEMA 3RX enclosure housing at corrosive locations of either aluminum or stainless-steel construction suitable for the intended environment when indicated on the drawings.
- B. Comply with the requirements of NEMA and NEC, and NECA Standard of Installation, for installation of switchboards.
- C. Where switchboard is used or indicated as the utility service building disconnect, provide main bonding jumper and neutral to ground bond connected to the building's grounding system. Do not bond neutral to ground when there is a neutral to ground bond upstream from the same derived neutral system serving the switchboard.
- D. Torque bus connections and tighten mechanical fasteners.
- E. Install fuses, of ratings shown, in each switchboard. Provide spare fuse cabinet with three fuses of each size provided. Locate in central plant as directed by Owner.
- F. Concrete Pads: Install switchboards on a 4" reinforced concrete housekeeping pad. The housekeeping pad shall extend 3" beyond the housing of the switchboard unless shown

otherwise. Switchboard shall be bolted to the housekeeping pad using 3/8" minimum galvanized bolts and anchors on 30" maximum centers. Furnish the exact position of any block outs, dimensions, and location of the housekeeping pads to prevent delay of the concrete work.

- G. Adjustment: Adjust operating mechanisms for free mechanical movement. Adjust circuit breaker time characteristic curves as recommended by the Fault Current and Coordination Analysis or as directed by the Engineer.
- H. Indicating Instruments: Provide initial factory start-up and programming with Owner present. Integrate with the Building Management System for monitoring and logging of all system data.

### 3.2 TESTING

- A. Notify Owner's Commissioning Authority (CxA) prior to performing any tests so that the CxA may witness tests at the CxA's discretion.
- B. Pre-energization checks: Before energizing, check switchboards for continuous of circuits and for short circuits.
- C. Switchboard insulation resistance test: Each switchboard bus shall be insulation resistance tested after installation is complete except for line and load side connections. Tests shall be made using Biddle Megger or equivalent test instrument at a voltage of not less than 1000 vDC. Resistance shall be measured from phase-to-phase and from phase-to-ground. Minimum acceptable value for insulation resistance is 2 megohms.
- D. Ground Fault Interrupter (GFI) test: After completion of construction and before final acceptance testing, the ground fault protection system shall be field-tested and reset to the manufacturer's settings for both current and time by a representative of the manufacturer's engineering service department. After the test, set ground fault to 50 percent of overcurrent device rating or 1,200 Amperes, whichever is lower.
- E. Provide thermal infrared scan of switchboard under full load as directed and witnessed by Owner. Correct any deficiencies causing abnormal heating and repeat the scan. Provide digital video documentation with deficiencies corrected for comparison to future test. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to closeout, and make corrections prior to close-out.
- F. Submittals: Furnish instruments and personnel required for tests. Submit 4 copies of certified test results to the Architect for review. Test reports shall include switchboard tested, date and time of test, relative humidity, temperature, and weather conditions.

### 3.3 TRAINING

- A. Provide minimum 2 hours of dedicated training provided by a factory authorized representative to Owner's personnel regarding programming, operating, and use of switchboard components including all indicating instruments and safety features.

END OF SECTION

## SECTION 26 24 16

### PANELBOARDS AND ENCLOSURES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Panelboards and enclosures, including cabinet, as shown, scheduled, indicated, and specified.

##### 1.2 QUALITY ASSURANCE

- A. UL Standards: Panelboards and enclosures shall confirm to all applicable UL standards and shall be UL labeled.

##### 1.3 SUBMITTALS

- A. Indicate:
  - 1. Detailed dimensions.
  - 2. Enclosure material, finish, and NEMA classification type.
  - 3. Location of main circuit breaker.
  - 4. Mounting and trim.
  - 5. Acceptable incoming conductors' size.
  - 6. Electrical characteristics including voltage, ampacity, overcurrent device frame size and trip ratings, bus material and rating, withstand ratings, lugs, and time current curves of all overcurrent devices and components.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Schneider Electric - Square D.
- B. ABB-General Electric Co.
- C. Siemens.
- D. Eaton.

##### 2.2 MATERIALS AND COMPONENTS

- A. General: Panelboards shall be dead-front type equipped with fusible switches or circuit breakers as shown and as required.
- B. The overcurrent protective device short circuit, coordination and arc flash studies performed by the overcurrent protective device manufacturer shall be used by the respective switchgear vendor(s) to select appropriate equipment, switchgear, and overcurrent protective device characteristics such as but not limited to: equipment bracing, AIC rating, circuit breaker frame size and trip settings, and fuse type/class. The appropriate equipment suitable and required by the studies for code compliance shall be included with the submittal data for review and provided at no additional cost to the Owner. The appropriate equipment recommended by the studies for enhanced selective coordination or enhanced arc flash energy reduction beyond code compliance shall be included with the submittal data for review and consideration purposes by the engineer.

- C. Busing Assembly: Panelboard phase, neutral, and equipment ground busing shall be copper. Bus structure and mains shall have ratings as shown and scheduled. Furnish a bare uninsulated ground bus inside each panelboard enclosure. Two section panelboards shall be connected with copper cable, with an ampacity conforming to the upstream overcurrent device. Neutral bus termination quantity for branch circuit panelboards shall match or exceed the maximum number of single pole circuit breakers the panelboard will accept.
- D. Main circuit breakers and feeder / branch circuit breakers:
1. Less than 125 Amps: Thermal magnetic with factory fixed trip.
  2. 125-600 Amps: Thermal magnetic with adjustable instantaneous trip of 5X – 10X with short time tracking.
  3. 601 Amps and larger: Solid state true RMS sensing with adjustable: current set by rating plug or adjustable dial, I<sup>2</sup>t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
  4. Provide permanent lock-off device for all fire alarm system branch circuit breakers, for all smoke control fans and equipment, and where indicated or required for circuit breaker to be used as a remote safety disconnect switch.
  5. General requirements:
    - a. Make prepared space provisions for additional breakers or fused switches so that no additional bus or connectors will be required to add circuit breakers or fused switches in the available device mounting space.
    - b. Two and three pole breakers shall have internal common trips.
    - c. All circuit breakers used as the main or branch mounted back-fed main shall be bolt-on. All circuit breakers used in 600 Amp and smaller panelboards shall be bolt-on breakers. Circuit breakers for distribution panelboards rated 601 amps and larger shall have plug-on or bolt-on circuit breakers.
    - d. Branch circuit panelboard shall have interrupting capacity as shown or as required, but in no case less 10k AIC for 120/208/240-Volt systems, and 18k AIC for 277/480-Volt systems.
    - e. 15 and 20 Amp circuit breakers for lighting circuits shall be UL listed switch duty (SWD).
    - f. Personnel ground fault interrupter (GFI) circuit breakers, where shown, shall be maximum 5 mA ground fault trip and shall include a TEST button.
    - g. Equipment ground fault interrupter (EGFI/EGPD) circuit breakers, where shown or required shall be 30mA ground fault trip and shall include TEST button.
    - h. Circuit breakers with 1,200 Amp and larger frame shall have Energy Reducing Maintenance Switching with local status indicator (ERMS).
- E. Fusible Switches for distribution panelboards: Fusible switches shall be quick-make, quick-break type. Each switch shall be enclosed in a separate steel enclosure. The enclosure shall employ a hinged cover for access to the fuses. Interlock cover with the operating handle to prevent opening the cover when the switch is in the ON position. This interlock shall be constructed so that it can be overridden for testing fuses without interrupting service. The switches shall have padlocking provisions in the OFF position. Switches shall include positive pressure rejection type fuse clips for use with UL Class J fuses and be UL labeled for 200,000 AIC.
- F. Spaces: Where space for future breakers or switches is shown, panelboard enclosure shall include removable blank panels or knockouts to allow installation of future breakers or switches, prepared spaces, and panelboard busing shall be complete, including required connectors.

- G. Integrated Equipment Rating: Do not apply series ratings. Each panelboard, as a complete unit, shall have a short-circuit rating equal or greater than the available short circuit current. Rating shall have been established by tests on similar panelboards with the circuit breakers or fusible switches installed.
- H. GFCI circuit breakers not available in the required panel AIC rating shall be series rated with the upstream over current protection device to provide the panelboard with required AIC rating. Coordinate series rating requirements with manufacturer. Mark the panel per NEC 110. The marking shall be visible and state the following: "CAUTION-ENGINEERED SERIES COMBINATION SYSTEM RATED XXX AMPERS. IDENTIFIED REPLACEMENT COMPONENTS REQUIRED".
- I. Panelboard Enclosures:
  - 1. Provide sheet steel enclosures, minimum 16-gauge nominal thickness, with multiple knockouts, unless shown otherwise. Provide all NEMA 1 panelboard fronts with spring-loaded door pulls, and flush lock and key, panelboard enclosures keyed alike to match the Owner's standard key system; coordinate with Owner.
  - 2. All NEMA 1 enclosure panelboards shall be hinged "door-in-door" type with interior hinged door with hand operated latch or latches, as required providing access only to circuit breaker or fusible switch operating handles, not to exposed energized parts. Outer hinged door shall be securely mounted to the panelboard box with factory bolts, screws, clips, or other fasteners, requiring a tool for entry. Hand operated latches are not acceptable. Push inner and outer doors shall open left to right. Manufacturer hardware (OEM), screws, and bolts shall be used to secure dead fronts and covers. Do not use third party hardware. Do not use power tools to secure panel hardware. Provide gray powder coat finish over a rust inhibitor.
  - 3. Equip with interior circuit directory frame, card, and clear plastic covering for panelboards.
  - 4. Panelboards located in kitchen preparation or natatorium areas shall have Type 316 stainless steel front, door, and trim with a NEMA 1 rating for the entire enclosure.
  - 5. Panelboards at exterior locations shall be NEMA 4X Type 316 stainless steel.
  - 6. Panelboards at hose down areas, cooling towers, in greenhouses, and other corrosive locations shall be NEMA 4X 316 stainless steel.
  - 7. Enclosure shall be for recessed or surface mounting as shown or as required.
  - 8. Enclosures shall be fabricated by the same manufacturer as panelboards to be enclosed. Multi-section panelboards shall have same physical dimensions.

## PART 3 - EXECUTION

### 3.1 INSTALLATION OF PANELBOARDS AND ENCLOSURES

- A. General: Install panelboards and enclosures, as shown, including electrical connections, in accordance with the manufacturer's written instructions, the requirements of NEC, NECA Standard of Installation, and industry practices. Circuit breakers shall be factory installed except for required field modifications due to actual site conditions.
- B. Coordination: Coordinate installation of panelboards and enclosures with conductor and raceways installation work.
- C. Anchoring: Anchor enclosures to walls and structural surfaces ensuring that they are permanently and mechanically secured.



- D. Directory Card: Provide a typed circuit directory card(s) upon completion of work. Directory card shall be of super heavy-weight index card stock, 110 lb, white. Directory shall include type of load (i.e.: receptacles, lighting, exhaust fan, etc.) and location (i.e.: Room 102, Office, etc.) Room number shall be identified as the actual graphics room number assigned to the space and not the room number identified on the Plans. Circuits with shunt trip shall be identified with the control circuit operating the shunt trip (i.e.: Kitchen Hood No. 2). Shunt trip breakers with common trip circuit shall be grouped in the panelboard (i.e.: circuits 1, 3, 5 and 7).
- E. Fuses: Install fuses, of the ratings and class shown.
- F. Circuit Arrangement: Branch circuits shall be arranged to provide the best possible phase balance, unless shown otherwise.
- G. Panelboards not intended to be used as service entrance (SE) rated or for establishing a separately derived neutral system shall have the factory installed neutral to ground bonding screws and straps removed and disposed of.
- H. Recessed or flush mounted panelboards: Terminate spare conduits in junction box 18-inches above accessible ceiling close to panelboard location. Label junction box cover as "not used" and include panel identification.
1. Provide (3) 1-inch and (3)  $\frac{3}{4}$ -inch spare conduits above accessible ceiling to j-box from each panelboard section.
  2. Where recessed panelboard is located above another building floor, also provide (3) 1-inch and (3)  $\frac{3}{4}$ -inch conduits to j-box in ceiling space on floor below.
- I. Conductors shall be bent neatly opposite the fuse switch or circuit breaker to which they are to be attached. Vertically installed conductors shall be neatly tie-wrapped. Conductors shall be connected in a neat and professional manner. Conductors brought in from the top or bottom of the cabinet shall be bent neatly opposite the fuse or circuit breaker to which they are to be attached. Each conductor shall be run along the full height of the panel and returned to the circuit breaker or fuse location to allow relocation of the conductor to any position along the bus. Panelboard shall be cleaned of all construction debris prior to substantial completion review. Neutral and grounding conductors shall be installed similar to the phase conductors.
- J. Circuit breakers and conductors installed for SPD devices shall be located on the same side as the SPD to allow the shortest and straightest run of conductors in respect to the location of the SPD device. Route all conductors to the SPD device with straight as possible run, using longest sweep bends and the shortest conductor length possible. Twist all SPD conductors and secure with tie straps wherever possible.
- K. Install copper ground bus for copper ground conductors. Ground conductors size #1 and larger are to be landed to panelboard enclosure with mechanical lugs and not to ground bus.
- L. Install panels so that breaker number 1 is the top left breaker.
- M. In panels that contain multi-layered neutral bus, install neutrals beginning with the back neutral bus row and work forward. Do not make up neutrals on front neutral bus row unless all other rows are full.
- N. Label breaker mounting space with stick-on number labels.
- O. Mount the fully aligned panelboard such that the maximum height of the top circuit breaker above the finished floor shall not exceed 78-inches. Mount panelboards as high

as practical and such that the bottom of the cabinets will not be less than 6 inches above the finished floor.

### 3.2 TESTING

- A. Before energizing, energization, check for continuity of circuits and short circuits.
- B. Provide thermal infrared scan of panelboards under full load as directed and witnessed by Owner. Correct any deficiencies causing abnormal heating and repeat the scan. Provide digital video documentation with deficiencies corrected for comparison to future test. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to closeout, and make corrections prior to close-out.

END OF SECTION

**INTENTIONALLY LEFT BLANK**

## SECTION 26 27 73

### LINE VOLTAGE WIRING DEVICES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Provide wiring device work as shown, scheduled, indicated, and specified. Low voltage and/or digital control switches required for lighting controls and lighting control systems shall be as specified and required for the low voltage and / or digital control lighting system. Refer to drawings or other specification sections for low voltage / digital lighting control systems. Cover plates for lighting control systems shall be as specified in this section unless specifically required otherwise by the low voltage / digital control device bulkhead or form factor.

##### 1.2 QUALITY ASSURANCE

- A. UL Label: Wiring devices shall be UL labeled.
- B. NEMA Standard WD1 and WD6.
- C. Fed. Spec. WC596, W-S-896.

##### 1.3 SUBMITTALS

- A. Mark up a complete copy of the specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect/Engineer/Owner (Does Not Comply, Explanation:) Do not submit an outline form of compliance, submit a complete copy of the specification section with the product data.
- B. Submit a sample of each style and color of 120-Volt duplex receptacle and each 120/277-Volt switch with related cover plate. Attach plate to wiring device and label back side of plate with job description with permanent black marker.
- C. Submit manufacturer's product data sheet for each style of device and plate on the project.
- D. Submit drawings of plans, elevation and sections of receptacles and outlets in casework, cabinetwork and built-in place furniture. Coordinate dimensions with millwork shop drawings and related architectural drawing series.

#### PART 2 - PRODUCTS

##### 2.1 ACCEPTABLE MANUFACTURERS

- A. Toggle switches, straight blade and twist lock devices, interior cover plates:
  - 1. Leviton.
  - 2. Hubbell.
  - 3. Pass and Seymour .
  - 4. Eaton.

- B. Dimming
  - 1. Leviton.
  - 2. Lutron.

## 2.2 WIRING DEVICE COLOR

- A. Device color shall be gray except 20A, 125V receptacles and toggle wall switches which are directly supplied from an emergency source shall be red, and heavy duty 30 Amp and larger simplex devices which shall be black in color where the building standard color is not available. Provide equivalent hospital grade devices where red is not available in grade specified. Verify with Owner / Architect prior to submitting for approval. Color change kits as required for dimming switches. Low voltage lighting control devices specified elsewhere shall match the line voltage wiring device color specified in this section.

## 2.3 RECEPTACLES

- A. Industrial grade tamper resistant smooth face duplex receptacles, 2 pole, 3 wire grounding, with ground connection and poles internally connected to mounting yoke, with metal mounting straps, locking plug-tail or back and side wired with screw type terminals, NEMA indicated, (X=color designation).
  - 1. 20A, 125V duplex NEMA #5-20R: Leviton #5362-SGX.
  - 2. 20A, 125V isolated ground duplex NEMA #5-20R: Leviton #5362-IGX.
  - 3. 20A, 125V ground fault circuit interruption (GFCI) NEMA #5-20R weather and tamper resistant: Leviton #G5362-WTX.
  - 4. 20A, 125V weather resistant (WR), tamper resistant: Leviton #TWR20-GY.
  - 5. 20A, 125V plug load control, split circuit marked for "controlled", tamper resistant: Leviton #TDR20-S1G.
  - 6. 15A, with 20A feed-through, NEMA #5-15R, 125V duplex, arc fault (AFCI), tamper resistant: Leviton #AFTR1-HGX.
- B. Heavy-Duty Simplex: Single heavy-duty type receptacles, with green hexagonal equipment ground screw, with metal mounting straps, back or side wiring, black molded phenolic compound.
  - 1. 15-60A, 125-250V, straight blade, NEMA configuration as indicated or as required by Owner.
  - 2. 15-50A, 125-480V, twist lock, NEMA configuration as indicated or as required by Owner.
- C. Hospital grade receptacles, 2 pole, 3 wire grounding, with ground connection and poles internally connected to mounting yoke, with metal mount straps, locking plug-tail or back and side wired with screw type terminals, molded phenolic compound, NEMA configuration indicated.
  - 1. 20A, 125V grounded duplex NEMA #5-20R: Leviton #8300-X.
  - 2. 20A, 125V isolated ground duplex NEMA #5-20R: Leviton #8300-LIG (orange).
  - 3. 20A, 125V ground fault circuit interruption (GFCI) with indicator light: Leviton NEMA 5-20R-8898-HGX.
  - 4. 20A/125V Tamper Resistant Duplex NEMA 5-20R: Leviton 8300-SGX.
- D. USB 2-port charger / tamper-resistant with 125-Volt receptacles:
  - 1. USB type A/C, 1 type A and 1 type C port, 5.1A 5.0VDC charging. 20A, 125V, NEMA 5-20R: Leviton #T5833-HGX.
  - 2. USB A, 2 type A ports, 5.1A 5.0VDC charging. 20A, 125V, NEMA 5-20R: Leviton #T5832-HGX.

- E. USB 4-port charger:
  - 1. USB type A+C, 2 type A ports and 2 type C ports. 5.0A 5.0VDC charging. Hubbell #USB4ACX.
  - 2. USB type A, 4 type A ports. 5.0A 5.0VDC charging. Hubbell #USB4X.

## 2.4 WALL SWITCHES

- A. Toggle: Industrial grade flush toggle switches, with mounting yoke insulated from mechanism, equipped with plaster ears, switch handle, back and side-wired screw terminals.
  - 1. Single-pole, 120/277V, 20A switch: Leviton #1221-2X.
  - 2. Double pole 120/277V, 20A switch: Leviton #1222-2X.
  - 3. Three-way, 120/277V, 20A switch: Leviton #1223-2X.
  - 4. Four-way, 120/277V, 20A switch: Leviton #1224-2G.
  - 5. Pilot light single-pole, 120/277V, 20A switch: Leviton #1221-PL.
  - 6. Momentary, 120/277V, 20A, single-pole double throw, center off: Hubbell only #HBL 1557G.
- B. Toggle key operated switch (verify manufacture and key type with Owner prior to construction).
  - 1. Single-pole, 120/277V, 20A key operated switch: Hubbell HBL #1221GY.
  - 2. Two-pole, 120/277, 20A key operated, Hubbell HBL #1222GY.
  - 3. Three-way, 120/277V, 20A key operated switch: Hubbell HBL #1223GY.
  - 4. Four-way, 120/277V, 20A key operated switch: Hubbell HBL #1224GY.
  - 5. Momentary, single pole double throw, center off, 20A key switch: Hubbell #HBL1557LG.
  - 6. Key: Hubbell #HBL 1209. Key switches shall be keyed alike to match the Owner's standard key system. Coordinate with Owner.
- C. Rotary key operated switch (verify manufacturer and keying with Owner prior to construction).
  - 1. Single-pole, 120/277V, 20A key operated switch: Leviton #1221-KL.
  - 2. Two-pole, 120/277, 20A key operated, Leviton #1222-2KL..
  - 3. Three-way, 120/277V, 20A key operated switch: Leviton #1223-3KL.
  - 4. Four-way, 120/277V, 20A key operated switch: Leviton #1224-4KL.
  - 5. Key switches shall be all keyed alike to match the Owner's standard key system. Leviton #WS-35 or as otherwise directed by Owner.

## 2.5 WALL DIMMERS

- A. Wall Box Dimmers: Self-contained, wall box mounted, linear slide square law dimmers with ON/OFF switch. Dimmers shall operate continuously at rated load in an ambient temperature up to 40°C and an input of 100 to 277V. Heat sink fins may be removed only as approved by Owner / Engineer for narrow ganging after applying de-rating.
  - 1. Single-pole, 120/277V, 1000/2308 Watt incandescent / magnetic low voltage: Leviton #AWSMT-MBW.
  - 2. Single-pole, 120/277V, 1500/3463 Watt incandescent / magnetic low voltage, 2-gang heat sink: Leviton #AWSMT-MCW.
  - 3. Single-pole, 120/277V, 1920/4432-Watt LED / fluorescent 0-10V dc, 75 mA current sink: Leviton #AWSMT-7DW.
  - 4. Three, four- or five-way remote switch: Leviton #AWSRT-00W.
  - 5. Color change kit as required.

## 2.6 GFCI – GROUND FAULT CIRCUIT INTERRUPTER, BLANK FACE

- A. 20A, 125V, GFCI, switch rated, blank face feed through, Hubbell #GFBF20GYL, gray finish, stainless steel cover plate black laser engraved with device protected, (example: DRINKING FOUNTAIN GFCI).

## 2.7 INTERIOR WALL COVER PLATES AND FASTENERS

- A. Type 302 non-magnetic stainless-steel with satin finish (also required for wall box device cover plates for low voltage and digital lighting controls specified elsewhere).
- B. Cover plate laser plate engraving for device identification (other than low voltage lighting controls).
  - 1. Provide laser cover plate engraving with black filling for all wiring devices indicating panelboard name, circuit, and voltage.
  - 2. Wiring devices connected to emergency/stand-by generator or inverter shall include the word "EMERGENCY".
  - 3. Text orientation shall be upright, readable from left to right when cover plate is installed.
  - 4. Remotely located lighting switches shall also indicate the room or area and zone controlled by each switch. Coordinate specific wording with Owner/Architect.
  - 5. Blank face GFCI cover plates shall also intuitively indicate the load or equipment served, device, or area protected downstream ("EDF" for drinking fountains, "RM RECEPES", "HOOD RECEPES", "VENDING", "REFRIG", etc.) For other loads, Owner/Architect shall determine name plate wording.

## 2.8 EXTERIOR COVER PLATES

- A. Thomas & Betts CK Series, cast aluminum standard depth, locking mount, while-in-use, wet location, universal configuration.
  - 1. Vertical mount receptacle: #CKSUV.
  - 2. Horizontal mount receptacle: #CKMU.
  - 3. Two-gang: #2CKU.
  - 4. 30-60 Amp Devices: #CKLSUV.

## 2.9 CORD REELS AND DROP CORDS

- A. Cord Reels:
  - 1. Lighted cord reels: Industrial grade, LED hand Lamp only, 125V, 45-foot 16/3 SJO cord, white finish, LED hand lamp. Hubbell #HBLI45163LED with #HBL340PB pivot base.
  - 2. 20 Amp (2) duplex receptacle cord reels: Industrial grade, 125V, (2) 20A duplex receptacles, GFCI protection, 45-foot 12/3 SJO cord, white finish, yellow outlet box. Hubbell #HBLI45123GF220 with #HBL340PB pivot base.
  - 3. 30 Amp receptacle cord reels: Industrial grade, 125/250V, 30A, 45-foot 10/4 SJO cord, white finish, yellow outlet box. Hubbell #HBLI45104 with #HBL340PB pivot base. 30 Amp NEMA receptacle termination as required by Owner.
  - 4. 50 Amp receptacle cord reels: Industrial grade, NEMA 4 wet location, 600V, 55A, 50-foot 6/4 SOOW cord, yellow finish, self-retracting, with NEMA 50-Amp maximum receptacle termination as required by Owner. KH-Industries RTMH4L-WW-K6K.
  - 5. Recessed enclosure for 20 and 30-Amp cord reels recessed above T-grid drop ceilings: Hubbell #HBLIPRBOX recessed cord reel enclosure, white finish, plenum rated.

- B. Drop cord receptacles:
    - 1. 20A, 125V, 25-feet 600 VAC, 3-conductor 12 AWG SOOW cable, twist lock plug, two 125V, 20A duplex WR GFCI outlets, safety yellow rubber outlet box, mesh strain relief cord grips. KH Industries #PP4DD-520-B12F-520.
    - 2. 20A, 125/250V, 25-feet 600 VAC, 4-conductor 12AWG SOOW cable, twist lock plug, four 125/250V NEMA L1420P outlets, safety yellow rubber outlet box, mesh strain relief cord grips. KH Industries #PP7DD-520-B12F-L1420.
    - 3. 30-60 Amp, voltage, NEMA plug/receptacle as required by Owner, SOOW cable, number of conductors and length as required, mesh strain relief cord grips.
- 2.10 FIRST RESPONDER EMERGENCY REMOTE POWER OFF (FREPO) STATION
- A. Knox Company Remote Power Rapid Access 4500 Series Shutdown Station
    - 1. Recessed mount for public spaces and new construction, surface mount for when mounted to equipment or existing construction.
    - 2. Single lock keyed for local Fire Department/AHJ, verify configuration and keying with Knox Company.
    - 3. Red Finish.
    - 4. Tamper alert for integration with building security system.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Cover plates for receptacles and toggle switches shall be of the same manufacturer throughout unless otherwise noted.
  - 1. Key switches and keys shall be as specified and also as approved by Owner.
  - 2. Submit samples for each specified toggle switch and duplex receptacle color to Architect.
- B. Install wiring devices where shown and as required, in accordance with manufacturer's written instructions, requirements of NEC, and in accordance with industry practices. Do not install devices until wall construction and wiring is completed.
- C. Install receptacles and switches only in electrical boxes that are clean, free from building materials, debris, and similar matter.
- D. Install wiring devices plumb and aligned in the plane of the wall, floor, ceiling or equipment rack.
- E. Install switches in boxes on the strike side of doors as hung. Install so the up position will close the circuit or will be the highest level of illumination. Where more than one switch is in the same location, install switches in a multi-gang box with a single cover plate.
- F. Provide a cover plate for every wiring device and blank cover plates for unused rough-in-only boxes that matches the building standard. Fasten all plates outdoors with type 302 Allen Head "tamper-proof" screws.
- G. Mounting heights of all wiring devices shall comply with local accessibility standards and local codes, except where wiring devices are indicated for special purpose and access is only required by maintenance or service personnel.
- H. Refer to Architectural drawing and elevations, etc. for exact location of wiring devices. Coordinate location of all wiring devices with other trades, specialty items, and millwork and resolve all conflicts prior to rough-in. Field coordinate exact mounting location with all trades to avoid and resolve conflicts during construction.



- I. Locate receptacles for electric drinking fountains/coolers and bottle fill stations below equipment so that the receptacle is accessible and concealed as much as practical from public view by the equipment open cowling so that the receptacle remain readily accessible. For dual level basin equipment, locate receptacle under the upper basin.
- J. Provide convenience outlet receptacle within 25-feet of all new electrically operated mechanical equipment.
- K. Where exterior receptacles are intended for continuous use, mount in horizontal position with while in use cover plate. (Exterior electric drinking fountains, ice makers, ice storage bins, landscape lighting low voltage transformers, seasonal decorative lighting, etc.)
- L. Install wall box dimmers to achieve full rating specified after de-rating for ganging as recommended by manufacturer.
- M. Do not share neutral conductor on load side of dimming switches.
- N. Install receptacles with grounding pole down, except in any of the following conditions where the grounding pole shall be installed in the up position: healthcare occupancies, if required by local AHJ, if required by Owner's construction standards or if directed by Owner or Architect. If installed horizontally, install with neutral pole on top.
- O. Connect wiring device grounding terminal to branch circuit equipment grounding conductor.
- P. Provide pigtail to each receptacle and each switch. Neutral and phase conductors shall be installed using side or rear entry lugs only. Do not wrap conductors around screw terminals. Tighten all screws and lugs as recommended by manufacturer.
- Q. All receptacles and switches shall have a minimum of two wraps of Scotch 33 or equivalent tape around terminal screws.
- R. Provide toggle switch within sight of all trap primers, circulation pumps, 120-Volt motors and motorized equipment to serve as the equipment disconnect switch.
- S. Mount cord reels and cord reel recessed enclosures to structure with galvanized steel struts and as recommended by manufacturer. Field verify exact location of cord reels with Owner/Architect. Mounting location shall avoid conflicts with piping, light fixtures and ductwork, etc. when cord reel is extended and retracted. Set ball stop as directed by Owner / Architect. Provide hand lamp only type cord reels in commercial / educational automotive garages with classified (hazardous) locations. Provide local toggle switch at standard switch height for hand lamp only cord reels.
- T. Mount drop cord suspension hook or j-box to structure to support the cord's weight and additional normal use pulling tension and as recommended by manufacturer. Use cable grips, either with cord grip hanging hook at open ceilings or with chrome plated escutcheon cover plate mounted to recessed j-box at finished ceilings. Field verify exact location, drop height, and NEMA outlet configuration of drop cords with Owner/Architect. Provide weatherproof receptacle cap or covers if located in wet location. Mounting location shall avoid conflicts with piping, light fixtures and ductwork, etc.

### 3.2 GROUND FAULT PROTECTION FOR PERSONNEL

- A. When GFCI personnel protection receptacles are not commercially available or cannot be installed at a readily accessible location or indicated otherwise on the drawings, GFCI personnel protection shall be provided by a remote blank face GFCI wiring device or by

an up-stream GFCI receptacle that also provides downstream GFCI protection and located in a readily accessible location. When branch circuit breaker device with integral GFCI protection is required or specified, it shall be within the manufacture's recommended distance limitations of the connected receptacle(s) or load(s) for proper GFCI personnel protection at the farthest outlet.

- B. GFCI personal protection locations include but are not limited to the following:
1. For other than dwelling units: All single phase 125-250-Volt (150-Volts to ground or less) receptacles 50-Amperes or less, and all three phase 125-250-Volt (150-Volts to ground or less) receptacles 100-Amperes or less in the locations indicated below.
  2. Dwelling units: All single phase 125-250-Volt receptacles installed in the following locations indicated below.
  3. Provide personnel GFCI protection as indicated above in the following locations and all additional locations as required by the NEC.
    - a. Outdoors (with exceptions for not readily accessible receptacles with dedicated branch circuits for snow melting, deicing, pipeline/vessel heat receptacles. Provide these loads with 30mA EGFI circuit breaker protection).
    - b. Bathrooms/toilets/restrooms.
    - c. Janitors/custodial closets and mop sinks.
    - d. Laundry areas.
    - e. Parking structures, service garages, garages and accessory buildings.
    - f. Basements, crawl spaces (including 120-Volt lighting) .
    - g. Within 6-feet of all water sources including sinks, mop-sinks, lavatories, bathtubs, shower stalls, faucets, eye wash stations, emergency shower stations.
    - h. Indoor damp and wet locations.
    - i. Locker rooms.
    - j. Indoor swimming pools and natatoriums areas and adjacent corridor/hall convenience receptacle outlets located within 25-feet of all access doors.
    - k. Non-dwelling unit therapeutic tubs/pools/whirlpool areas and adjacent corridor/hall convenience receptacle outlets located within 25-feet of all access doors.
    - l. Receptacles serving dwelling unit kitchen counter tops.
    - m. Vending machines.
    - n. Elevators, dumb waiters, escalators, moving sidewalks: receptacles in pits, hoist ways, well ways or those mounted on the cars of elevators and dumb waiters.
    - o. Electric vehicle charging equipment.
    - p. All receptacles serving kitchen or food preparation counter tops.
    - q. Automotive vacuum machines.
    - r. Drinking water fountains/coolers and bottle fill stations.
    - s. Corded high-pressure spray washing machines.
    - t. Tire inflation machines.
    - u. Dish washers.
    - v. Receptacles at end of cord reels or drop cords.
    - w. Boat houses, boat hoist, and all pier/dock receptacles and lighting (excludes shore power that requires GFPE).
    - x. Central plant, mechanical rooms and electrical rooms.
    - y. Wood, metal, or other material fabrication or vocational training shops.
    - z. Receptacles that serve educational science and science prep room counter tops.
- C. Where a GFCI protected receptacle outlet is required or indicated behind vending machine, refrigerators or other equipment, provide remote GFCI blank face in same room

as protected receptacle and at a readily accessible location with standard receptacle outlet behind equipment. Refrigerators shall be GFCI protected only where located within 6-feet of power cord distance from the edge of a sink to the surface of the refrigerator.

- D. Unless indicated otherwise, locate blank face GFCI device near light switches at same height as light switches or ganged with the light switch. Provide GFCI protection for all receptacle outlets located below 42-inches in all infant through 2-year old day care and similar areas designated for occupancy by infant through 2-year old day care occupants so the GFCI device can easily be intentionally tripped or tested and reset.
- E. Provide branch circuit breaker 30mA (EDP) or 100mA (EPE) equipment protection for utilization equipment as required by the NEC and where indicated on the drawings.

### 3.3 FIRST RESPONDER REMOTE EMERGENCY POWER OFF (FREPO) STATION

- A. Provide Knox Company first responder remote emergency power off (FREPO) stations as indicated and/or where required by local AHJ. Mounting locations shall be as directed by the local AHJ and exact locations coordinated with the Architect. FREPOs shall be circuited only to shunt trip or shut-down control circuiting. FREPOs shall be recessed mounted in public locations and in all new construction when attached to building construction. Provide surface mount FREPOs when mounted to equipment or existing construction.
- B. Integrate the FREPOs to shut-down the building non-emergency and non-legally required power sources which include the main electrical utility service disconnect circuit breaker(s), other than non-life safety or non-legally required distribution scale UPS equipment, and non-life safety or non-legally required local power generation equipment.
- C. Provide FREPOs for fire pump, life safety, and legally required electrical generation equipment only when required by the AHJ. When required by the AHJ, fire pump, life safety, and legally required power generation and/or stored energy power supply equipment shall each have separate dedicated FREPOs that shut down only their associated power generation/stored energy equipment. FREPOs for emergency, and legally required systems shall have minimal 25-foot physical separation from the building main utility service FREPOs and clearly labeled with the equipment that they will shut down. FREPOs for fire pumps shall have minimal 25-foot physical separation from the any other FREPOs and from the building main utility service disconnect and clearly labeled with the equipment that it will shut down.
- D. Integrate the FREPOs tamper switch with the building security or building management control system (BMCS) as directed by Owner.

### 3.4 TESTING

- A. Before energizing, check for continuity of circuits, short circuits, and grounding connections.
- B. After energizing, check wiring devices to demonstrate proper operation and receptacles for correct polarization, voltage and phase orientation if intended 3-phase equipment is phase orientation dependent for proper motor rotation or operation.
- C. Test each individual GFCI receptacle and all downstream receptacles protected by an upstream GFCI device with simulated ground fault tester, make corrections as necessary.
- D. Operate each wall switch with circuit energized and verify proper operation.

END OF SECTION

## SECTION 26 43 00

### SURGE PROTECTION DEVICES

#### PART 1 - GENERAL

##### 1.1 DESCRIPTION

- A. The Surge Protection Device (SPD) covered under this section includes service entrance type surge protection devices suitable for use as Type 1 or Type 2 Devices per UL1449 5<sup>th</sup> Edition, applied to the line or load side of the utility feed inside the facility. SPDs shall be connected in parallel with the facility's wiring system. The unit shall be manufactured in the USA by a qualified manufacturer of suppression filter system equipment, which has been engaged in the commercial design and manufacture of such products for a minimum of five years.
- B. Contractor shall provide all labor, materials, equipment, and incidentals as shown, specified and required to finish and install surge protection devices.

##### 1.2 QUALITY ASSURANCE

- A. Reference Standard: Comply with the latest edition of the applicable provisions and recommendations of the following, except as otherwise stated in this document:
  - 1. UL 1449 Fifth Edition
  - 2. ANSI/IEEE C62.41, Recommended Practice for Surge Voltages in Low-Voltage AC Power Circuits.
  - 3. ANSI/IEEE C62.45, Guide for Surge Testing for equipment connected to Low-Voltage AC Power Circuits.
  - 4. IEEE 1100 Emerald Book.
  - 5. National Fire Protection Association (NFPA 70 (NEC), 75, and 78).
  - 6. UL 1283 – Electromagnetic Interference Filters
- B. When requested for verification, provide copies of the following:
  - 1. Copies of actual let through voltage data in the form of oscilloscope results for both ANSI/IEEE C62.41 Category C3 (combination wave) and B3 (Ring wave) tested in accordance with ANSI/IEEE C6245.
  - 2. Copies of test reports from a recognized independent testing laboratory, capable of producing 200kA surge current waveforms, verifying the suppressor components can survive published surge current rating on both a per mode and per phase basis using the ANSI/IEEE C62.41 impulse waveform C3 (8 x 20 microsecond, 20kV/10kA). Test data on an individual module is not acceptable.

##### 1.3 SUBMITTALS

- A. Submit shop drawings complete with all technical information for specific unit dimensions, let through voltage data, detailed installation instructions, maintenance manual, and wiring configuration.
- B. Provide detailed marked-up copy of this specification with line-by-line compliance or exception statements to all provisions of this specification.
- C. Copies of Manufacturer's catalog data, technical information and specifications on equipment.
- D. Copies of documentation stating that the Surge Protection Device is listed from a Nationally Recognized Testing Laboratory (NRTL) (UL, ETL, etc.) and are tested and

multi-listed to UL 1449 5<sup>th</sup> Edition and UL 1283.

- F. Copy of warranty statement clearly establishing the terms and conditions to the building/facility owner/operator.

#### 1.4 WARRANTY

- A. The manufacturer shall provide a minimum 20-year warranty for high and very high exposure SPDs. Very high exposure unit warranties shall include exposure to temporary extended over-voltage conditions. Provide a minimum 15-year warranty for all medium exposure SPDs, and a minimum 10-year warranty for all other SPDs for parts from date of substantial completion against failure. Contractor shall assist the Owner with manufacturer warranty registration.

### PART 2 – PRODUCTS

#### 2.1 APPROVED MANUFACTURER

- A. Low exposure, minimum 10-year parts warranty, minimum 50k Amps per mode, 100k Amps per phase, Type 1 and Type 2.
  - 1. Recessed mount panelboard extension with brushed stainless-steel front:
    - a. ACT Communications:471- ###V-050-SS-F-PB flush series.
    - b. ABB Current Technology PX3-050-VVV- #X-SF-X-F- # series.
    - c. SSI Surge Suppression, Inc. CSMx12-FMPxSS series.
    - d. SST Southern Tier Technologies T45-VVVV-50-AWAJ2-C-RKSS(Stainless Steel front).
  - 2. Branch panelboard surface mounted:
    - a. ACT Communications 455 series.
    - b. ABB Current Technology CG3 60 series.
    - c. SSI Surge Suppression, Inc. CSMx12 series.
    - d. SST Southern Tier Technologies T45-VVVV-50AWAJ2-C.
- B. Medium exposure, minimum 15-year parts warranty, minimum 120k Amps per mode, 240k Amps per phase, Type 2.
  - 1. ACT Communications 471 series.
  - 2. ABB Current Technology CGP3 125 series.
  - 3. SSI Surge Suppression, Inc. CSMx24 series.
  - 4. SST Southern Tier Technologies T45-VVVV-120A series.
- C. High exposure, minimum 20-year parts warranty, minimum 200k Amps per mode, 400k Amps per phase, Type 2 SPD.
  - 1. ACT Communications 471 x200 series.
  - 2. ABB Current Technology TG3 200 series.
  - 3. SSI Surge Suppression, Inc. CHLxM series.
  - 4. SST Southern Tier Technologies T45-VVVV-200A series.
- D. Very high exposure at service entrance 1,201 Amps and above: Minimum 20-year parts warranty; minimum 200k Amps per mode; 400k Amps per phase, Type 1 and 2 SPD:
  - 1. ACT Communications 471 x200 SEL series.
  - 2. ABB Current Technology SEL3 200 series.

The service entrance protector shall incorporate a combination of TPMOV and Selenium technology allowing for transient surge and temporary over voltage protection. The unit shall be able to prevent common temporary over voltages and high impedance faults from damaging the MOVs, increasing their longevity and ability to protect the critical load. Limited and Intermediate current TOVs can be caused by a loss of the neutral conductor

in a split phase or three phase power system. The available fault current will be determined by the impedance of the loads connected to the phases opposite the SPD and are typically in the range of 30A to 1000A. Minimum 20-year parts warranty, extended over-voltage protection, minimum 200k Amps per mode, 400k Amps per phase, Type 2 SPD. The Selenium elements must limit voltage to the MOV as a percent of nominal as outlined below:

| Overvoltage seen by MOVs as % of Nominal |                   |      |      |       |
|------------------------------------------|-------------------|------|------|-------|
|                                          | available current |      |      |       |
| time                                     | 30A               | 100A | 500A | 1000A |
| 1 cycle                                  | 120%              | 130% | 150% | 160%  |
| 10 cycles                                | 130%              | 150% | 160% | 160%  |
| 30 cycles                                | 140%              | 150% | 160% | 160%  |

\*To verify damage to the MOVs has been mitigated, the percent overvoltage seen at the MOV must be less than 200% for split-phase applications or 173% for three-phase applications (100% is nominal).

## 2.2 MANUFACTURED UNITS / ELECTRICAL REQUIREMENTS

- A. Declared Maximum Continuous Operating Voltage (MCOV) shall be greater than 115 percent of the nominal system operating voltage and in compliance with test and evaluation procedures outlined in the nominal discharge surge current test of UL1449, section 37.7.3. MCOV values claimed based on the component's value or on the 30-minute 115% overvoltage test in UL1449 will not be accepted.
- B. Unit shall have not more than 10% deterioration or degradation of the UL1449, Voltage Protection Rating (VPR) due to repeated surges.
- C. Protection Modes SVR (6kV, 500A) and UL1449 VPR (6kV, 3kA) for grounded WYE/delta and High Leg Delta circuits with voltages of (480Y/277), (208Y/120), (600Y/347). 3-Phase, 4 wire circuits, (120/240) split phase shall be as follows and comply with test procedures outlined in UL1449: Values Depicted are based on a system Without Disconnect / With Disconnect

| System Voltage | Mode | MCOV | C3 Wave   | UL 1449 VPR Rating |
|----------------|------|------|-----------|--------------------|
| 120/240        | L-N  | 150  | 650/775   | 700/800            |
| 120/208        | L-G  | 150  | 650/825   | 700/900            |
|                | N-G  | 0    | 500/500   | 900/1000           |
|                | L-L  | 300  | 950/1250  | 900/1200           |
| 277/480        | L-N  | 320  | 1125/1225 | 900/1200           |
|                | L-G  | 320  | 1075/1225 | 1200/1200          |
|                | N-G  | 0    | 900/900   | 1200/1500          |
|                | L-L  | 550  | 1950/2200 | 1800/1800          |

- D. Electrical Noise Filter- each unit shall include a high-performance EMI/RFI noise rejection filter. Noise attenuation for electric noise shall be as follows using the MIL-STD-220A insertion loss test method.
  - 1. 14 dB from 10 kHz to 1 MHz.
- E. Each Unit shall provide the following features:
  - 1. Phase Indicator lights, Form C dry contacts, counter and audible alarm.
  - 2. Field testable while installed.
  - 3. High performance interconnecting cable.
  - 4. The UL 1449 Voltage Protection Rating (VPR) shall be permanently affixed to the SPD unit.

5. The UL 1449 Nominal Discharge Surge Current Rating shall be 20kA
6. The SCCR rating of the SPD shall be 200kAIC without requiring an upstream protection device for safe operation.
7. The unit shall be listed as a Type 2 SPD per UL1449.
8. Power wiring: SPD shall be equipped with mechanical lugs that can accept up to #2 AWG wire on High Exposure units and up to #6 on Medium and Low Exposure units.

## 2.3 POWER CABLES FOR CONNECTION

- A. Power wiring: Conductors between all high and very-high SPDs and switchgear shall be high performance interconnect system "Low Z Cable" cables with Ultra Low impedance characteristics at 10kHz and above.
- B. High Performance Low Impedance cable shall be #6 AWG minimum for Very High, High, and Medium Exposure SPDs and #10 AWG minimum for Low Exposure SPDs.

## PART 3 – EXECUTION

### 3.1 GENERAL INSTALLATION

- A. The unit shall be installed as close as practical to the facility's wiring system in accordance with applicable national/local electrical codes and the manufacturer's recommended installation instructions. Connection shall be with high performance, low impedance cables in conduit and shall not be any longer than necessary, avoiding unnecessary bends. Minimum wire size and overcurrent protection device for disconnect shall be provided and as recommended by the manufacturer.
- B. Units specified for lighting and appliance panel boards as panelboard extensions (EGPE) shall be mounted directly above or below the first section of the panel board it is protecting. Any other mounting location will not be acceptable and shall be corrected, without exception, at no additional cost to the Owner.
- C. Units specified for panelboards, switchboards, or motor control centers shall be mounted directly above or adjacent to the panelboard, switchboard or motor control center using unistrut supports secured to structure as required. Conduit length between power distribution panelboard or switchboard shall be less than two inches. Mounting above equipment is not acceptable.
- D. Overcurrent device and conductors for devices shall be the maximum recommended by the manufacturer. Manufacturer's recommendations shall prevail over the information given in the plans and specifications.
- E. Provide recessed mounted panelboard extension type enclosures for devices protecting recessed panelboards. Enclosure front shall match panelboard front material and finish. Provide brushed stainless-steel front at kitchens and food processing areas.

### 3.2 UNIT SELECTION BASED ON EXPOSURE LEVEL

- A. (SPDVH) Provide very-high exposure SPDs with Selenium and TPMOV technology for the following new electrical equipment or where indicated:
  1. Service entrance rated 1,201 Amps and above.
- B. (SPDH) Provide high exposure SPDs for the following new electrical equipment or where indicated:
  1. Service entrance rated 801 – 1,200 Amps.

2. Switchboards located outside.
- C. (SPDM): Provide medium exposure SPDs at the following new electrical equipment or where indicated:
1. Service entrance rated 401 - 800 Amps.
  2. Panelboards above 600 Amps.
  3. Motor control centers.
  4. Non-service entrance switchboards.
- D. (SPDL): Provide low exposure SPDs at the following new electrical equipment or where indicated:
1. Service entrance rated 400 Amps and below.
  2. Panelboards 600 Amps and below.

### 3.3 TESTING

- A. Factory Trained Representative shall provide start-up to include initial verification of proper installation, shortest cable connection, and initiate factory warranty. The technician will be required to do the following as a minimum:
1. Verify the installation follows applicable national / local electrical codes related to SPDs and the manufacturer's Installation, Operation and Maintenance Instructions and recommendations.
  2. Verify overcurrent device rating.
  2. Verify all wiring connections and installation conforms to manufacturer's recommendations.
  3. Record information for each product installed and include in O&M Manual
- B. A copy of the Factory diagnostic test report and written approval of the installation shall be included with the Electrical Operating and Maintenance Manual. The Contractor shall make all adjustments, changes, corrections, etc. as required by the Factory Trained Representative so that the installation follows the manufacturer's installation and operation instructions without additional charge to the Owner.

END OF SECTION



**INTENTIONALLY LEFT BLANK**

## SECTION 26 51 13

### LIGHTING FIXTURES

#### PART 1 - GENERAL

##### 1.1 WORK INCLUDED

- A. Work Included: Lighting fixture work is as shown, scheduled and specified.
- B. Applications: The applications of lighting fixtures required for the project include the following:
  - 1. General lighting.
  - 2. Emergency lighting.
  - 3. Outdoor area lighting.

##### 1.2 QUALITY ASSURANCE

- A. Provide interior building LED fixtures that comply with the Design Lights Consortium (DLC) standards and are DLC or DLC Premium listed as a Qualifying Product at time of proposal submittal date.
- B. UL Standards: Lighting fixtures shall conform to applicable UL standards, and be UL or ETL labeled.
- C. Light fixtures shall conform to the requirements of NFPA 101, and 70 (NEC).

##### 1.3 SUBMITTALS

- A. Submit product data for light fixtures, and emergency lighting equipment, including generator transfer devices.
- B. Specification Compliance Review: Mark up a complete copy of the specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect / Engineer / Owner (Does Not Comply, Explanation:) Do not submit an outline form of compliance, submit a complete copy with the product data.
- C. Submittal data shall include luminaire efficiency parameters.
- D. Submittal data for exterior luminaires shall include IESNA BUG ratings, backlight, uplight, and glare ratings of each unique luminaire for the orientation and tile specified. Indicate total absolute lumens per luminaire and absolute lumens emitted above horizontal based by each luminaire for the orientation and tile specified.

##### 1.4 WARRANTY

- A. Provide 5-year warranty on all light fixtures, including internal or remote LED drivers, all other electrical internal electrical or electronic components except for emergency battery packs or emergency load control device relays. Refer to other specific component warranty requirements below.

## PART 2 - PRODUCTS

### 2.1 ACCEPTABLE MANUFACTURERS

- A. Manufacturers: Provide products produced by manufacturers shown or scheduled for each type of lighting fixture. Refer to drawings for additional approved manufacturers.
1. Where alternate fixtures to those specified are provided, notification of alternates are required prior to bid in accordance with Section 26 05 12. Full photometric drawings and a spreadsheet indicating the differences between the specified fixtures and alternate fixtures shall be provided as part of the pre-bid notification. The spreadsheet shall indicate all aspects of the alternate fixture that differ from the specified fixture, including, but not limited to the following:
    1. Physical Dimensions.
    2. Mounting Type.
    3. Fixture Ratings/Listings.
    4. Housing Materials/Construction.
    5. Lumen Output.
    6. Fixture Voltage.
    7. Fixture Wattage.
    8. Fixture Efficacy.
    9. CCT.
    10. CRI.
    11. Beam Angles/Distribution.
    12. Manufacturer Warranty.
    13. Emergency Power.
    14. Controls Requirements.
  3. Emergency Battery Packs with self-testing drivers/inverters: Shall be the same manufacturer as the low voltage lighting controls provided on this project. Where there are no low voltage lighting controls specified or provided, the manufacturer shall be Bodine.  
Bodine.  
Chloride.  
Lithonia.  
Dual Lite.  
IOTA.
  4. Emergency Generator/Inverter Load Control Bypass Relay (ELC); UL924 listed and 0-10Vdc compatible: Shall be the same manufacturer as the low voltage lighting controls provided on this project. Where there are no low voltage lighting controls specified or provided, the manufacturer shall be Bodine.
  5. Emergency Generator / Inverter Branch Circuit Transfer Switch, UL 1008 listed and 0-10Vdc compatible:  
Bodine GTD20A.

### 2.2 MATERIALS AND COMPONENTS

- A. General: Provide lighting fixtures of the size, type, and rating indicated, with all accessories for a complete aesthetic installation.
- B. Fixture Types:
1. General:
    - a. LED Lay-in edge lit or back flat panel / troffer fixtures: Opaque, edge or back lighted, 4000 Kelvin color temperature. 0-10 Vdc dimmable, L70: 60,000 minimum hours.
    - b. Safety chains and wire guards at fixtures in mechanical and electrical rooms, and high abuse areas. Provide safety chains only for gymnasium fixtures which shall be inherently vandal proof, no wire guards.

- c. Fixtures located outdoors, in interior unconditioned spaces, and in wet locations shall be of aluminum construction.
    - d. Fixtures with door frames shall be of aluminum construction, white finish where located in kitchens, food prep areas, toilets, restrooms, locker rooms, dressing rooms, showers, and unconditioned spaces.
    - e. DLC, DLC Premium or Energy Star qualified unless specified otherwise.
    - f. Outdoor fixtures shall include a discrete / replaceable surge suppression device in addition to the surge suppression incorporated in the LED driver.
    - g. Operating temperature rating shall be between -40 degrees F and 120 degrees F.
    - i. Color Rendering Index (CRI):  $\geq 80$  Indoor;  $\geq 65$  Outdoor
    - j. The manufacturer shall have performed JEDEC (Joint Electron Devices Engineering Council) reliability tests on the LEDs as follows: High Temperature Operating Life (HTOL), Room Temperature Operating Life (RTOL), Low Temperature Operating Life (LTOL), Powered Temperature Cycle (PTMCL), Non-Operating Thermal Shock (TMSK), Mechanical Shock Variable Vibration Frequency, and Solder Heat Resistance (SHR).
  - 2. Downlight Fixtures: Provide recessed downlight fixtures with trim rings compatible with the ceiling material where fixture is to be installed.
  - 3. LED Exit Signs: Provide red lettering. Exit lighting fixtures shall meet the requirements of Federal, State, and Local Codes. Edge-lit exit signs shall have a silver background so that "EXIT" cannot be read backwards from the opposite side.
    - a. Gymnasiums, locker rooms, athletic/PE wing and associated corridors, black box theaters, auditorium stages, cafeteriums and kitchens: Vandal resistant, wet location cast aluminum with polycarbonate protective cover exit signs, Lithonia Extreme Series.
  - 4. Emergency Lighting Units: Lead Calcium batteries with self-diagnostics. Provide full light output at 90 minutes of battery operation. LED lamps.
  - 5. Gymnasium light fixtures, glass or acrylic refractors or lenses, round profile, single point swivel pendant or hook mounting, designed to be vandal proof without the need for wire guards, no wire guards.
- C. LED drivers:
- 1. NEMA 410 compliant for in-rush current.
  - 2. Starting Temperature: -40° F [-40° C].
  - 3. Input Voltage: 120 to 480 ( $\pm 10\%$ ) V.
  - 4. Power Supplies: Class I or II output.
  - 5. Surge Protection: The system must survive 250 repetitive strikes of "C Low" (C Low: 6kV/1.2 x 50  $\mu$ s, 10kA/8 x 20  $\mu$ s) waveforms at 1-minute intervals with less than 10% degradation in clamping voltage. "C Low" waveforms are as defined in IEEE/ASNI C62.41.2-2002, Scenario 1 Location Category C.
  - 6. Power Factor (PF):  $\geq 0.90$ .
  - 7. Total Harmonic Distortion (THD):  $\leq 20\%$ .
  - 8. Comply with FCC Title 47 CFR Part 18 Non-consumer RFI/EMI Standards.
  - 9. Drivers shall be reduction of hazardous substances (ROHS)-compliant.
- D. Voltage: Equipment for use on 120V systems shall be suitable and guaranteed for voltage range of 100V to 130V. Equipment on 277V systems shall be suitable and guaranteed for voltage range of 225V to 290V. Universal voltage equipment shall be suitable and guaranteed for a voltage range of 100V to 290V.
- E. Light fixture housing for exterior use: Provide aluminum or stainless housing. Where stainless steel hardware is used, both male and female fasteners shall be stainless steel.

- F. Emergency LED battery self-testing drivers and inverters; 5-year warranty. Basis of Design:
  - 1. Bodine BSL-ST Series for OEM installation.
  - 2. Bodine BSL310-SI Series for field installation.
  - 3. Bodine ELI-S Series for line voltage sine wave inverter field installation.
- G. Emergency Battery Packs – Exit Signs: Nickel Cadmium battery with self- diagnostics; Minimum 3-year non-prorated replacement warranty.
- H. Emergency Generator / Inverter Load Control Device (ELC):
  - 1. 16 Amp minimum ballast / driver load.
  - 2. Compatible with 0-10 Volt dimmer switches.
  - 3. UL 924.
  - 4. Minimum 3-year warranty.
  - 5. Integral or remove test switch.
- I. Emergency Generator / Inverter branch circuit transfer switch:
  - 1. UL 1008.
  - 2. 20 Amp ballast/driver load.
  - 3. 0-10Vdc dimming compatible.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. General: Install lighting fixtures of the types indicated, where shown, and at indicated heights in accordance with the fixture manufacturer's written instructions and industry practices to ensure that the fixtures meet the specifications. Fixtures shall fit the type of ceiling system scheduled.
- B. Standards: Comply with NEMA standards, applicable requirements of NEC pertaining to installation of interior lighting fixtures, and with NECA Standard of Installation.
- C. Attachment: Fasten fixtures to the indicated structural support members of the building. Provide four separate wire supports for recessed ceiling mounted lighting fixtures, one at each corner of fixture. Check to ensure that solid pendant fixtures are plumb. Provide T-bar locking clips on all four sides for lay-in fixtures.
- D. Coordination: Field coordinate and locate lighting fixtures in open ceiling areas including mechanical and electrical rooms so that light is not obstructed by piping, ductwork, etc. Locate light fixtures in front of electrical and mechanical equipment to provide adequate illumination for testing and maintenance. Relocate installed light fixtures as directed by Owner / Architect at no additional cost.
- E. Final adjustment of all aimable exterior light fixtures shall be in coordination with, and to the satisfaction of, the Owner's designated representative. Pre-aim all fixtures prior to scheduled final aiming and adjustment with Architect / Owner. Verify that all rotatable optics are in their proper orientation prior to final aiming.
- F. Provide vandal resistant exit signs without wire guards in all physical education and athletic sports areas, including egress corridors adjacent to these areas, black box theaters, auditorium stages, vocational shops, cafeteriums and kitchens.
- G. Provide exit sign directional arrows as required. Provide a minimum of two and a maximum of 10% spare exit signs to be installed as directed by Architect.

- H. Install in accordance with manufacturers instructions.
- I. Install suspended luminaires using pendants supported from swivel hangers. Provide pendant length required to suspend luminary at indicated height.
- J. Locate recessed ceiling luminaires as indicated on the Architectural reflected ceiling plan.
- K. Install surface mounted luminaires plumb and adjust to align with building lines and with each other. Secure to prohibit movement.
- L. Exposed Grid Ceilings: Support surface mounted luminaires on grid ceiling directly from building structure. Provide auxiliary members spanning ceiling Ts to support surface mounted luminaires. Fasten surface mounted luminaires to ceiling T using bolts, screws, rivets, or suitable clips.
- M. Install recessed luminaires to permit removal from below.
- N. Install recessed luminaires using accessories and fire stopping materials to meet regulatory requirements for fire rating.
- O. Install wall-mounted luminaires at height as directed by Architect.
- P. Install accessories furnished with each luminary.
- Q. Connect luminaires to branch circuit outlets using flexible conduit as specified.
- R. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within luminaires.
- S. Bond products and metal accessories to branch circuit equipment grounding conductor.
- T. Provide emergency transfer devices for light fixtures powered by generator or inverter emergency lighting circuits which are used for normal lighting and to be switched with the switched normal lighting circuit in the same room, corridor or area.
- U. Provide un-switched, constant-hot circuit to all battery powered emergency lighting equipment and emergency load control devices (ELC). Where normal light fixture circuit is switched or contactor controlled, non-switched battery charging or ELC circuit shall originate from same branch circuit breaker as switched lighting circuit.
- V. Provide emergency powered light fixture in front of all electrical switchgear, including but not limited to panelboards, switchboards, motor control centers, low voltage control panels, transfer switches, motor controllers and disconnect switches.
- W. Provide emergency battery operated light fixtures at all transfer switch locations and at all central battery emergency lighting inverters.
- X. Provide automatic controls for exterior light fixtures. Exterior building mounted light fixtures shall be circuited through lighting contactors. Lighting contactors shall be controlled by the Building Management System. Provide separate lighting contactors for:
  - 1. Parking Lot Lighting.
  - 2. Building Mounted Lighting.
  - 3. Exterior Signage.
- Y. Lighting contactors shall not be installed above ceiling and shall be readily accessible, located in same room as panelboard serving load.

- Z. Wall mounted light fixtures shall be attached to the studs in the walls. Attachment to gypsum board only is not acceptable. Where wall mounted fixtures attach to junction box only, firmly secure junction box to adjoining studs in wall.
- AA. Lighting Fixture Supports:
  - 1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction to the structural slab or to structural members within a partition, or above a suspended ceiling.
  - 2. Shall maintain the fixture positions after cleaning and relamping.
  - 3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
- BB. Hardware for surface mounting fixtures to suspended ceilings:
  - 1. In addition to being secured to any required outlet box, fixtures shall be bolted to a grid ceiling system at four points spaced near the corners of each fixture. The bolts shall be not less than 1/4 inch secured to channel members attached to and spanning the tops of the ceiling structural grid members. Non-turning studs may be attached to the ceiling structural grid members or spanning channels by special clips designed for the purpose, provided they lock into place and require simple tools for removal.
  - 2. In addition to being secured to any required outlet box, fixtures shall be bolted to ceiling structural members at four points spaced near the corners of each fixture. Pre-positioned 1/4-inch studs or threaded plaster inserts secured to ceiling structural members shall be used to bolt the fixtures to the ceiling. In lieu of the above, 1/4-inch toggle bolts may be used on new or existing ceiling provided the plaster and lath can safely support the fixtures without sagging or cracking.
- CC. Lighting Fixture Supports for aluminum canopies:
  - 1. Light fixtures mounted under aluminum canopies shall be UL wet location from above listed without a protective ceiling or cover. Light fixture shall not have conduit penetrations or mounting hole penetrations field made in the top of the fixture. Conduit penetration shall be at the end of the fixture only.

### 3.2 TESTING

- A. General: Upon installation of lighting fixtures, and after building circuits are energized, apply electrical energy to demonstrate proper operations of lighting fixtures, emergency lighting, and controls. When possible, correct malfunctioning units at the site, then retest to demonstrate proper operation; otherwise, remove and replace with new units, and proceed with retesting.
- B. Pre-Inspection Tasks: Immediately before final inspection, clean fixtures inside and out, including plastics and glassware, adjust trim to fit adjacent surfaces, replace broken or damaged parts, and lamp and test fixtures for electrical and mechanical operations. Any fixtures, or parts of fixtures that show signs of rust or corrosion at the time of completion, shall be removed, and replaced with protected metal parts.
- C. Final aiming and adjustment: Aim and adjust lighting fixtures for their intended purpose as specified or as required. Adjustments may include but not be limited to directional aiming, adjusting selectable lumen output, selectable correlative color temperature (CCT), selectable beam pattern, replacing/installing fixture manufacture's optional optical lens used for adjusting beam patterns or for softening beam edges, replacing/installing manufacture's optional theatrical/specialty color lens colors. Re-aim and re-adjust as required to the satisfaction of the Architect / Owner, including nighttime adjustment of exterior lighting in the presence of the Architect / Owner.

END OF SECTION



**INTENTIONALLY LEFT BLANK**