


**MOORE PUBLIC SCHOOLS -
RED OAK ELEMENTARY
2025 MILLWORK REPLACEMENT**
Moore Public Schools - Moore, Oklahoma
AGP - Moore, Oklahoma

ADDENDUM NO. 3
November 5, 2025

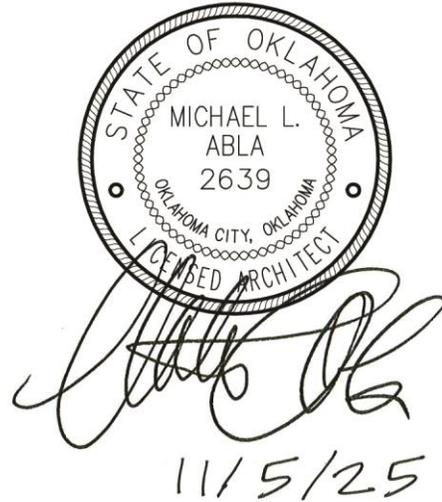

This addendum is applicable to work designated herein, shall be understood to be an Addendum, and as such shall be included in the Contract Agreement.

Receipt of this Addendum shall be acknowledged by the Construction Management Firm notifying this office in writing, and by any applicable subcontractor to the CM.

This addendum consists of one (1) page with attachments of two (2) 8.5"x11" pages and zero (0) 24"x36" sheets.

A. Drawings:

Civil, Structural, Mechanical, Electrical, Plumbing, and Technology

No changes.

Architectural

1. All affected architectural sheets: wherever noted otherwise on the drawings, the new carpet tile shall be provided with tactile connector strips in lieu of "full spread adhesive system" as indicated in Section 09681-1.03-H Installation Quality Assurance. Owner will provide both carpet tiles and tactile connectors with installation being provided by the Construction Manager / Flooring Subcontractor.

B. Specifications:

1. Section 09650-1.01 Work Included, 2.01 General, and 2.02 Materials – Resilient Flooring – Addendum No. 3: flooring subcontractor to provide and install all rubber wall base where indicated in the drawings as per the revised attached section.

END OF ADDENDUM NO. 3

DIVISION 9 - FINISHES

SECTION 09650 - RESILIENT FLOORING - ADDENDUM NO. 3

Part 1 - General

1.01 Work Included:

- A. All materials, labor, services, and incidentals necessary for the completion of this section of the work. **REGARDLESS OF HOW IT IS INDICATED/NOTED ON THE DRAWINGS, ALL EXISTING RUBBER BASE WHERE INDICATED ON THE DRAWINGS TO BE REPLACED, SHALL BE SUPPLIED AND INSTALLED BY THE CONSTRUCTION MANAGEMENT FIRM OR APPROVED SUBCONTRACTOR TO MEET THIS SPECIFICATION.**

1.02 Quality Assurance:

- A. Installation Qualification: contractors for floor covering installation shall be experienced in managing commercial flooring projects and provide professional installers, qualified to install the various flooring materials specified with a minimum of three years of documented experience. Installer shall be trained by flooring manufacturer and - if applicable - certified to install the specified flooring by the manufacturer.
- B. Manufacturer Qualifications: company specializing in manufacturing the specified flooring with minimum three years documented experience.

1.03 Submittals:

- A. Submit product data for each type of product indicated.
- B. Submit samples for color selection / verification.
- C. Maintenance Data and Instructions Furnish manufacturer's recommended maintenance methods and procedures.

1.04 Delivery, Storage, and Handling:

- A. Store resilient products and installation materials in dry spaces protected from the weather, at temperatures required by the product manufacturer.

Part 2 - Products

2.01 General:

- A. **Replace all existing wall base where noted on the drawings with material specified below. Material and labor shall be performed by approved CM or Subcontractor.**

2.02 Materials:

- A. Rubber Cove Base: ASTM F 1861, Type TP-Rubber as manufactured by Armstrong Cork Company or approved equal.
 - 1. Size: 4" high x .018 gauge.
 - 2. Provide preformed inside and outside corners.
 - 3. Wall base color at each room shall be as directed/selected by Architect.
- B. Primer and Adhesive: All wall base shall be applied with

DIVISION 9 - FINISHES

SECTION 09650 - RESILIENT FLOORING - ADDENDUM NO. 3

epoxy adhesive as approved by the manufacturer.

- C. Cleaner or other finishing material: As recommended by flooring manufacturer for the particular type of floor material.**

Part 3 - Execution

3.01 Installation:

- A. Comply with manufacturer's written instructions for installing specified wall base.
- B. Carefully examine the surfaces on which the above materials are to be applied, report to Architect in writing any unsatisfactory surface and do not begin work until all defective surfaces have been corrected. Otherwise, the Contractor shall assume responsibility for all failures and defects resulting from such defective surfaces.
- C. Installation shall not begin until the work of all other trades, including painting, has been completed. The Contractor shall maintain all rooms at a minimum of 70 degrees F. for several days before and after application of tile.
- D. The material shall be applied in a first class, workmanlike manner by skilled mechanics experienced in this type of work.
- E. Primer and adhesive shall be as recommended by the manufacturer of the flooring for this particular project. The adhesive for applying all materials shall be waterproof and shall be furnished and guaranteed by the flooring manufacturer.

3.02 Replacement Base:

- A. Provide 20 linear feet of spare rubber wall base. Wall base shall be in perfect condition.

End of Section