

**LEGEND**  
 ER EXISTING RECEPTACLE  
 ES EXISTING SMARTBOARD


**GENERAL NOTE :**

- 1 REMOVE / DEMOLISH EXISTING BASE / WALL CABINETS COMPLETELY & PREPARE WALL / SLAB TO RECEIVE NEW BASE CABINETS
- 2 REMOVE / DEMOLISH EXISTING COAT HOOK UNITS & SHELF COMPLETELY & PREPARE WALL / SLAB TO RECEIVE NEW CABINETS
- 3 TEMPORARILY REMOVE EXISTING TACKBOARDS & STORE. REINSTALL @ SAME LOCATIONS AFTER INSTALLATION OF NEW BASE CABINETS & WARDROBE CABINETS / SHELVING UNITS. COORDINATE MOUNTING HEIGHTS PRIOR TO REINSTALL.
- 4 PREPAIR WALLS TO RECEIVE NEW PAINT AT ENTIRE ROOM - PAINT COLOR TO BE SHERWIN-WILLIAMS - SW7008 - ALABASTER
- 5 REMOVE EXISTING SINK / FAUCET AND ASSOCIATED PIPING AS REQUIRED TO REMOVE / DEMOLISH EXISTING BASE CABINET COMPLETELY & PREPARE WALL / SLAB TO RECEIVE NEW BASE CABINETS W/ NEW SINK. PROVIDE ALL MATERIALS FOR COMPLETE INSTALLATION.
- 6 PREPAIR WALLS & SHELVES TO RECEIVE NEW PAINT AT ENTIRE ROOM - PAINT COLOR TO BE SHERWIN-WILLIAMS - SW7008 - ALABASTER
- 7 REMOVE EXISTING CARPET TILES & WALL BASE AT ENTIRE ROOM INSTALL NEW CARPET AND BASE PROVIDED BY OWNER
- 8 REPAIR EXISTING HM. DOORS AND FRAMES AS REQUIRED TO PAINT EXISTING HOLLOW METAL DOORS AND FRAMES COLOR TO BE SHERWIN-WILLIAMS - SW7055 ENDURING BRONZE.
- 9 REMOVE EXISTING CHALKBORAD & PREPARE WALL TO RECEIVE NEW PAINT - COLOR TO BE SHERWIN-WILLIAMS - SW7008 - ALABASTER. INSTALL NEW MARKERBOARD / TACKBOARD, RE: 9A401
- 10 NUMBER NOT USED
- 11 EXISTING MONITOR & MOUNTING SYSTEM TO BE REMOVED & REINSTALLED BY MPS VENDOR. COORDINATE WITH MPS PERSONAL.
- 12 UNLESS NOTED OTHERWISE ALL ROOMS TO RECEIVE NEW 2x2 LAY-IN CEILING W/ 6" BATT INSULATION & GRID. DEMO EXISTING CEILING AS REQUIRED. @ WORK AREA - REINSTALL ALL EXISTING ELECTRICAL, SPEAKERS, FIRE PROTECTION, MECHANICAL, ETC. PROVIDE ALL MATERIALS NECESSARY FOR A COMPLETE INSTALLATION.
- 13 REMOVE EXISTING WALL PANELS / WALL PAPER & TRIM AT WALL INDICATED. PREPARE EXISTING GYP BOARD TO REMAIN TO RECEIVE NEW PAINTERS FINISH. COLOR TO BE SHERWIN-WILLIAMS - SW7008 - ALABASTER
- 14 AT ROOM # 405 - EXISTING CEILING SYSTEM "RUNS" OVER THE TOP OF EXISTING WALL. PROTECT GYP. BD. PARTITION AS REQUIRED FOR NEW 2X2 ACOUSTICAL LAY-IN CEILING.

**GENERAL DEMOLITION NOTES:**


- 1. ALL SALVAGEABLE ITEMS TO REMAIN THE OWNER'S PROPERTY & IS TO BE DISPOSED OF / STORED AS PER OWNER'S INSTRUCTIONS.
- 2. CARE IS TO BE TAKEN TO PROTECT ALL EXISTING ITEMS TO REMAIN. THE CONTRACTOR IS RESPONSIBLE FOR REPLACING / REPAIRING ALL EXISTING TO REMAIN ITEMS THAT ARE DAMAGED DURING CONSTRUCTION.
- 3. THE SUBCONTRACTORS ARE RESPONSIBLE FOR VISITING THE SITE PRIOR TO SUBMITTING A BID & OBTAINING ALL PERTINENT INFORMATION REQ'D. TO PREPARE AN ACCURATE BID. VERIFY ALL DEMOLITION & NEW WORK REQUIRED. ANY REQUIRED ADDITIONAL WORK NOT INDICATED ON THE CONTRACT DOCUMENTS MUST BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE GENERAL CONTRACTOR PRIOR TO BIDDING.
- 4. VERIFY CLEARANCES FOR THERMOSTATS, SWITCHES, CALL BUTTONS, ETC. COORDINATE W/ ARCHITECT

**1 BUILDING 400 DEMOLITION FLOOR PLAN**  
 1/8" = 1'-0"  
 NORTH

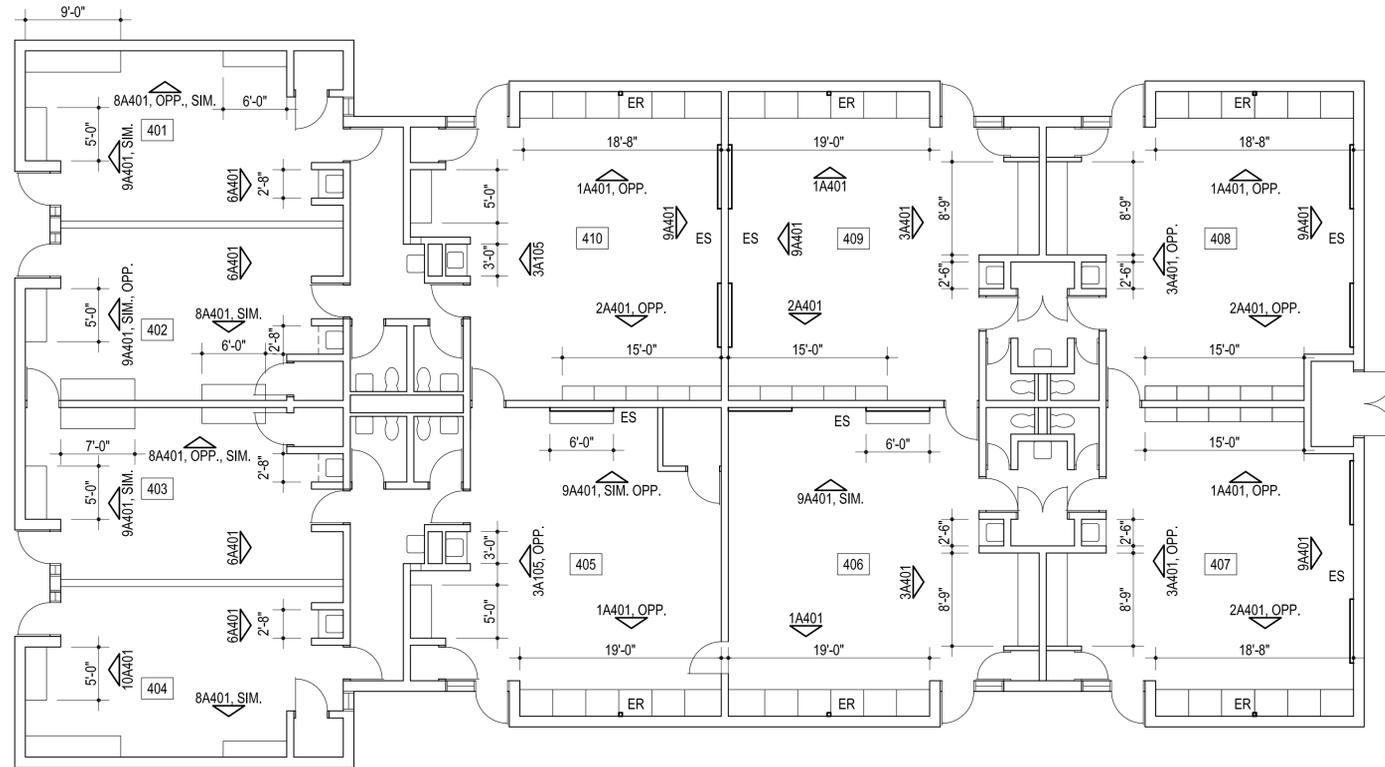

**LEGEND**  
 ER EXISTING RECEPTACLE  
 ES EXISTING SMARTBOARD / MONITOR  
 EC EXISTING CONDUIT ON WALL

**2 BUILDING 400 FLOOR PLAN**  
 1/8" = 1'-0"  
 NORTH

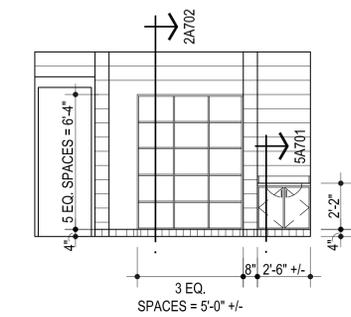

**3 S. WALL BUILDING 400 ROOM 405 & 410**  
 1/4" = 1'-0"

313 S. E. 5th Street  
 MOORE, OK. 73160  
 405.735.3477  
 AGP@theAGP.net  
 www.theAGP.net



CG  
 drawn by  
 MA  
 checked by  
 OCTOBER 2025  
 date  
 revisions

sheet no:

OWNERSHIP USE OF DOCUMENTS:  
 AGP EXPRESSLY RESERVES ITS COPYRIGHT AND OTHER PROPERTY RIGHTS OF ALL PLANS AND DRAWINGS DESIGNED AND/OR PRODUCED. PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM OR MANNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF AGP.