




NOTES BY SYMBOL - SHEET M201

NUMBER	DESCRIPTION
1	EXHAUST DUCT 20"x16" TO ROOF AND CONNECT TO EXHAUST FAN EF-1. PROVIDE ALL NECESSARY SUPPORTS, ACCESSORIES, AND APPURTENANCES REQUIRED FOR A COMPLETE INSTALLATION AND INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
2	SUPPLY DUCT TO FIRST FLOOR.
3	PROVIDE PRIMEXVENTS WC-28 WALL CAP. EXHAUST DUCT TO BE VENTED TO ROOF ABOVE. REFER TO DETAIL 12 (DRYER VENT DETAIL) ON SHEET M300 FOR MORE INFORMATION.
4	HOLD DUCT HIGH AS POSSIBLE. COORDINATE ROUTING WITH OTHER SERVICES, EQUIPMENT AND STRUCTURE PRIOR PERFORMING WORK.
5	INSTALL CEILING MOUNTED EXHAUST FAN DUCT TO EXTERIOR WALL WITH WALL CAP. COORDINATE WITH ARCHITECT FOR FINAL LOCATION. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
6	FULL-SIZE SUPPLY AND RETURN AIR DUCTWORK FROM RTU. TRANSITION AND OFFSET AS NECESSARY TO TERMINATE WITH CONCENTRIC DIFFUSER SIMILAR TO RUSKIN CDS. MOUNT BOTTOM OF CONCENTRIC DIFFUSER AT 18" A.F.F. COORDINATE IN FIELD WITH ARCHITECTURAL AND EQUIPMENT DRAWINGS PRIOR TO BID.
7	DASHED LINES REPRESENT THE THROW OF THE CONCENTRIC DIFFUSER. TYPICAL.

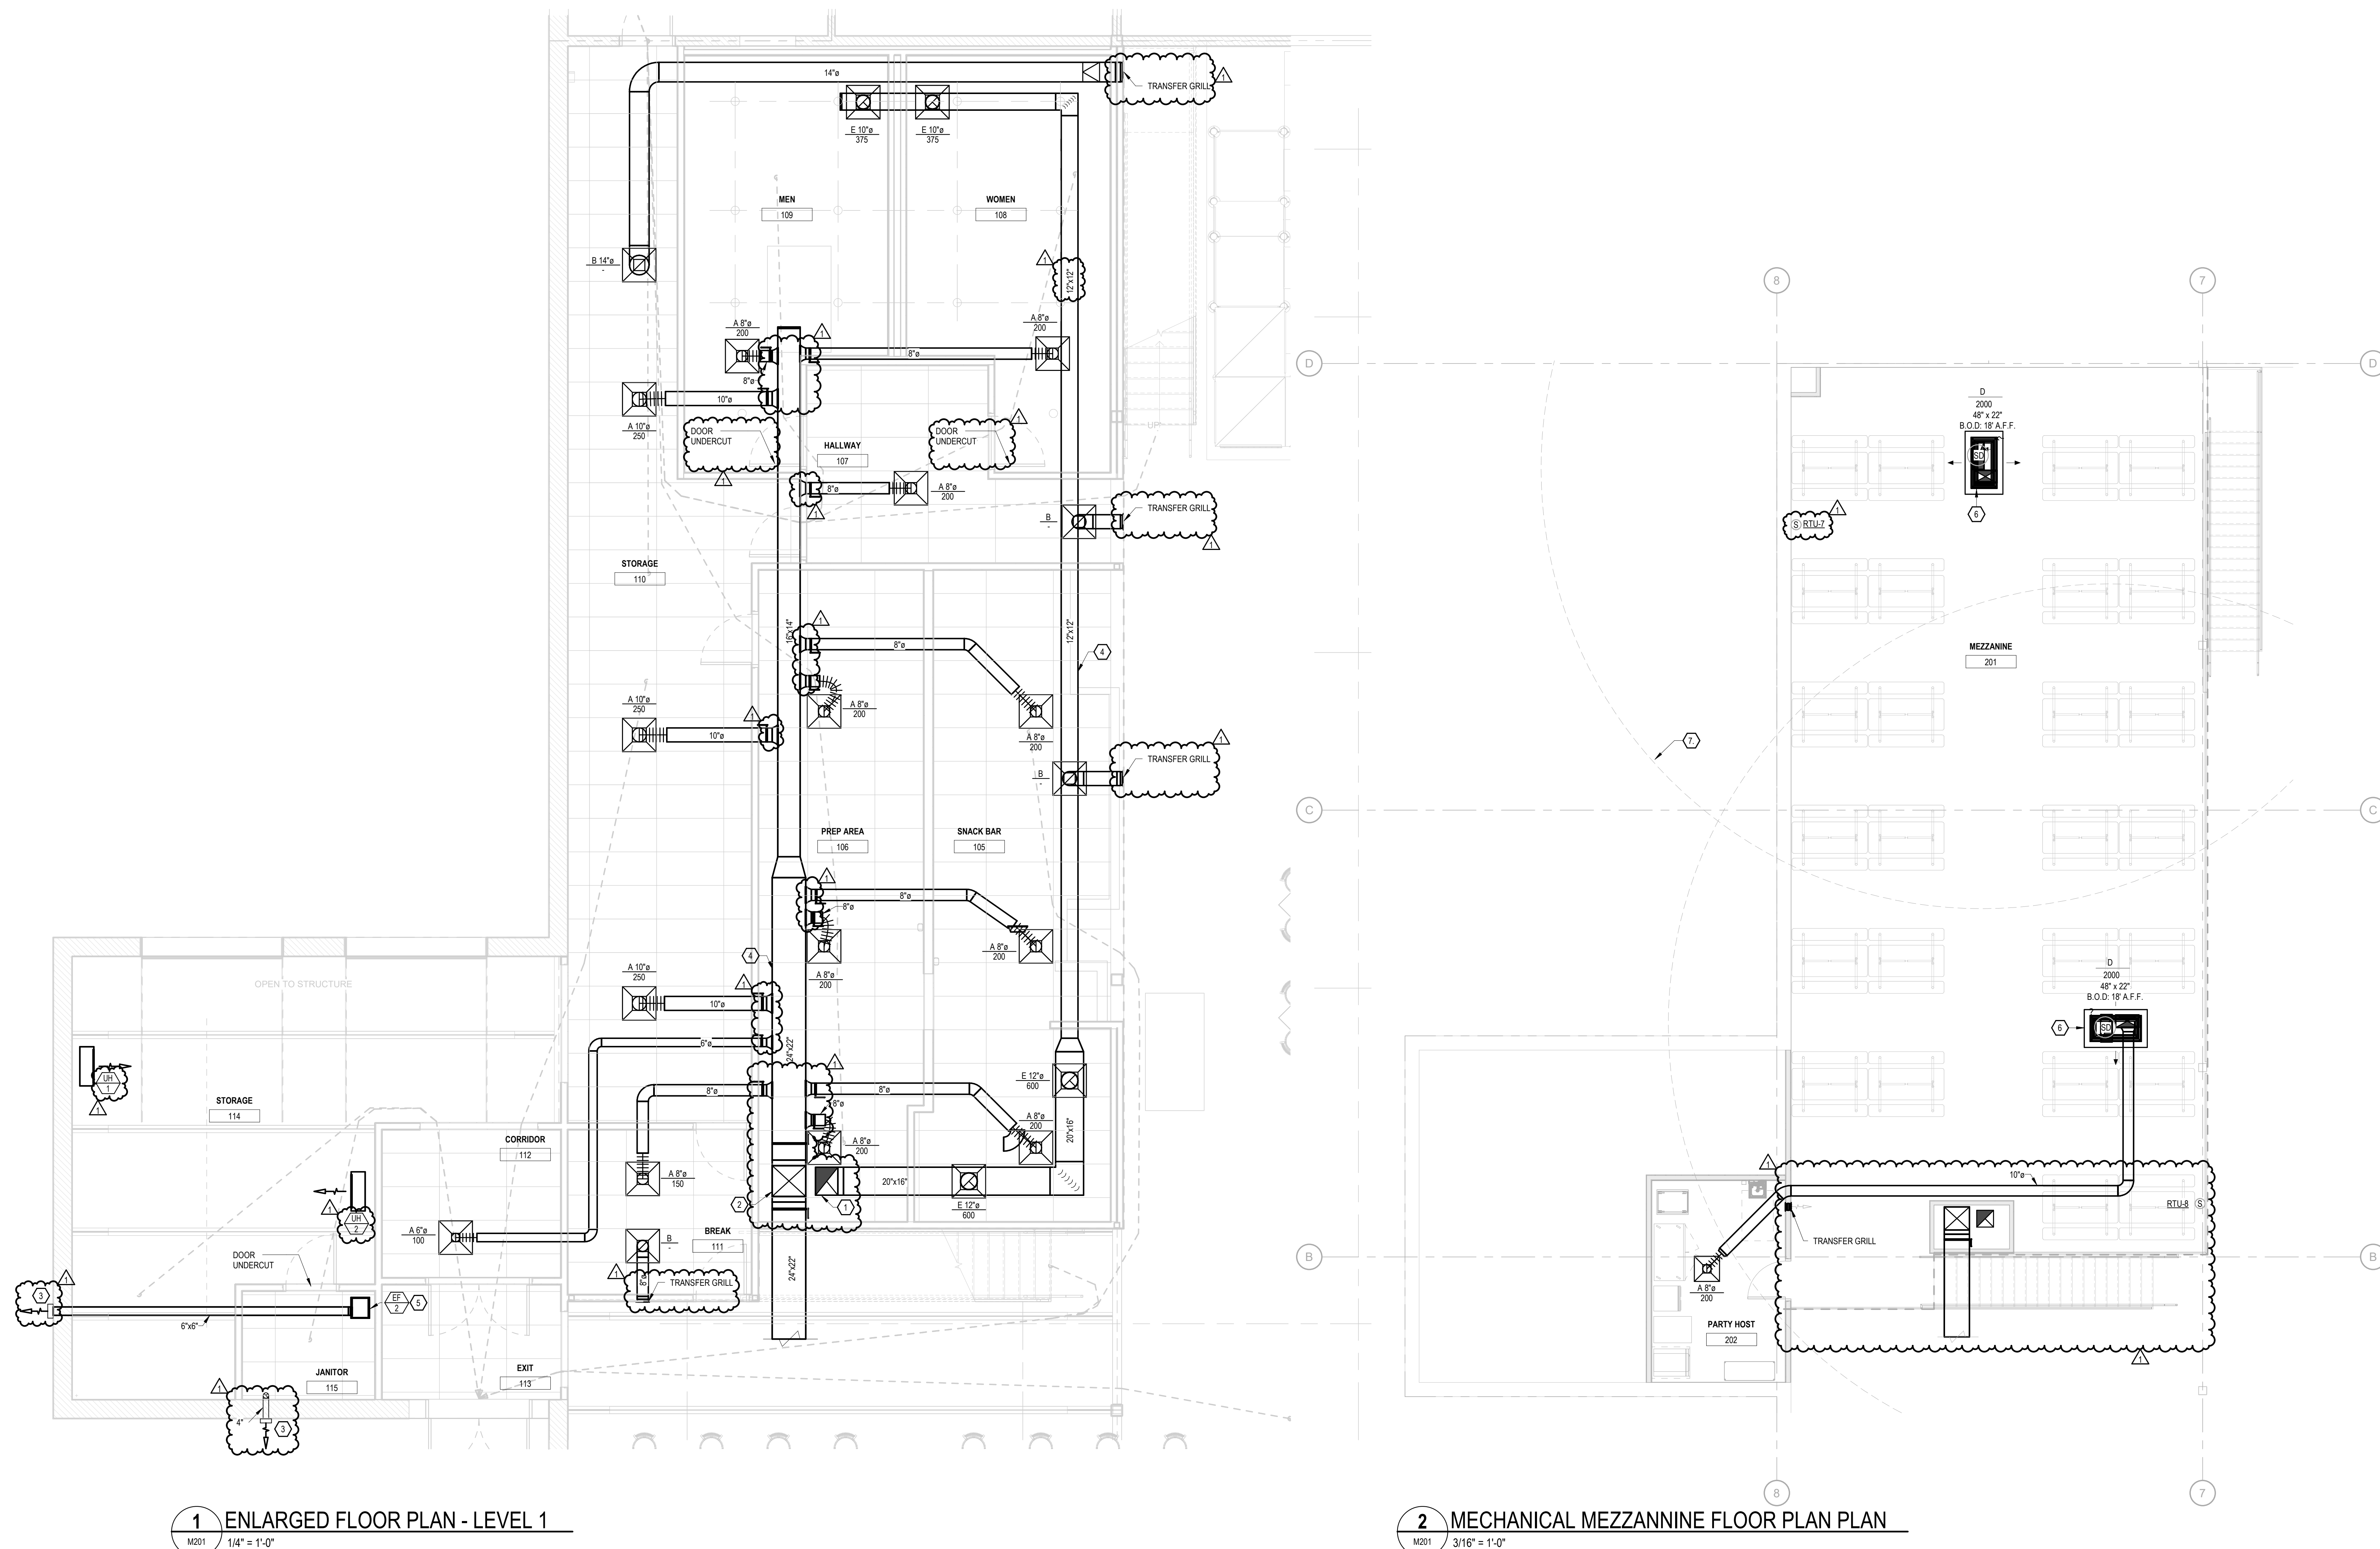

1 ENLARGED FLOOR PLAN - LEVEL 1
M201 1/4" = 1'-0"

2 MECHANICAL MEZZANNINE FLOOR PLAN PLAN
M201 3/16" = 1'-0"