


**MOORE PUBLIC SCHOOLS -
SOUTHGATE ELEMENTARY SCHOOL
KITCHEN UPGRADES AND ADDITION**
Moore Public Schools - Moore, Oklahoma
AGP - Moore, Oklahoma

ADDENDUM NO. 2

August 19, 2026

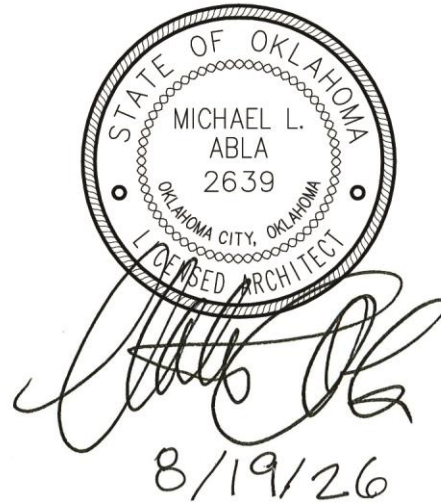

This addendum applicable to work designated herein, shall be understood to be an Addendum, and as such shall be included in the Contract Agreement.

Receipt of this Addendum shall be acknowledged by the Construction Management Firm notifying this office in writing, and by any applicable subcontractor to the CM.

This addendum consists of two (2) pages with attachments of two (2) 8.5"x11" pages and zero (0) 24"x36" sheets.

A. Drawings:

General / Civil / Structural

No changes.

Architectural

1. Sheet A101, Detail #1, Floor Plan / Sheet A102, Reflected Ceiling Plan / Sheet FS100, Detail #1, Kitchen Equipment Plan / applicable MEP Sheets: please note, the overhead kitchen hood – Kitchen Equipment Item #17 – has been included in Bid Package No. 13. Coordinate with Construction Manager.
2. Sheet A601, Detail #1, Room Finish Schedule: at Rooms #1 - Corridor, #4 – Dry Storage, & #7 – Existing Corridor, omit providing stainless steel wall panels and provide epoxy paint color #2.
3. Sheet A601, Detail #1, Room Finish Schedule: at Room #8 – Existing Kitchen, omit providing stainless steel wall panels at the entire room. Provide stainless steel wall panels at the dishwashing area three (3) walls to receive the new counters and at the cooking area behind the cooking equipment below the new overhead hood. All other walls are to receive epoxy paint color #2. Refer to attached drawing.

4. Sheet A602, Color Schedule, Color #12 – Masonry Brick Veneer: brick veneer color to be equal to modified brick sample from Kansas Brick & Tile Company. Refer to attachment.




Mechanical, Electrical, and Plumbing

1. Sheet P101, Detail #1, Plumbing Plan: in lieu of relocating existing grease interceptor, provide new unit equal to Schier Products, Model #GB-250, 100GPM Grease Interceptor with cast iron covers and 4" connections.

B. Specifications:

1. Section 08700-2.02 Hardware Sets: at Hardware Groups No. 002 and 003: provide door surface closers 4041 or P4041 MTG BRKTS, SPCRS & PLATES AS REQ 689 LCN at Doors #2, 3, and 5.

END OF ADDENDUM NO. 2

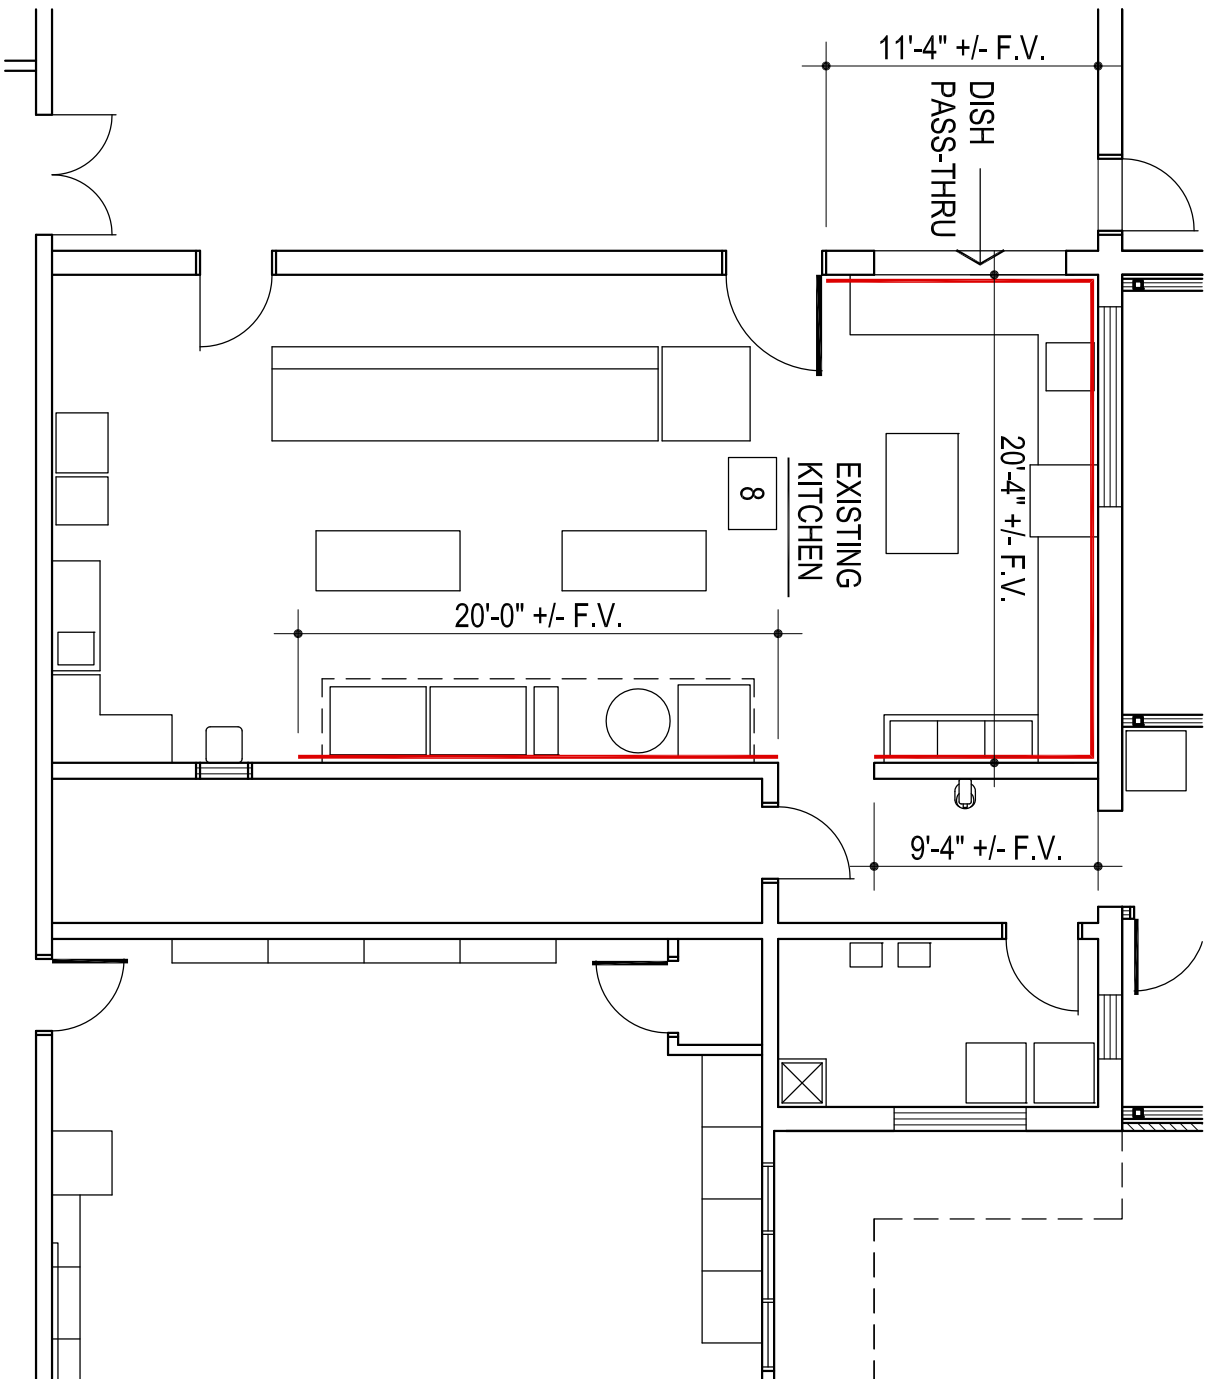

1

FLOOR PLAN

1/8" = 1'-0"

INDICATES WALL TO RECEIVE
NEW STAINLESS STEEL WALL PANEL

SOUTHGATE ELEMENTARY SCHOOL
KITCHEN UPGRADES and ADDITION
ADDENDUM #2

65% 530 DARK
20% 500 CHESTNUT
10% 500 CHARCOAL
~~5% 550 DARK~~
MODULAR

SOUTHGATE

BRICK ARE MADE FROM NATURAL CLAYS.
INVENTORY MAY VARY SLIGHTLY IN COLOR
AND PERCENTAGES FROM SAMPLES.

KANSAS BRICK & TILE CO.



P.O. BOX 450 • HOISINGTON, KANSAS 67544
(620) 653-2157 • 1-800-999-0480

