DESCRIPTION	RM. NO.	FLOOR	BASE	CEILING	CLG. HT.	REMARKS	RM. NO.	WALLS	PAINT / COLOR SCHEDULE					
		QUARRY TILE	QUARRY TILE	2 X 2 ACOUT. LAY-IN (TEG) / GYP. BOARD				GYP. BOARD / STAINLESS STEEL WALL PANEL / CERAMIC TILE / CONCRETE MASONRY UNIT / MASONRY VENEER UNIT	CLG.	WALLS N	E	S	W	REMARKS
CORRIDOR	1	○	○	○	9'-0"		1	☒	7	9	9	9	9	6
TOILET	2	○	○	●	9'-0"	EPOXY PAINT	2	☒	1	5	5	5	5	6
LOCKERS	3	○	○	●	9'-0"	EPOXY PAINT	3	●	1	2	2	2	2	6 EPOXY PAINT
DRY STORAGE	4	○	○	○	9'-0"		4	☒	7	9	9	9	9	6
OFFICE	5	○	○	○	9'-0"		5	⊠	7	2	2	2	2	6
EXISTING LAUNDRY	6	○	○	○	9'-4"	MATCH EXISTING CLG. HT.	6	⊠	7	2	2	2	2	6 EPOXY PAINT
EXISTING CORRIDOR	7	○	○	○	9'-4"	MATCH EXISTING CLG. HT.	7	☒	7	9	9	9	9	6
EXISTING KITCHEN	8	○	○	○	9'-4"	MATCH EXISTING CLG. HT.	8	☒	7	9	9	9	9	6
EXISTING STORAGE	9	○	○	○	9'-4"	MATCH EXISTING CLG. HT.	9	●	1	2	2	2	2	6 EPOXY PAINT

1 ROOM FINISH SCHEDULE

- ☒ SCHEDULE ORIENTED SAME AS PLAN
- ○ INDICATES MATERIAL IN A GIVEN AREA
- ☒ MATERIAL ON ALL SURFACES
- ⊠ MATERIAL ON EACH INDIVIDUAL SURFACE
- ● IF CIRCLE IS BLACKENED - SURFACE TO RECEIVE PAINTER'S FINISH
- ○ IF CIRCLE IS BLANK - SURFACE OR MATERIAL IS PREFINISHED OR NOT PAINTED

PAINT:

1. GYP. BOARD CEILINGS: SHERWIN-WILLIAMS - SW7006 - EXTRA WHITE
2. WALLS - FIELD: SHERWIN-WILLIAMS - SW7008 - ALABASTER
3. H.M. DOORS & FRAMES : SHERWIN-WILLIAMS - SW6992 - INKWELL
4. MISCELLANEOUS METALS: SHERWIN-WILLIAMS - SW6992 -INKWELL

GENERAL NOTE:

PROVIDE CONCRETE HARDENER AT EXPOSED CONCRETE AT FREEZER / COOLER

PREFINISHED COLORS:

5. CERAMIC TILE WALLS & BASE: DALTILE - SYNCHRONIC - WHITE SY30 OR TILEBAR - MARBELLA - DESERT SAND BEIGE W/ MTL. TRIM @ ALL OUTSIDE CORNERS
6. QUARRY TILE & BASE:
7. 2 X 2 ACOUSTICAL LAY - IN TILES - KITCHEN ZONE : REFER SPECIFICATIONS
8. INTERIOR SIGNAGE: MOHAWK SIGN SYSTEMS - TO BE SELECTED BY ARCHITECT
9. STAINLESS STEEL WALL PANELS : REFER SPECIFICATIONS & REFER PLANS FOR LOCATIONS

EXTERIOR COLORS:

10. PREFINISHED METAL COPING: COLOR TO BE SELECTED FROM ALL MFR. COLORS - MATCH PREFINISHED WALL PANELS
11. PREFINISHED METAL WALL PANEL: COLOR TO BE SELECTED FROM ALL MFR. COLORS - LAMINATORS, INC. - MEDIUM BRONZE
12. MASONRY BRICK VENEER - CLOUD CERAMICS -
13. MASONRY MORTAR - COLOR TO BE SELECTED FROM ALL MFR. COLORS

2 COLOR SCHEDULE

COORDINATE ALL COLORS & THEIR LOCATIONS, QUANTITIES, ETC. W/ THE ARCHITECT PRIOR TO ACQUIRING MATERIALS

DOOR NO.	LOCATION FROM	LOCATION TO	DOOR ELEV.	DOOR MA'TL	DOOR SIZE WIDTH	HEIGHT	TH' K	FRAME ELEV.	DOOR DETAILS HEAD	SILL	JAMB	JAMB	REMARKS	HDWR. SET NO.
1	1	EXT.	A	H.M.	4'-0"	7'-0"	1 3/4"	A	1A501	15A501	8A501	8A501		1
2	1	2	B	H.M.	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN DOOR & FRAME	2
3	1	3	B	H.M.	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN DOOR & FRAME	2
4	1	4	B	H.M.	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN DOOR & FRAME	4
5	1	5	A	H.M.	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN DOOR & FRAME	3
6	EXIST.	8	A	H.M.	4'-0"	7'-0"	1 3/4"	A	10A501	16A501	17A501	17A501	20 MIN DOOR & FRAME	5

3 DOOR SCHEDULE

G1 7/8" NOM. TEMPERED INSULATING GLASS

G2 1/4" CLEAR TEMPERED GLASS

4 GLAZING SCHEDULE

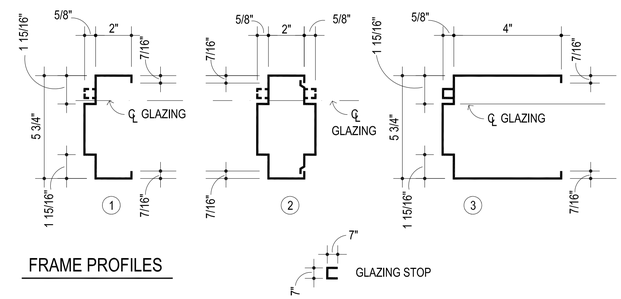

5 FRAME PROFILES



6 FRAME ELEVATIONS



7 DOOR ELEVATIONS

AGP
the Abla Griffin Partnership L.L.C.

313 S. E. 5th Street
MOORE, OK. 73160
405.735.3477
AGP@theAGP.net
www.theAGP.net

KFC ENGINEERING
STRUCTURAL

SALAS O'BRIEN
MECHANICAL / ELECTRICAL

STATE OF OKLAHOMA
MICHAEL L. ABLA
2639
OKLAHOMA CITY, OKLAHOMA
REGISTERED ARCHITECT

5/15/26

CG
drawn by

MA
checked by

APRIL 2026
date

revisions

MOORE PUBLIC SCHOOLS

SOUTHGATE ELEMENTARY KITCHEN UPGRADES and ADDITION

sheet no:
A601

OWNERSHIP USE OF DOCUMENTS:

AGP EXPRESSLY RESERVES ITS COPYRIGHT AND OTHER PROPERTY RIGHTS OF ALL PLANS AND DRAWINGS DESIGNED AND/OR PRODUCED. PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM OR MANNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF AGP.