DESCRIPTION	RM. NO.	FLOOR: EXPOSED CONCRETE W/ HARDENER	BASE: RUBBER BASE	BASE: NONE	CEILING: 2'X2 ACOUT. LAY-IN (TEG)	CEILING: GYP. BOARD	CEILING: EXPOSED STRUCTURE	CLG. HT.	REMARKS	RM. NO.	WALLS: CONCRETE MASONRY UNIT	WALLS: CONCRETE	PAINT / COLOR SCHEDULE: CLG.	WALLS: N	WALLS: E	WALLS: S	WALLS: W	REMARKS
MECH. / ELEC.	1	○		○			●	----		1			(1)	(2)	(2)	(2)	(2)	
TOILET	2	○	○			●		8'-8"	EPOXY PAINT	2			(1)	(2)	(2)	(2)	(2)	EPOXY PAINT (6)
TOILET	3	○	○			●		8'-8"	EPOXY PAINT	3			(1)	(2)	(2)	(2)	(2)	EPOXY PAINT (6)
VESTIBULE	4	○	○		○			8'-8"		4			(8)	(2)	(2)	(2)	(2)	(6)
SHELTER	5	○	○		○			8'-8"		5			(8)	(2)	(2)	(2)	(2)	(6)
VESTIBULE	6	○	○		○			8'-8"		6			(8)	(2)	(2)	(2)	(2)	(6)
GENERATOR	7	○		○			○	----		7			(1)	(2)	(2)	(2)	(2)	

1 ROOM FINISH SCHEDULE

- ⊠ SCHEDULE ORIENTED SAME AS PLAN
- ◯ INDICATES MATERIAL IN A GIVEN AREA
- ⊠ MATERIAL ON ALL SURFACES
- ⊠ MATERIAL ON EACH INDIVIDUAL SURFACE
- ● IF CIRCLE IS BLACKENED - SURFACE TO RECEIVE PAINTER'S FINISH
- ○ IF CIRCLE IS BLANK - SURFACE OR MATERIAL IS PREFINISHED OR NOT PAINTED

PAINT:

1. GYP. BOARD / EXPOSED CEILINGS: SHERWIN-WILLIAMS - SW7006 - EXTRA WHITE
2. WALLS - FIELD: SHERWIN-WILLIAMS - SW7008 - ALABASTER
3. H.M. DOORS & FRAMES & MISC. METALS : SHERWIN-WILLIAMS - SW6992 - INKWELL
4. MISCELLANEOUS METALS : SHERWIN-WILLIAMS - SW6992 - INKWELL
5. WOOD DOORS: ARCHITECTURAL WOOD DOORS - CLEAR CL07

PREFINISHED COLORS:

6. RUBBER BASE : ROPPE - BLACK
7. NUMBER NOT USED
8. 2 X 2 ACOUSTICAL LAY - IN TILES - SQUARE EDGE : REFER SPECIFICATIONS
9. INTERIOR SIGNAGE: MOHAWK SIGN SYSTEMS - TO BE SELECTED BY ARCHITECT

EXTERIOR COLORS:

10. PREFINISHED METAL COPING: MATCH EXISTING PREFINISHED WALL PANEL / COPING
11. MASONRY BRICK VENEER : MATCH EXISTING BUILDING COLOR "A"
12. MASONRY BRICK VENEER : MATCH EXISTING BUILDING COLOR "B"

2 COLOR SCHEDULE

DOOR NO.	LOCATION: FROM	LOCATION: TO	DOOR ELEV.	DOOR MATL	DOOR SIZE: WIDTH	DOOR SIZE: HEIGHT	DOOR SIZE: TH' K	FRAME ELEV.	DOOR DETAILS: HEAD	DOOR DETAILS: SILL	DOOR DETAILS: JAMB	DOOR DETAILS: JAMB	REMARKS	HDWR. SET NO.
1	4	EXT.	A	STL.	PR. 3'-0"	7'-0"	1 3/4"	A	1A501	15A501	8A501	8A501		3
2	5	4	A	WD	PR. 3'-0"	7'-0"	1 3/4"	A	3A501	16A501	10A501	10A501	TORNADO DOORS	TS1
3	6	EXT.	A	STL.	3'-0"	7'-0"	1 3/4"	A	1A501	15A501	8A501	8A501		5
4	5	6	A	WD	3'-0"	7'-0"	1 3/4"	A	3A501	16A501	10A501	10A501	TORNADO DOORS	TS2
5	5	3	A	WD	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN. DR. & FRAME	2
6	5	2	A	WD	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN. DR. & FRAME	2
7	1	5	A	WD	3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	20 MIN. DR. & FRAME	4
8	7	5	A	WD	PR. 3'-0"	7'-0"	1 3/4"	A	2A501	16A501	9A501	9A501	90 MIN. DR. & FRAME	1

4 DOOR SCHEDULE



HOLLOW METAL

5 FRAME ELEVATION

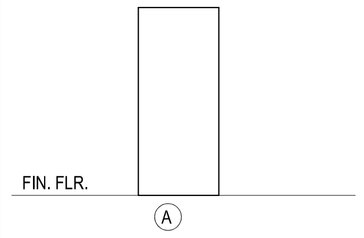

6 DOOR ELEVATIONS

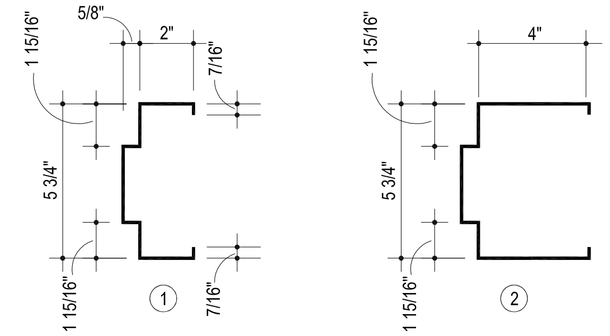

7 FRAME PROFILES

AGP
the Abla Griffin Partnership L.L.C.
201 N. BROADWAY
SUITE 210
MOORE, OK. 73160
405.735.3477
AGP@theAGP.net
www.theAGP.net

CEDAR CREEK INC.
CIVIL

KFC ENGINEERING
STRUCTURAL

SALAS O'BRIEN
MECHANICAL / ELECTRICAL

STATE OF OKLAHOMA
MICHAEL L. ABLA
2639
OKLAHOMA CITY, OKLAHOMA
REGISTERED ARCHITECT

10/14/22

CG
drawn by

MA
checked by

OCTOBER 2022
date

revisions

MOORE PUBLIC SCHOOLS
BOARD OF EDUCATION
MOORE, OKLAHOMA

MOORE Public Schools
LEARNING FOR LIFE

NEW ADDITION
KELLEY ELEMENTARY SCHOOL

sheet no:
A601

SCHEDULES

OWNERSHIP USE OF DOCUMENTS:

AGP EXPRESSLY RESERVES ITS COPYRIGHT AND OTHER PROPERTY RIGHTS OF ALL PLANS AND DRAWINGS DESIGNED AND/OR PRODUCED. PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED IN ANY FORM OR MANNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF AGP.